



# HL-LHC project

(including introduction to Hi-Lumi Design Study)

Lucio Rossi  
CERN

3rd sLHC Annual Meeting @ INSTN, CEA Saclay  
8 February 2011

# Content

- Scope of HL-LHC
- Main technologies
  - sLHC as key step toward high luminosity
- HiLumi LHC, an FP7 Design Study
  - A global collaboration



# How the lumi might evolve in LHC

Prudent assumptions, of September 2010:

The better than expected LHC behaviour is not yet integrated.

It is assumed to saturate at design luminosity of  $1.0 \times 10^{34}$ . Today we **may assume**  $1.7-2 \times 10^{34}$  !

The new shutdown plan (approved 31 January 2011) not yet integrated (shutdown in 2013)

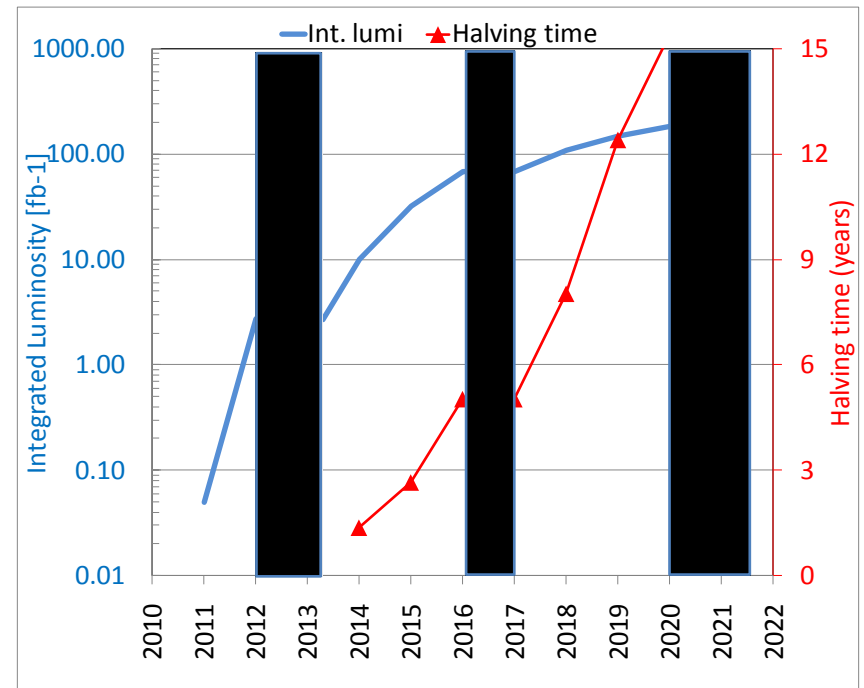
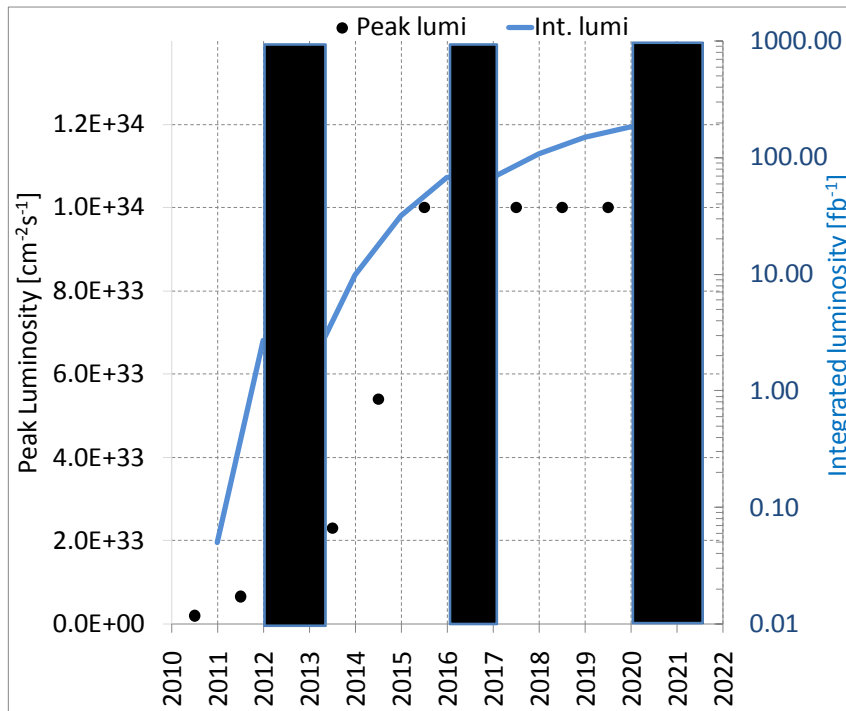


Better performance may push the integrated lumi to 300  $\text{fb}^{-1}$  before 2020.

# (some of the) Physics motivation

In particular, operation at higher luminosity as foreseen by HL-LHC has three main purposes:



- **Perform more accurate measurements** on the new particles discovered in the LHC.
- **Observe rare processes**, whether predicted by the Standard Model (SM) or by the new physics scenarios unveiled by the LHC, which have rates below the sensitivity of the current phase.
- Extend the **exploration of the energy frontier, therefore extending the discovery reach**, by probing the very rare events where most of the proton momentum is concentrated in a single quark or gluon.

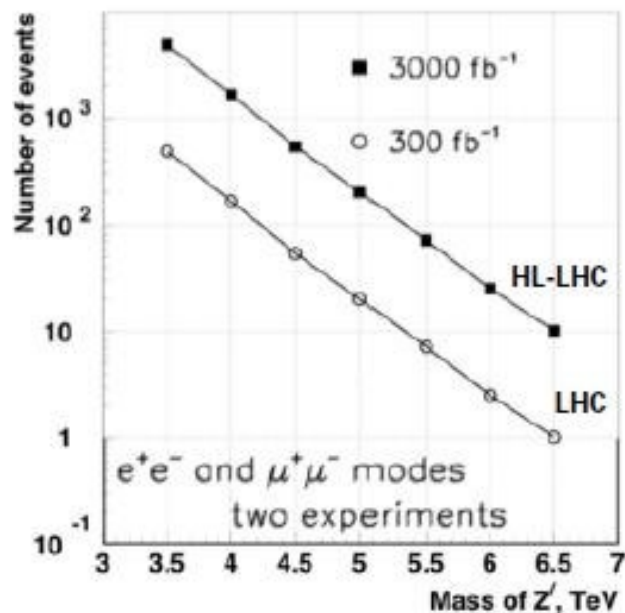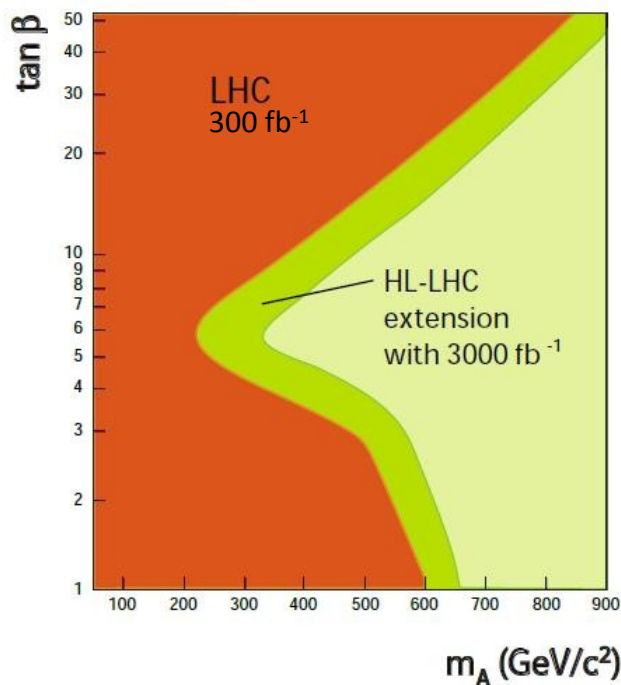



# The goal

**The main objective of HL-LHC** is to implement a hardware configuration and a set of beam parameters that will allow the LHC to reach the following targets:

- A peak luminosity of  $5 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$  with levelling, allowing:
- An integrated luminosity of  $250 \text{ fb}^{-1}$  per year, enabling the goal of  $3000 \text{ fb}^{-1}$  twelve years after the upgrade. This luminosity is more than ten times the luminosity reach of the first 10 years of the LHC lifetime.

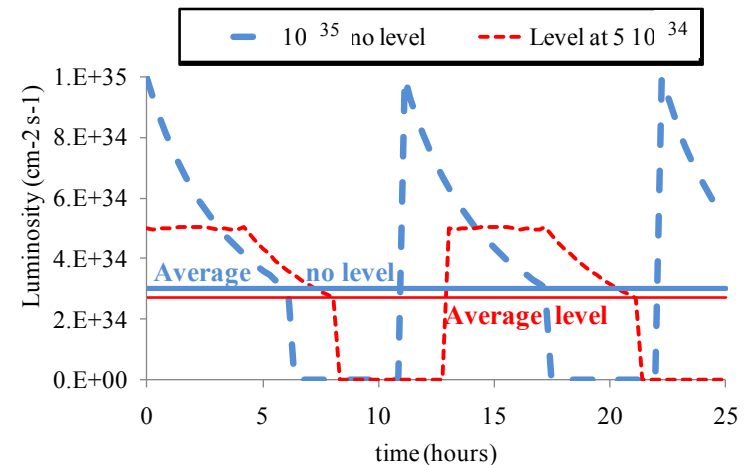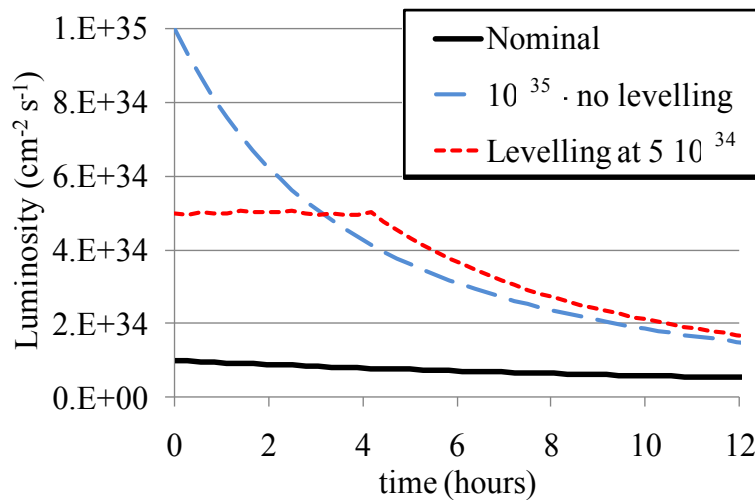


# The path toward high lumi

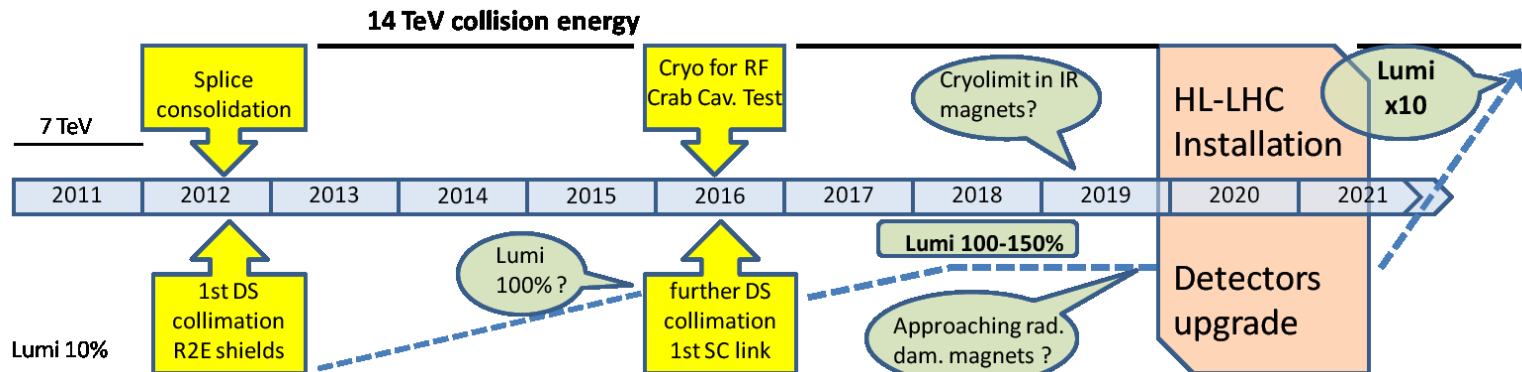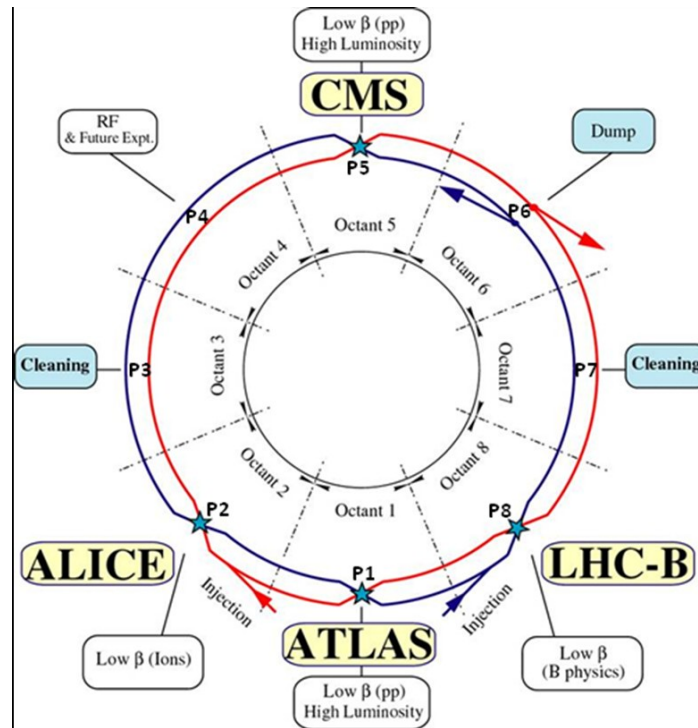

# Squeezing the beam

## High Field SC Magnets






- 13 T, 150 mm aperture Quads for the inner triplet (LHC: 8 T, 70 mm). More focus strength,  $\beta^*$  as low as 15 cm (55 cm in LHC)
- Dipole separators capable of 6-8 T with 150-180 mm aperture (LHC: 1.8 T, 70 mm)

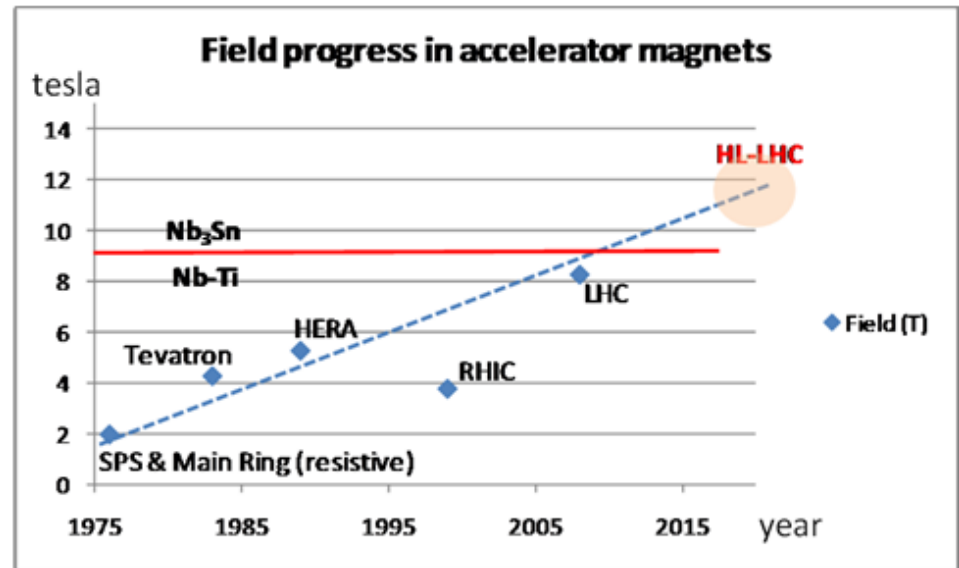








# LARP Magnets

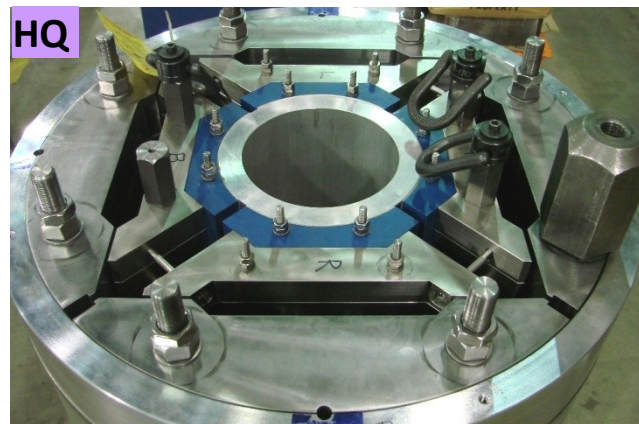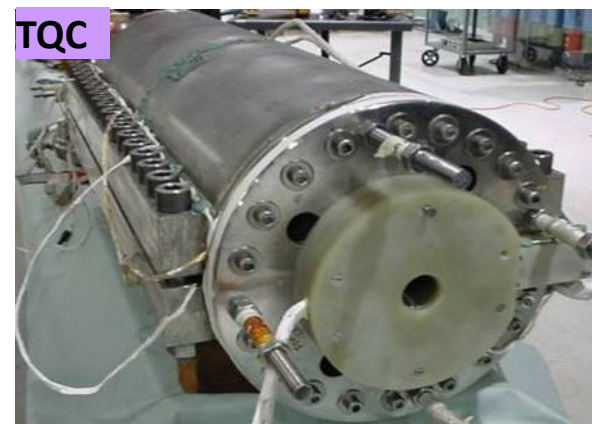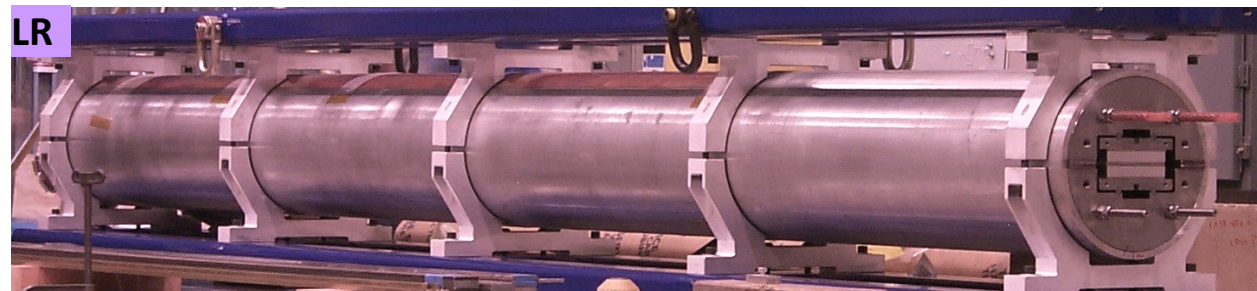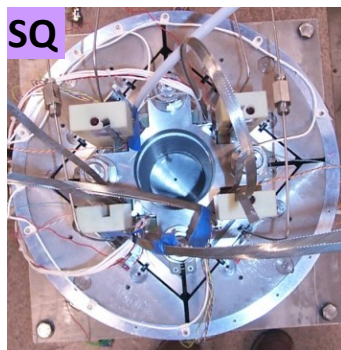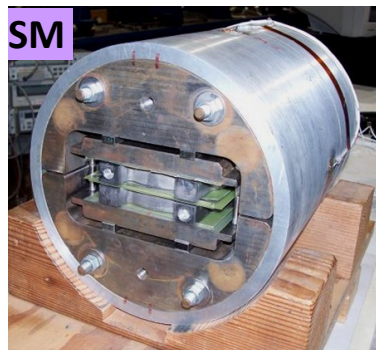



# Direct benefit from sLHC program: improved Nb-Ti technology

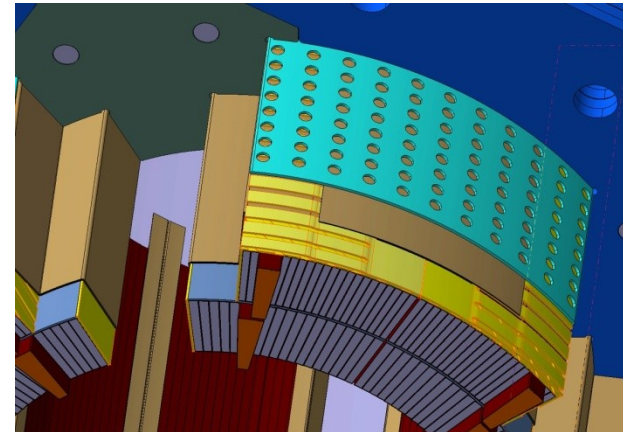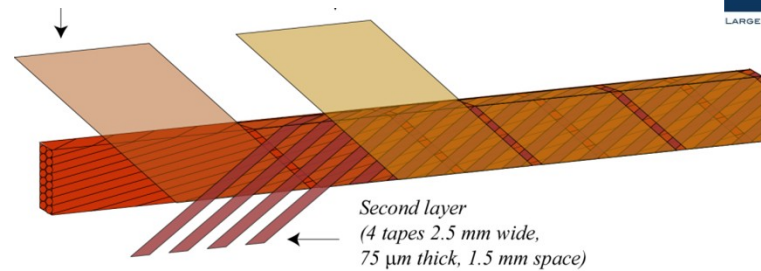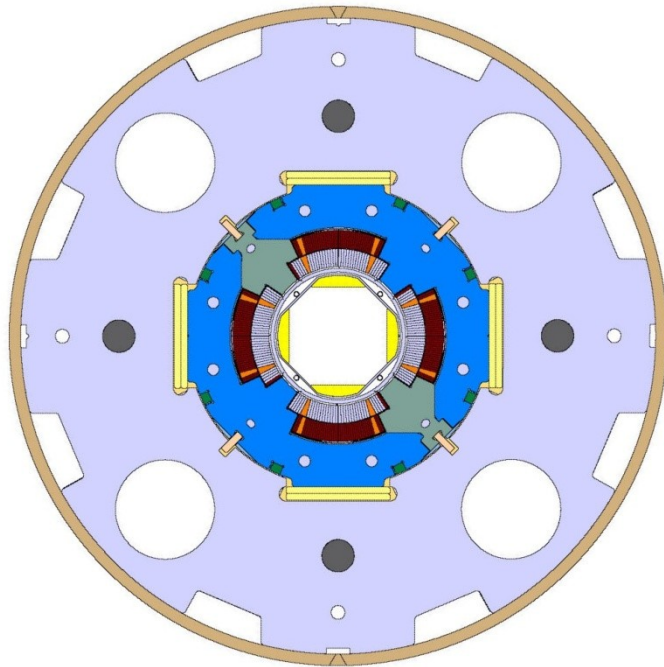


Favorite scheme of HL-LHC requires new Nb-Ti more pushed wrt to present LHC for the matching sections: larger aperture (85-90 mm, wrt LHC 56 mm)  
Higher heat deposition will demand use of the new insulation scheme

# Improve beam overlap


## SC RF Crab cavities

- Crab cavities to rotate the beam and colliding with good overlap
- Providing « easy » way for levelling
- Necessary to fully profit of the low  $\beta^*$
- Very demanding phase control (better than  $0.001^\circ$ ) and protection
- Very compact design

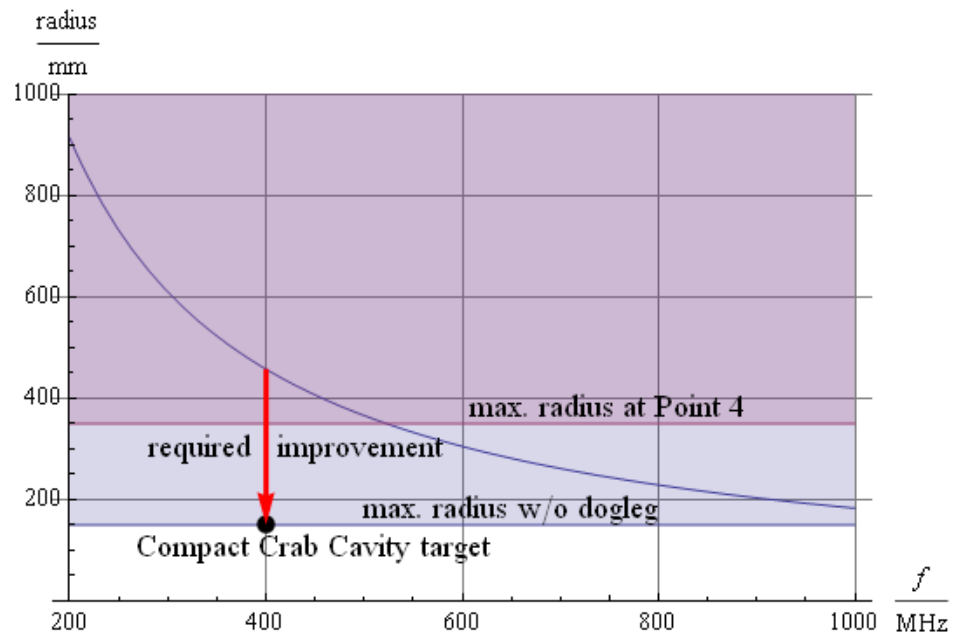


# Compact 400 MHz (see 4th LHC CC workshop)


HWDR, JLAB, OD

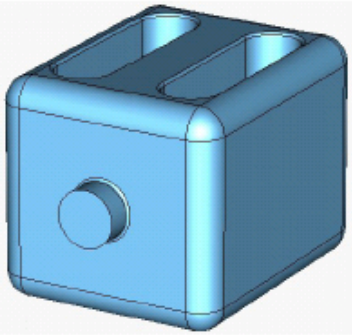


HWSR, SLAC-LARP

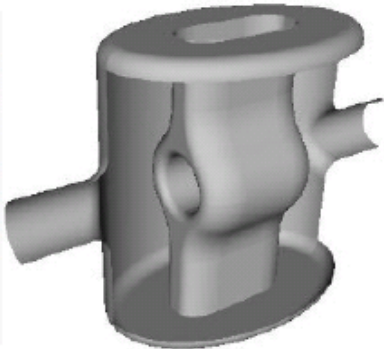

DR, UK, TechX





Kota, KEK

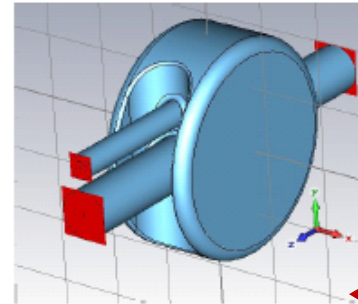

Compact cavities aiming at small footprint & 400 MHz, ~5 MV/cavity

**All these 400 MHz can fit into the standard 194 mm LHC beam separation with cavities in a common cryostat (but not easy...)**

New idea for a very compact elliptical 800 MHz

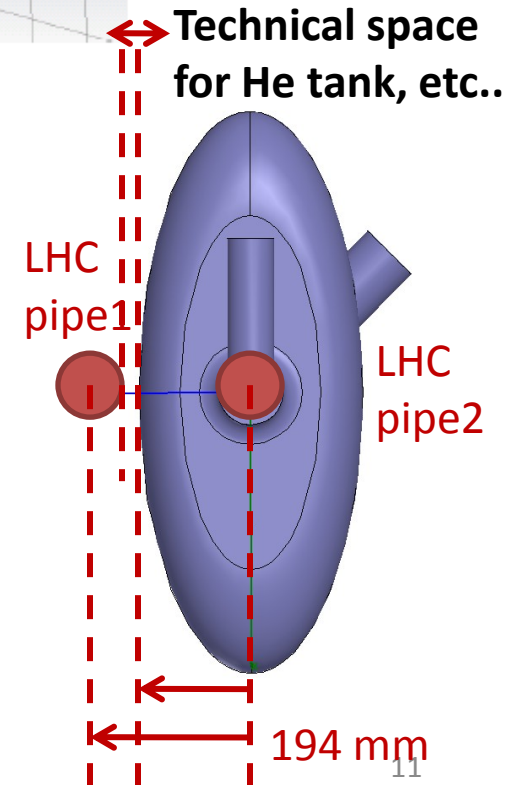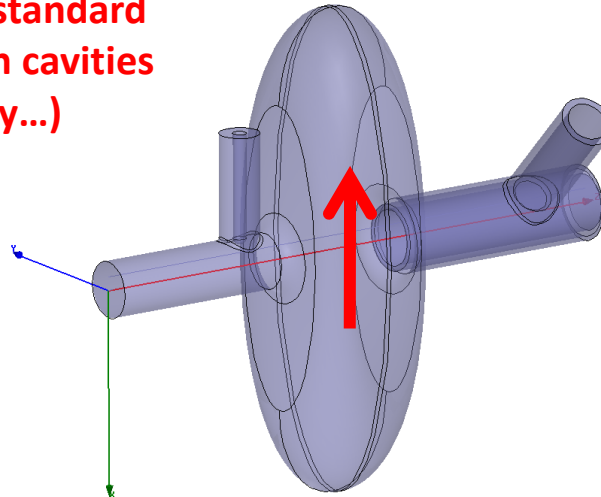

# Initial LHC Collimation System

2009 - 2011

$\leq 50\%$   
 $I_{\text{nom}}$  @  
3.5 TeV  
 $\beta^* \approx 2\text{m}$

## Upgrade

2012 - 2012

## Interim IR3 Upgrade

2013 - 2015

$\leq 100\%$   
 $I_{\text{nom}}$  @  
7.0 TeV  
 $\beta^* \approx 1\text{m}$

## Upgrade

2016 - 2016

## Full Collimation System

2017 - 2020

$\geq 160\%$   
 $I_{\text{nom}}$  at  
7.0 TeV  
 $\beta^* \approx 55\text{cm}$

**HL-LHC WP5:  
Upgrades as  
required for HL-  
LHC upgrade**

## Upgrade

2021 - 2021

2009

2011

2013

2015




2017

2019


2021

LHC Collimation Plan

# Removal of Electrical Power Converter (200kA-5 kV SC cable, 100 m height)

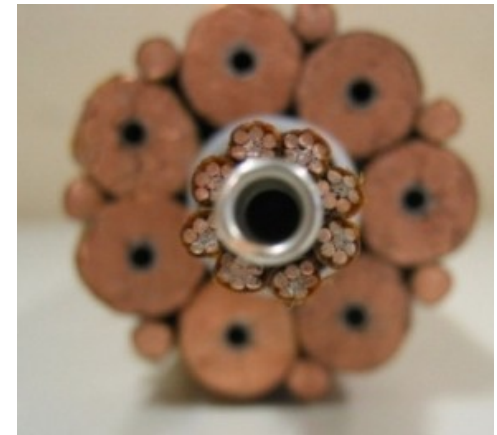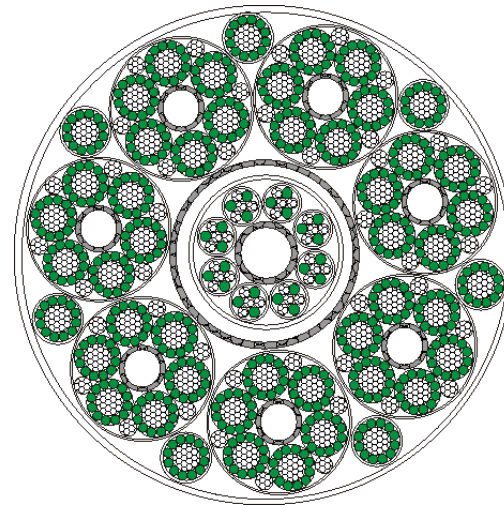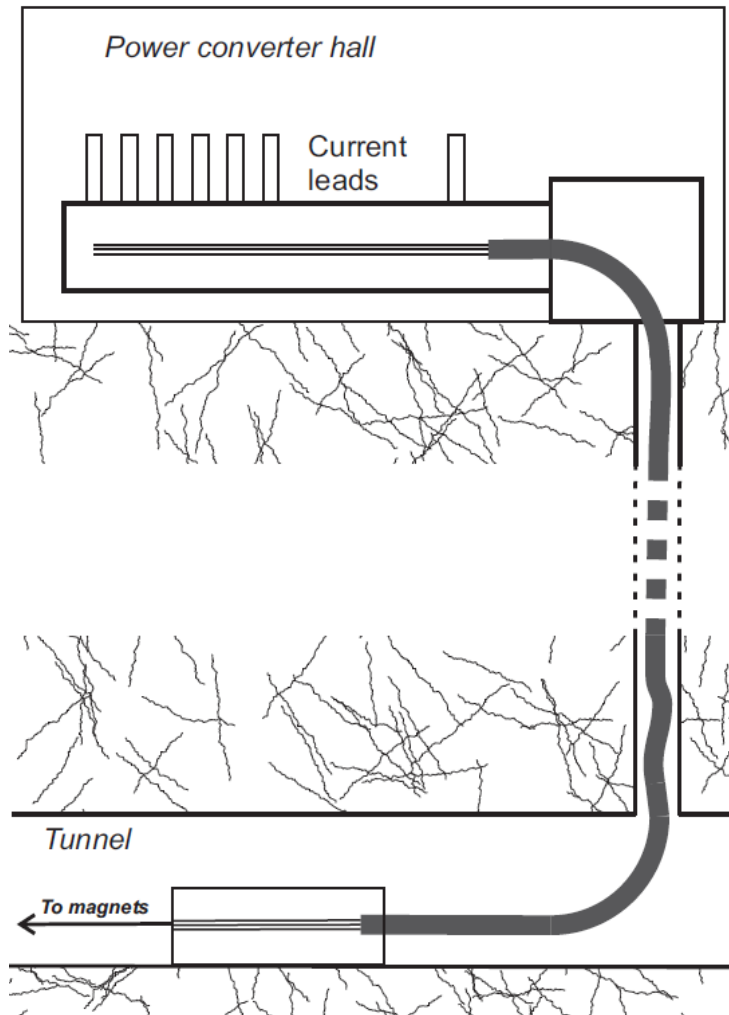

$\Phi = 62$  mm



7 × 14 kA, 7 × 3 kA and 8 × 0.6 kA cables –  $I_{tot} \sim 120$  kA @ 30 K

MgB<sub>2</sub>  
(or other HTS)

Also DFs with current leads removed to surface

Definitive solution to R2E problem

Make room for shielding unmovable electronics


Make much easier maintenance and application ALARA

# example HL-LHC parameters, $\beta^*=15$ cm

parameter	symbol	nom.	nom.*	HL crab	HL sb + lrc	HL 50+lrc
protons per bunch	$N_b$ [ $10^{11}$ ]	<b>1.15</b>	1.7	<b>1.78</b>	<b>2.16</b>	<b>3.77</b>
bunch spacing	$\Delta t$ [ns]	<b>25</b>	50	<b>25</b>	<b>25</b>	<b>50</b>
beam current	I [A]	<b>0.58</b>	0.43	<b>0.91</b>	<b>1.09</b>	<b>0.95</b>
longitudinal profile		<b>Gauss</b>	Gauss	<b>Gauss</b>	<b>Gauss</b>	<b>Gauss</b>
rms bunch length	$\sigma_z$ [cm]	<b>7.55</b>	7.55	<b>7.55</b>	<b>5.0</b>	<b>7.55</b>
beta* at IP1&5	$\beta^*$ [m]	<b>0.55</b>	0.55	<b>0.15</b>	<b>0.15</b>	<b>0.15</b>
full crossing angle	$\theta_c$ [ $\mu$ rad]	<b>285</b>	285	<b>(508-622)</b>	<b>508</b>	<b>508</b>
Piwinski parameter	$\phi=\theta_c\sigma_z/(2*\sigma_x^*)$	<b>0.65</b>	0.65	<b>0.0</b>	<b>1.42</b>	<b>2.14</b>
tune shift	$\Delta Q_{tot}$	<b>0.009</b>	0.0136	<b>0.011</b>	<b>0.008</b>	<b>0.010</b>
potential pk luminosity	$L$ [ $10^{34}$ cm $^{-2}$ s $^{-1}$ ]	<b>1</b>	1.1	<b>10.6</b>	<b>9.0</b>	<b>10.1</b>
events per #ing		<b>19</b>	40	<b>95</b>	<b>95</b>	<b>189</b>
effective lifetime	$\tau_{eff}$ [h]	<b>44.9</b>	30	<b>13.9</b>	<b>16.8</b>	<b>14.7</b>
run or level time	$t_{run,level}$ [h]	<b>15.2</b>	12.2	<b>4.35</b>	<b>4.29</b>	<b>4.34</b>
e-c heat SEY=1.2	P [W/m]	<b>0.2</b>	0.1	<b>0.4</b>	<b>0.6</b>	<b>0.3</b>
SR+IC heat 4.6-20 K	$P_{SR+IC}$ [W/m]	<b>0.32</b>	0.30	<b>0.62</b>	<b>1.30</b>	<b>1.08</b>
IBS $\epsilon$ rise time ( $z, x$ )	$\tau_{IBS,z/x}$ [h]	<b>59, 102</b>	40, 69	<b>38, 66</b>	<b>8, 33</b>	<b>18, 31</b>
annual luminosity	$L_{int}$ [fb $^{-1}$ ]	<b>57</b>	58	<b>300</b>	<b>300</b>	<b>300</b>



Luminosity vs.  $\beta^*$  in the Xing plane (with hour-glass effect) for different values of  $\beta^*$  in the other plane: nominal emittance and bunch length, ultimate intensity, no crab-cavity

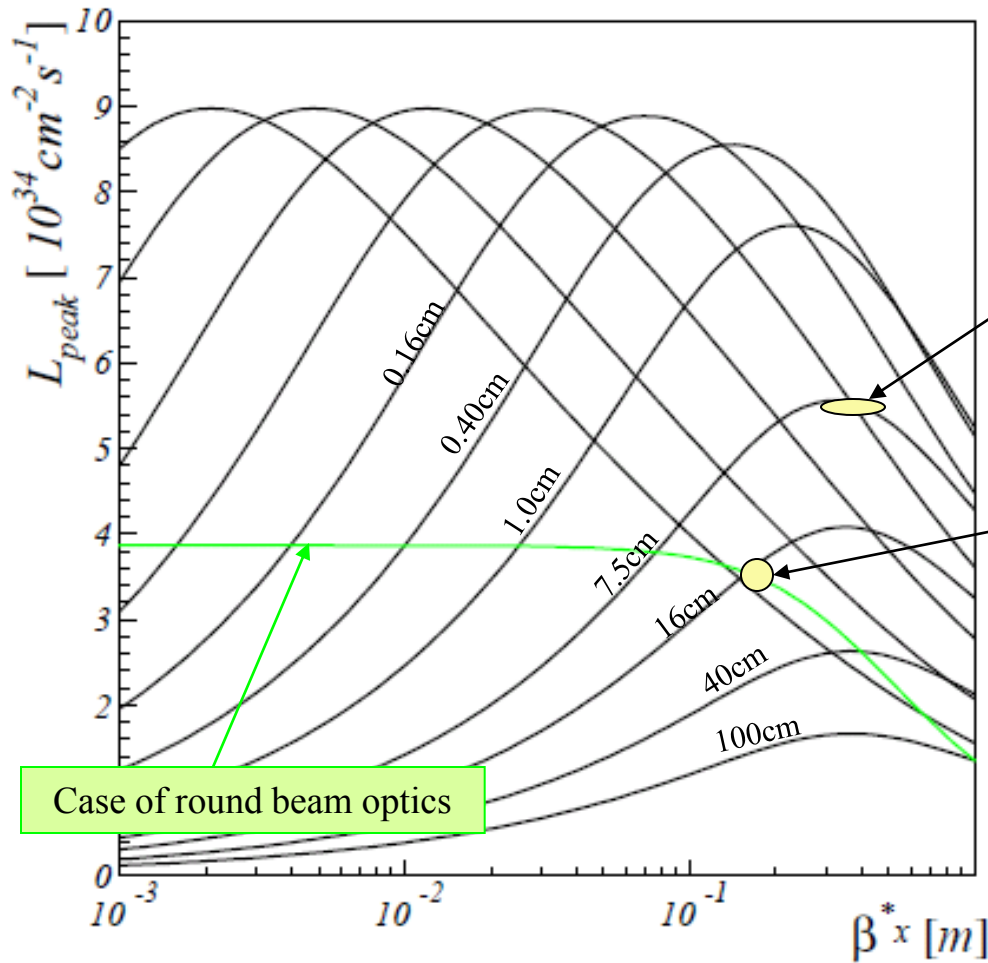

Example of flat optics:

$\beta^* = 30$  cm in the crossing-plane  
 $\beta^* = \sigma_z = 7.5$  cm in the other plane  
 $\Theta_c = 10\sigma$  in the plane of biggest  $\beta^*$   
 $\rightarrow$  Peak lumi  $\sim 5.6 \cdot 10^{34} \text{cm}^{-2} \text{s}^{-1}$


“Equivalent” round optics:

$\beta^* = 15$  cm in both planes  
 $\Theta_c = 10\sigma$   
 $\rightarrow$  Peak lumi  $\sim 3.5 \cdot 10^{34} \text{cm}^{-2} \text{s}^{-1}$

Case of round beam optics

1. The “virtual” performance of the two optics is equivalent with crab-cavity ( $\sim 8\text{-}9 \cdot 10^{34}$ ),
2. In all cases the two options requires to push  $\beta^*$  well beyond the Phase I limit of 30 cm.  
 ...Nb3Sn can only improve the situation by  $\sim 25\%$ , not more!

# Structure of the project HL-LHC and the HiLumi FP7 Design Study

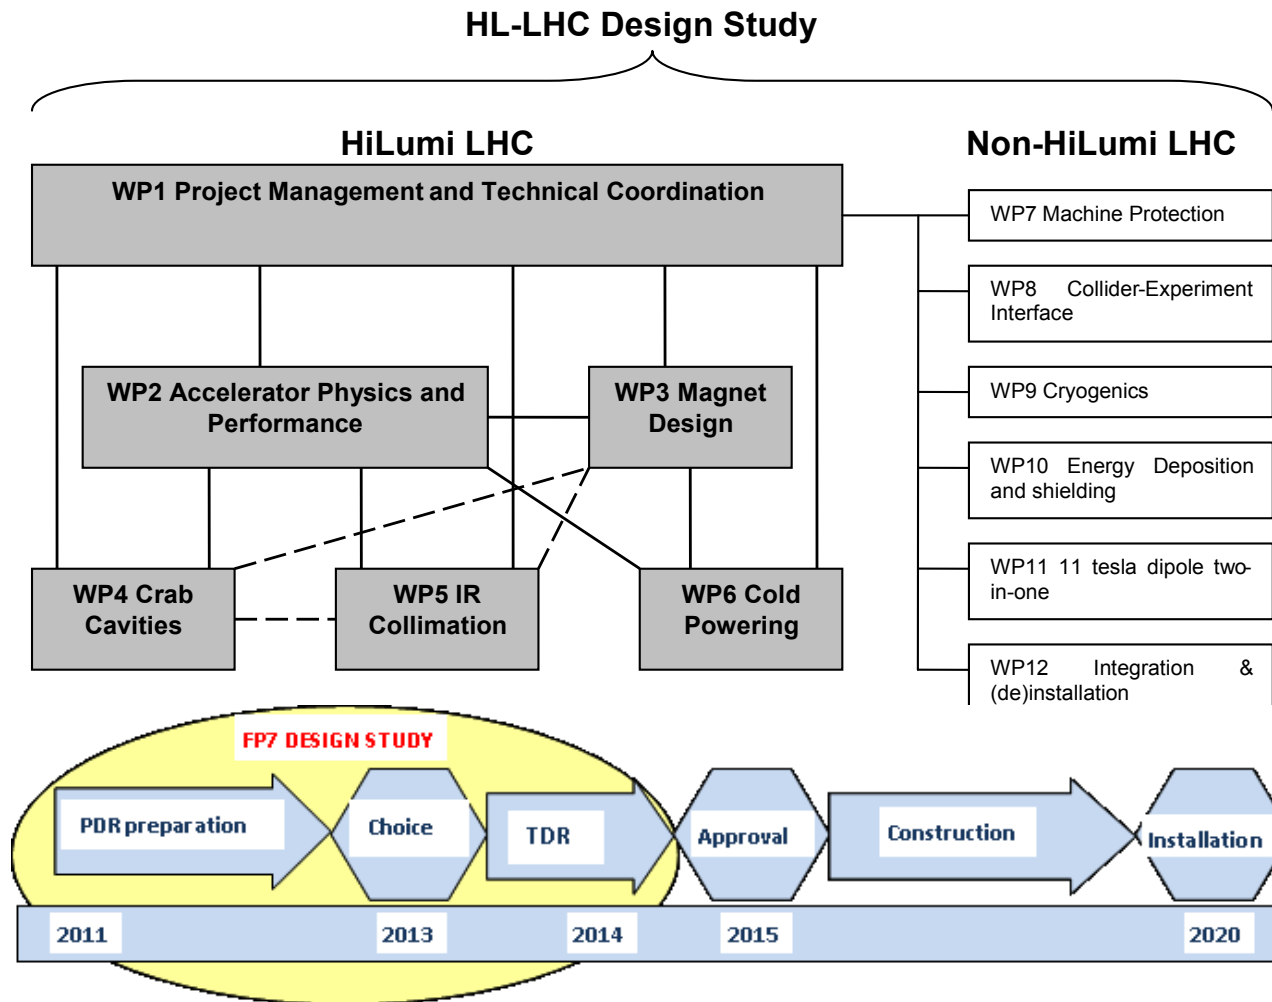


# Large participation application 25 Nov 2010


Participant no.	Participant organisation name	Short name	Country
1 (Coordinator)	European Organization for Nuclear Research	CERN	IEIO <sup>1</sup>
2	Commissariat à l'Énergie Atomique et aux énergies alternatives	CEA	France
3	Centre National de la Recherche Scientifique	CNRS	France
4	Stiftung Deutsches Elektronen-Synchrotron	DESY	Germany
5	Istituto Nazionale di Fisica Nucleare	INFN	Italy
6	Budker Institute of Nuclear Physics	BINP	Russia
7	Consejo Superior de Investigaciones Cientificas	CSIC	Spain
8	École Polytechnique Fédérale de Lausanne	EPFL	Switzerland
9	Royal Holloway, University of London	RHUL	UK
10	University of Southampton	SOTON	UK
11	Science & Technology Facilities Council	STFC	UK
12	University of Lancaster	ULANC	UK
13	University of Liverpool	UNILIV	UK
14	University of Manchester	UNIMAN	UK
15	High Energy Accelerator Research Organization	KEK	Japan
16	Brookhaven National Laboratory	BNL	USA
17	Fermi National Accelerator Laboratory (Fermilab)	FNAL	USA
18	Lawrence Berkeley National Laboratory	LBNL	USA
19	Old Dominion University	ODU	USA
20	SLAC National Accelerator Laboratory	SLAC	USA

# HiLumi is the focal point of 20 years of converging International collaboration


- The collaboration with US on LHC upgrade started during the construction of LHC
- EU programs have been instrumental in federating all EU efforts
- With Hi-Lumi the coordination makes a step further: from coordinated R&D to a common project
- CERN is not anymore the unique owner, rather is the motor and catalyzer of a wider effort.
- Managed like a large detector collaboration (with CERN in special position as operator of LHC)

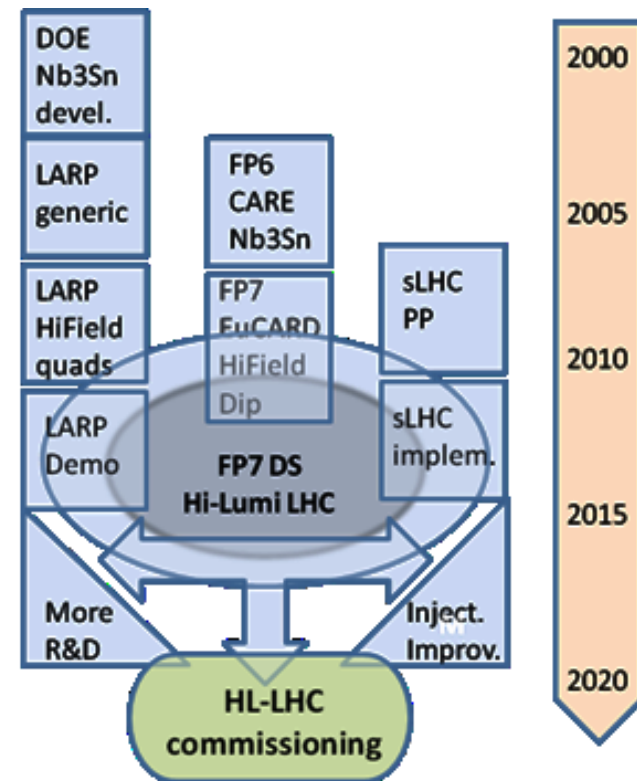

# Budget FP7 HiLumi

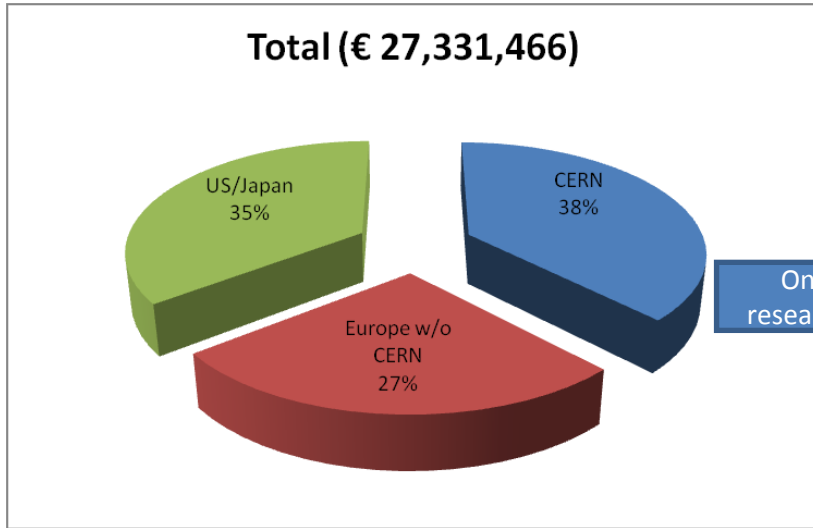


Only EU research area

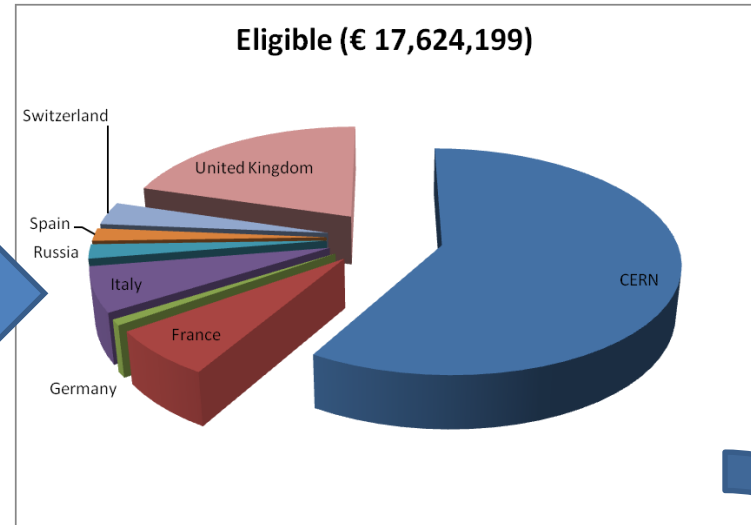


CERN waives all technical works: LHC is core program. Only kept the CERN cost for managem.


Waiving effect

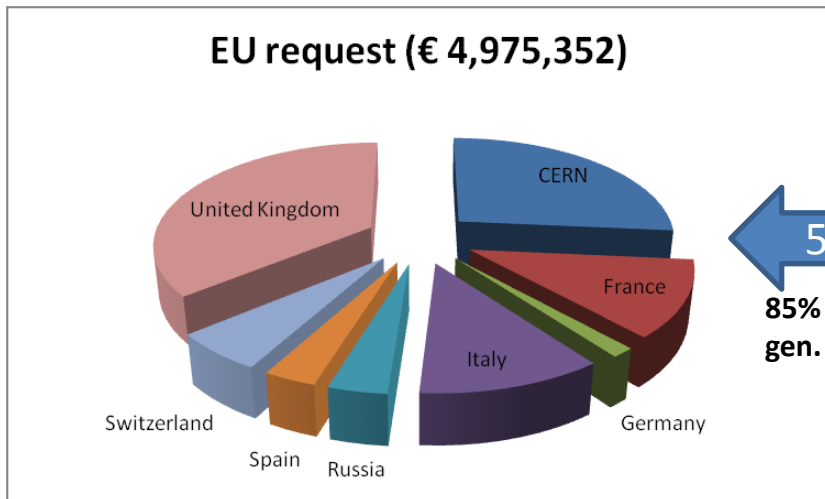

50%  
85% of CERN gen. mngt

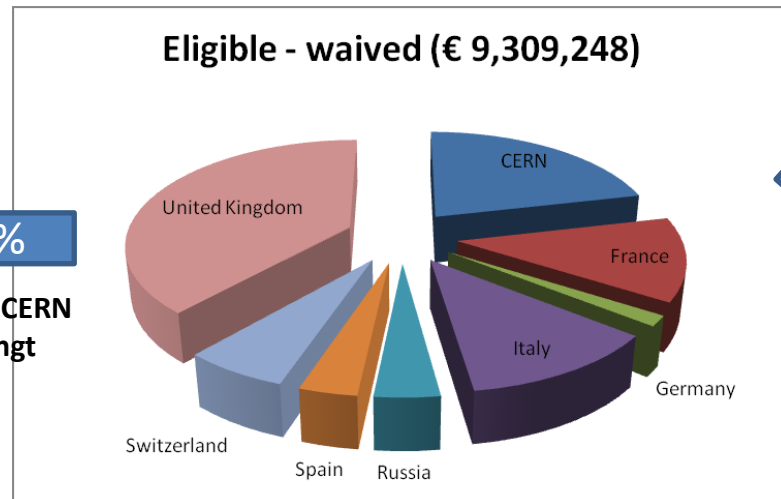

# Budget cont.

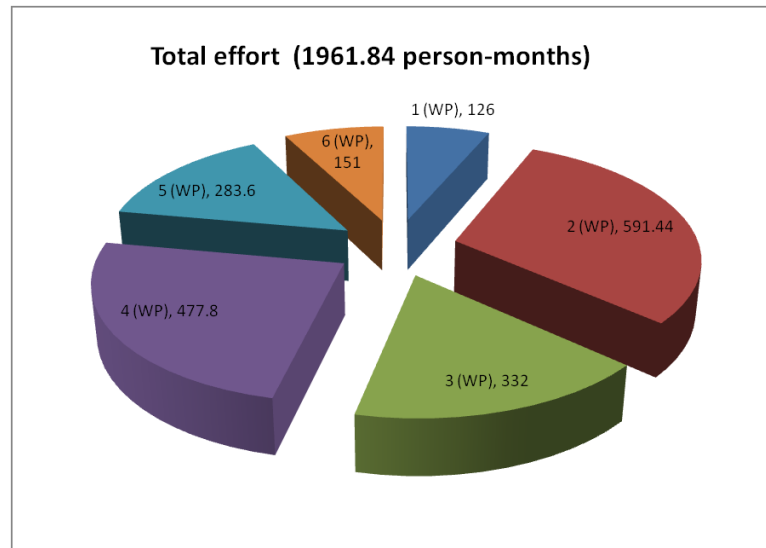

- Personnel for HiLumi by WP
1. Manag and Tech. Coord. (6%)
  2. Acc. Physics and beam
  3. Magnets for IR
  4. Crab Cavities
  5. Collimators
  6. Sc links

## Estimated cost for the the whole HL-LHC over 10 years in M€

	Design in FP7 HiLumi	Extra effort for Design	R&D and proto	Industrialization & Construction	TOT	Industry
W1-WP6	27	10	50	200	287	160
WP7-12	0	15	30	100	145	80
Other	0	5	10	50	65	40
TOT	27	30	90	350	497	280



# Conclusion

- HL-LHC project is starting, forming a large international collaboration
- HL-LHC has a flexible plan: however the development of the main hardware is –almost – traced
- **HL-LHC builds on the strength and expertise of sLHC**
  - For the injectors (that will deliver the needed beam)
  - For the beam studies (fundamental understanding the limitation of Phase 1)
  - For the pushed Nb-Ti technologies for magnets:
    - Essential for Matching Section magnets
    - Important back-up solution for the low- $\beta$  magnets
  - For the radiation studies, safety aspect and management tools.

