

Optics issues at HERA

B. Holzer



HERA Parameter

HERA is a **double ring collider**:


two independent storage rings

4 straight sections for experiments

collision of protons & electrons at two
interaction regions (North/South)

internal gas target at IR East

internal wire target at IR West

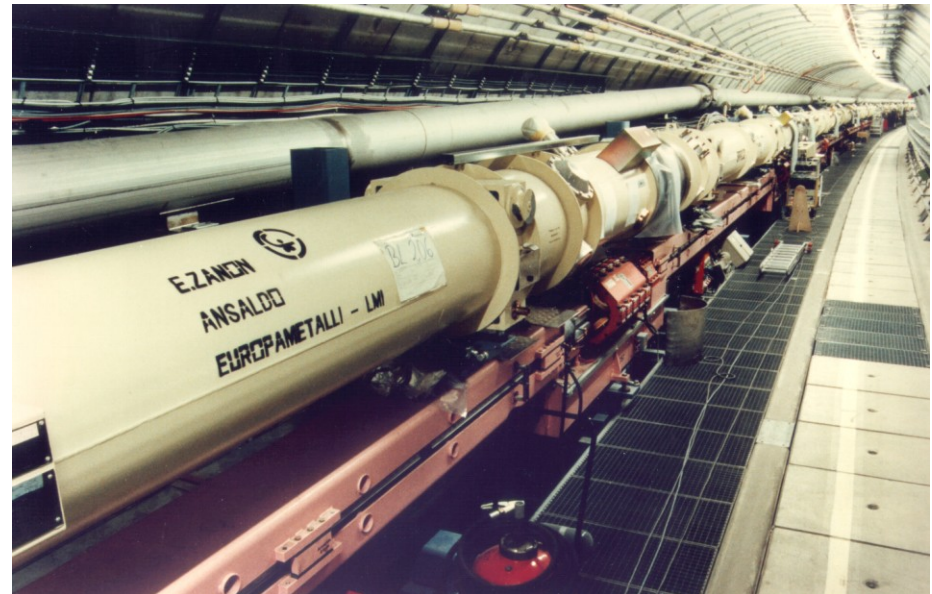

Circumference:

6.3 km

Proton Beam:

Injection Energy 40 GeV

Lumi-Energy 920 GeV

Electron Beam:

Injection Energy 12 GeV

Lumi Energy 27.5 GeV

Dipole field p:

5.1 Tesla

at I=5500 A for 920 GeV

***HERA** the main parameters*

Parameter	Elektronen	Protonen
Energie E / GeV	27.5	920
Max. Strom I / mA (Designwerte für $n_b=180$)	58 / 41	140 / 102
Zahl der Bunche n_b	180 / 63 – 126 – 153	180 / 60 – 120 – 150
Zahl der kollidierenden Bunche n_c	174 / 57 – 114 – 147	
Horizontale Emittanz ε_x / π -nm-rad	20 / < 26	5.1 / 4.7
Vertikale Emittanz ε_y / π -nm-rad	3.4 / 3.0	5.1 / 4.7
Horizontale Beta-Funktion am IP β_x^* / m	0.63	2.45
Vertikale Beta-Funktion am IP β_y^* / m	0.26	0.18
Bunchlänge σ_p / m	0.0103	0.191 / 0.21
Hourglass-Faktor R	0.924 / 0.913	
Spezifische Luminosität $L_b / 10^{30} \text{ cm}^{-2} \cdot \text{s}^{-1} \cdot \text{mA}^{-2}$	1.79 / 1.9 – 2.2	
Luminosität $L / 10^{31} \text{ cm}^{-2} \cdot \text{s}^{-1}$	7.44 / 2.5 – 5.1	


HERA History

1989 Commissioning of the *electron storage ring*

1991 Commissioning of the *proton storage ring*


Oct. 1991 First e/p collisions

July 2007: shut down

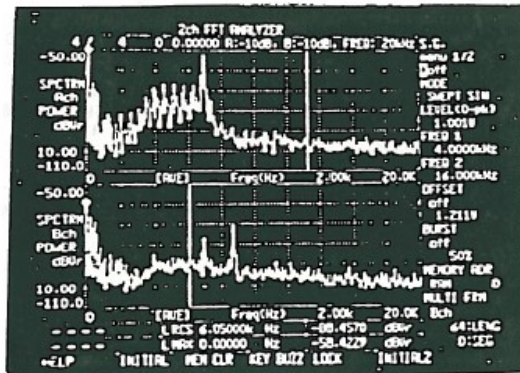

HERA-p tune spectrum


starting in 1989 with “very basic” tools

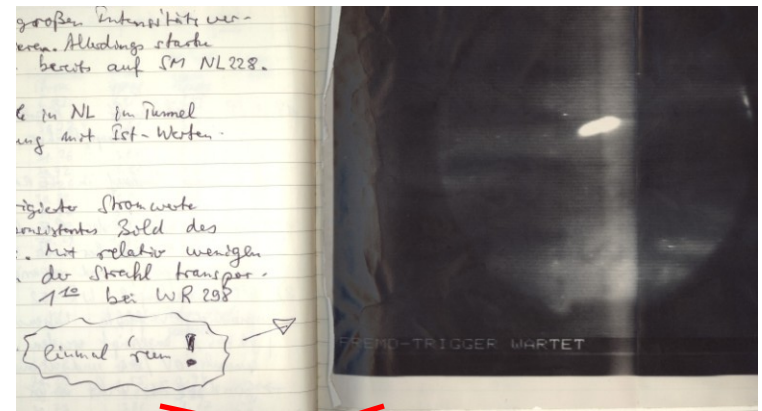


~~HERA-e electronic~~ Logbook
very first BPM system

HERA Optics

... the special problem of interleaved beam lattices

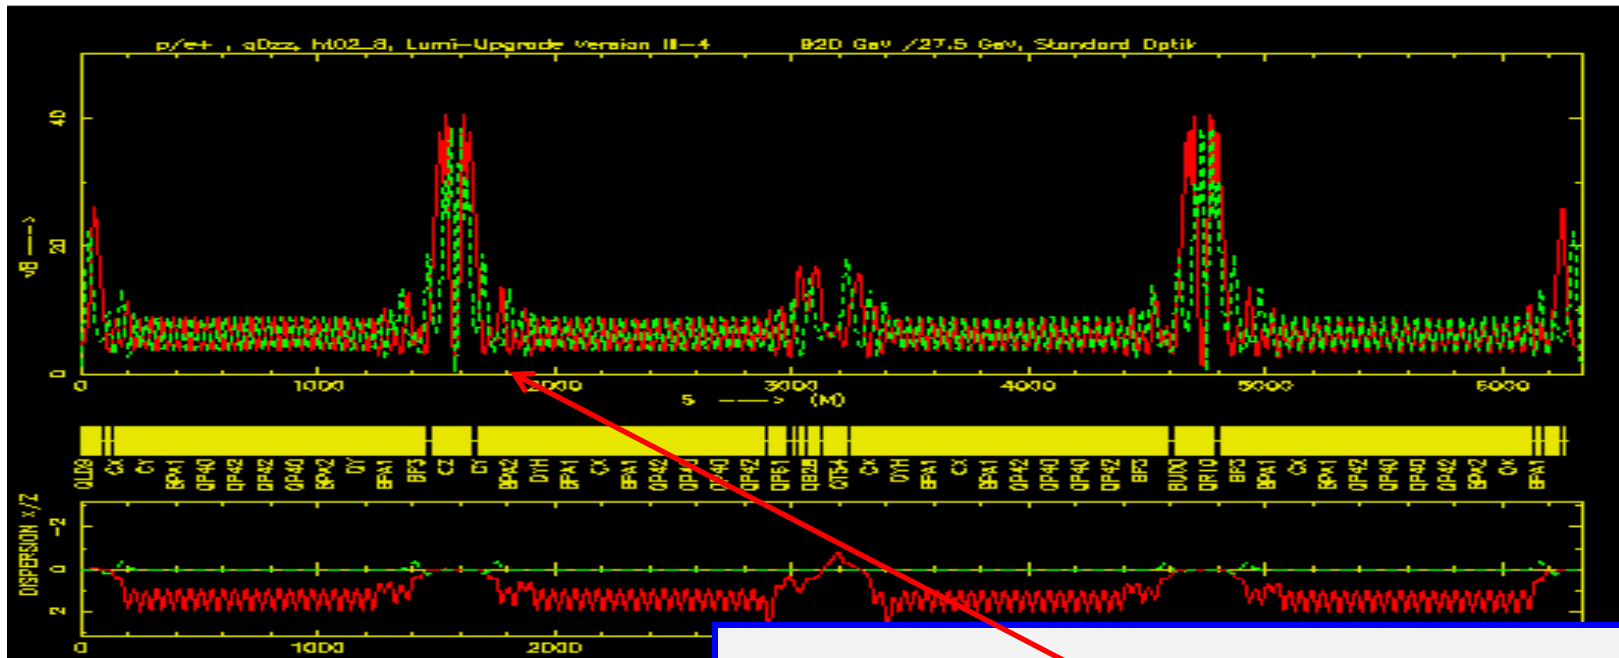

HERA-p optics: standard layout of FODO & mini β insertions

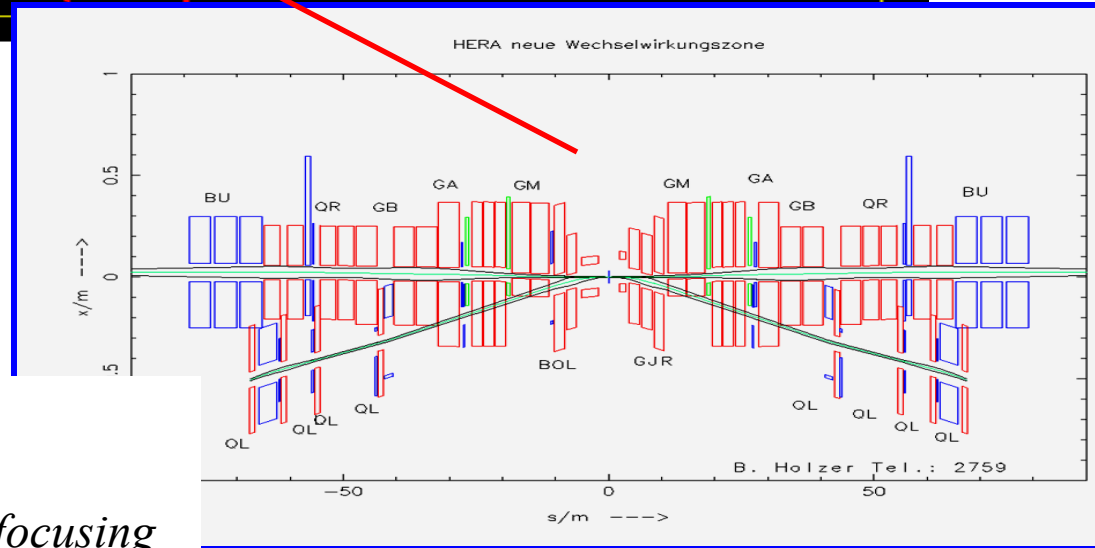

straight sections: interleaved scheme of electron optics (mini β), beam separation & proton doublet focusing


Optics Measurements:

Measurement of β

Different methods used:

Change gradients of quadrupoles

*21 individual quadrupoles
in the LSS,
slow, but independent of
bpm readings*

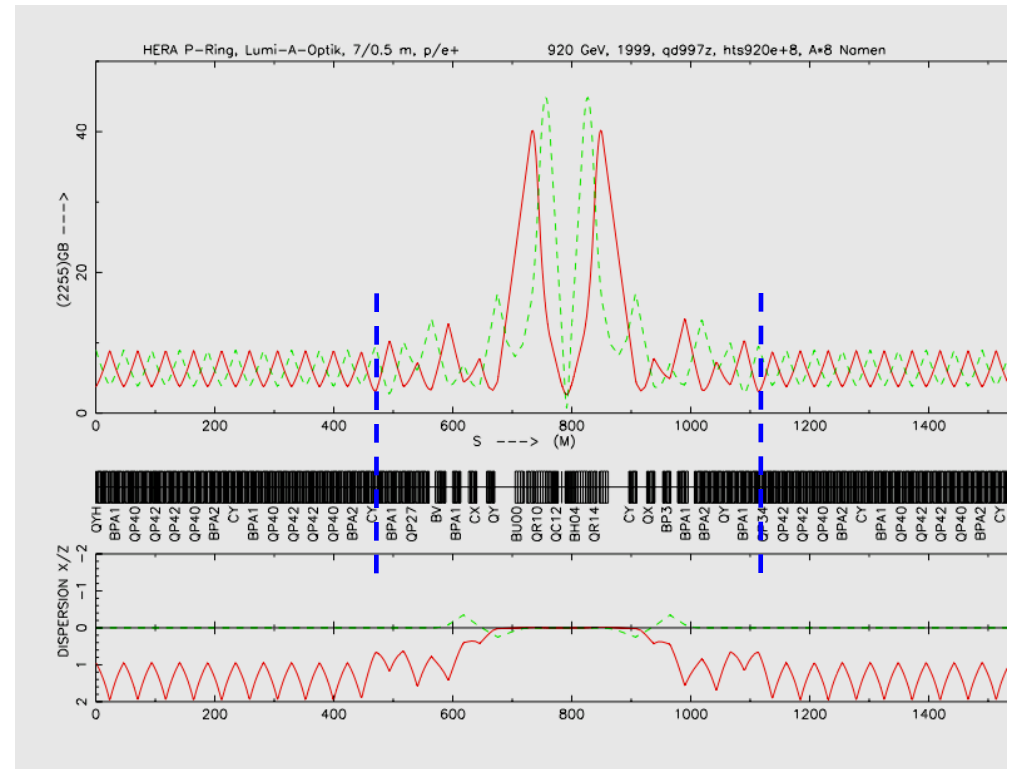

Orbit response matrix measurement

*faster than other method,
depend on orbit stability & bpm quality*

ORM specialities in HERA:

Amplitude of difference orbits: $\Delta x \approx 1\text{mm}$ in the arcs

Unidirectional current change

For each corrector: 5 + 7 orbits (HERA-e), 3 + 5 orbits (HERA-p)

Time needed to measure matrix (both planes):

For HERA-e at 27.5GeV: ≈ 2 hours (556 correctors)

For HERA-p at 920GeV: ≈ 4 hours (254 correctors)

Stable conditions needed for several hours!

Orbit Update rate: HERA-e: 5 Hz, HERA-p: 1 Hz

Limitation for the total time is the corrector magnet current change speed

Always problems with background and lifetime

Reference orbit is drifting (Hysteresis of corrector magnets)


HERA-p: BPM electronic is aging; many BPMs not working; unfortunately many of them in the IR

ORM specialities in HERA:

Response-Matrix: Accuracy I

Top: Difference orbits (Measurement, unfitted and fitted model) for kick of corrector OR 17 C1


Bottom: Difference between measurement and model before and after fit

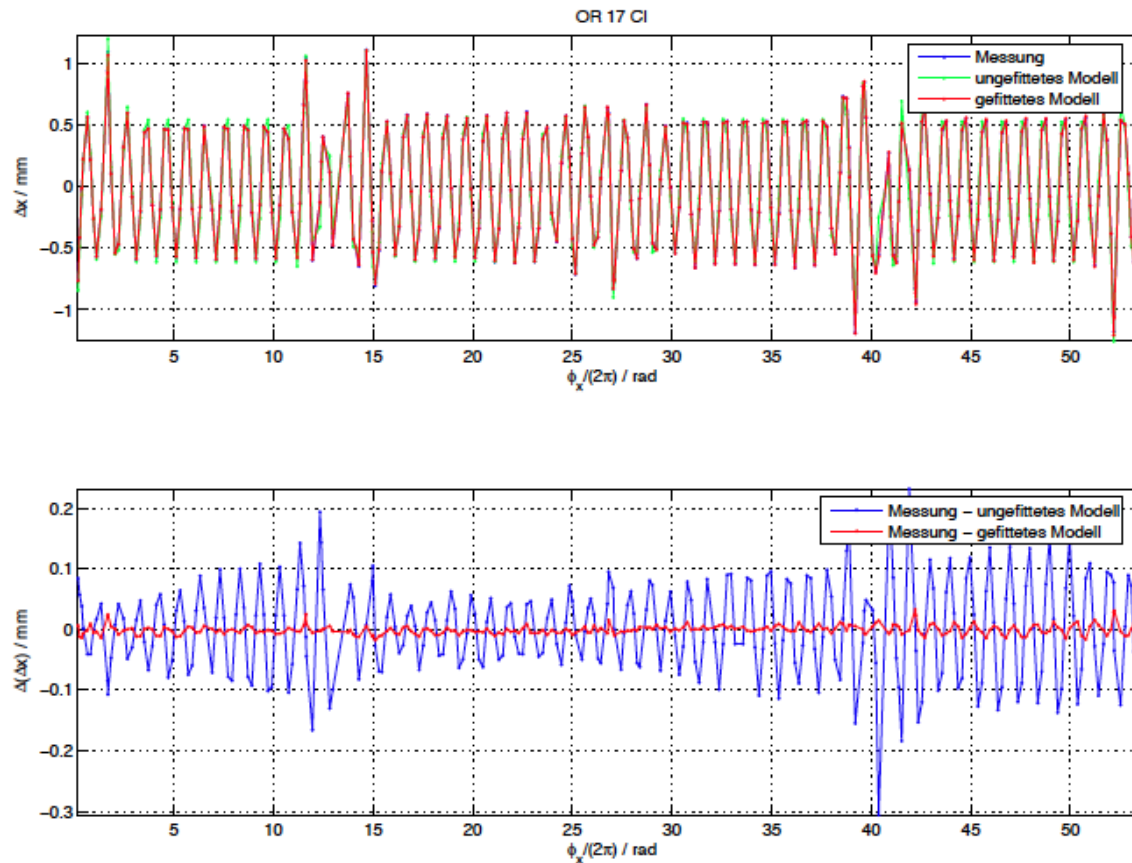

ORM specialities in HERA:

Example: Luminosity Optics HERA-e, y -plane

Before correction; ZEUS calorimeter closed

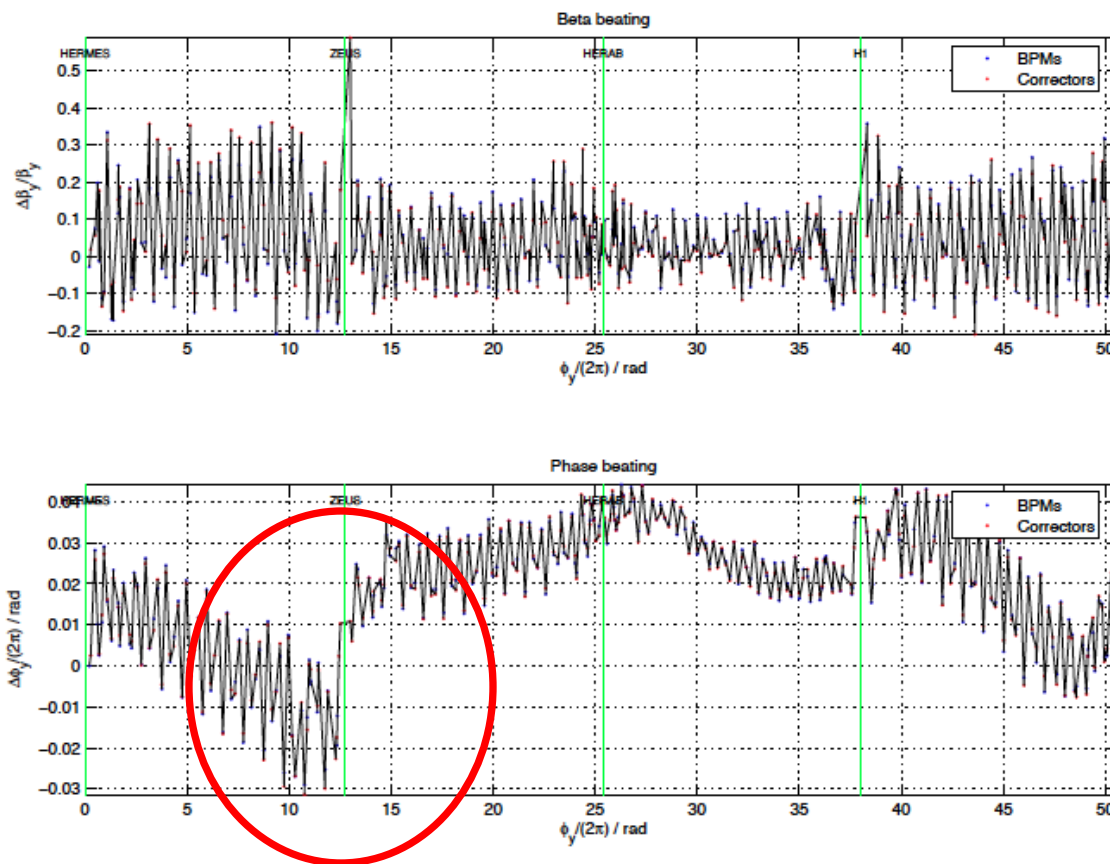


Optics Measurements:

specialities HERA-e

mini beta quads inserted in detector design

-> influence of calorimeter position on beam orbit & optics

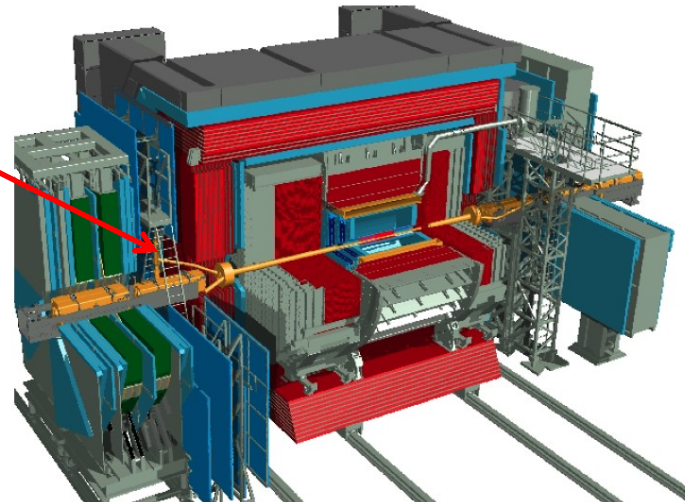

$$\Delta x \approx 5\text{mm}$$


$$\Delta\beta/\beta \approx 20\%$$

to be corrected “on the flight”

ORM specialities in HERA:

Example: Luminosity Optics HERA-e, y -plane

After correction with 10 quadrupoles ($\Delta k/k$ up to 4%)

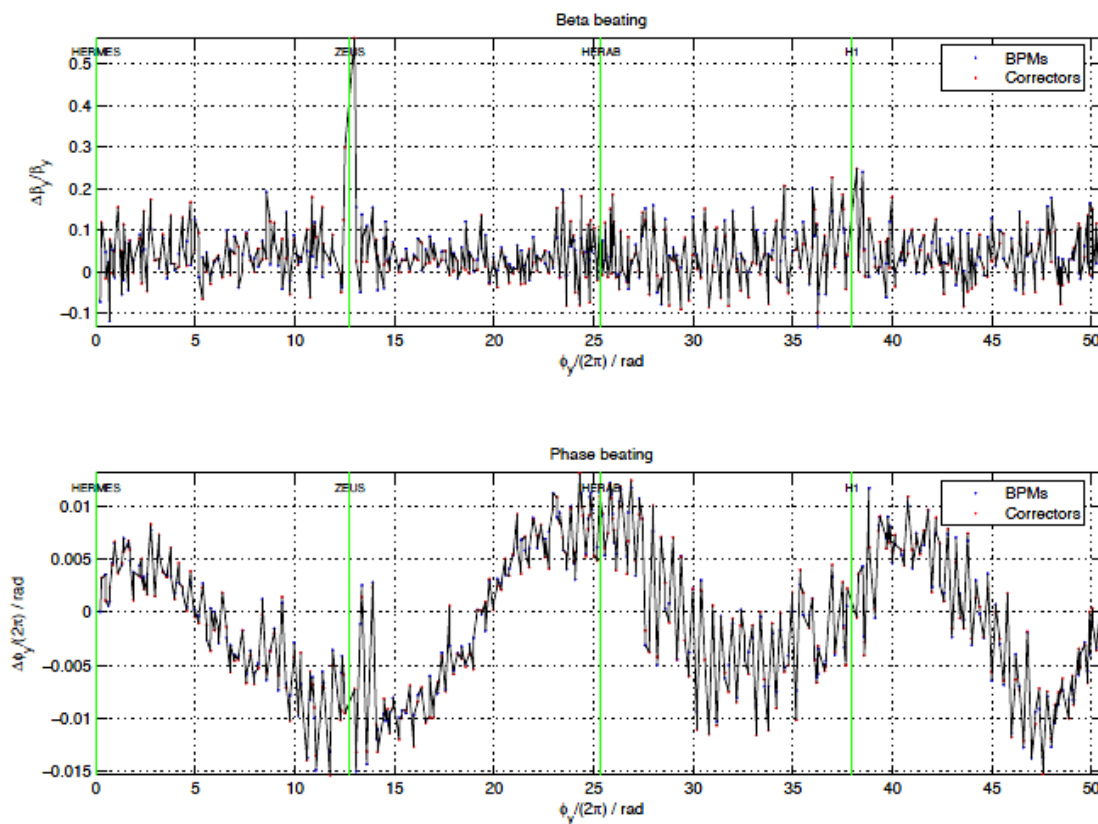

Optics Measurements:

Dispersion Correction in HERA-e

$$\begin{aligned} \vec{u}_g &= \vec{u}_m + S * \Delta \vec{u}' & \vec{u}_g, \vec{u}_m & \text{golden \& measured orbit} \\ \vec{D}_{u,g} &= \vec{D}_{u,m} + R * \Delta \vec{u}' & \vec{D}_{u,g}, \vec{D}_{u,m} & \text{golden \& measured Dispersion} \\ & & & \text{for an applied orbit kick } \Delta \vec{u}' \end{aligned}$$

golden & measured orbit
golden & measured Dispersion
for an applied orbit kick $\Delta u'$

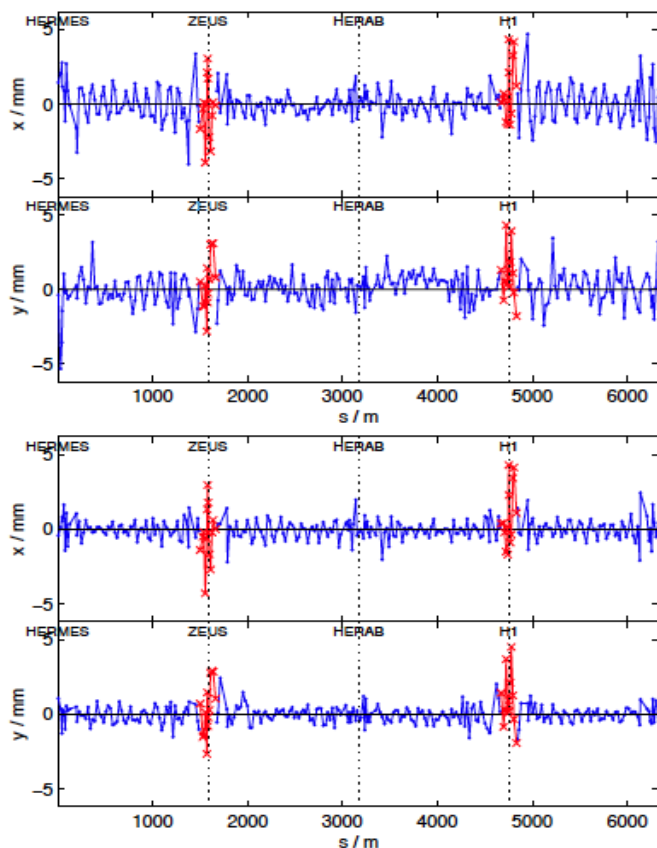


Figure 1: Orbit before (above) and after correction (below). Crosses show fixed BPM positions in the IRs.


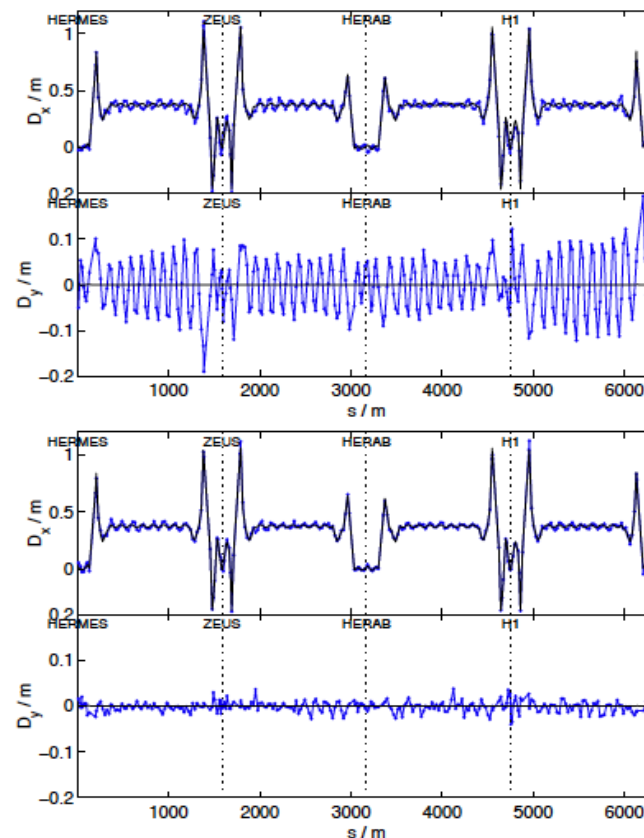


Figure 2: Dispersion before (above) and after correction (below).



Dispersion Correction in HERA-e

essential for Beam Polarisation

Polarisation während eines Lumi-Runs

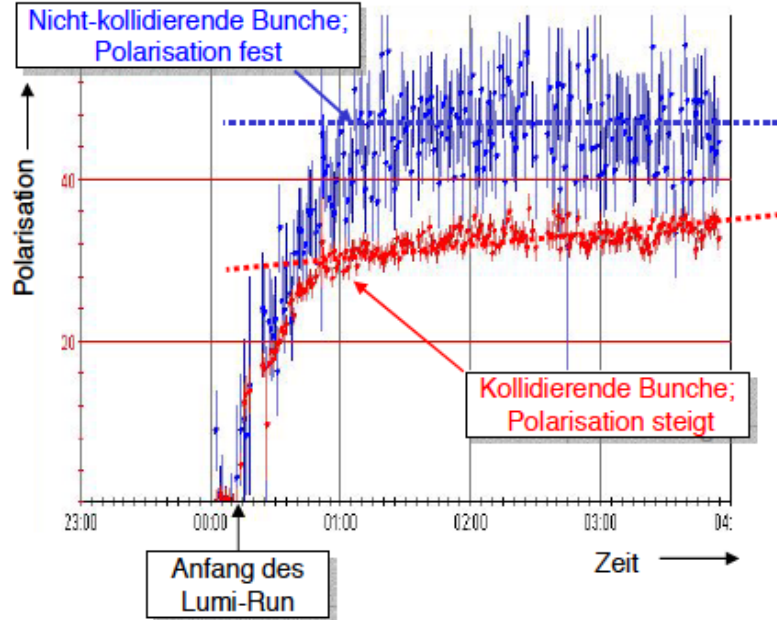


herae, 17-Nov-2004, 00:09:17

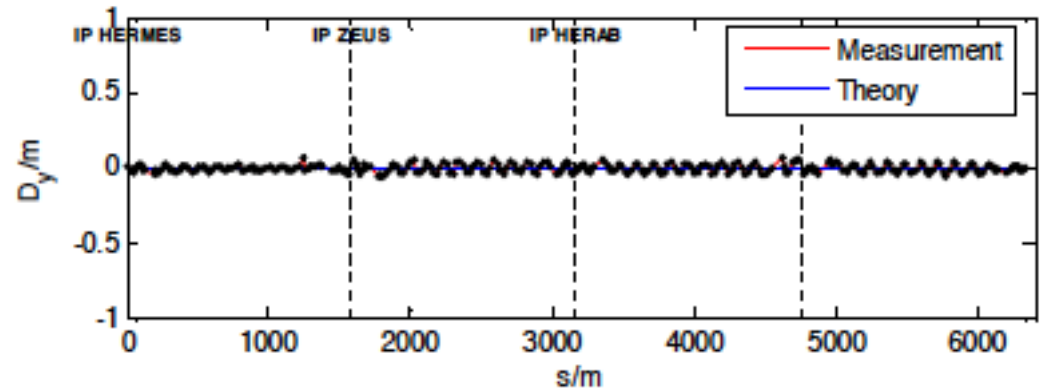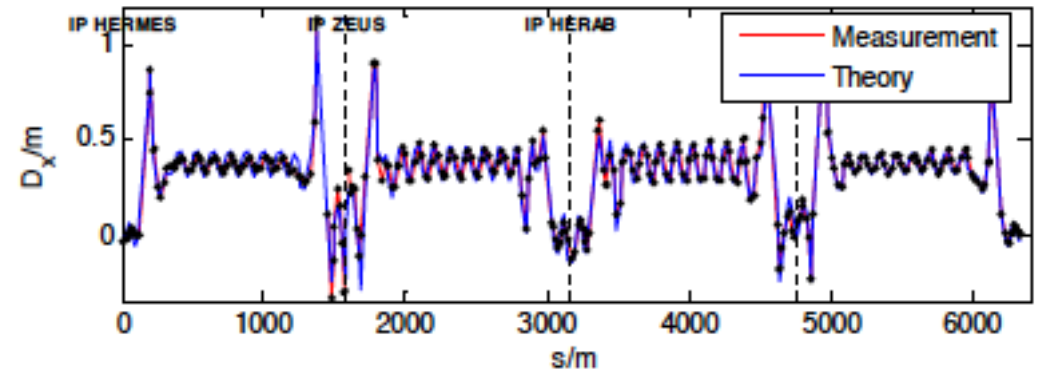

Beam Based Alignment




The relative offset of the beam in an IR quadrupole with respect to the magnet axis can be found by changing the quadrupole strength and measuring the thus generated difference in the orbit

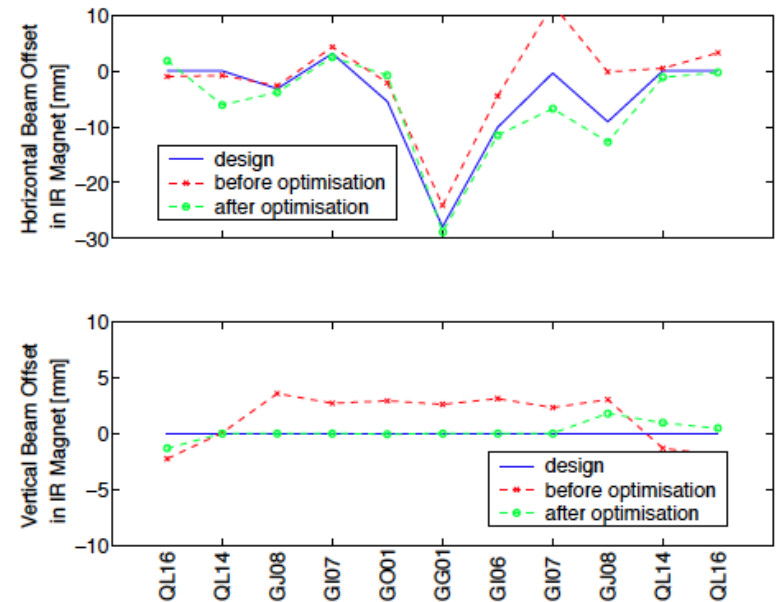


Beam Based Alignment

... the problem: control of synchrotron light

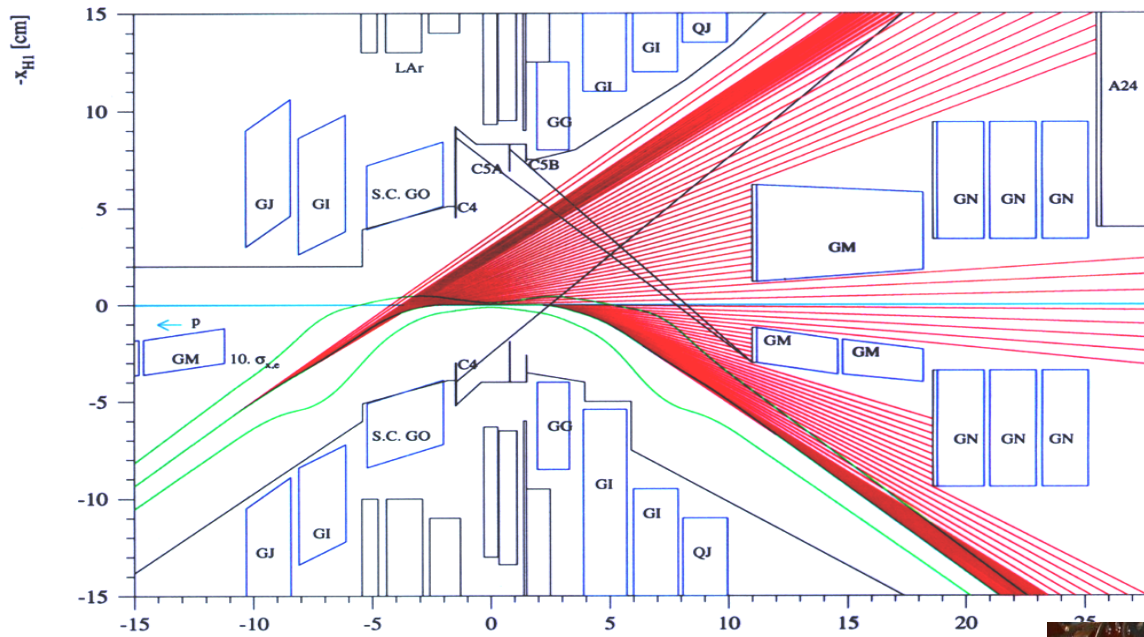

synchrotron light produced during beam separation:
 $P_{syn} = 30 \text{ kW per LSS}$

damaged vacuum chamber in mini beta quad

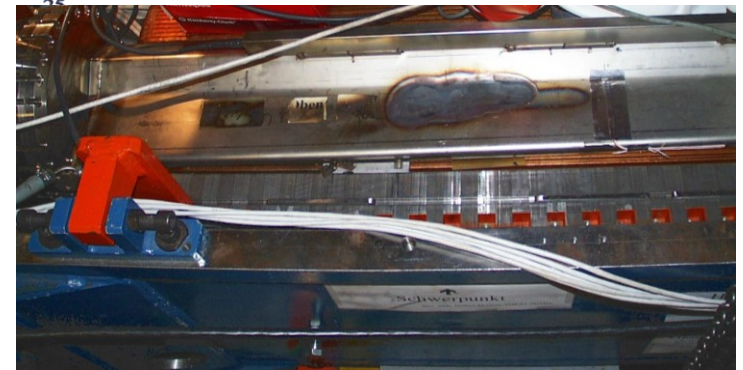

HERA Optics & Dynamic Aperture



... the special problem of a sc. storage ring

Beam Optics at Injection: a running target

s.c. eddy currents / imbalance currents / persistent currents have a strong influence on the performance of the storage ring.

HERA proton ring at injection:

*Chromaticity measurement at flat bottom
„on beam“*

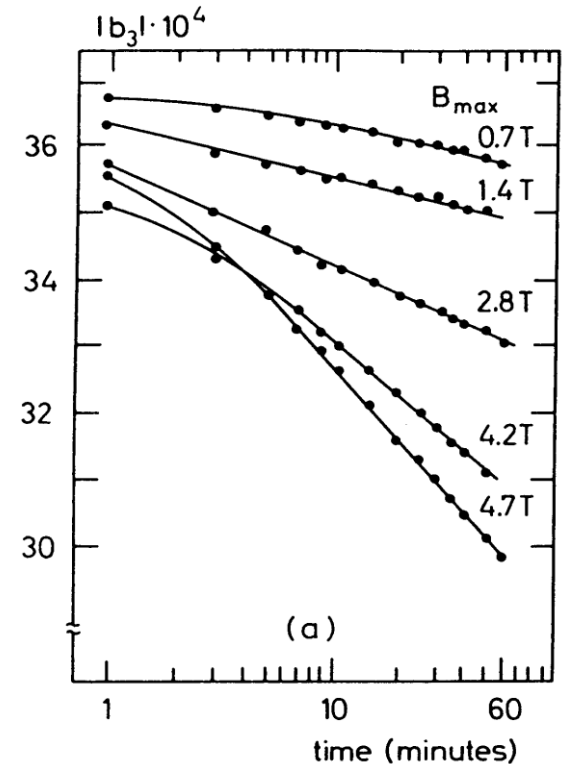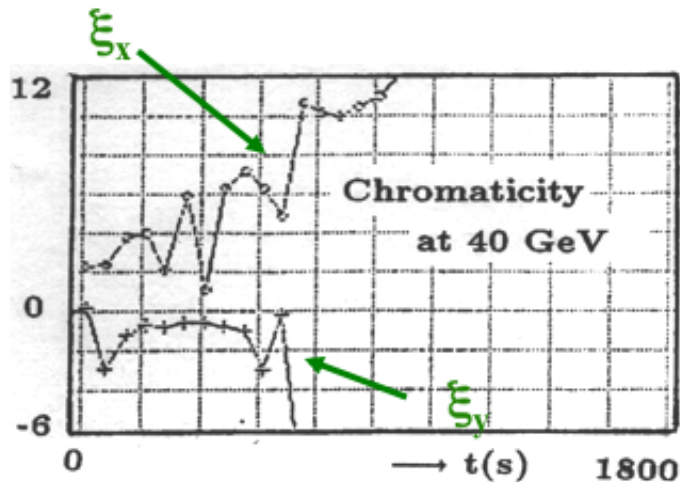


un-reproducibility after different pre-cycles

Dynamic Aperture


... the Mystery ?

Multipoles in HERA main magnets

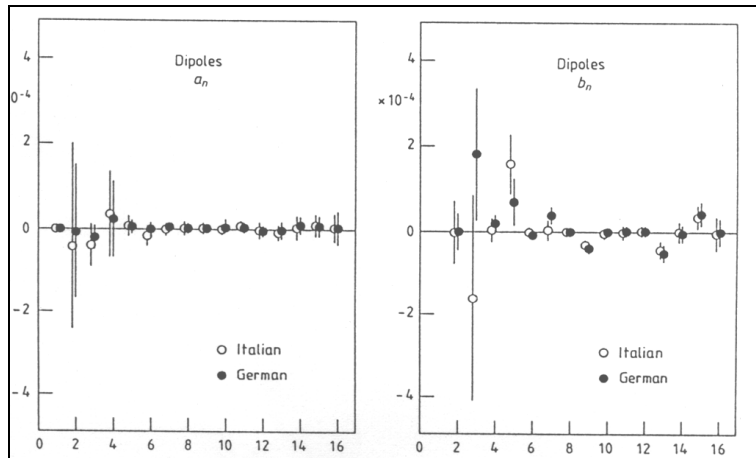

HERA dipole magnets

measurements at 5000 A,
closed to the flat top operating point

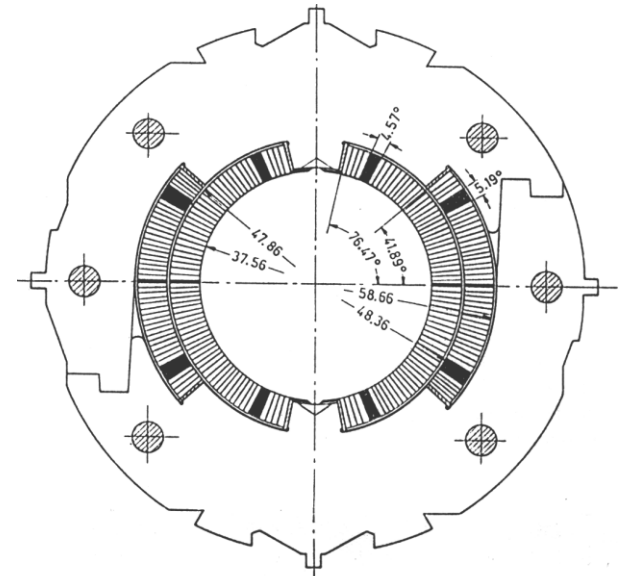

$$B_{\varphi}(r, \varphi) = B_{main} \cdot \sum_{n=1}^{\infty} \left(\frac{r}{r_0}\right)^{n-1} \cdot (b_n \cos n\varphi + a_n \sin n\varphi)$$

$$r_0 = 25 \text{ mm}$$

Sextupole component at low field


Conditions at injection: $I=244$ A

$$b_3=32 \cdot 10^{-4}$$

Effect on the beam:

chromaticity in a storage ring

$$\xi_{total} = \frac{1}{4\pi} \oint \{k(s) + m_{6\text{ pol}} D(s) + m_{pc} D(s)\} \beta(s) ds$$

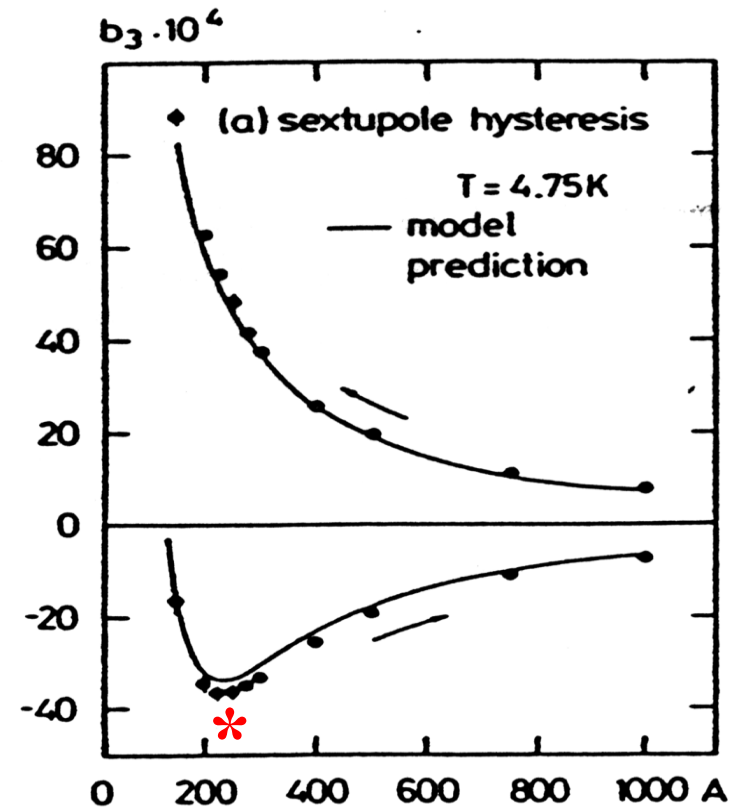

natural *b3 contribution*

ξ_{-x} -44 -275

ξ_{-y} -47 245

... is it stable ?


... is it reproducible?

Dynamic Aperture


... the Mystery ?

2000: new campaign to measure DA
careful optics measurement & correction


$$\left\langle \frac{\Delta\bar{\beta}}{\beta} \right\rangle_x = (4 \pm 7)\% \quad \left\langle \frac{\Delta\bar{\beta}}{\beta} \right\rangle_y = (11 \pm 9)\%$$

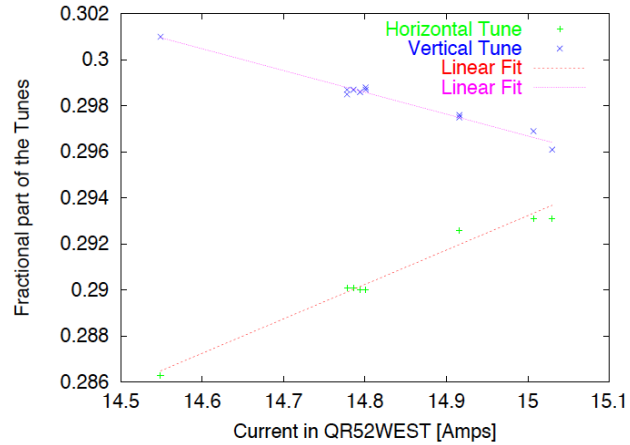

detuning with amplitude:
1994

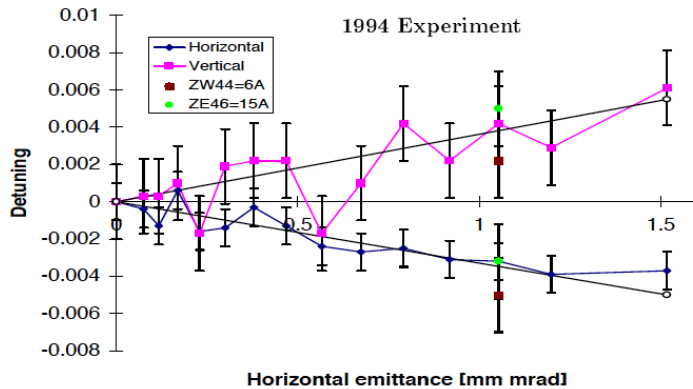


2000

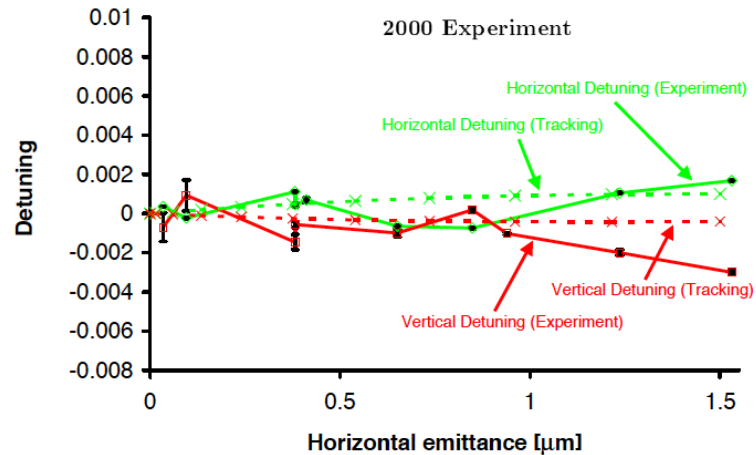


Dynamic Aperture

... the Mystery ?

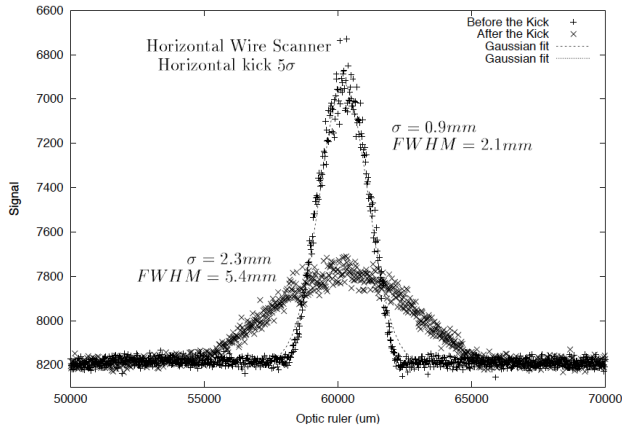


2000: kicking the beam to 5σ & observing survival amplitude... geometriv aperture smaller than DA during the first measurement series in 1994

*new sixtrack calculation ...
DA = $2.5 \mu\text{m} \rightarrow 4.5 \sigma$*

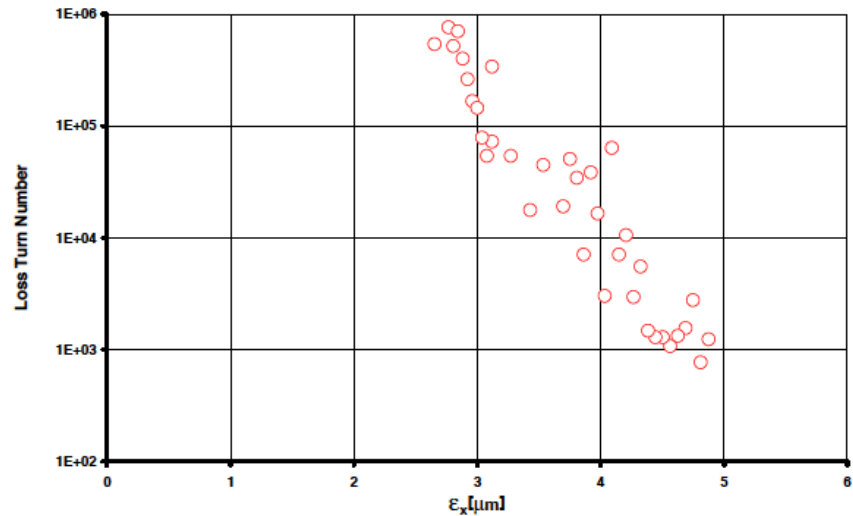

Dynamic Aperture

... the Mystery ?

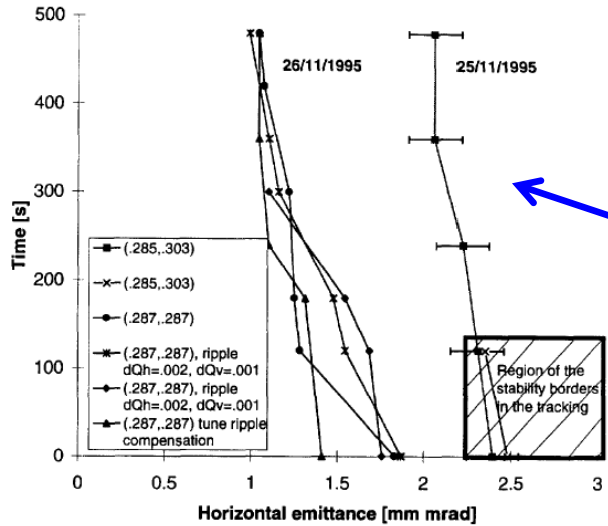

1994: kicking the beam, observing survival amplitude ... for different tunes
 $DA = 2.1 \mu\text{m} \rightarrow 4.1 \sigma$

Figure 10: Horizontal Dynamic Aperture derived from Beam Profile Measurements

sixtrack calculation ...
 $DA = 2.5 \mu\text{m} \rightarrow 4.5 \sigma$

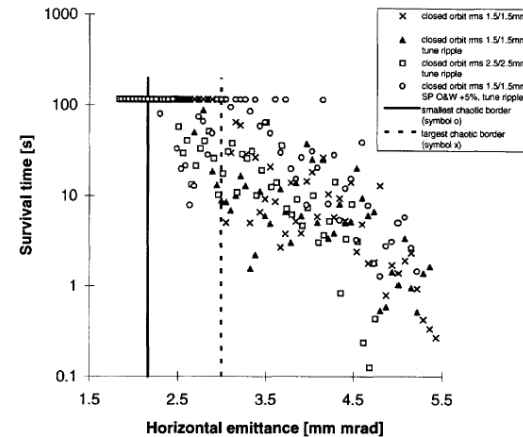


Figure 11: Survival plots for the cases #2, #10, #11 and #12 together with their smallest and largest chaotic border. SP stands for sextupoles correctors.

Dynamic Aperture

... and beam size

Aperture of vacuum chamber:

$$r_0 = 27.5 \text{ mm}$$

Beam size at injection

$$\gamma = 42$$

$$\varepsilon_{n,2\sigma} = 20 \text{ mrad mm}$$

$$\varepsilon_0 = 1.2 * 10^{-7}, \quad \hat{\beta} = 120 \text{ m}$$


$$\sigma = 3.8 \text{ mm}$$

ideal maximum aperture at injection:

$$r_0 = 27.5 \text{ mm} \Leftrightarrow 6.5 \sigma$$


measured dynamic aperture at injection:

$$r_0 \approx 17 \text{ mm} \Leftrightarrow 4.1 \sigma$$

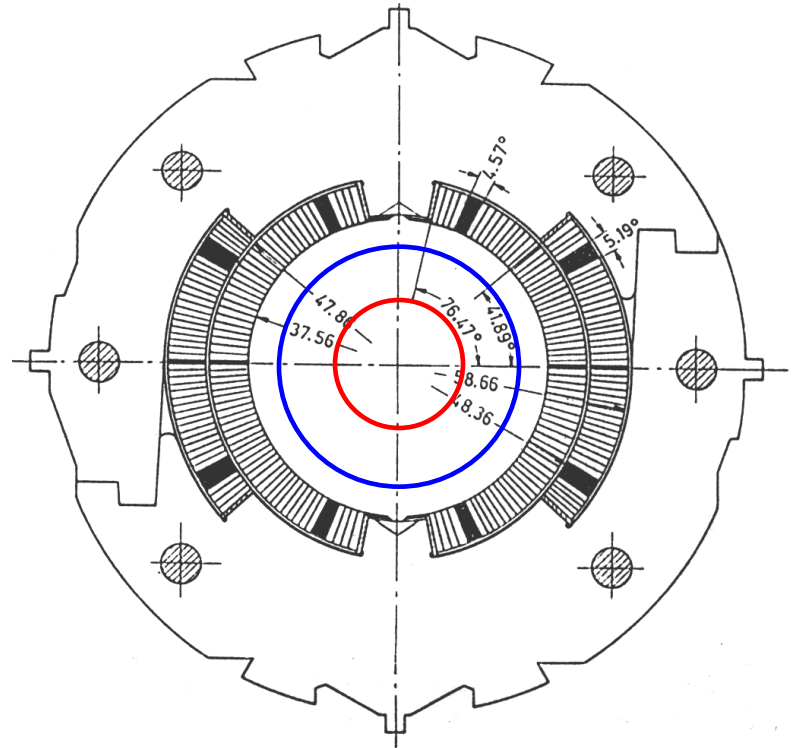


Dynamic Aperture

... and the multipole coils

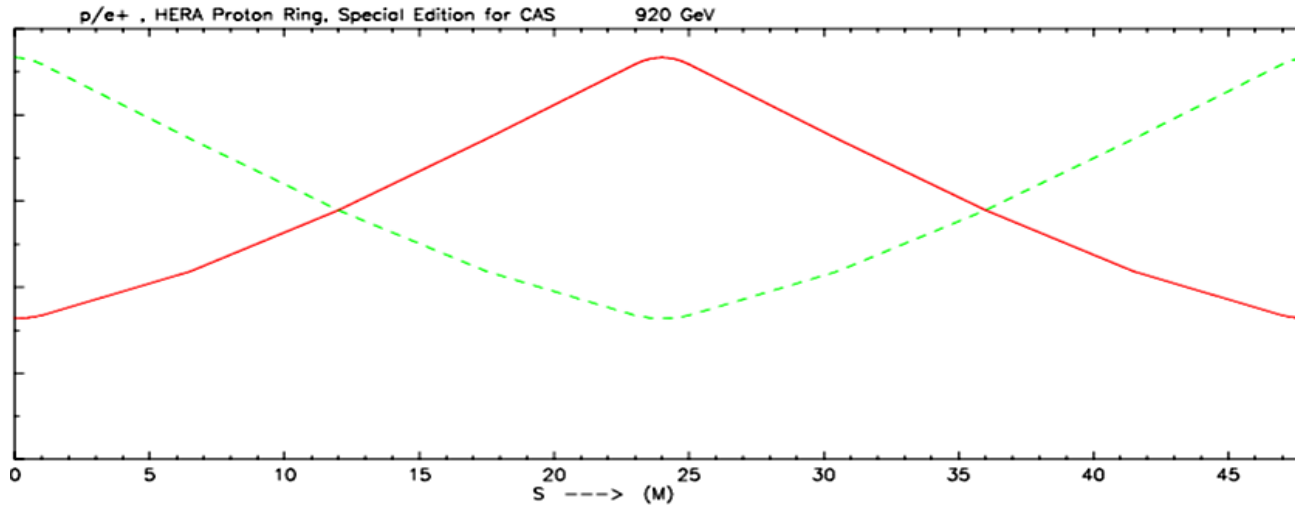

HERA multipole compensation scheme



QD	Dipole	Dipole	QF	Dipole	Dipole	QD
qp / sextupole	qp/sextupole	qp/sextupole	qp/sextupole	qp/sextupole	qp/sextupole	
cy b6	b5		cx b6	b5		cy b6

all correction coils (except the orbit correctors) were built as nested coils
 -> special precycle to avoid influence on the optics / dynamic aperture.


Dynamic Aperture

... and the multipole coils

the original calculations (1991 ?)

$$DA = 8 \mu\text{m} \rightarrow 8 \sigma$$

larger than geom. Aperture

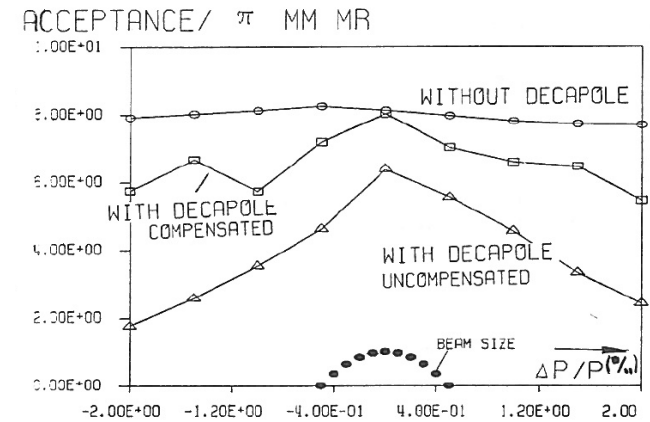

- 1.) *lifetime at injection*: $\tau \approx 5h$
- 2.) after *re-arranging the sextupole corrector strengths* $\tau \approx 10h$
- 3.) after *tlc optimisation* by the one and only expert $\tau \approx 20h$
- 4.) *deca poles powered between $I = \pm \infty$*
- 5.) *deca poles polarity switch between sectors (octants)*

→ goto point 1.)

Dynamic aperture was limited at injection,

beam parameter settings were extremely critical,

machine very non-linear

and still we did not see any influence from the higher order spool piece correctors




Effective beam cross section at the IP:

Luminosity – or van der Meer - scans

special care for ...

* dynamic beta beat in HERA-e

Lumioptik (HELUMGJ) 9.4.2002, Step 1, $\Delta f^{\text{Soil}} = 350$ Hz

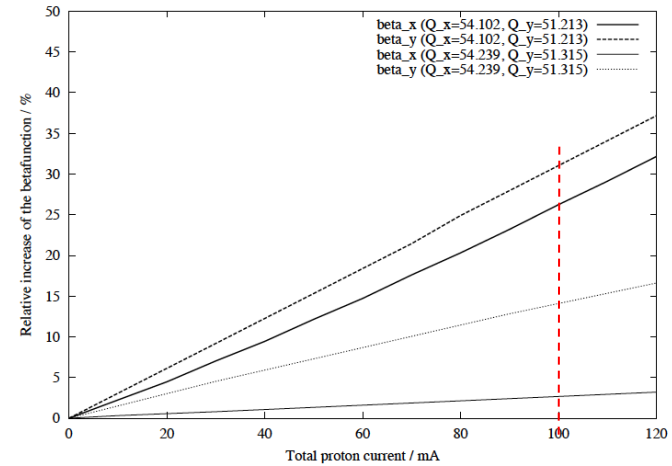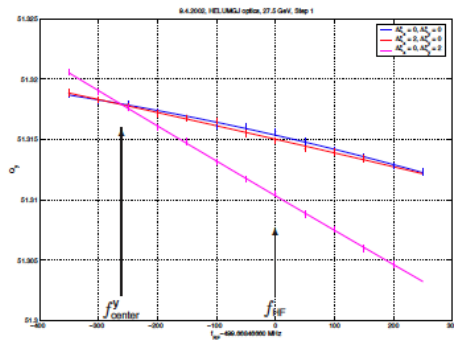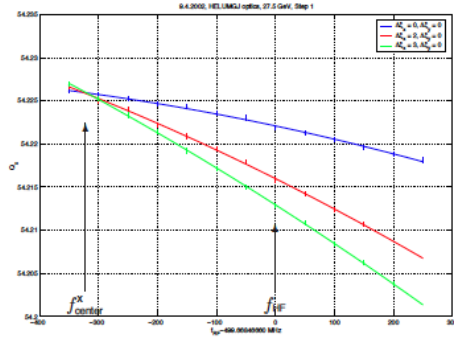


$\Delta\beta/\beta$ in e-ring as function of I_p

* centre frequency of e-ring


emittance reduction required $\Delta f = +350$ Hz

Effective beam cross section at the IP:

Luminosity – or van der Meer - scans

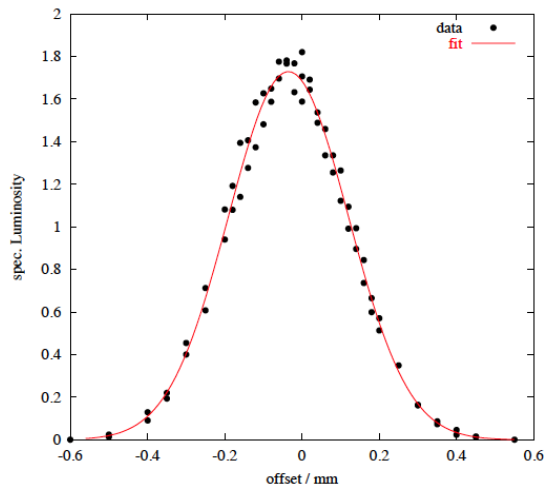

Horiz. plane, $\sigma_{eff,x} = 109.9 \mu\text{m}$

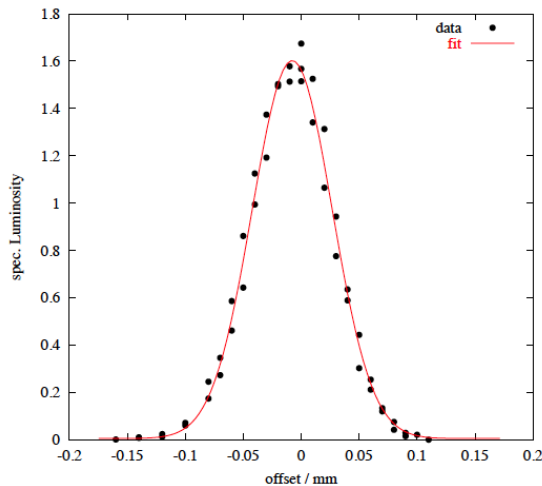

Vert. plane, $\sigma_{eff,y} = 24.4 \mu\text{m}$

theoretical values: $\sigma_{x,e} = \sigma_{x,p} = 112 \mu\text{m}$

$\sigma_{y,e} = \sigma_{y,p} = 30 \mu\text{m}$

$$L_{spec} = \frac{f_0}{2\pi * \sqrt{(\sigma_{x,p}^2 + \sigma_{x,e}^2)} * \sqrt{(\sigma_{y,p}^2 + \sigma_{y,e}^2)}}$$

$$= 1.76 * 10^{30} \text{ cm}^{-2} \text{ s}^{-1} \text{ mA}^{-2}$$

