

# CTF3 Streak Camera Results and Improvements

Aurélie Rabiller BE-BI-PM


09.02.2012

# Summary

---

- 2011 Measurements in CR, DL and CLEX
- Optical lines improvements
- Streak camera operation
- Discussion


# Streak camera optical lines

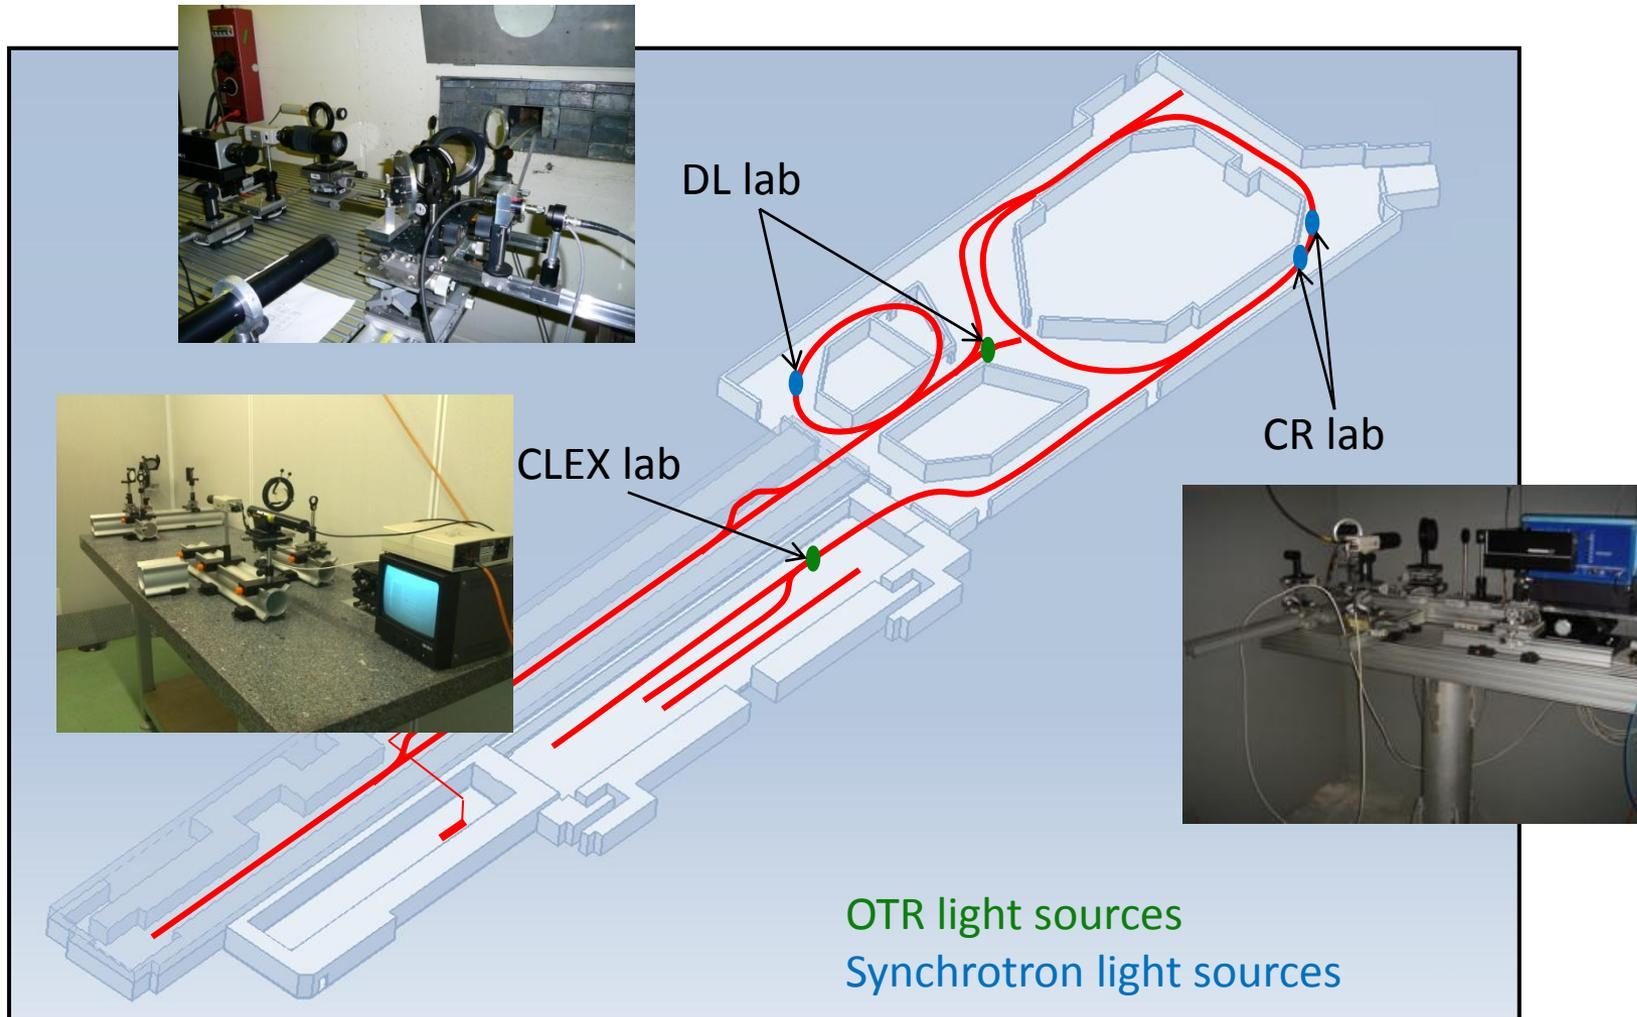

# 2011 Measurements


## Combiner ring: Bunch length stability and bunch spacing

### Multi-turn bunch length stability (July)

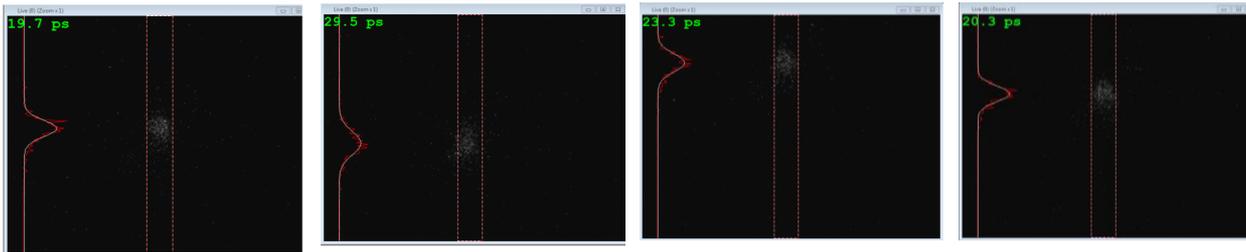

*Bunch length: 200 ps window Turn 1 to Turn 4 (10.06.2011)*

### Bunch Spacing (July)

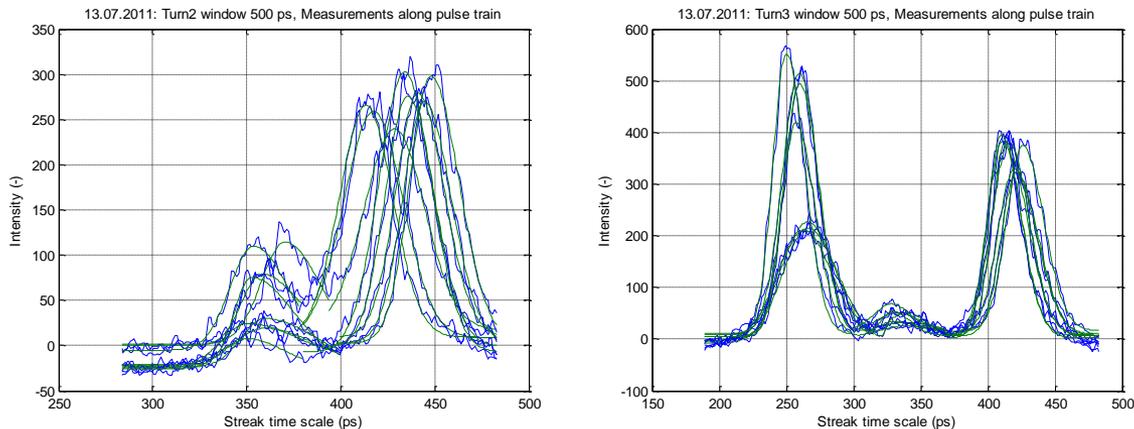





*Bunch spacing : 500 ps window Turn2 and 3 (13.07.2011)*

Very few measurements  
this year due to the  
difficulties to operate the  
beam  
+  
Misalignment of the  
optical line

# 2011 Measurements

## CLEX: bunch length and bunch spacing

### Bunch length and bunch spacing along the train (July)

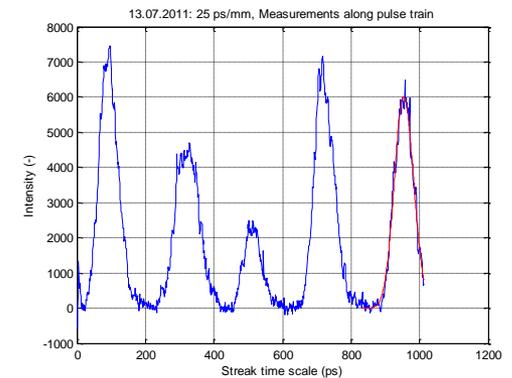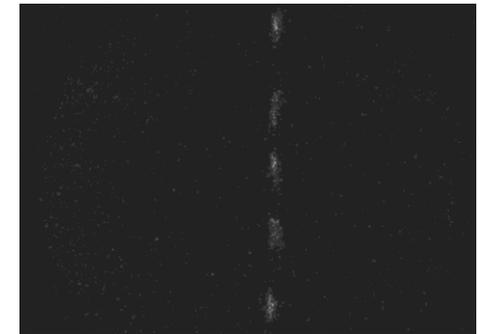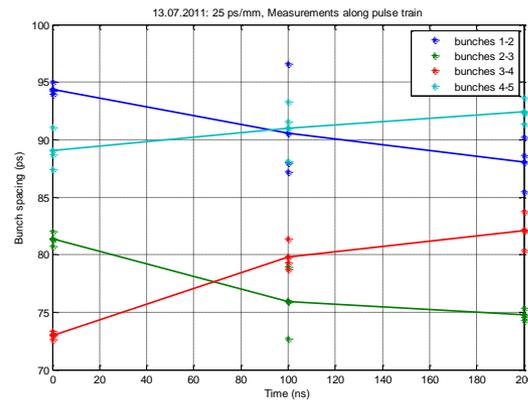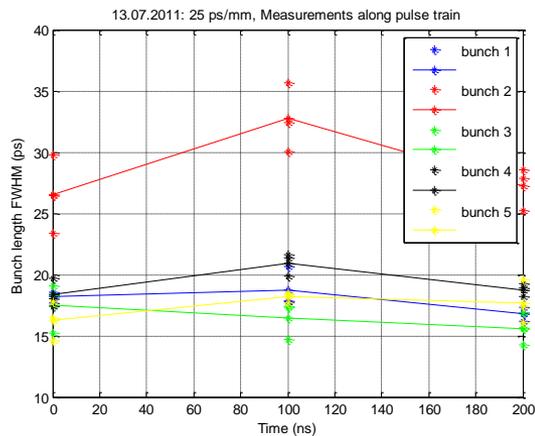

*Bunch length and bunch spacing along train: 25 ps/mm speed*

First measurements with the line done successfully  
Need more beam time to finish commissioning

# Optical lines improvements

---

## **Combiner ring:**

re-alignment of the lines => next week

## **Delay Loop:**

re-aligned last year, should be ready for measurements

(No measurements last year due to difficulties to send the beam in DL)

## **CLEX:**

- addition of a light shielding => next month

- replacement of the lens by an elliptical mirror => this year

Third streak camera equipped with readout camera => ready

=> **One streak camera for each lab**

# Operation of the streak cameras

## General procedure:

- spot adjustment in focus mode (no sweep) : the spot should be centered on the slit and as focused as possible
- slit reduced to 0.2-0.4mm (depending of the spot size and the light intensity)

*In Focus mode, the camera is really sensitive to light*

- switch in sweep mode with the biggest time window (1ns) to find the train (trigger delays adjustment)
- Reduce step by step the time window with trigger and gain adjustment

For this procedure, the presence in the lab is required

# Operation of the streak cameras

---

## Old streaks:

- Manual control of shutter, slopes and gain  
*=> For the operation of old streaks, presence in the lab required*
- no online values => data needed to be processed (Matlab or equivalent)

## New streak:

- automatic control of shutter, slopes and gain
- online bunch length value provided
- possibility to use cursors on the graphic window for rough bunch spacing values
- possibility to control the camera with LabView application

# Discussion

---

- Online processing of the data (Labview application or else)
- Remote control of the cameras
- ...