



# CMS iRPC readout electronics


*Maxime Gouzevitch on Behalf of CMS Collaboration*

IP2I, Lyon, France

- 1) iRPC project for HL-LHC
- 2) FEB design
- 3) FEB certification, calibration and production




# 1)iRPC project for HL-LHC

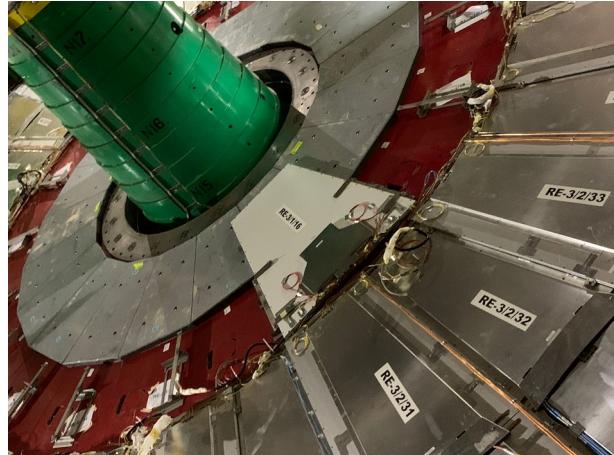



# 1.1) iRPC project for HL-LHC phase

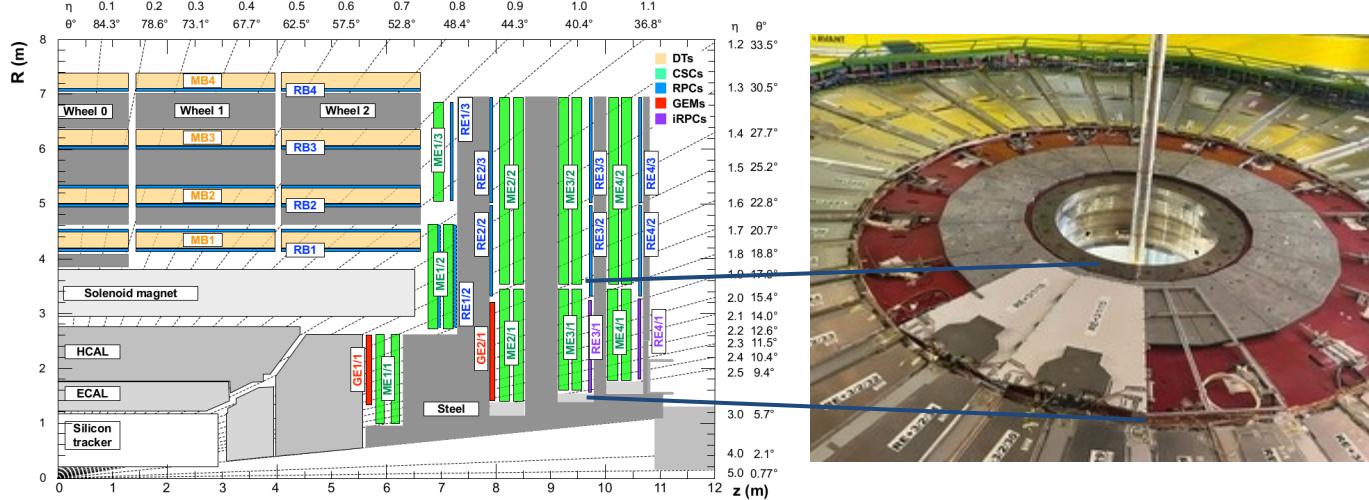




4 stations of 18 trapezoidal chambers complementing the Forward Muon Spectrometer in the most forward rings :

- Sub-ns timing resolution
- High background capability up to 2 kHz/cm<sup>2</sup>
- Requires an innovative FEB with low sensitivity threshold (below 50 fC), an excellent timing resolution, and high transmission rate.



# 1.3) iRPC

## readout

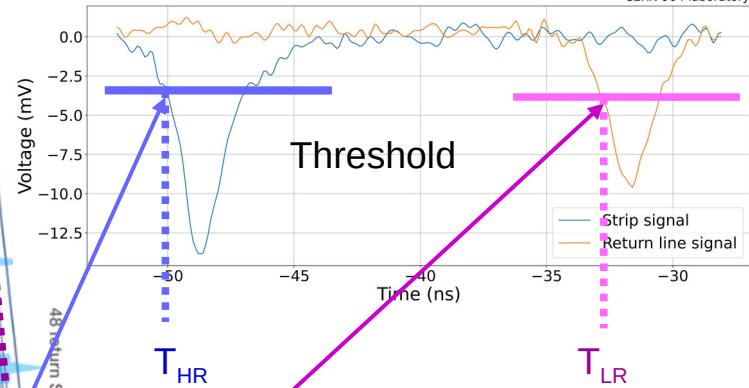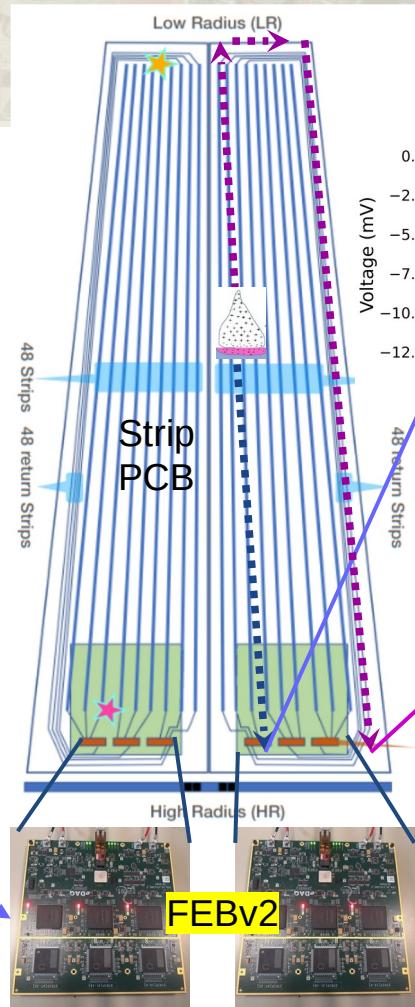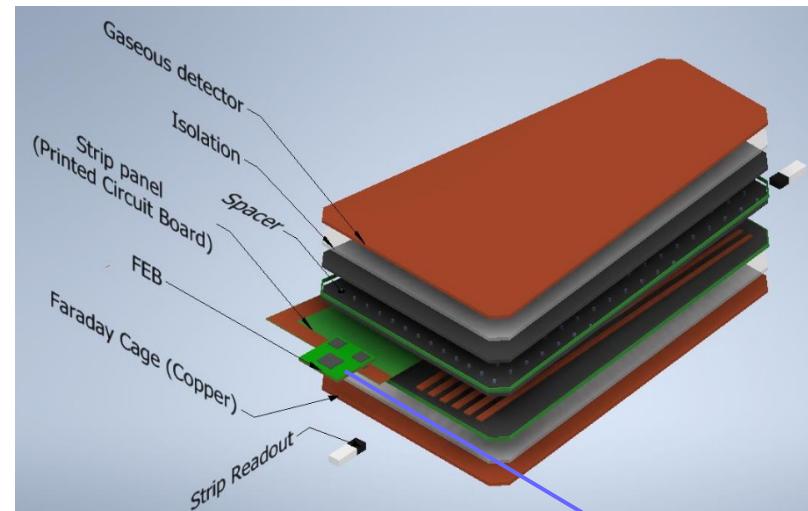


- Strip pitch : 0.5 – 1 cm
- Double sided readout of long strips using timing to localise the signal position

$$\Delta T = T_{HR} - T_{LR}$$

$$\sigma_{\Delta T} \sim 150 \text{ ps} \rightarrow \sigma_{\eta} \sim 1.5 \text{ cm}$$

# 2) FEB design

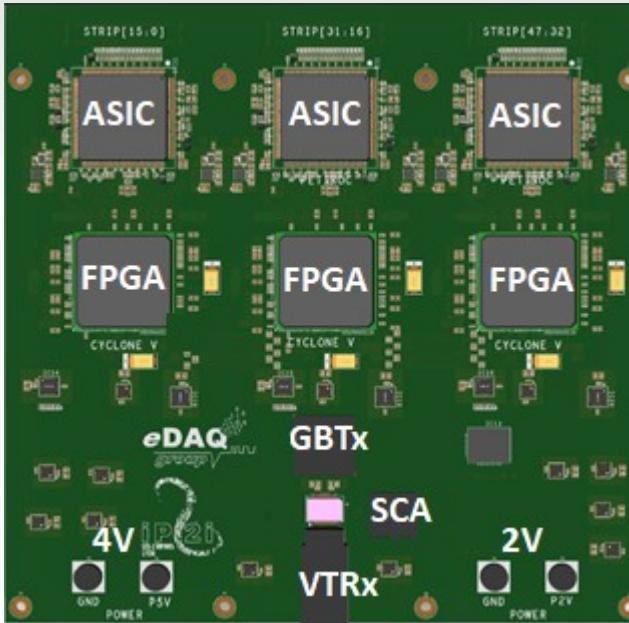

# 2.1) History of the FEB

First proto

2017

proof of principle for  
CMS-MUON-TDR-016

2 PetiROC2A  
+ FPGA Cyclone II  
+ ETHERNET  
directly on strip PCB  
(50 cm)



Feb V0

2018

First FEB (Conf. note)

1 PetiROC2A +  
MEZZANINE with  
FPGA Cyclone II  
+ ETHERNET



Feb V1

2019

FEB without  
mezzanine

2 PetiROC2B  
+ FPGA Cyclone V  
+ ETHERNET



Feb V2\_1,2

2021

Non-rad hard  
for iRPC Demo

6 PETIROC2C  
+ 3 FPGA Cyclone V  
+ Optical GBT




Feb V2\_3

2021

Mass production  
prototype


FEBv2\_1 + firmware  
update feature by  
optical GBT







## 2.2) FEBv2 details

- 2 FEBs / Chamber → 144 (+16 spares) FEBs in total
- 3 Erni connectors with 32 channels each.
- 6 ASIC PetiROC2C (PR2C):
  - Specially designed by OMEGA group for CMS RPC project based on Petiroc2A
- 3 FPGAs (96 + 6 TDC channels)
  - FEBv2: CYCLONE V (non rad-hard)
- CERN ASICS: GBTx + GBT-SCA + VTRx
  - for the communication and slow control
- Separated 2V and 4V power zone for Analog and Digital components. Latchup protection (Overcurrent detection).

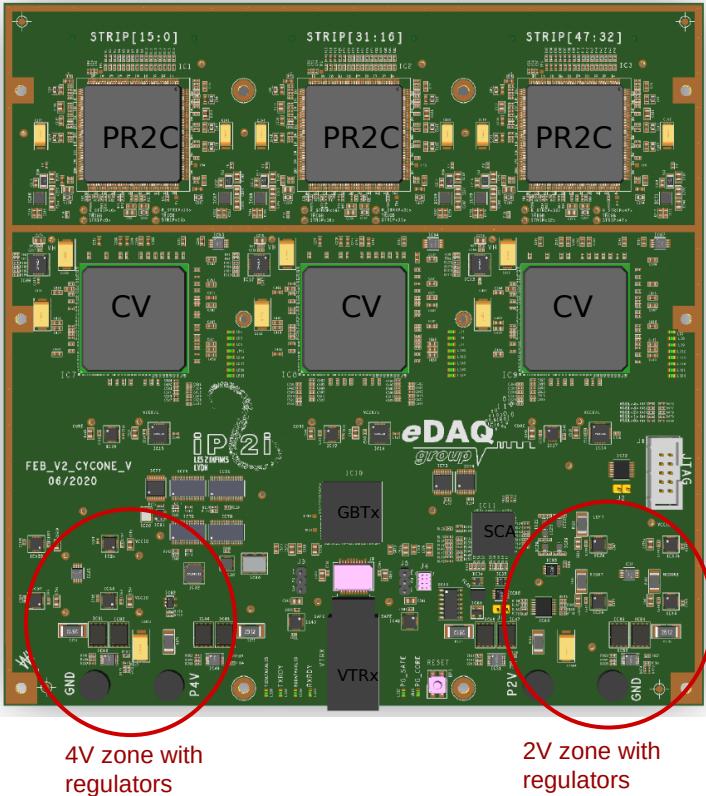



## 2.3) FEBv2 logical scheme

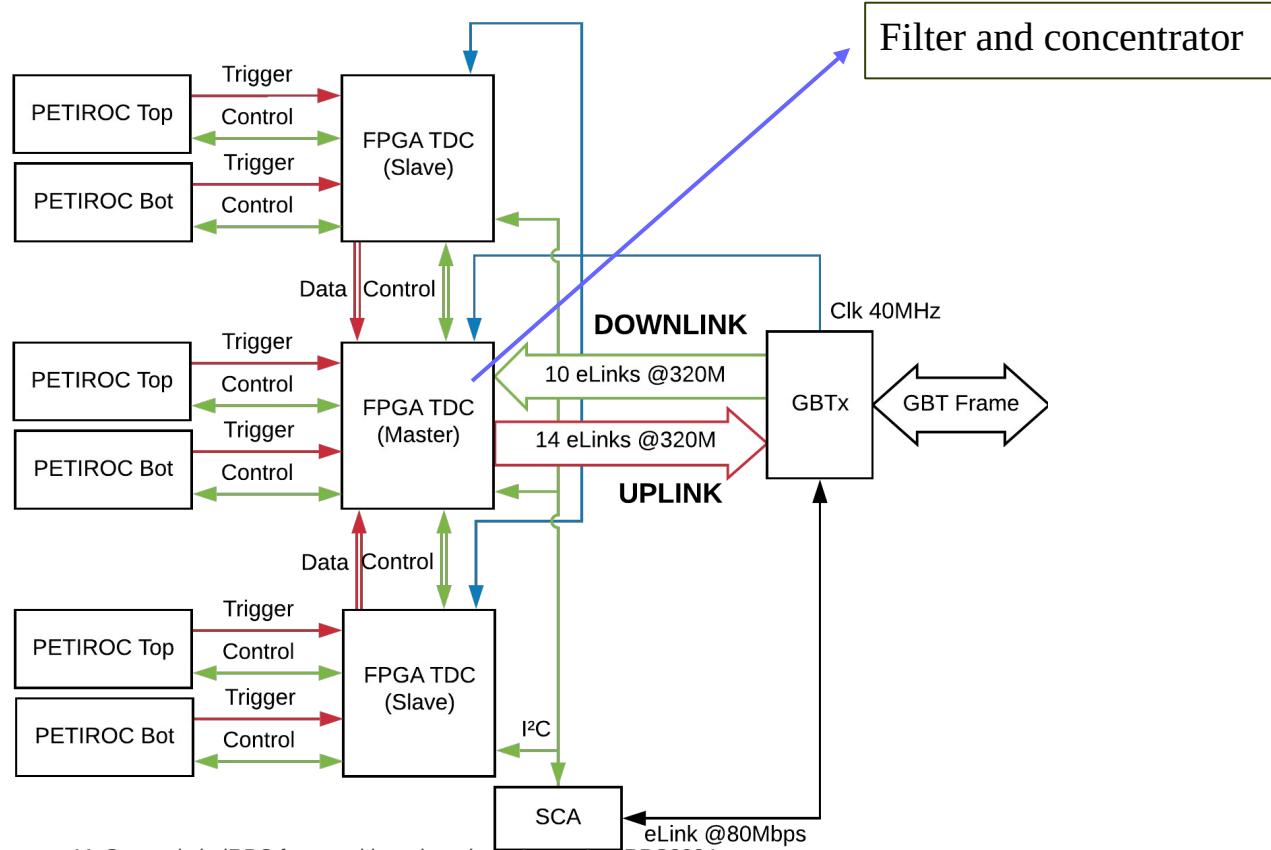



## 2.4) ASIC – Petiroc or iRPCROC

PETIROC2A designed for PET

- High frequency preamp
- Thr > 60 fC
- Time resolution < 100 ps

Limitations: low rate expected

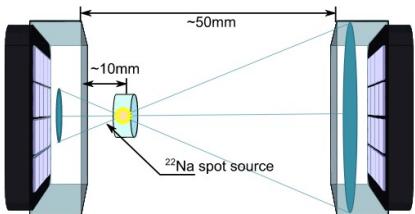


Figure 2. Setup structure used during the experiments.

<https://dx.doi.org/10.1109/NSSMIC.2018.8824464>

PETIROC2A for RPC :

- Retriggering and inter-channels cross-talk
- Thr > 100 fC
- Time resolution < 200 ps

PETIROC2B modif for iRPC :

- Reduce preamp. frequency
- Thr ~ 100 fC
- 10-20 ns / ASIC dead time introduced to remove retriggering  
→ 2-3% efficiency loss / chamber

**iRPCROC (PETIROC2C) :**

- Removed useless components from PR2A.
- Thr < 50 fC
- 40 ns auto-reset / channel to remove retriggering.
- 864 (+ 96 spares) required, a set of 1300 available with uniform behaviour.



# 2.5) Radiation hardness

1) TID (charged hadrons, thermal neutrons)

in CHARM, CERN

Dose Requested: 17 Gy

Certified:  $\sim 57$  Gy



**SF: 3.3**

Fluence Requested:  $0.9 \times 10^{11}$  HEH/cm<sup>2</sup>;  $2.7 \times 10^{11}$  ThN/cm<sup>2</sup>

Certified:  $\sim 1.6 \times 10^{11}$  HEH/cm<sup>2</sup>;  $3.3 \times 10^{11}$  ThN/cm<sup>2</sup>



**SF: 1.8; 1.2**

2) SEU (charged hadrons, thermal neutrons)

in CHARM, CERN

Flux Requested: 1.4 kHEH/cm<sup>2</sup>/s; 4.2 kThN/cm<sup>2</sup>/s

Certified: 140 kHEH/cm<sup>2</sup>/s; 280 kThN/cm<sup>2</sup>/s



**SF: 100; 67**

Target configuration

NT - Empty

AlH - Aluminium Hole

Al - Aluminium

Cu - Copper


Movable shielding:

□ 1 - Concrete

□ 2 - Iron

□ 3 - Iron

□ 4 - Concrete

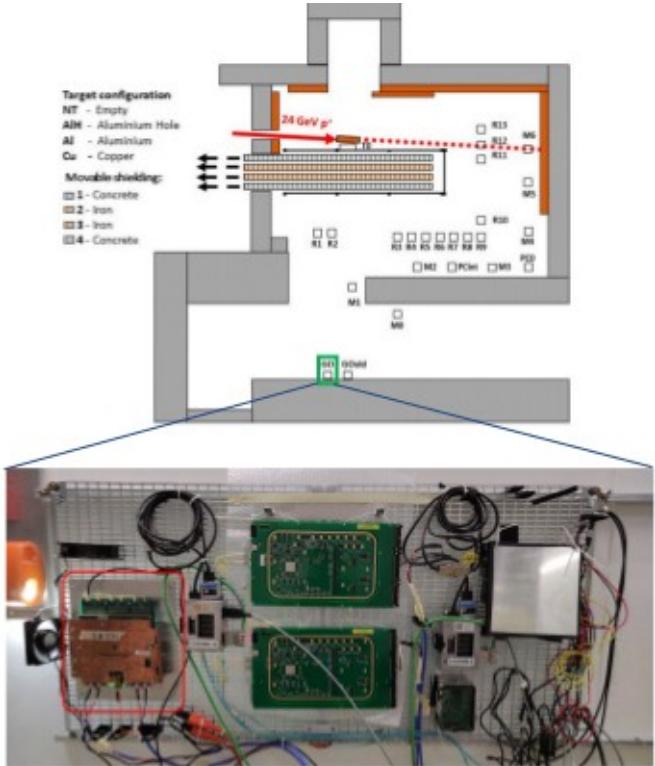



## 2.5) Radiation hardness

- **Functional certification :**

No persistant radiation damage is observed on any components of the FEB for the doses under consideration :

- performances of the FEB doesn't change with accumulated dose.

- **Petiroc :**

No Single Events Upsets (SEU) observed in Petiroc2C

- **Power supply :**

Few Single Event Latchups (SEL) observed in power supply well caught by the overcurrent protection.

- **Cyclone V :**

- We estimate that during HL-LHC phase 1 Cyclone V needs a soft reset (1 second) every 10 hours of CMS data-taking.

- Soft reset can be performed in a transparent way for CMS data taking and trigger.

- **Mass production :**



The first prototype of FEBv2\_3 passer successfully the test in CHARM to certify all the components from the lot used for mass production.

# 3) Certification, calibration and production





M. Gouzevitch: iRPC front-end board readout electronics. RPC2024

# 3.1) FEB pedestal alignment method

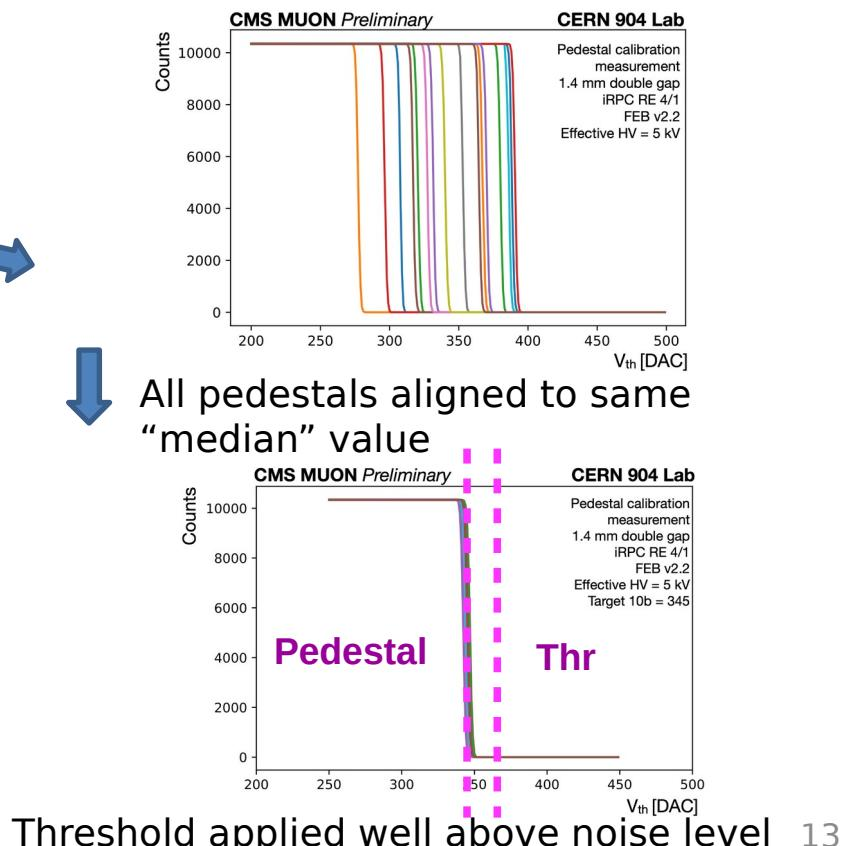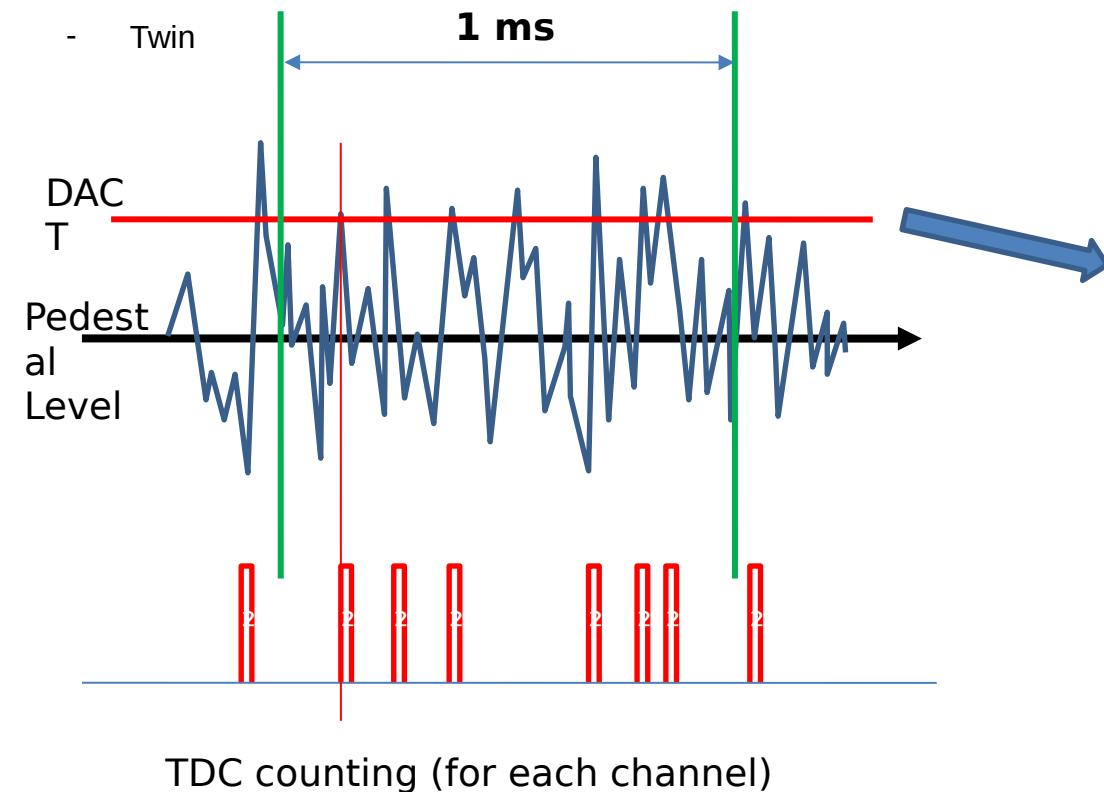

# 3.2) FEB calibration

## DAC T vs Charge Measurement setup considerations

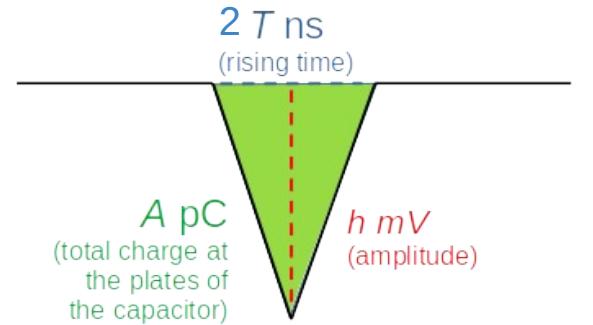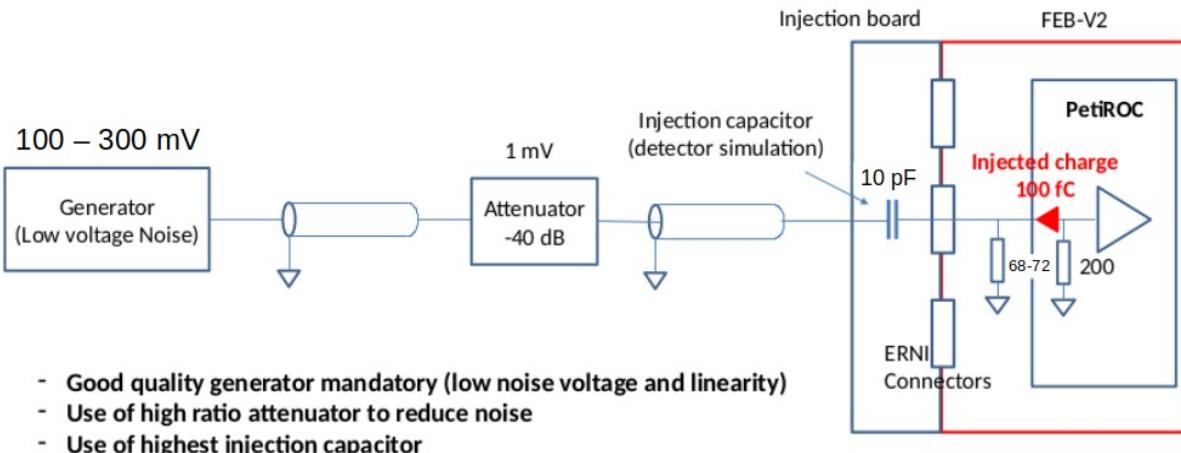

Idealized sketch of the injected signal to PETIROC


$$A(pC) = \frac{2T(ns) \times h(mV)}{2R(\Omega)} = \frac{T \times h}{R} \implies A(pC) = T \times \frac{f(mV/DAC) \times h_{DAC}}{R}$$

Conversion factor mV - DAC


$$\implies \frac{A(pC)}{h(DAC)} = T \times \frac{f(mV/DAC)}{R}$$

Calibration factor


### 3.3) FEB calibration

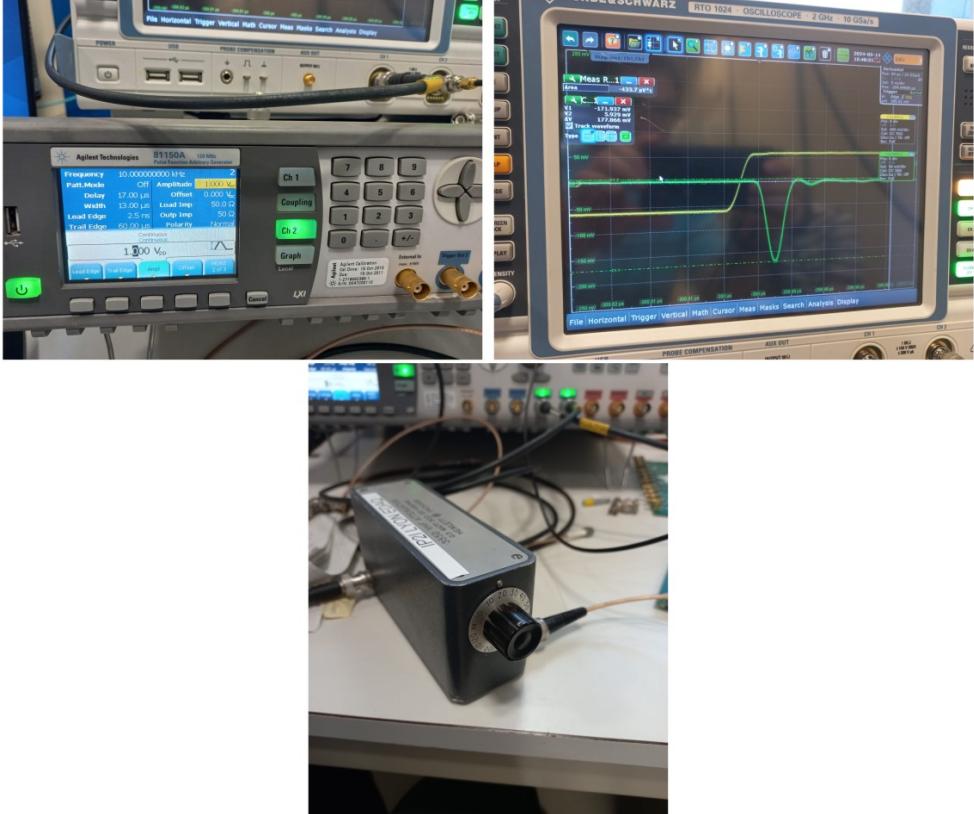


- Signal generator (left)
- Attenuator (center low)
- Injected signal (right):  
**Yellow** – signal before capacitor  
**Green** – signal after capacitor and attenuator.



## 3.2) FEB calibration

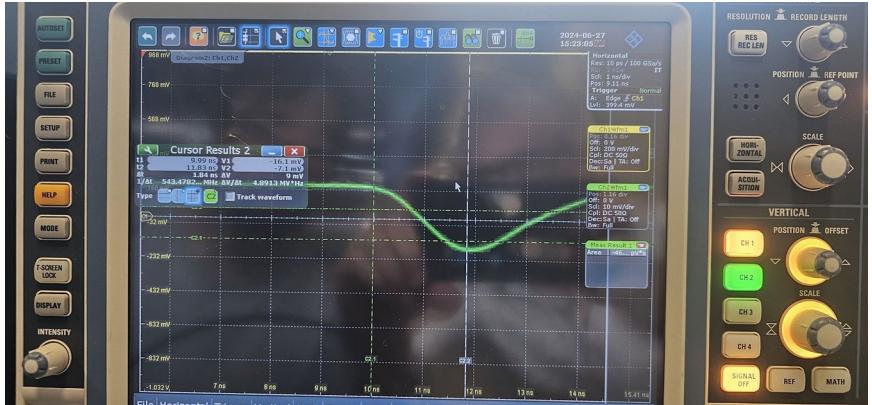


- 1 ns rising time

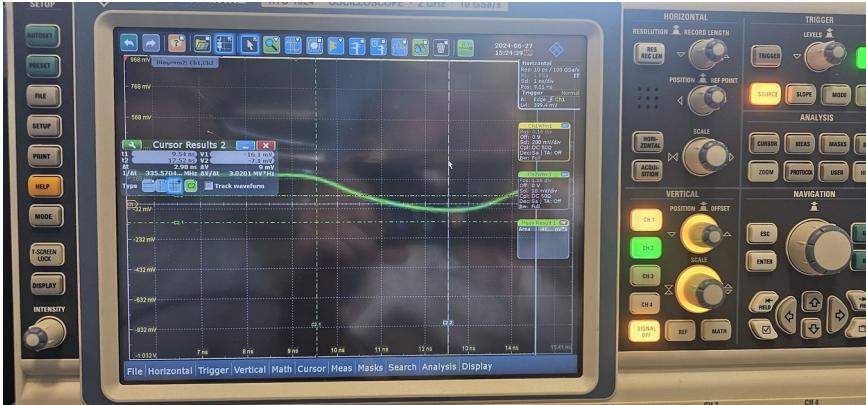


- 2.5 ns rising time



## 3.2) FEB calibration


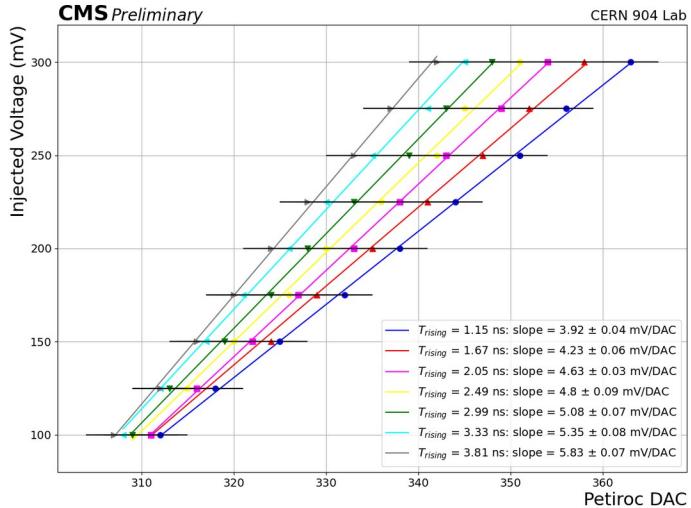


Typical RPC rising time : 1.8-2. ns  
Calibration factor = 4.2-4.3 fC/DAC

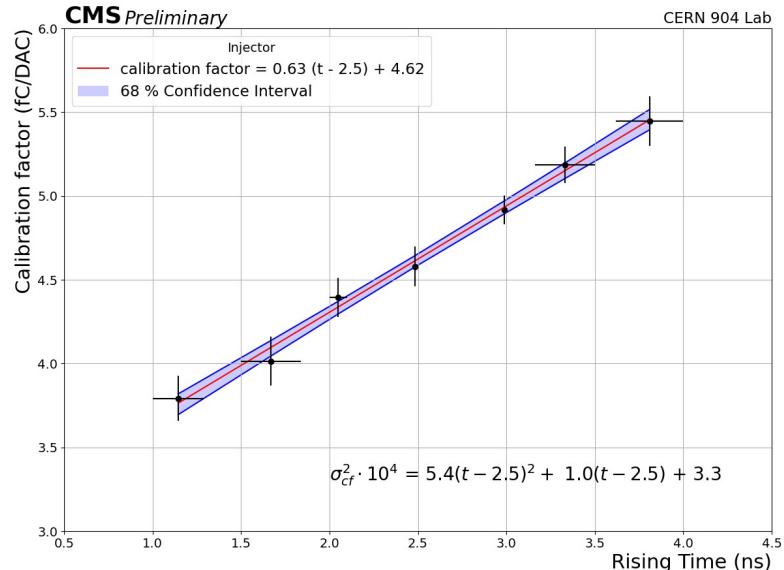



Threshold: Specification  
10 DAC  $\leq$  42-43 fC  $\rightarrow$  Safe operating WP  
7 DAC  $\leq$  29-30 DAC  $\rightarrow$  Can be used to reduce current in chambers

### 3.3) TDC time resolution

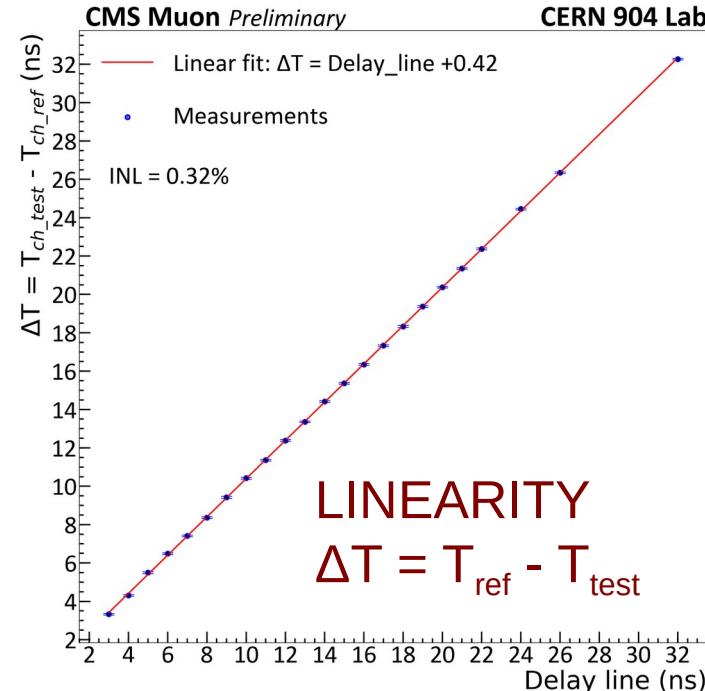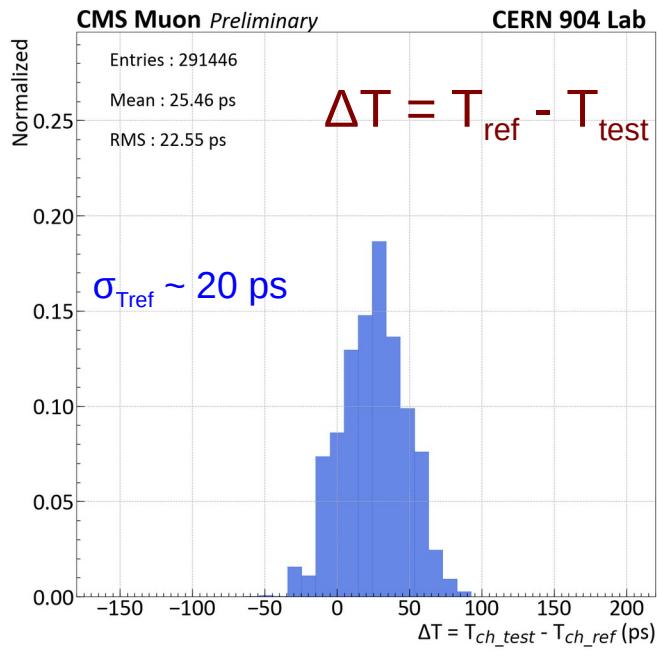



Pure TDC time resolution was measured using 2 channels test and a reference

### 3.3) Chamber absolute time resolution

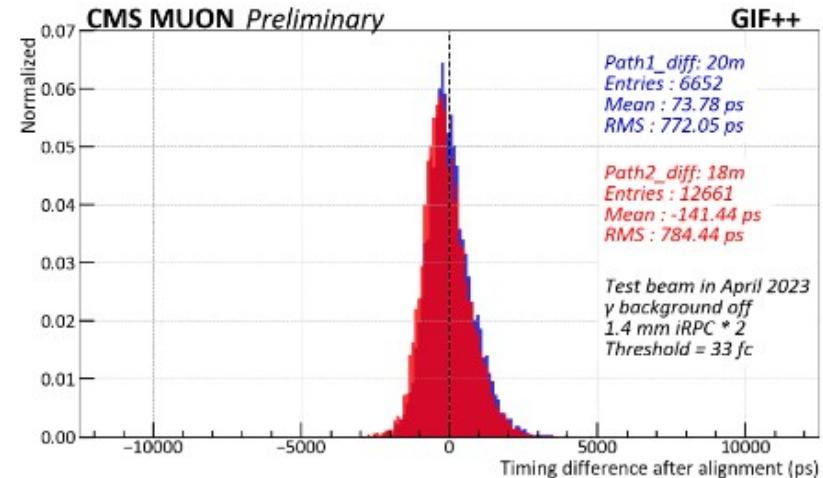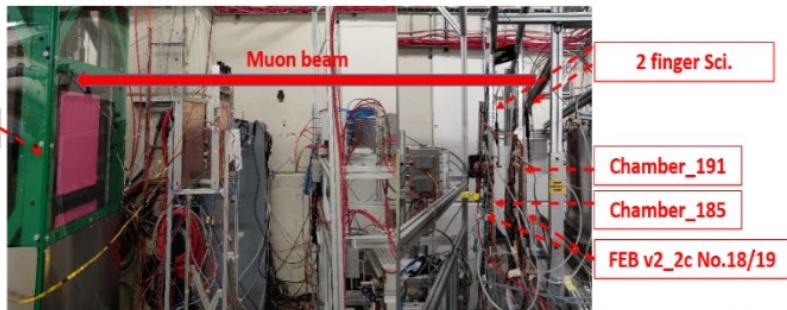

- 2 chambers iRPC chambers in test beam in Gamma Irradiation Facility (GIF++) at SPS CERN.
- Absolute time resolution of the system :  $780 \text{ ps} \rightarrow \text{per chamber } 780/\sqrt{2} \sim 550 \text{ ps}$


## 3.4) Space resolution

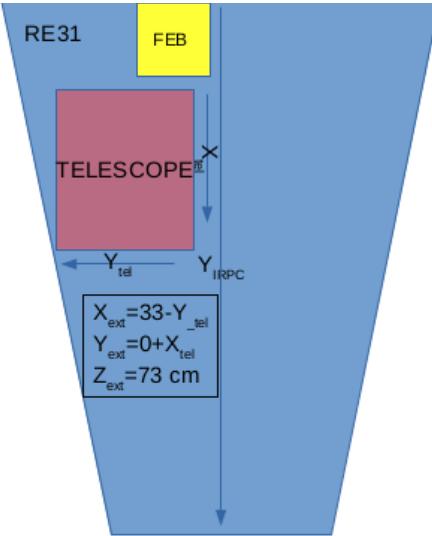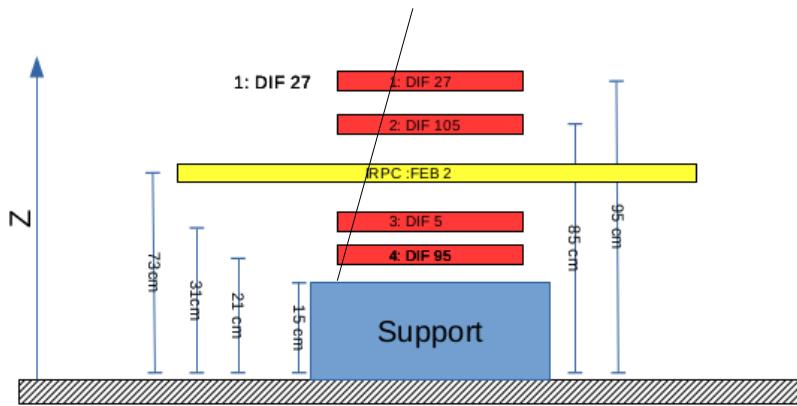

- A cosmic telescope is made of 2+2 RPC chambers with  $1 \times 1 \text{cm}^2$  pads.
- iRPC chamber in sandwich.
- Comparing extrapolated track and actual position of the RPC hit.





# 3.5) Space resolution

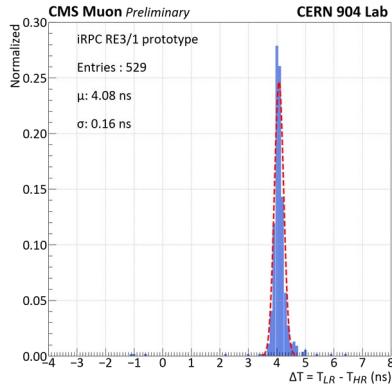


$$\Delta T = T_{HR} - T_{LR}$$

$$\sigma_{\Delta T} \sim 150 \text{ ps} \rightarrow \sigma_y \sim 1.5 \text{ cm}$$

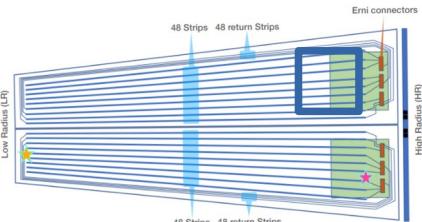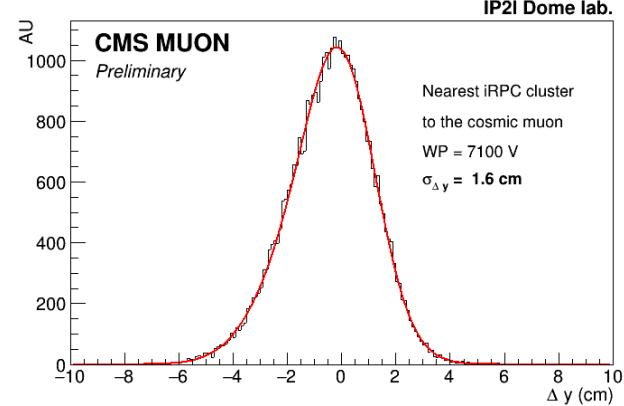

Strip pitch in telescope region  $\sim 0.8 \text{ cm}$



$$\sigma_x \sim 0.4 \text{ cm}$$

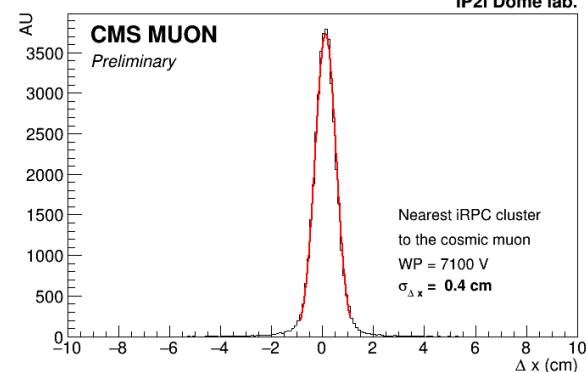

## 3.6) Mass production

Production of 160 is done by French company FEDD :

- 1) PCB production : SOMACIS
- 2) Stuffing + QC factory : FEDD
- 3) Functional QC1 at IP2I on test bench
- 4) QC on final chamber at CERN

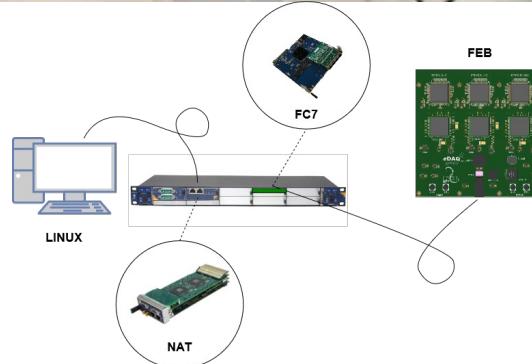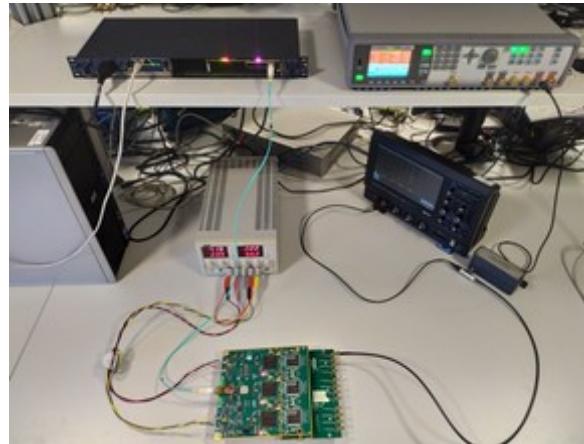


Production successfully started in July 2024 with 16 prototypes.

End of mass production expected in October 2024.

## *CONCLUSIONS*


- iRPC FEB desinged/certified, integrated into the chamber.  
Mass production of 160 FEB expected in October 2024.
- The rad tolerance of the FEB are sufficient for project requirements
- Time and threshold calibration finalised and characteristics meets the HL-LHC requirements :
  - Threshold : below 50 fC (down to 30 fC)
  - Space resolution :  
1.6 cm along strip, 0.4 cm perp. to strip
  - Time resolution : 500 ps

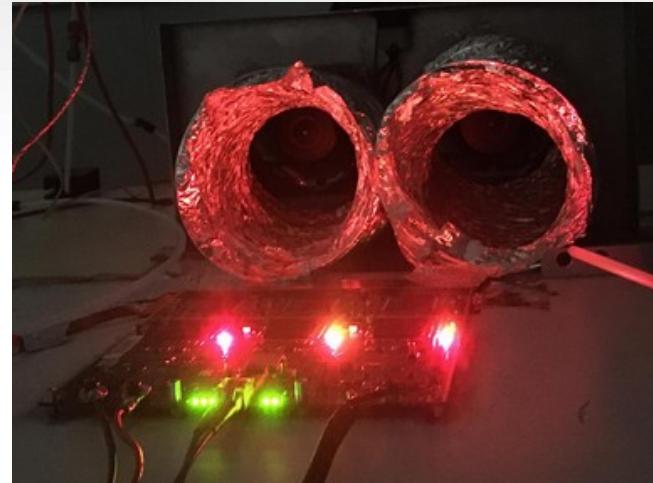


# BACKUP



# Radiation Effects in Electronics

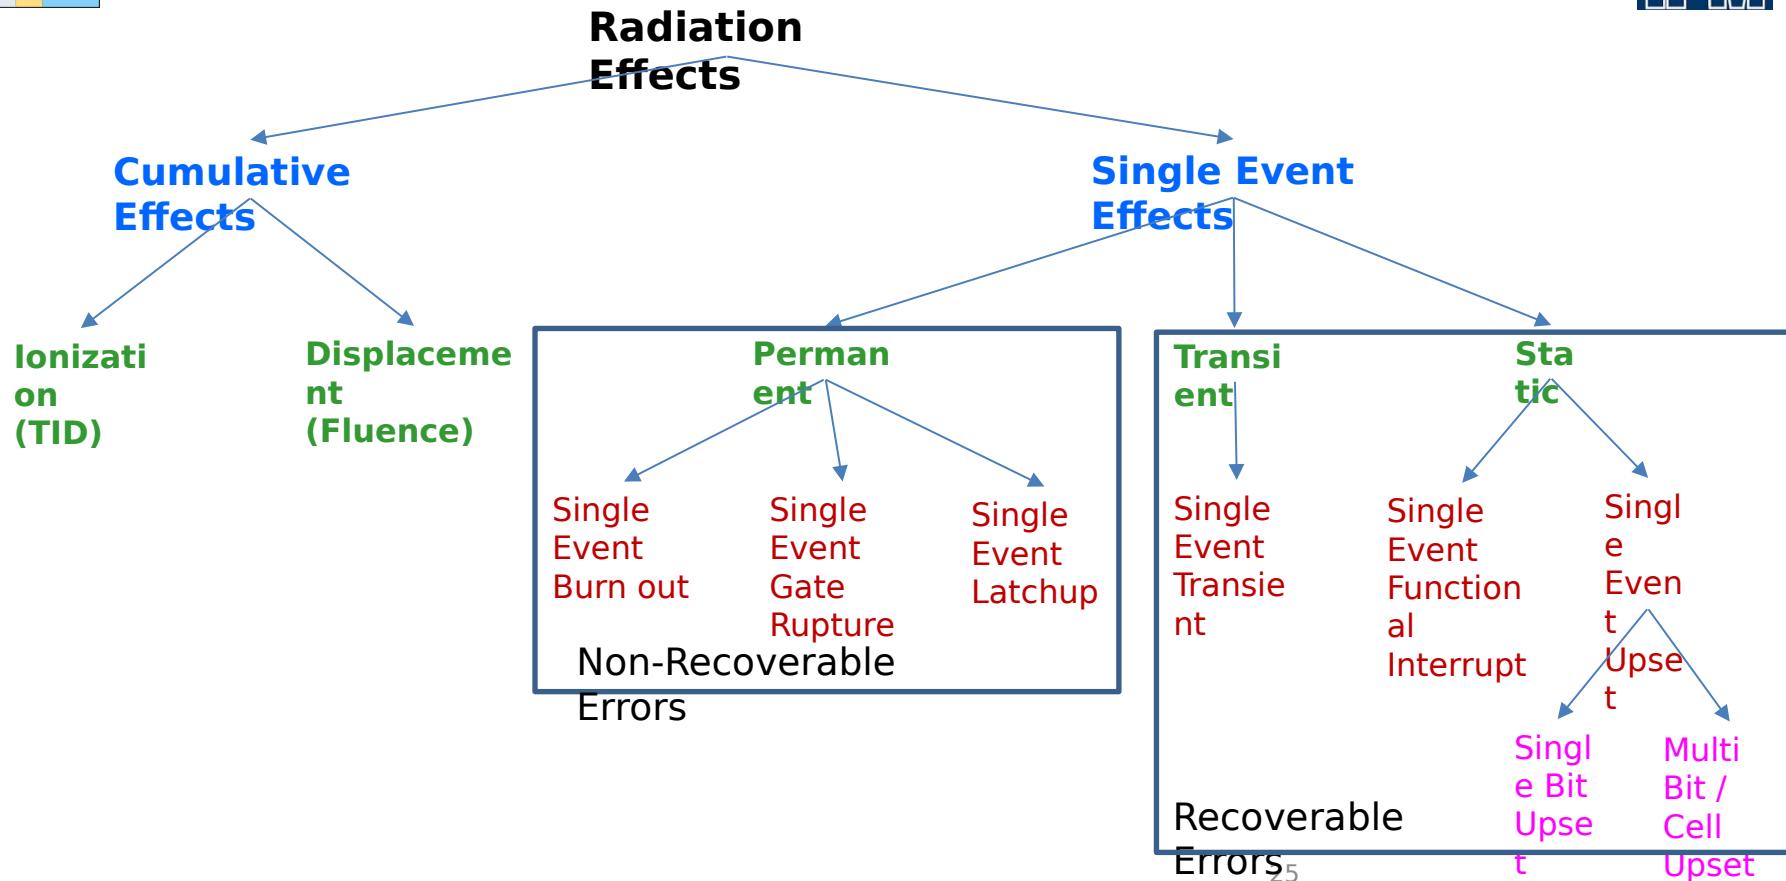

# Validation en radiation gamma

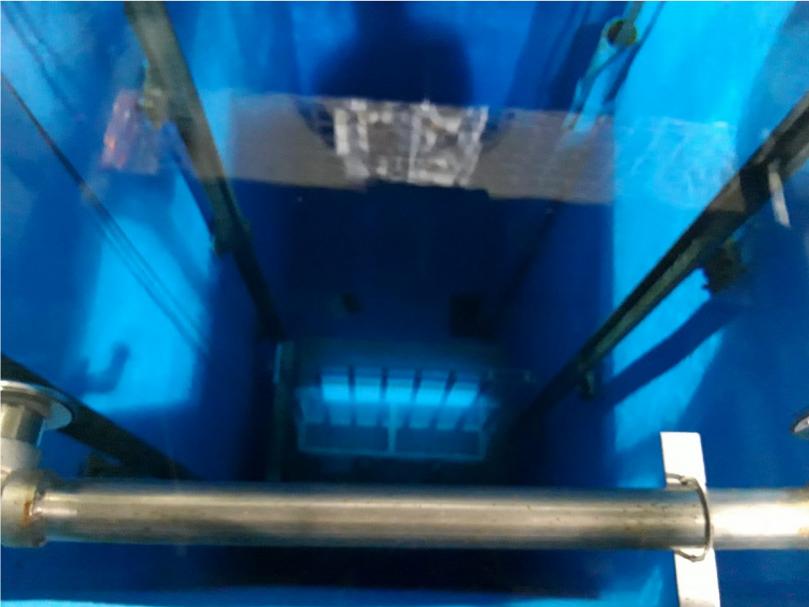


Caliope a ENEA  
Casaccia a côté de  
Rome










# FEBv2 logical scheme

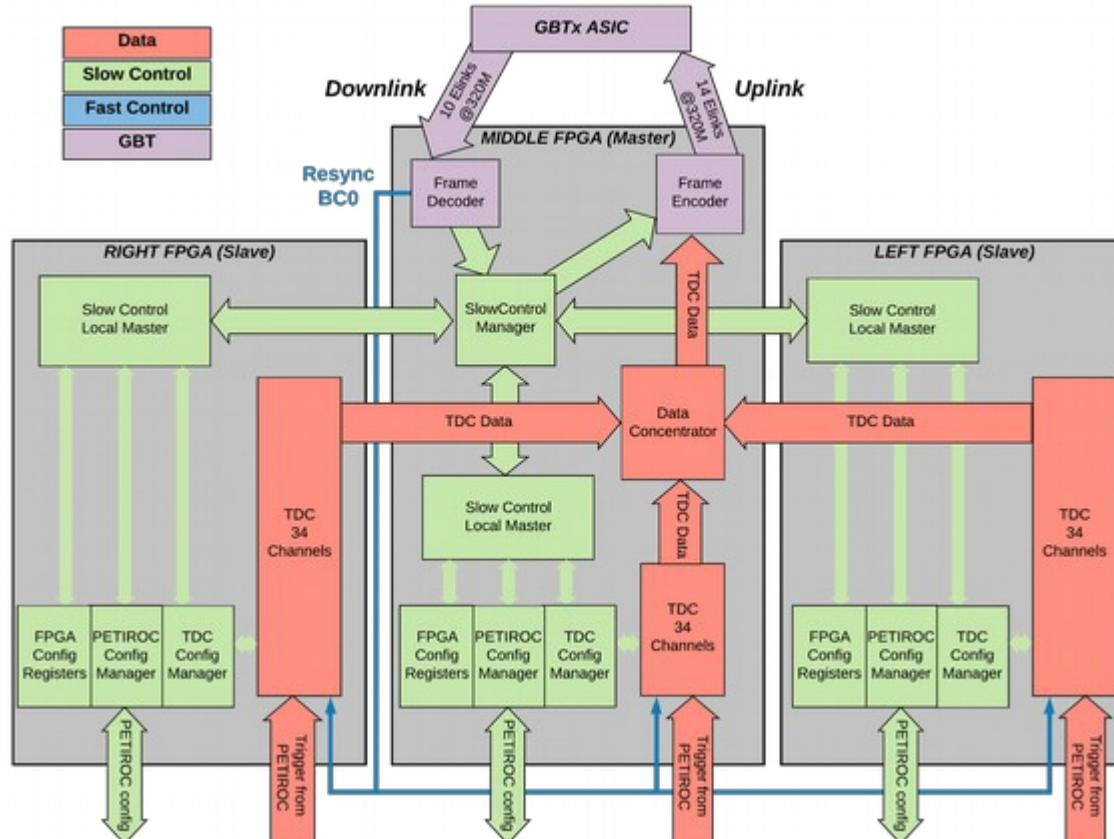

# Expected Fluence and Dose at HL-LHC

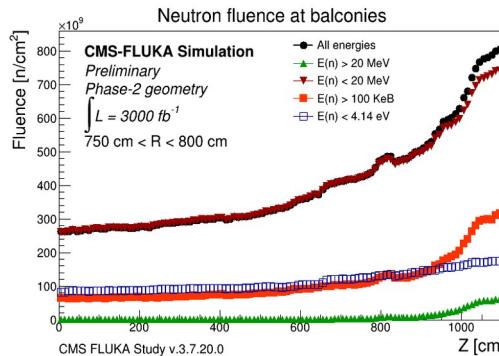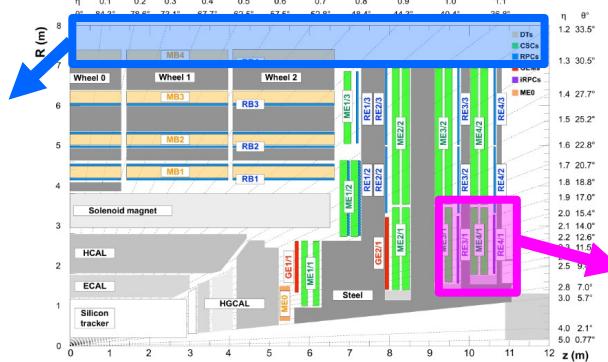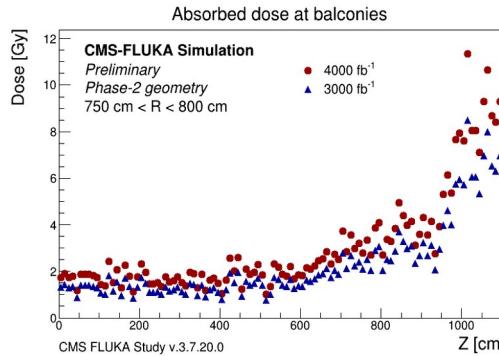

- Expected fluence and dose (RE3/1 FEBS)**
  - at  $R=303 \text{ cm}$  for RE3/1 is  $\sim 4.3 (5.8) \times 10^{11} \text{ n/cm}^2$ , and
  - at  $R=304 \text{ cm}$  for RE4/1 it is about  $6.2 (8.2) \times 10^{11} \text{ n/cm}^2$ ,
  - at  $R=303 \text{ cm}$  for RE3/1 is  $\sim 10 (13.6) \text{ Gy}$
  - at  $R=304 \text{ cm}$  for RE4/1 it is about  $18 (24) \text{ Gy}$
  - where  $R=303 (304)\text{cm}$  are the expected FEB positions
- Expected fluence and dose (Balcony)**
  - The total irradiation fluence  $800 \times 10^9 \text{ cm}^{-2}$
  - Maximum integrated dose is about  $10 \text{ Gy}$

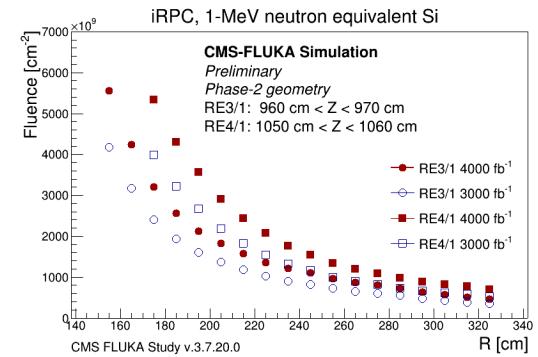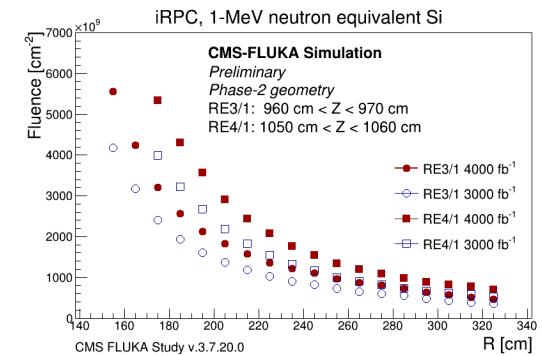



## 2.8) Extrapolation to HL-LHC


Estimation using flux  
(same method used for LB ESR)

Estimation using fluence

	CHARM	HL-LHC (continuous data taking at max intensity for 1 day)
Flux (HEH+ThN) (/cm <sup>2</sup> /s)	4.2e5	5.6e3
SEU	1/8.2 mn	1 / 10.3 h 2.3 / day


(HEH+ThN)/SEU from CHARM	(HEH+ThN)/year at HL-LHC (10 years of data taking)	SEU/year
210e6	3.2e10	150/year

- We could assume this as the worse case.
- Among these stops only a fraction would require an FPGA power cycle (see slide 14).
- 1500 FPGA power cycles in full FEB life. During CHARM tests we performed around 3000 FPGA power cycles without problems.



## 3.6) FEB power consumption

Total consumption:  $2V \times 6.3A + 4V \times 2.3A = 22 \text{ W}$

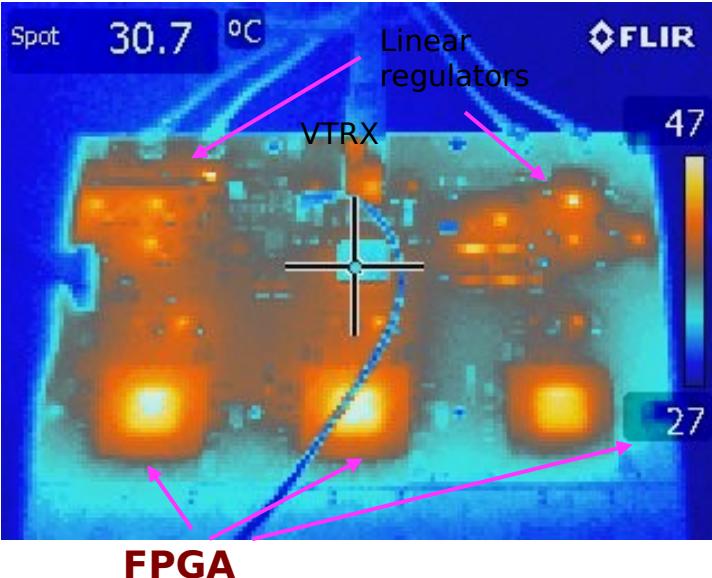

Hottest elements:


- linear regulators - Ohmic effect
- Optical communication
- FPGA - logic


### Cooling system

- 1) Thermal pads + copper plate
- 2) Cooling pipe
- 3) Cool water: 15 C

Max temperature < 50 C

Play also the role of grounding plane

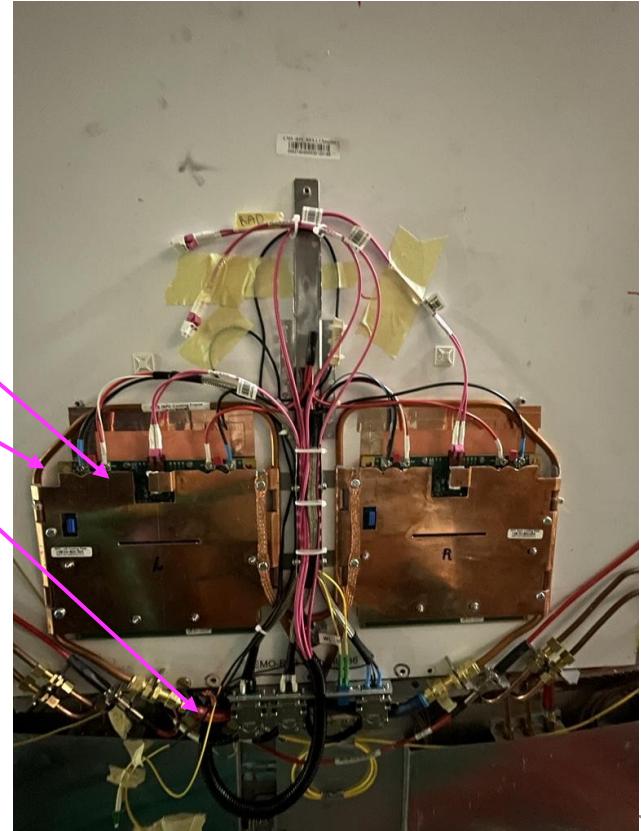



## 2.5) Radiation hardness


1) TID ( $\gamma$ 's) -- Facility ENEA Casaccia Calliope  $^{60}\text{Co}$  July 2022

Requested: 17 Gy

Certified:



- FPGA Cyclone V (50 Gy);
- Petiroc (160 Gy);
- Power supply zone (100 Gy)
- **Safety Factor: 3 - 9**

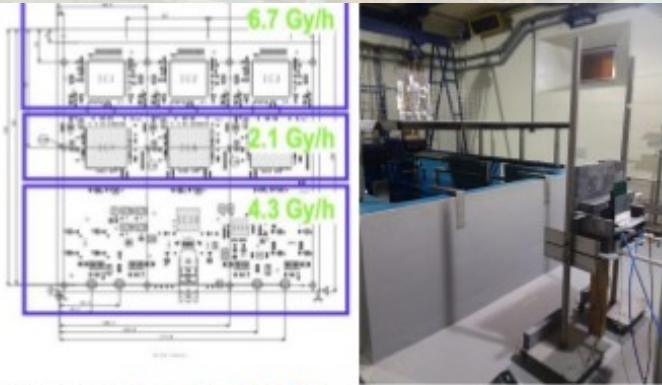

2) TNID (neutrons) - Facility FNG Frascati, with support from RADNEXT March 2022

Requested:  $6\text{e}11 \text{ neq1MeV/cm}^2$ :



Certified:  $25\text{e}11 \text{ neq1MeV/cm}^2$ :

**SF: 4**

3) Neutron flux -

Requested:  $10\text{e}3 \text{ neq1MeV/cm}^2/\text{s}$



Certified:  $450\text{e}3 \text{ neq1MeV/cm}^2/\text{s}$

**SF: 45**

