

LHeC Detector Working Group: CDR Discussion

Peter Kostka

Alessandro Polini

Rainer Wallny

Outline

- Draft - Structure
- Detector Design kept
- Some Needs; Status
- WG-Summary Talk Divonne'09 attached

1 Detector Design

1.1 Requirements on the Detector

1.1.1 *Acceptance*

1.1.2 *Resolution and Calibration*

1.1.3 *Particle ID and Tagging*

1.1.4 *Technical Constraints*

1.2 Magnet

1.2.1 *Magnet Concept - similar to the CMS*

1.2.2 *Field homogeneity*

1.3 Tracker

1.3.1 *Technical Requirements*

1.3.2 *Tracking Performance*

1.3.3 *Front-end Electronics and Readout*

1.3.4 *Tracker Design Consideration*

1.3.5 *Si-Pixel, -Strip, -Strixel, -Pad Tracker - Characteristics*

1.3.6 *Removable fwd/bwd Si-Tracker*

1.3.7 *Material Budget*

1.4 Electromagnetic Calorimeter

1.4.1 *Design Considerations*

1.4.2 *Spagetti Calorimeter (H1 type)*

1.4.3 *Calibration and Monitoring*

1.4.4 *Read-Out Electronics*

1.4.5 *Crystal Option of ECal*

1.4.6 *CALICE Type ECal*

1.4.7 *Layout of the ECal Parts*

1.5 Hadronic Calorimetry

1.5.1 *Design Considerations*

1.5.2 *Cu/Brass/Tungsten Calorimeter Spagetti Type*

1.5.3 *Calibration and Monitoring*

1.5.4 *R/O Electronics*

1.5.5 *Crystal option - CMS like*

1.5.6 *CALICE Type HaCal*

1.5.7 *Layout of the HCal Parts*

Kostka, Polini, Wallny

CDR - Topics to be covered

- Detector Concept
 - Dimensions and General Requirements
 - Magnet
 - Tracking
 - Calorimeters

1.6 Muon Detection - Tail Catcher - depend on Magnet Config.

1.6.1 *Forward Magnetic Spectrometers - Toroid*

1.6.2 *Design Considerations*

1.6.3 *Removable fwd/bwd Parts*

1.7 Beam-Beam Counter - Level-0 Trigger

1.7.1 *Requirements and Detector Configuration*

1.7.2 *Triggering Capabilities, Experiment-Machine Interface*

1.8 Very Forward Detector in Trigger (proton/neutron tag) - chapter 11

1.9 Zero Degree Calorimeter - ZDC

1.9.1 *Requirements of ZDC Construction*

1.9.2 *Technical Design*

1.10 Trigger, DAQ

1.10.1 *Data Acquisition System and Trigger*

1.11 Computing

1.11.1 *Data Processing Model*

1.11.2 *Computer Resources for the Experiment*

1.12 Integration and Services

1.12.1 *Hall Facilities and Services*

1.12.2 *Facility Integration*

1.12.3 *Mechanical Integration*

1.13 Detector Assembly

1.13.1 *Detector Interface (Machine Interface)*

1.13.2 *Environmental Safety and Health*

1.13.3 *Safety Analysis Issues*

1.14 Electronics integration

1.15 Software Integration

1.16 Detector Control System

1.16.1 *Technical Requirements*

1.16.2 *L1 DCS Architecture*

1.17 Simulation and Detector Performance

1.17.1 *Detector Simulation Software Packages*

1.17.2 *Event Reconstruction*

1.17.3 *MC Simulation*

1.18 Detector Summary

CDR - Topics to be covered 2

- Detector Concept
 - Beam-Beam Counter
 - VeryForwardDetector, Zero Degree Calo
 - Forward Muon Spectrometer
 - Trigger, DAQ, Computing
 - Services, Assembly
 - Electronics/Software Integration, DCS
 - Detector Simulation and Performance

Infrastructure Needs

- Mandatory - minimal requirement:
 - ≥ 1 Computer at CERN -
1 Server - software repository and reference installation
+ desktop boxes
 - accessible for LHeC group - apply for registered LHeC group at CERN-IT
 - configuration to be defined -
SL5 machine

Status

- Collaboration with Ilhan Tapan et.al. (Turkey)
 - Detector geometry being implemented into AliRoot/IlcRoot framework (F.Kosac and A.Kilic);
 - Progress to be organized
 - Essential for detailed simulation
- Needs better information exchange
- Refreshing of collaboration with all experienced ILC/ LHC working groups and with Nikhef group as well

LHeC Detector: version for low x and eA

Muon chambers
(fwd, bwd, central)

Coil ($r=3\text{m}$ $l=11.8\text{m}$, 3.5T)

[Return Fe not drawn,
2 coils w/o return Fe studied]

Central Detector

Pixels

Elliptic beam pipe ($\sim 3\text{cm}$ - or smaller)

Silicon (fwd/bwd+central)

[Strip or/and Gas on Slimmed Si Pixels]
[0.6m radius for $0.05\% * p_t$ in 3.5T field]

El.magn. Calo (Pb,Scint. 9-12 X_0)

Hadronic Calo (Fe/LAr; Cu/Brass-Scint. $\sim 30\lambda$)

Fwd Detectors

(down to 1°)

Silicon Tracker

[Pix/Strip/Strixel/Pad Silicon or/and Gas on Slimmed Si Pixels]

Calice (W/Si); dual ReadOut - Elm Calo

FwdHadrCalo:

Cu/Brass-Scintillator

Bwd Detectors

(down to 179°)


Silicon Tracker

[Pix/Strip/Strixel/Pad Silicon or/and Gas on Slimmed Si Pixels]

Cu/Brass-Scintillator,

Pb-Scintillator

(SpaCal - hadr, elm)

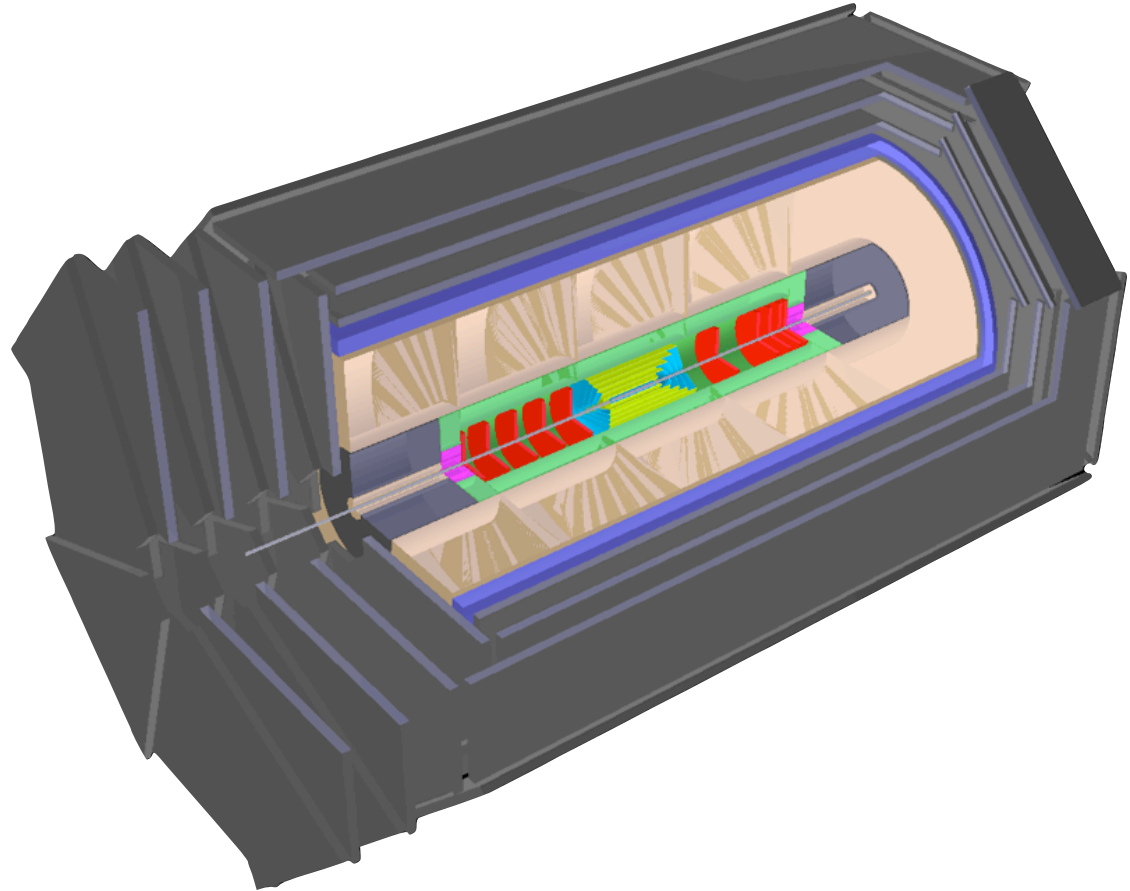

Extensions in fwd direction (tag p,n,d) and backwards (e,y) under study.

Attachment
Summary Talk Divonne '09
(at your convenience)

LHeC Detector Working Group: Summary

Peter Kostka
Alessandro Polini
Rainer Wallny

Outline

- Detector requirements
- Updated detector design
- Open Questions

2nd CERN-ECFA-NuPECC
Workshop on the LHeC
program and detector collaborations at the LHC
1-3 September 2009
Esplanade du Lac, Divonne, France

Steering Committee	Scientific Advisory Committee	Working groups & convenors
<ul style="list-style-type: none"> Chair: Giorgio Sardan Vice-Chair: Giuseppe Members: ... 	<ul style="list-style-type: none"> Chair: ... Members: ... 	<ul style="list-style-type: none"> Chair: ... Members: ...

European Organization for Nuclear Research

CDR - Topics to be covered

- Detector Concept
 - Dimensions and General Requirements (accuracy, acceptance, beam pipe)
 - Coil
 - Calorimeters
 - Tracking (including options as GOSSIP vs. full Silicon)
 - Options for the Inner Detector Region
 - Detector Simulation and Performance

Detector Session

- Joint sessions with ACC/IRF and IRF/HPD
- Dedicated session:



Contribution List	Time Table
Wednesday, 02 September 2009	
14:00	[50] Detector Requirements low x by Paul NEWMAN (Ausone: 14:00 - 14:30)
	[54] MagCal Concept by Tim GREENSHAW (Ausone: 14:30 - 14:50)
15:00	[51] Si Gas Detector for Tracking by Henry VAN DER GRAAF (Ausone: 14:50 - 15:30)
	[52] High Energy Calorimeters for ILCLIC by Christian GREFE (Ausone: 15:30 - 16:00)
Wednesday, 02 September 2009	
16:00	[53] Simulation of Detector in GEANT4 by Adnan KELIC (Artists: 16:30 - 16:45)
17:00	[73] Introduction to Current Detector by Peter KOSTKA (Artists: 16:45 - 17:15)
	[55] Discussion of Detector Layout (Artists: 17:15 - 18:00)

Requirements from Physics

- High resolution tracking system
 - excellent primary vertex resolution
 - resolution of secondary vertices down to small angles in forward direction for high x heavy flavour physics and searches
 - precise p_T measurement matching to calorimeter signals, calibrated and aligned to 1 mrad accuracy
- The calorimeters - Energy flow
 - **electron** energy to about $10\%/\sqrt{E}$ calibrated using the kinematic peak and double angle method, to **permille level**
 - Tagging of γ 's and backward scattered electrons - precise measurement of luminosity and photo-production physics
 - **hadronic** part $30\%/\sqrt{E}$ calibrated with pT_e/pT_h to **1% accuracy**
 - Tagging of forward scattered proton, neutron and deuteron - diffractive and deuteron physics
- Muon system, very forward detectors, luminosity measurements

Physics Motivation (I)

Max Klein

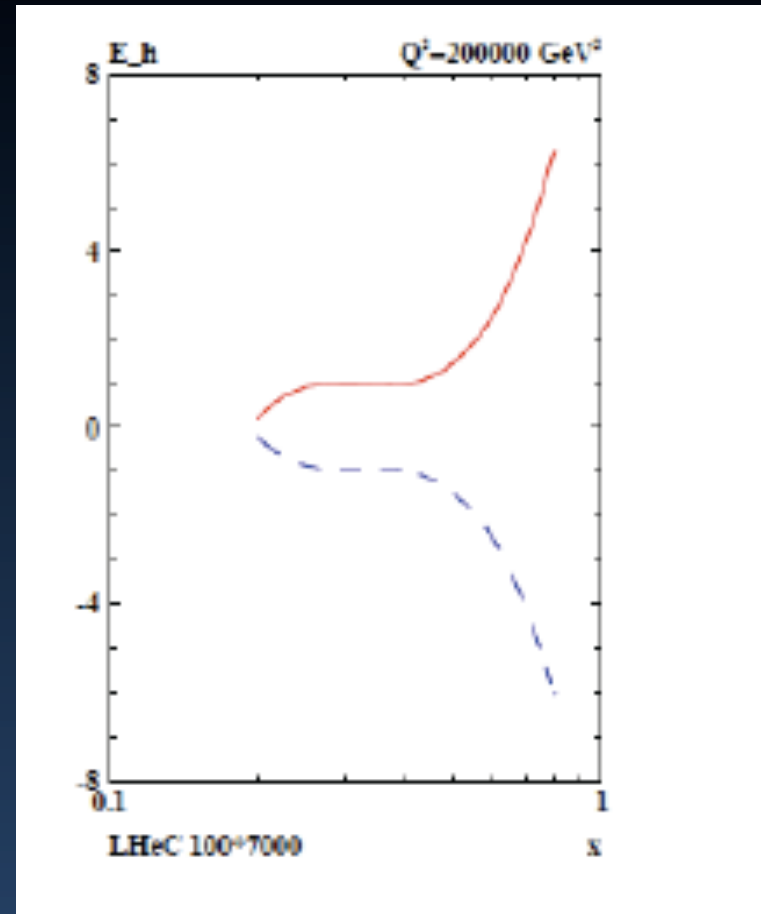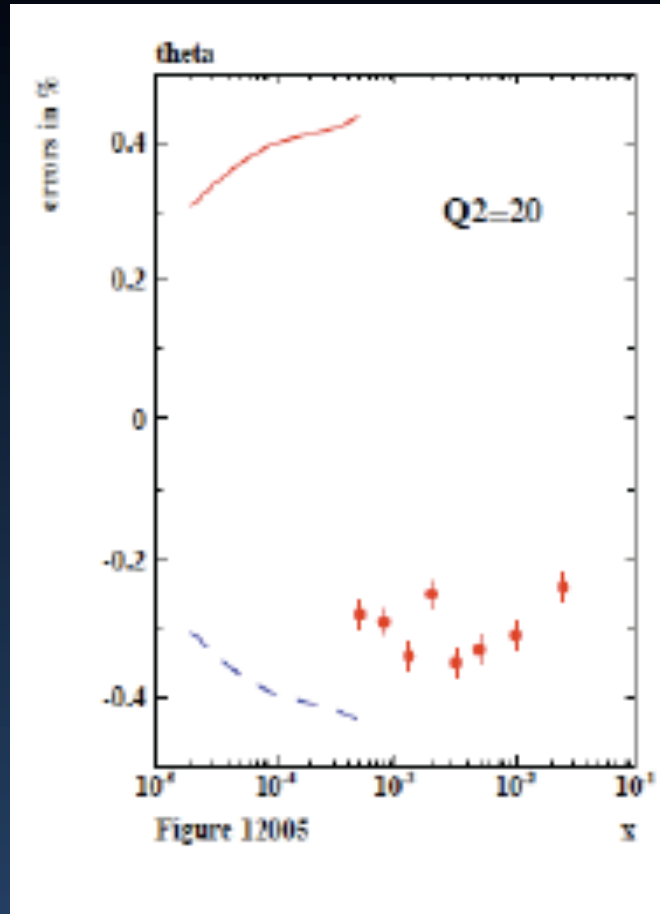


$\Delta \theta \sim 0.1 \text{ mrad} \Rightarrow 0.5\% \text{ @ low } Q^2$

$\Delta E_h/E_h = 1\% \Rightarrow 5\% \text{ @ } x=0.8$


Two times better than H1 and full fwd/bwd coverage to $\theta = 1^\circ$

Physics Motivation (II)

Try to see charm at large x

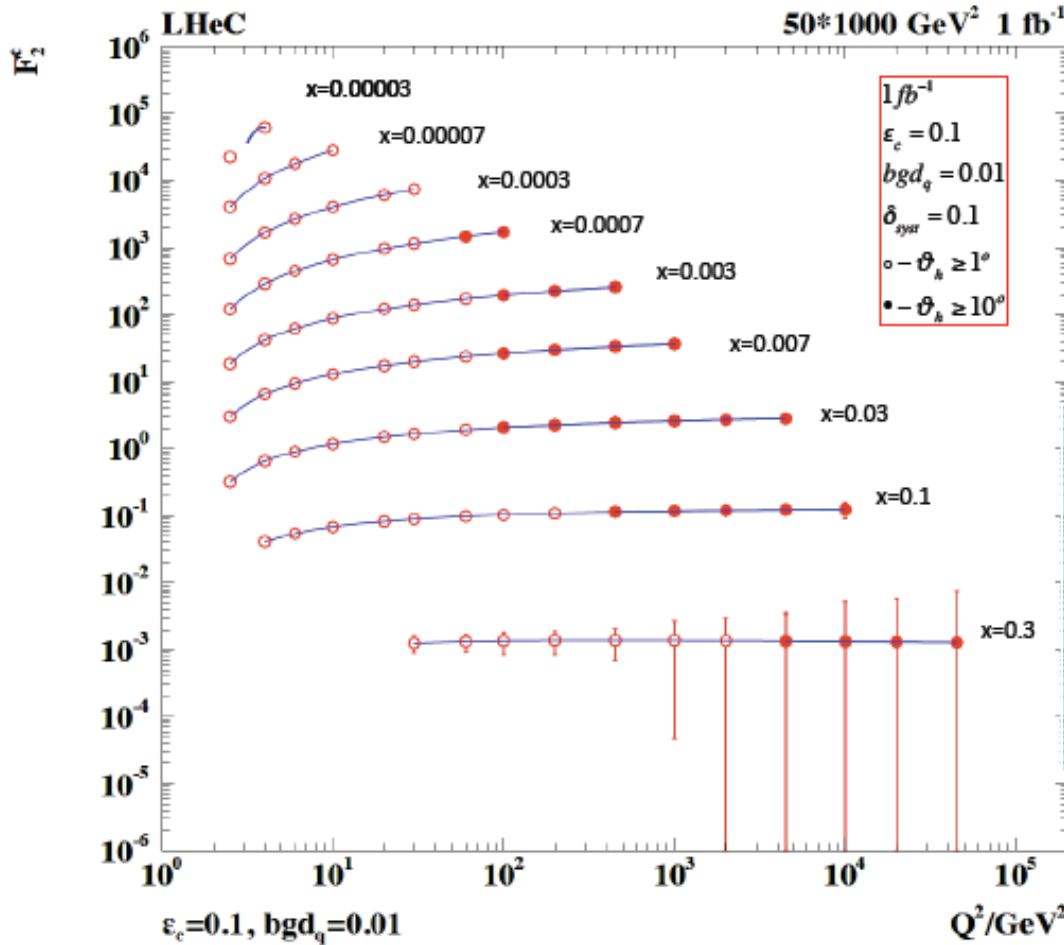

SecVtx Tag Efficiency for Top b-Jets

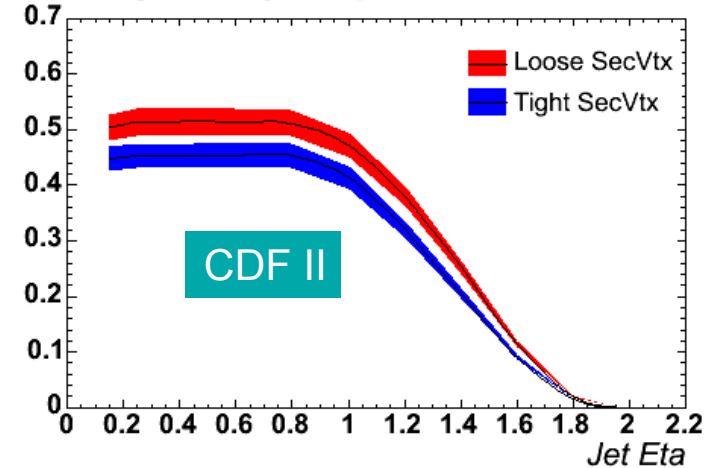


Even in the most favourable beam energy setting, a search for intrinsic charm at $x \geq 0.1$ would require charm tagging down to few degrees...

Requesting stringent Heavy Flavor tagging capabilities

Beam Pipe Considerations

Pipe dimensions – very essential choice: to large extent it determines the size of the detector.


Strong implications in terms of costs and acceptance

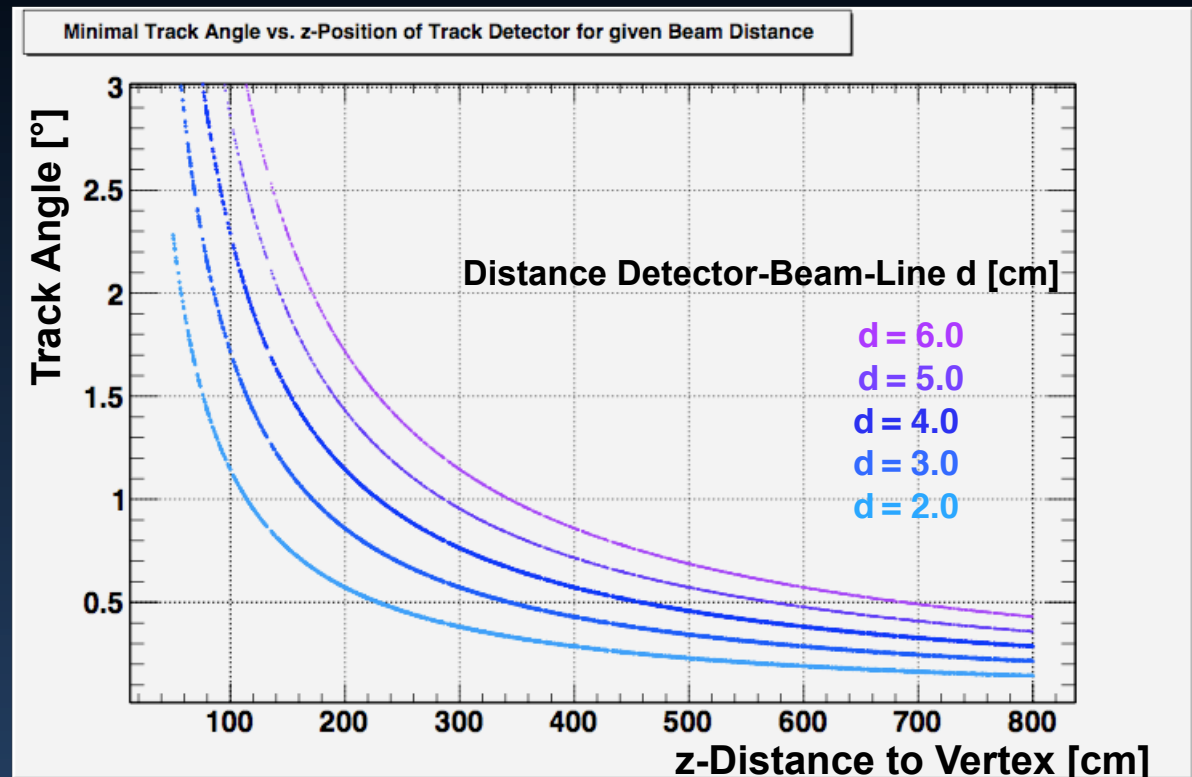

Present design: elliptical Be beam pipe from SLHC for now: $r_y=2.50$ cm (radius of SLHC design) and $r_x=3.07$ cm (scaled from HERA experience)

→ Dedicate simulation of Interaction region needed (synchr. background)


IP beam-pipe for 100GeV e^-

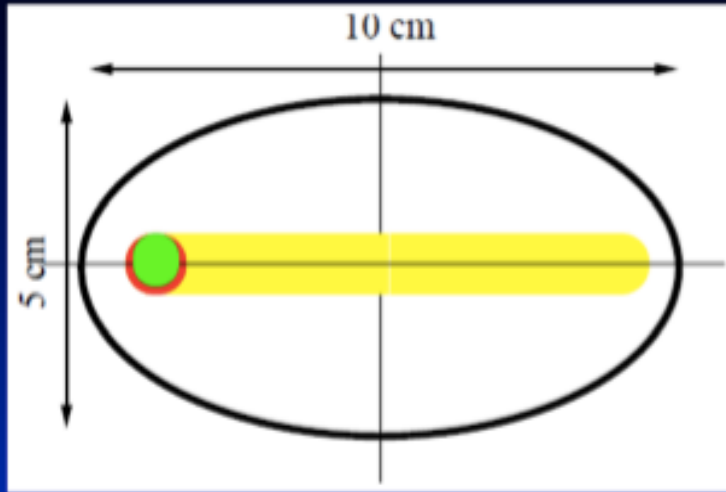

Horizontal dimension is defined by SR. Vertical dimension is a guess by P. Kostka. Precise calculation needs to include solenoid, radiation from e^- triplet, etc.

LINAC-Ring

Rogelio
Tomas
Garcia

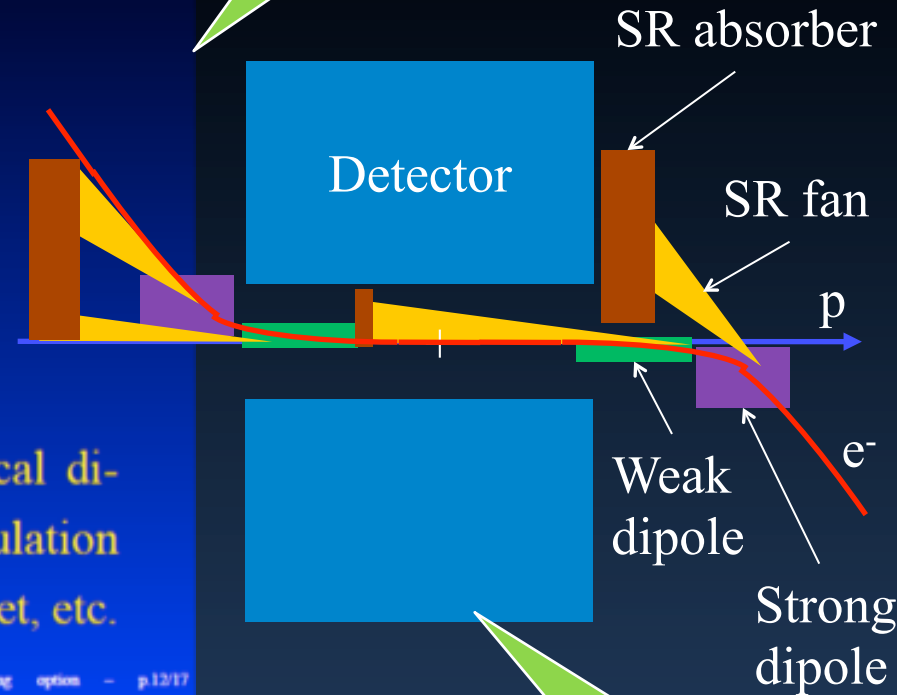

SR absorber

Detector

SR fan

p

e^-

Weak
dipole

Strong
dipole

Vladimir
Litvinenko
(T. Greenshaw
remix)

- We assumed beam pipe diameter 6cm @ IP - larger radius in backward region smaller in forward (proton) direction possible
- eRHIC solution: hard bend of electron beam outside of detector sync rad fan bypasses active areas

- **needs optimization/feedback detector WG ↔ IR region ↔ Accelerator Group**

Detector Requirements (I)

- Tracking


- **lowest mass tracker** - essential for γ/e^\pm ident (specifically bwd)
- **TPC**
TPC near the beam line - TPC background tolerant / BG tolerable? outer radii only?
Discussion during this meeting - TPC replaced by low weight high resolution Si-Detectors ("conventional" or SiGas)
- **high resolution** track definition in front of forward calo
- **tracking trigger** in front of fwd/bwd calo
- Early π^0 ident - vertex detector/trigger

Precision Tracking: Si-Gas Tracker – GOSSIP

Gas
on Slimmed Silicon Pixels

- Gas for charge creation, Si-pixel/strips/pads for signal collection
- Lightweight detector
- **More than one hit per track - defines track segments**
- Si radiation hard - standard CMOS (90 nm process)
- **Trigger capable**: 25ns, Gossipo 3/4 readout chip $\sim O(1)$ ns time resolution.
- Large volume detector affordable, industrial production
- **Time measurement – 3D tracking**
- Gas choice: radiator : **Transition Radiation Tracker** - e/π identification
- Diffusion and drift velocity limits position measurement currently to $\sim \ll 20\mu\text{m}$

Henry van der Graaf

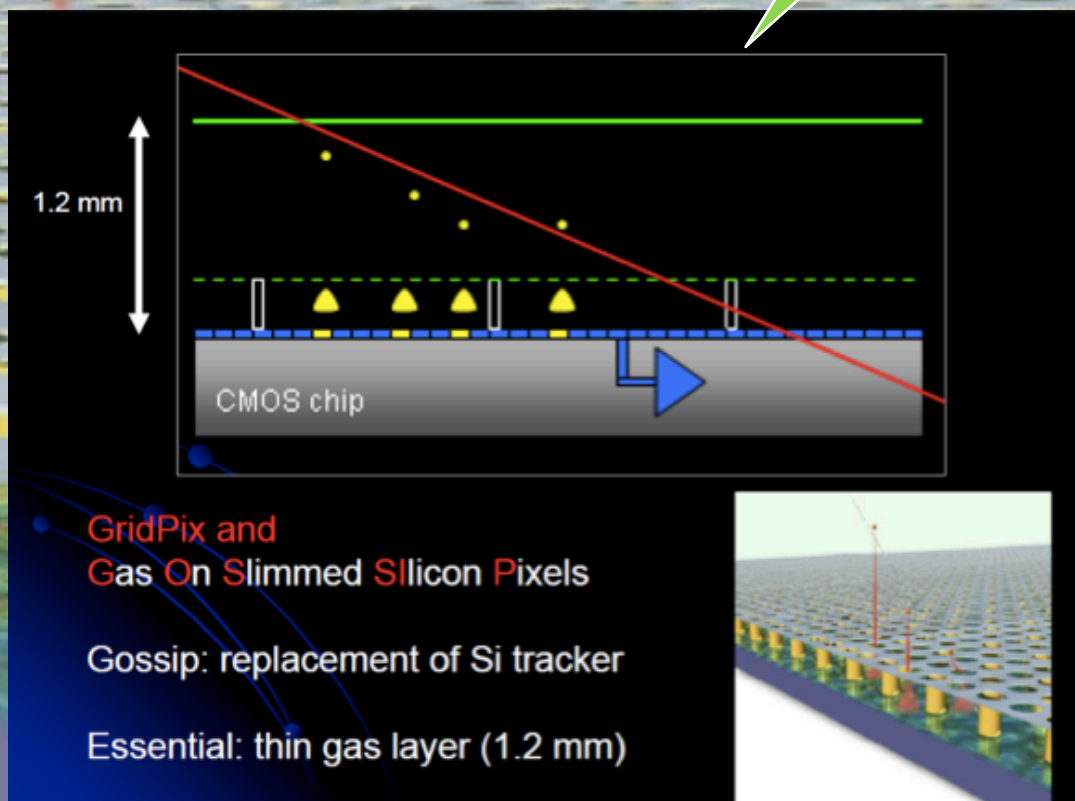

Detector Requirements (II)

Calorimeter

- Minimize longitudinal and lateral energy leakage
- Fwd/bwd **Particle Flow Detector** to achieve desired mass resolution ; γ/e^\pm ; π^0 ; ...

This technique combines the tracking/calorimetry information in an optimal way in order to get the best possible jet-energy resolution.


Or **Dream** (dual readout) - event to event correction

- Both electromagnetic and hadron calorimetry inside the solenoid coil; minimum material inside EmCal;
- Prototyping, test at high energy!

Magnetic Field

- 3.5 Tesla solenoidal field

- Use tracking information to improve jet energy reconstruction
- Need to associate tracks with clusters
- Ideally only neutral cluster energy is taken from calorimeter

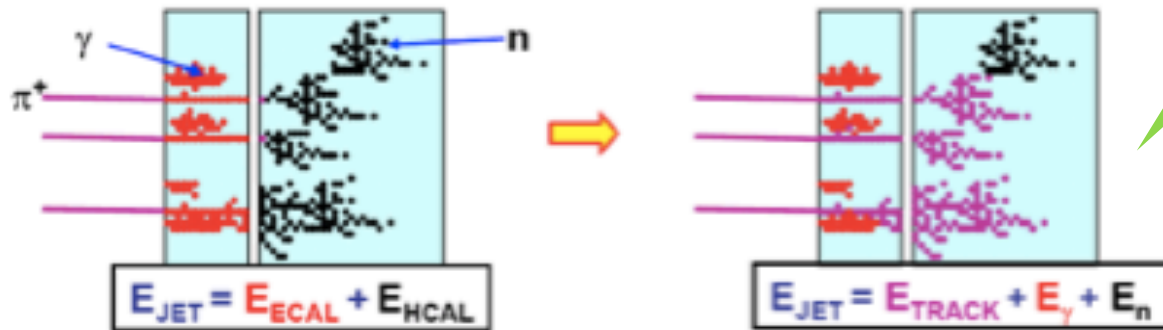

Christian Grefe

- “Confusion” is main source of errors
 - Need to separate neutral and charged clusters ($B + \text{radius}$)
 - Need highly granular calorimeter to see cluster structure

$$\text{Confusion} \propto B^{-0.3} R^{-1.0}$$

A hardware and software challenge

Tungsten = compact HCAL to minimize solenoid radius

Christian Grefe


Barrel Region

- Empiric formula for PFA performance

$$\frac{\sigma_E}{E} = \frac{21}{\sqrt{E}} \oplus 0.7 \oplus 0.004E \oplus 2.1 \left(\frac{E}{100}\right)^{+0.3} \%$$



- Comparing PFA and pure calorimetry:
 - PFA “wins” for $E_{jet} < 400$ GeV
 - There is room for improvement of the algorithm
 - Can chose reconstruction depending on event

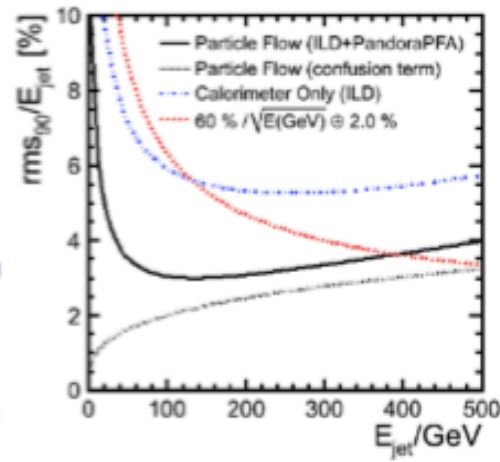

- <http://indico.cern.ch/contributionDisplay.py?contribId=268&sessionId=2&confId=30383>
- <http://indico.cern.ch/materialDisplay.py?contribId=1&materialId=slides&confId=56735>

Mark Thomson

- Good option for barrel HCAL
 - need input from physics groups about mass and/or energy resolution
- PFA performance in fwd region unproven
- => consider conventional or “DREAM” fwd calorimeter

Default ILD: B = 3.5 T, 6 λ HCAL


E_{JET}	$\sigma_E/E = \alpha/\sqrt{E_{jj}} \quad \cos\theta < 0.7$	σ_E/E_j
45 GeV	25.2 %	3.7 %
100 GeV	29.2 %	2.9 %
180 GeV	40.3 %	3.0 %
250 GeV	49.3 %	3.1 %
375 GeV	81.4 %	3.6 %
500 GeV	91.6 %	4.1 %

... the detector

... an updated draft

The Detector - Low Q^2 Setup

(to be optimised)

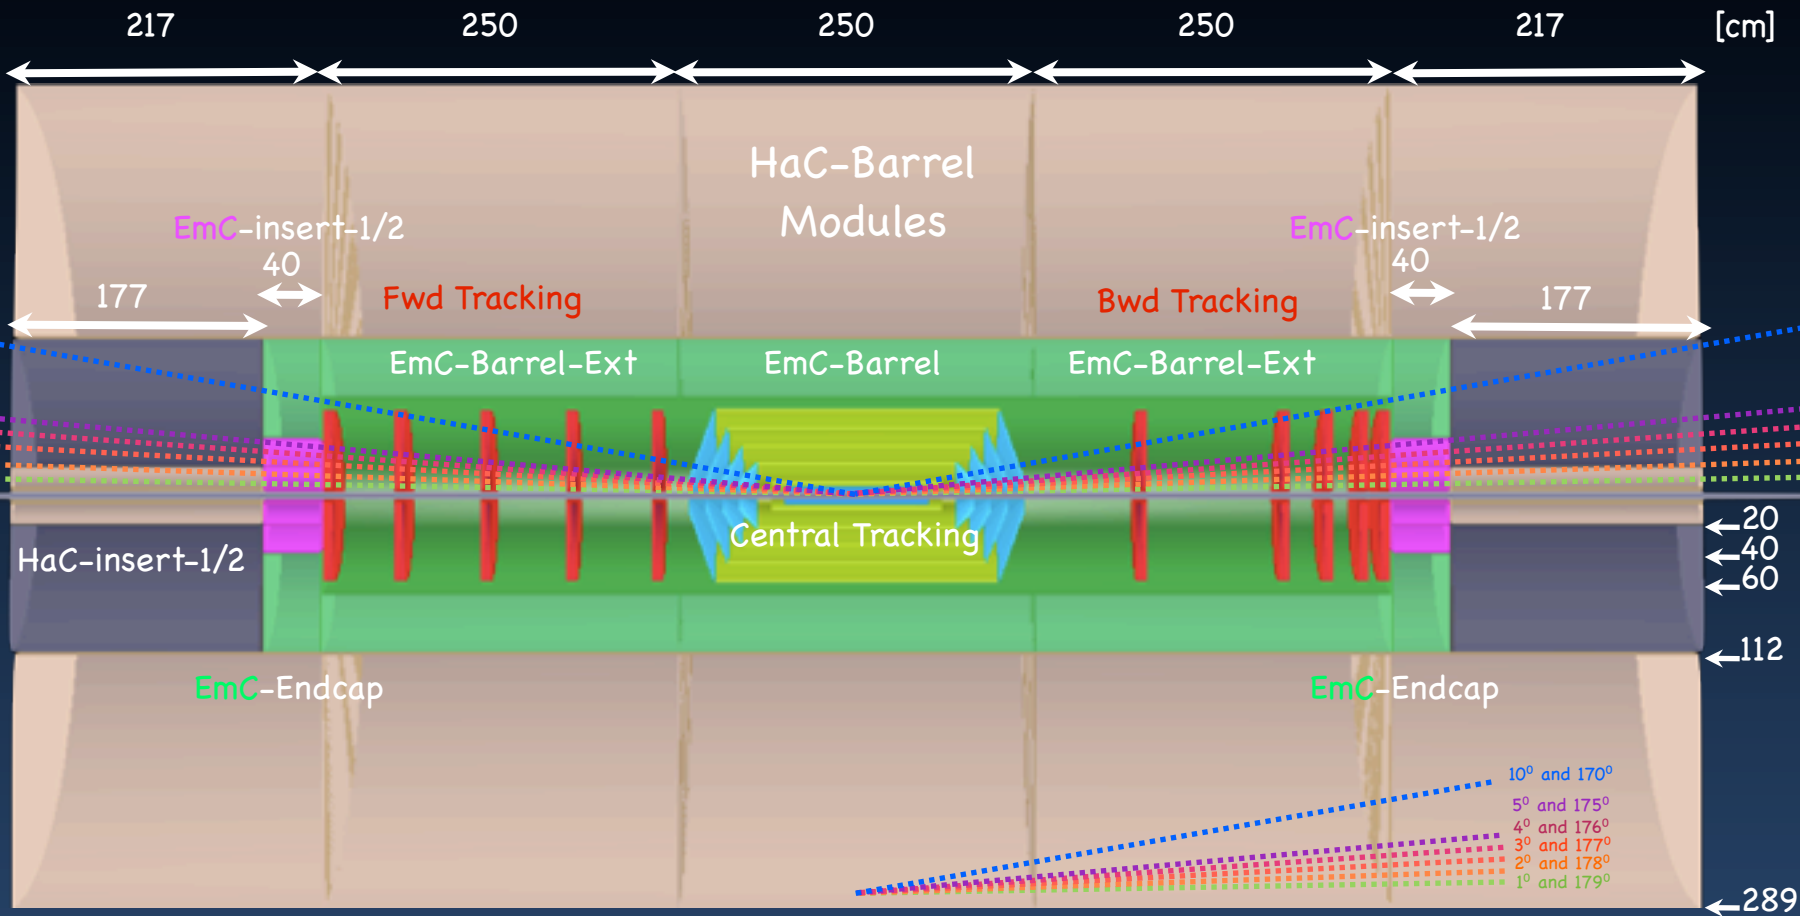

- TPC replaced with Si-Gas double planes (concern about low angle tracks)

LOW-X

Paul Newman


Discussion Points on Detector Requirements for low x / high parton density physics

Paul Newman (Birmingham)



with Nestor Armesto,
Brian Cole, Anna Stasto
and the low x
working group


LHeC @ Divonne
2/9/2009

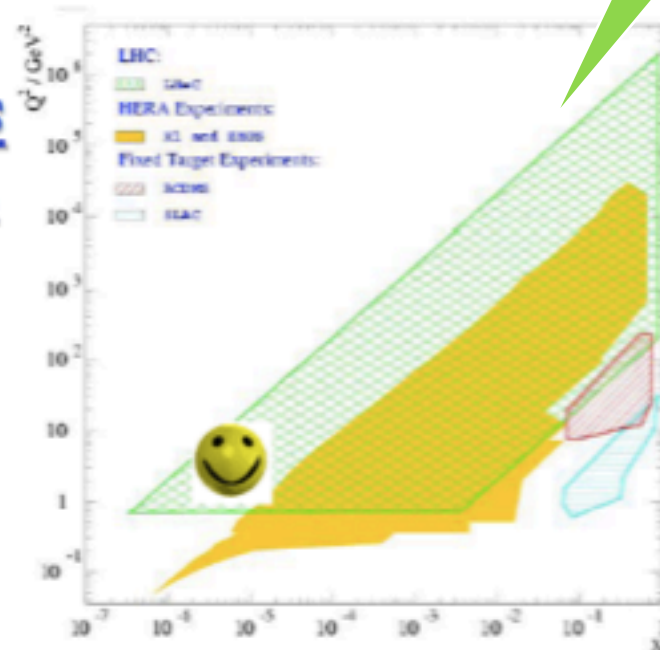

- 1) Generalities
- 2) Inclusive scattering
- 3) Vector mesons
- 4) Inclusive diffraction
- 5) Beam-line detection (e, p, n)
- 6) Forward jets

The High Q^2 Setup

(to be optimised)

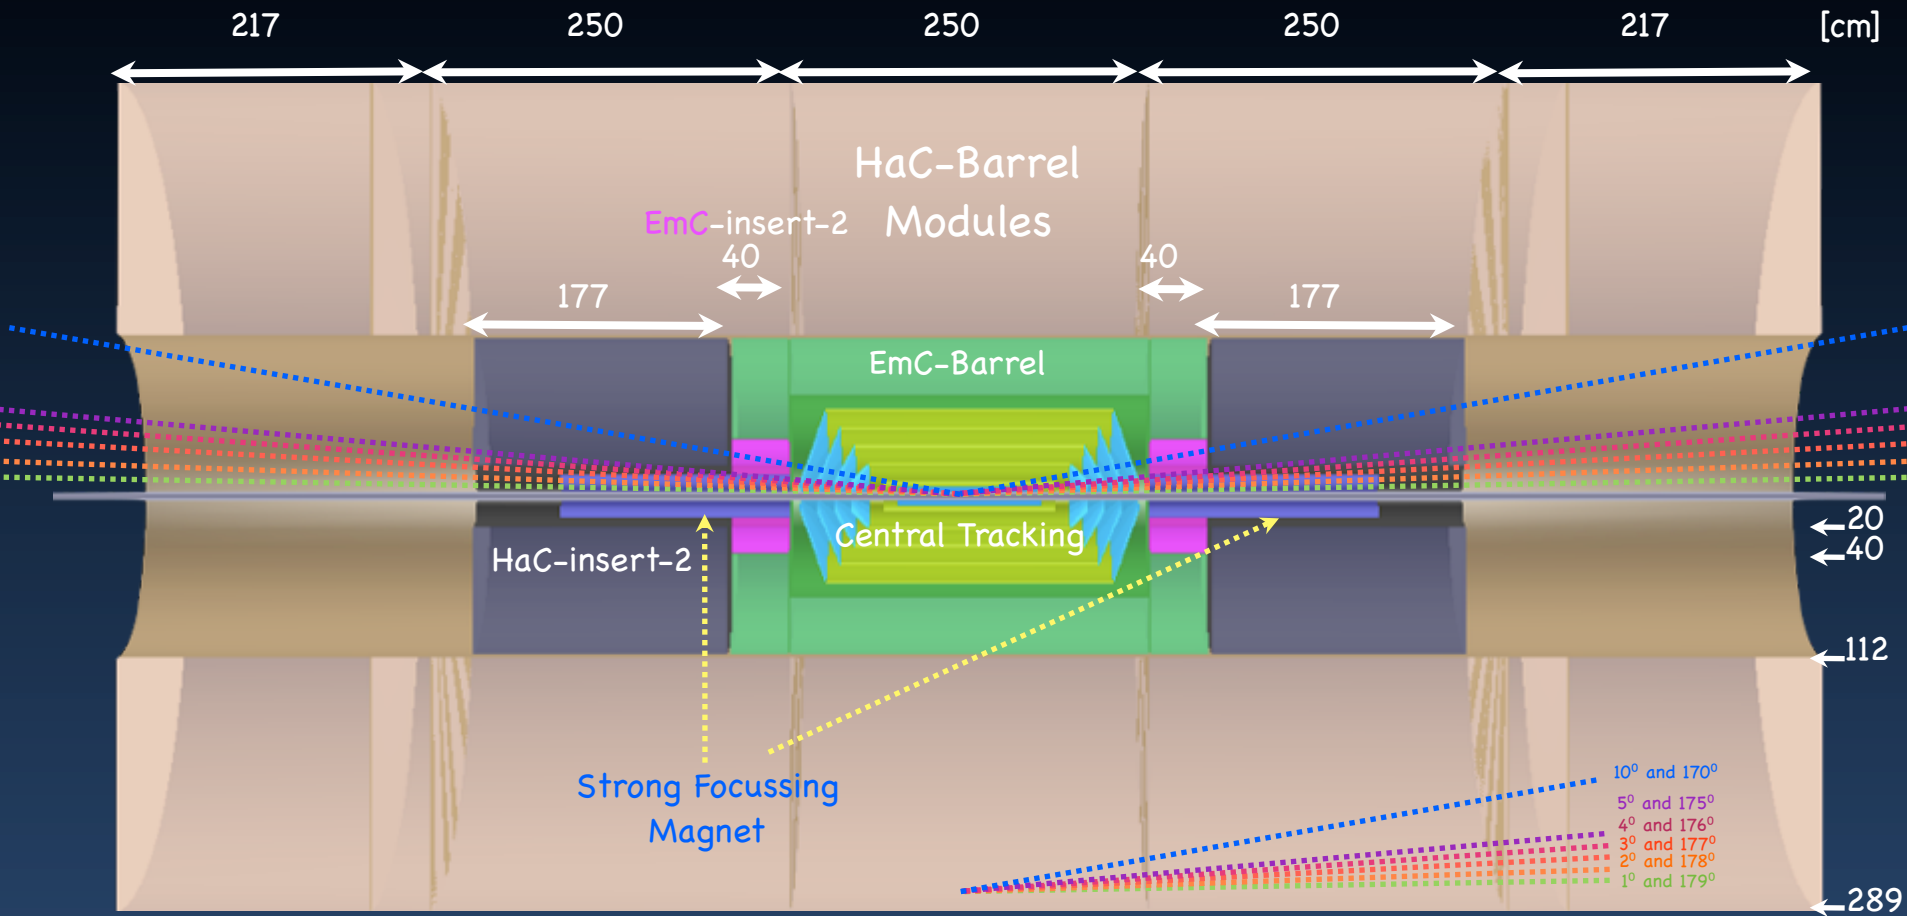

L1 Low Q^2 SetUp → High Q^2 SetUp


- Fwd/Bwd Tracking & EmC-Extensions, HaC-Insert-1 removed
- Calo-Inserts in position
- Strong Focussing Magnet installed

Instrumented Magnets


Tim Greenshaw

Superconducting magcal – take one

- Helium cooled SC magnet.
- Coils in He bath.

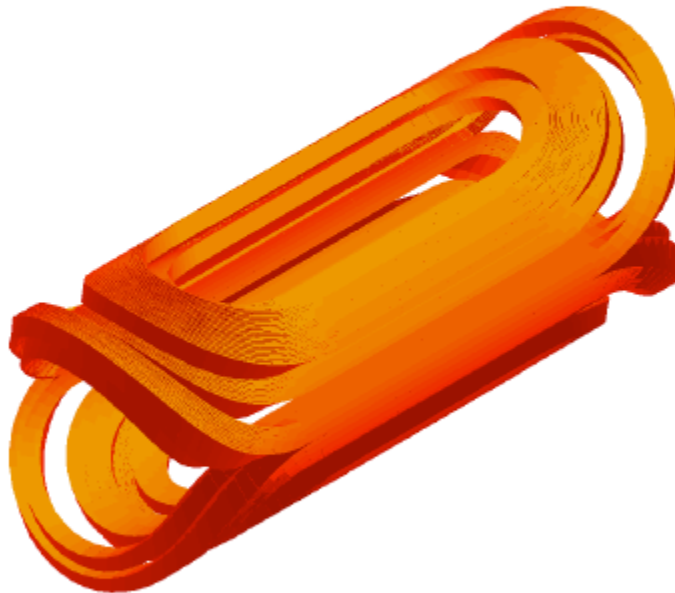

- Could add stainless steel plates as absorber with readout pads:

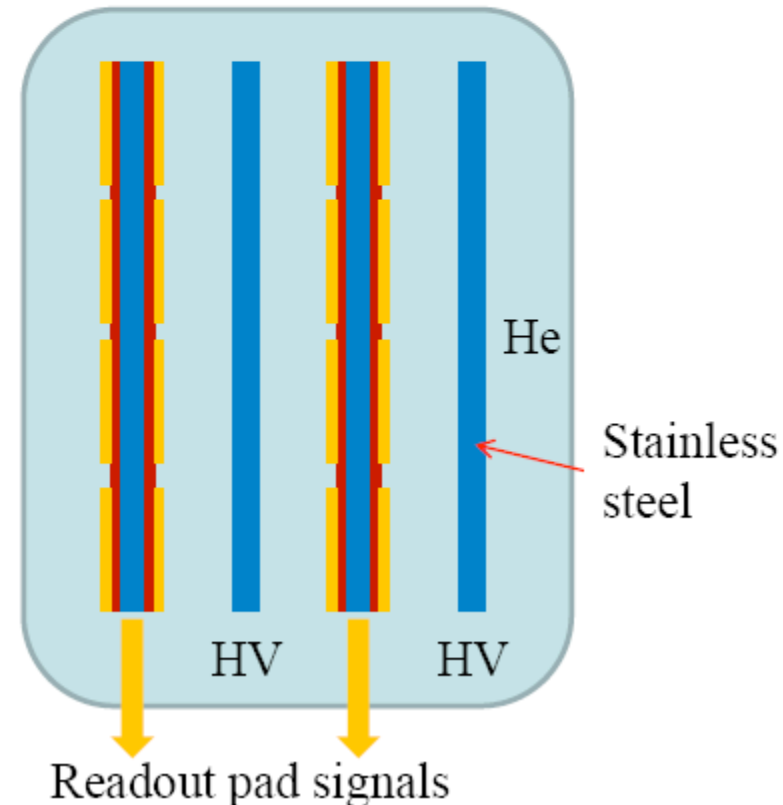


- Space for calorimeter using He as active component?

Geant 4 studies Birmingham

- Resolution, expect:

$$\frac{\sigma}{\mu} = \frac{\text{const.}}{\sqrt{E}}$$


- Extract const. from slope of graph of σ/μ against $1/\sqrt{E}$.

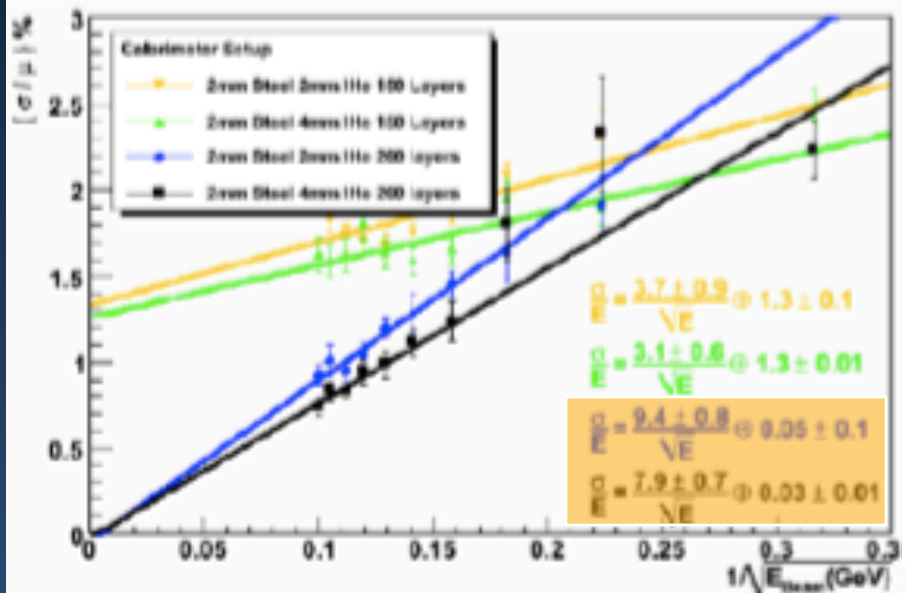

- Highest luminosity at collider requires magnets close to IP.
- These limit experimental acceptance unless they can provide (calorimetric) measurements.
- Stainless steel/LHe scintillation sandwich calorimeters look to be able to provide an energy resolution of $\sim 10\%/\sqrt{E}$...
- ...but the showers in the calorimeters are broad and so they have to be reasonably large.

Solenoid

Modular structure: assembly on surface level or in the experimental area depending on time constraints and access shaft opening

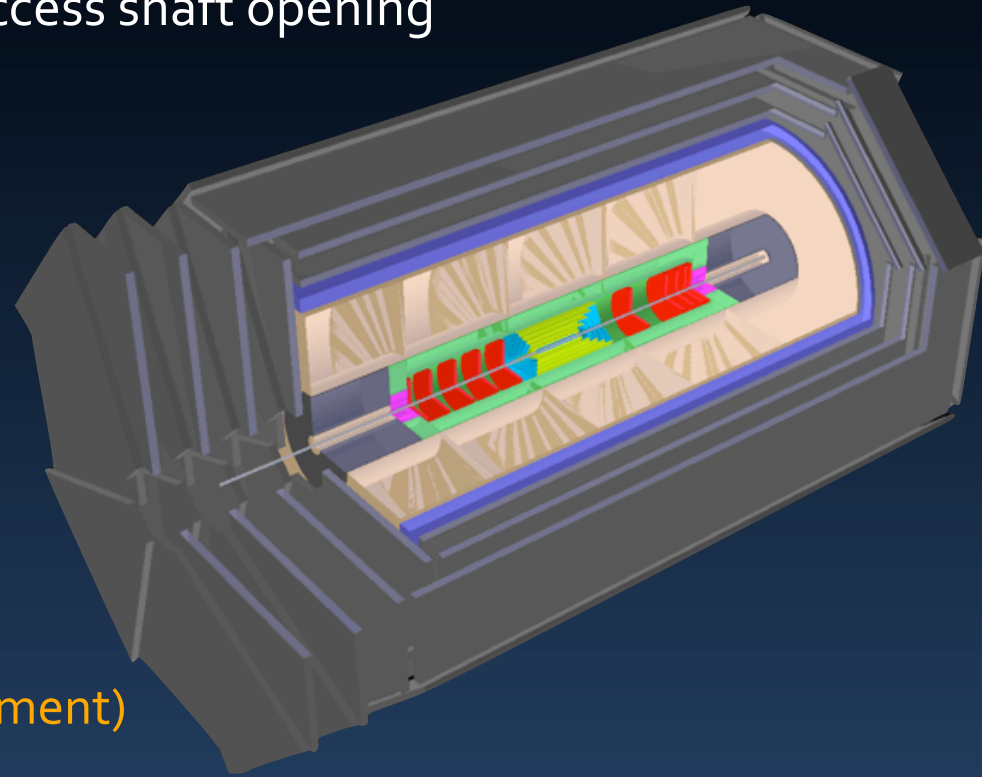

Solenoid dimensions:

- 594 cm half length
- 291 cm inner radius
- B field = 3.5 T (resolution improvement)

Geometry constraints:

- Current beam pipe dimensions
- Requirement of 1° tracking coverage
- Homogeneous B field in the tracking area

Overview - Core Detector

Radius (cm)	Subdetector	Comment
2.9–4.6/3.47–6.05	2 layer ellipt. V_{pix}	$\delta(\text{IP}) < 10 \mu\text{m}$
7.5–61	5 layer Si-Gas barrel	
5–61	4 cone Si-Gas barrel	
5–60	fwd/bwd $\times 5 \times 2$ planes Si-Gas	
70–110	ECAL	25-30 X_0
112–289	HCAL	6-10 λ_1
300–330	Coil	3.5 T - tracking
340–700	Fe/muon, ...	

Not covered:

very forward detectors, lumi measurement, what to do w/ 2nd proton beam ...

may be important for e-nucleon running:
TOF system, Zero Degree Calo ... ?

Detector Simulation



- Precise detector simulations are needed:
 - optimize full detector designs for physics performance on mission critical processes
 - optimize the designs of subsystems and subdetectors
 - compare proposed detector technologies with each other (in concert with test beam)
- The hardware selection aspect makes use of world wide efforts for the preparation of ILC and SLHC experiments

Simulation of Detector in Geant4

Adnan Kilic

A. Kilic, F. Kocak and I. Tapan
Uludag University, Turkey

Simulation

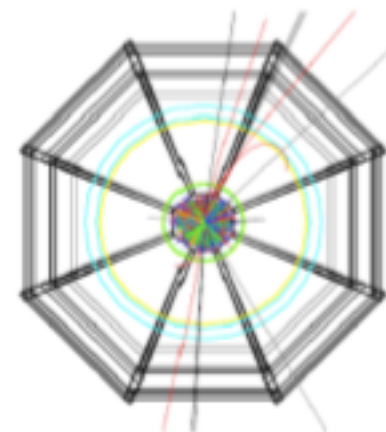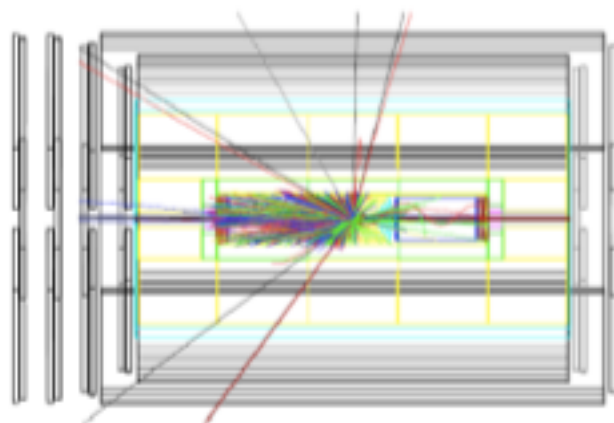


kaon- blue, kaon+ red, kaon0 black, kaon0S black, kaon0L black, kaon0 green,
e- blue, e+ red, pi+ red, pi- blue, mu+ red, mu- blue, nu_mu black, gamma green, neutron yellow

First promising
steps towards
GEANT4 detector
simulation for physics

Simulation Framework

- Several tools on the market
→ Use a homogeneous, powerful and widespread
- Frameworks which have come to our attention:
 - 4th concept - **ILCRoot** - ILC evolved from: **AliRoot** - Alice - LHC
 - Based on CERN software **root** with so-called Virtual Monte Carlo
 - 4 experiments using AliRoot based framework: Ali - Ilc - Fair - MPD -Root
 - Import of our contained model-detector geometry in the environments
 - Good contact to developers
- **Dedicated manpower for software implementation needed**

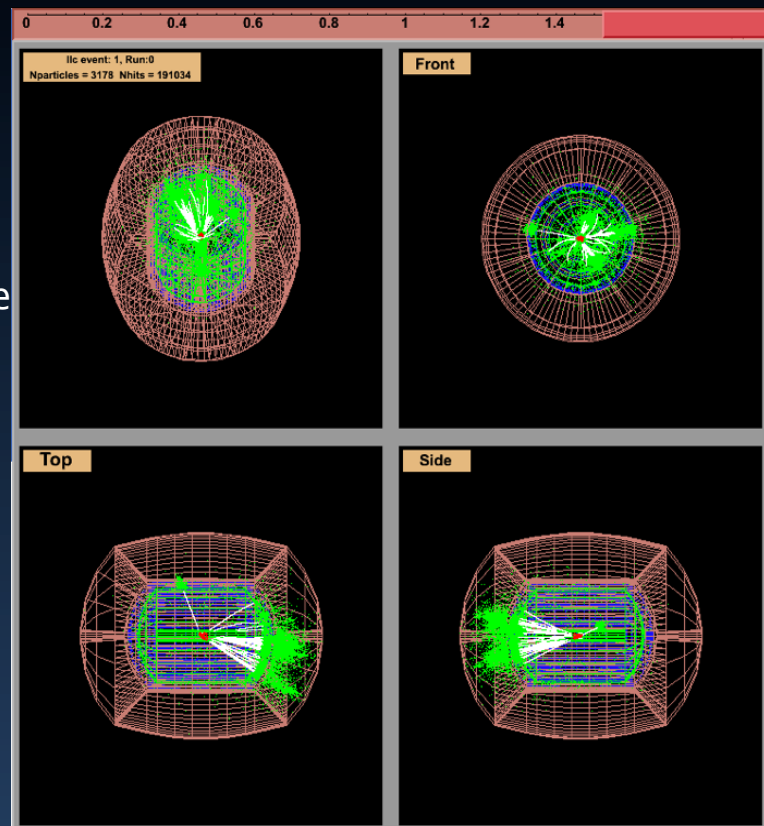

ep Higgs event in 4th detector

Summary

- Need to define beam pipe radii – feedback w/ accelerator and physics working groups (HF tagging needs)
- Need to agree benchmark physics analyses – negotiate different requirements on the detector
 - mass resolution needed
 - heavy flavor tagging needs
- Benchmark analyses need to be set up in simulation environment – need simulation experts
- We are trying to give our best estimation for first detector iteration - nothing is final yet, but should provide a reasonable start
- CDR detector design philosophy – ‘conventional’ technology + new options

Backup slides

Infrastructure


ALICE

- Round access shaft of **23m diameter**, cavern about **50m** along the beamline


LHCb

- Shaft: 100m depth, **10.10m diameter**, very slightly non vertical; experiment: length 19.90m from IP, max width at the muon station 12m; **cavern: 50m x 20m**


Point 2 (Alice)

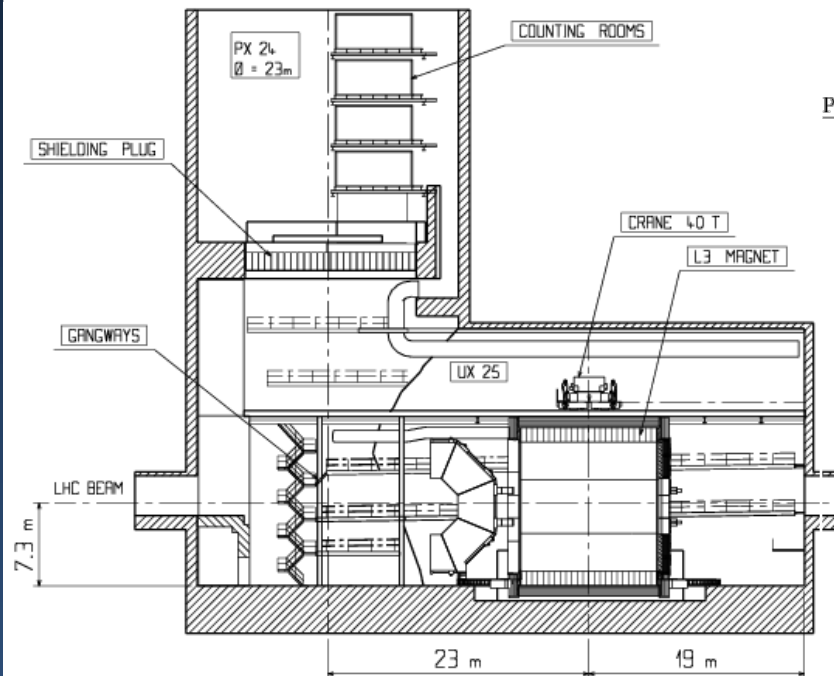


Point 8 (LHCb)

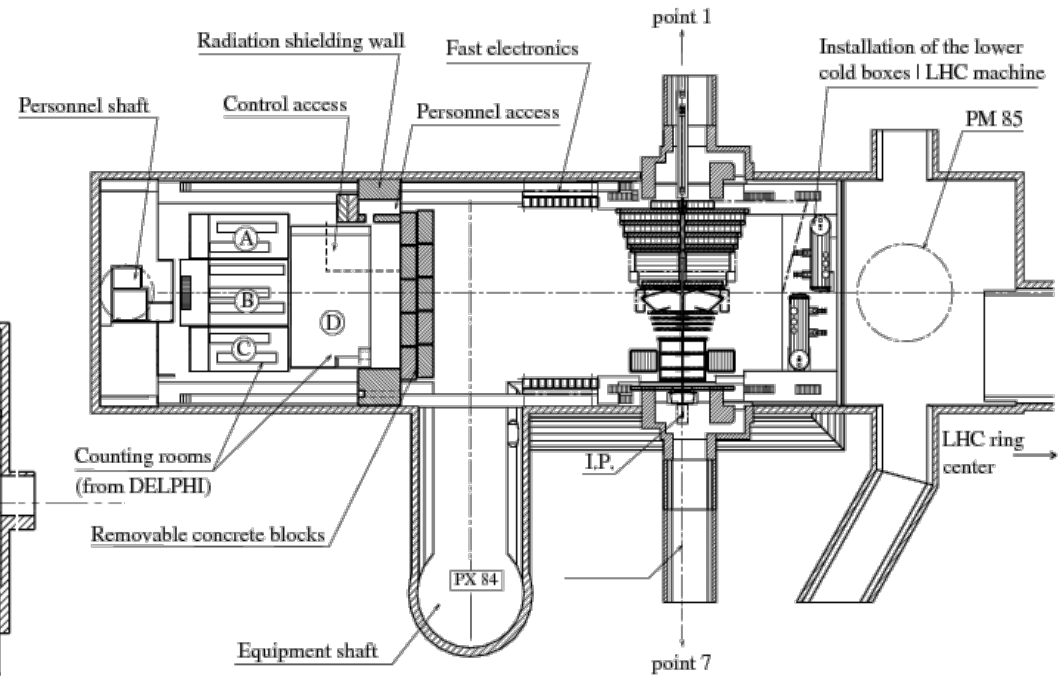

Simulation Environment (I)

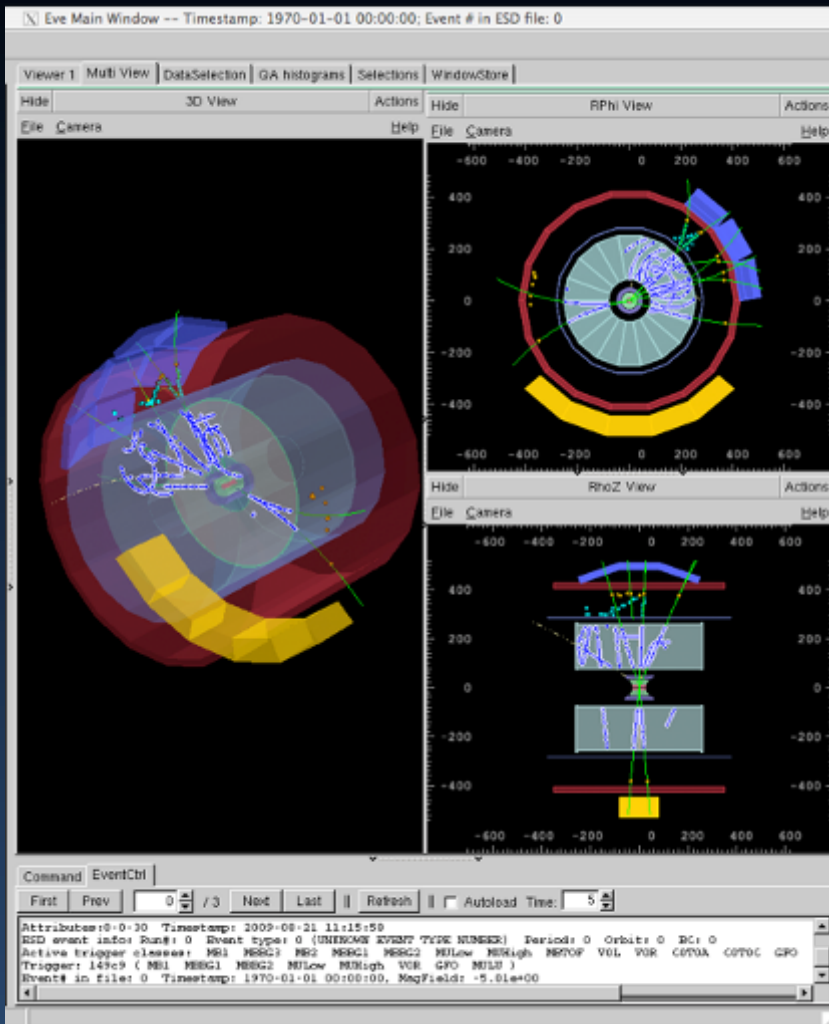

P-p Alice

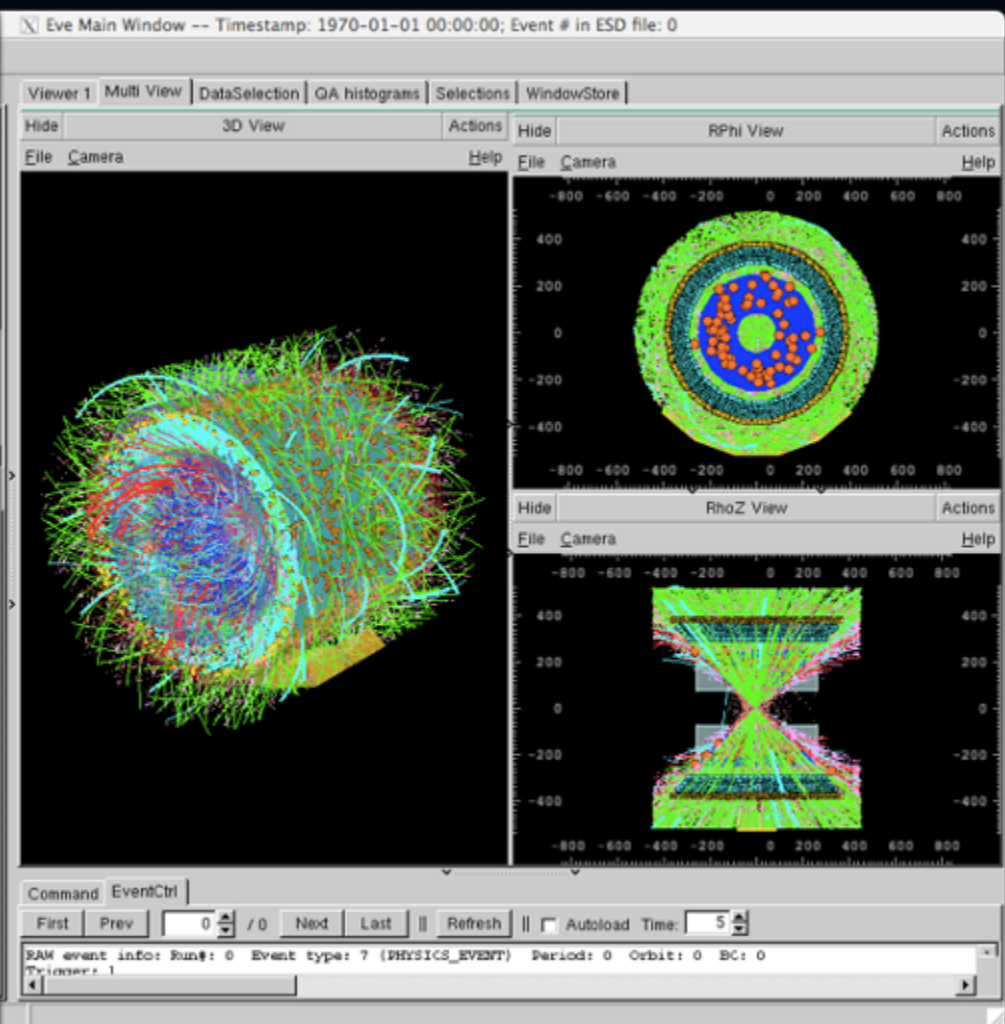

Pb-Pb Alice