



Beam Diagnostics

Lecture 1

Ulrich Raich
CERN BE - BI
(Beam Instrumentation)

Dakar, Senegal 2014



Overview








- First hour:
 - Introduction
 - Overview of measurement instruments
 - Faraday Cup
 - Beam Current Transformer
 - Beam Position Monitor
 - Fluorescence screens
 - Profile Detectors
 - SEMGrids
 - Wire Scanners
 - Beam Loss Monitors
- Second hour
 - Some depicted examples of beam parameter measurements



Introduction




An accelerator can never be better than the instruments measuring its performance!

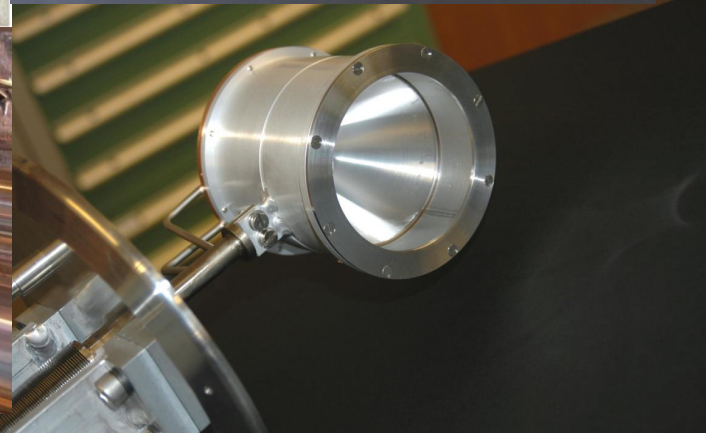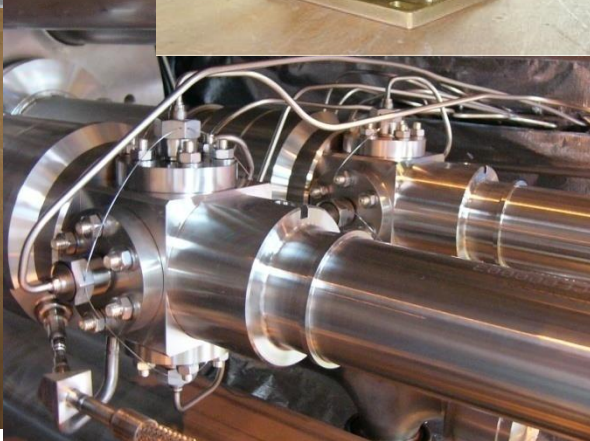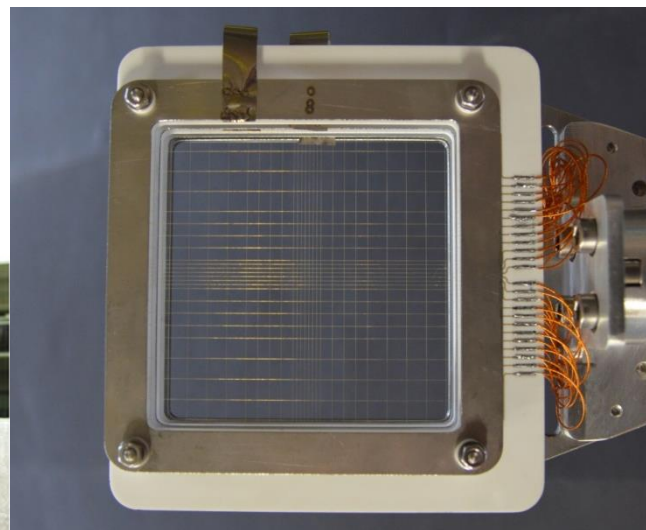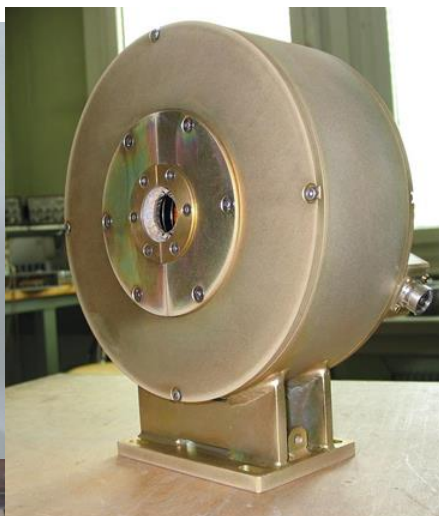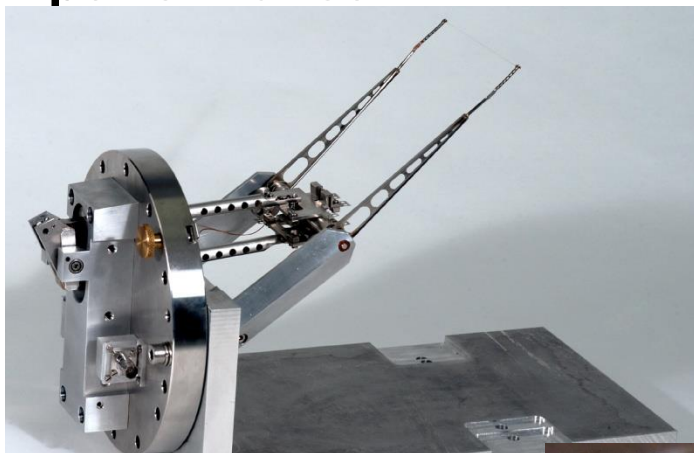




Diagnostic devices and quantity measured



Instrument	Physical Effect	Measured Quantity	Effect on beam 
Faraday Cup	Charge collection	Intensity	Destructive
Current Transformer	Magnetic field	Intensity	Non destructive
Wall current monitor	Image Current	Intensity Longitudinal beam shape	Non destructive
Pick-up	Electric/magnetic field	Position	Non destructive
Secondary emission monitor	Secondary electron emission	Transverse size/shape, emittance	Disturbing, can be destructive at low energies
Wire Scanner	Secondary particle creation	Transverse size/shape	Slightly disturbing
Scintillator screen	Atomic excitation with light emission	Transverse size/shape (position)	Destructive
Residual Gas monitor	Ionization	Transverse size/shape	Non destructive



A beam parameter measurement

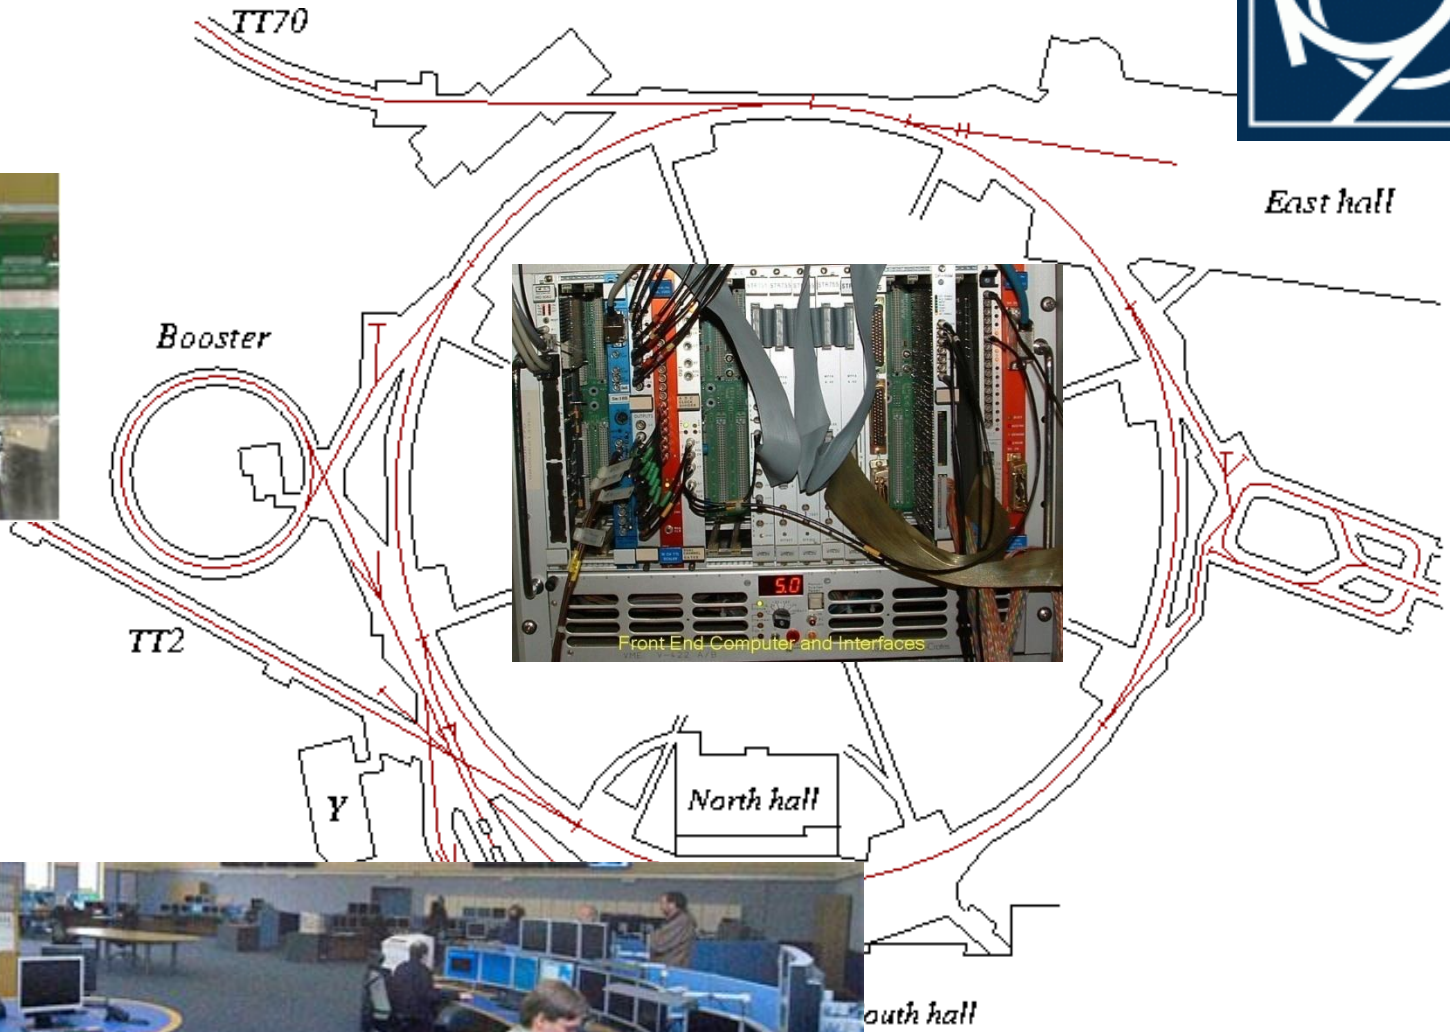

Scintillating Screens

Method already applied in cosmic ray experiments


- Very simple
- Very convincing

Needed:

- Scintillating Material
- TV camera
- In/out mechanism

Problems:


- Radiation resistance
- Heating of screen (absorption of beam energy)
- Evacuation of electric charges

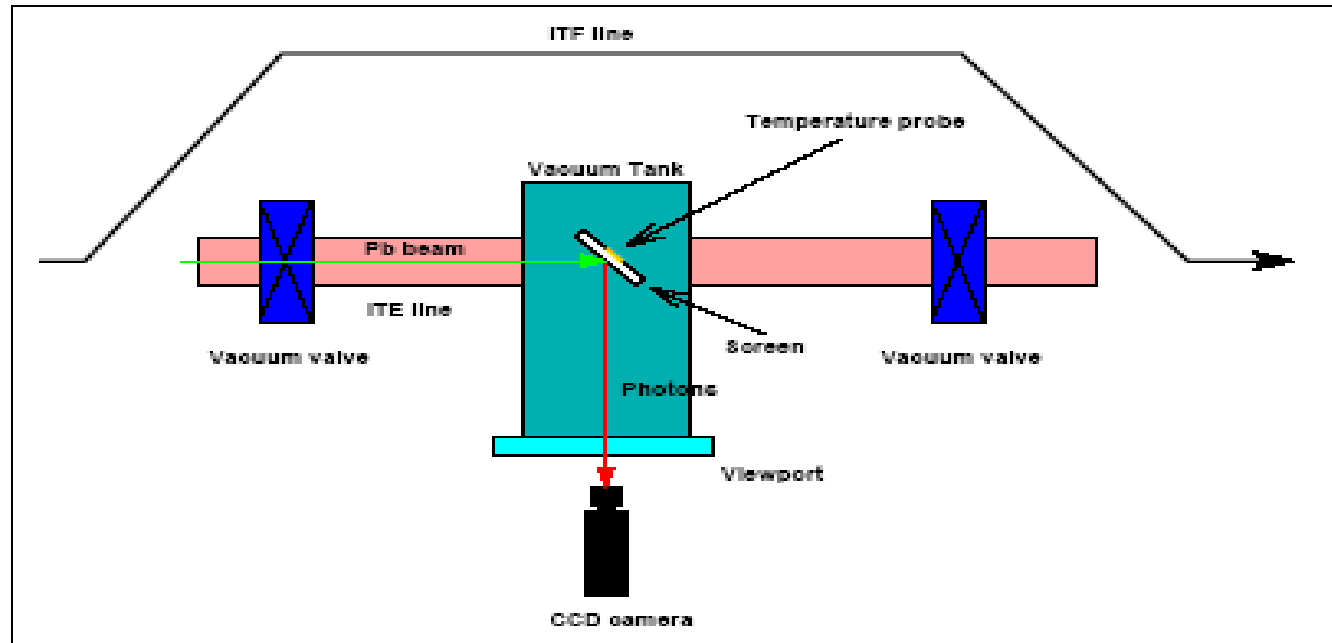

Screen mechanism




- Screen with graticule

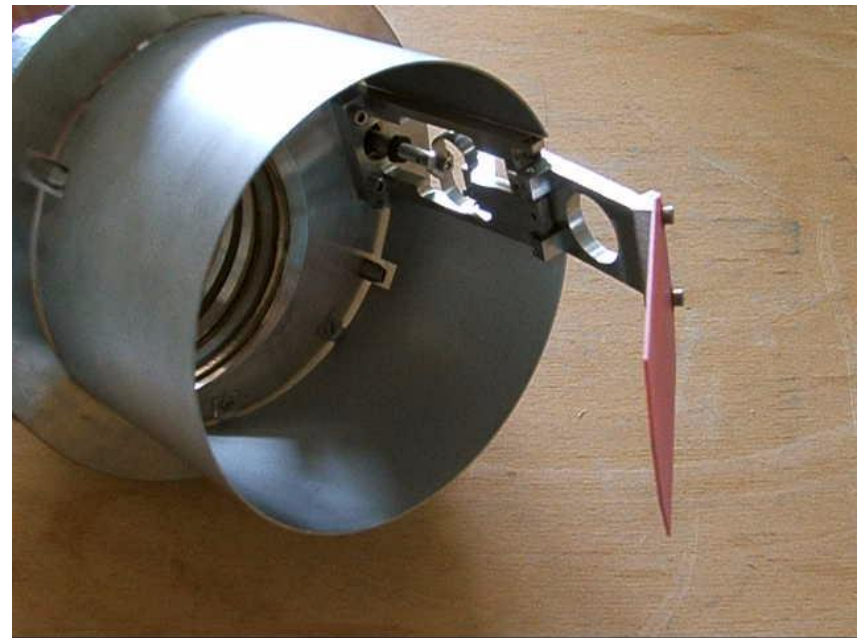





Results from TV Frame grabber

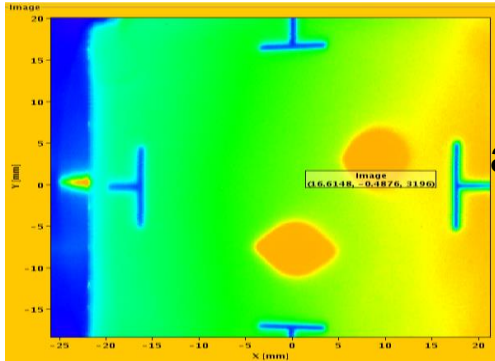

First full turn
as seen by the
BTV
10/9/2008

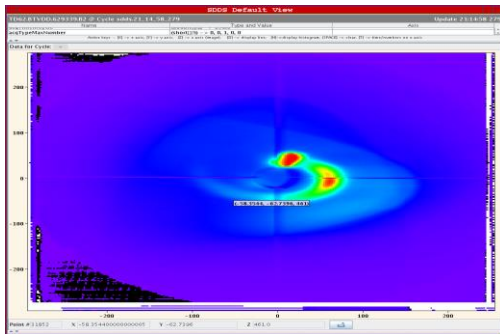

Uncaptured
beam sweeps
through the
dump line

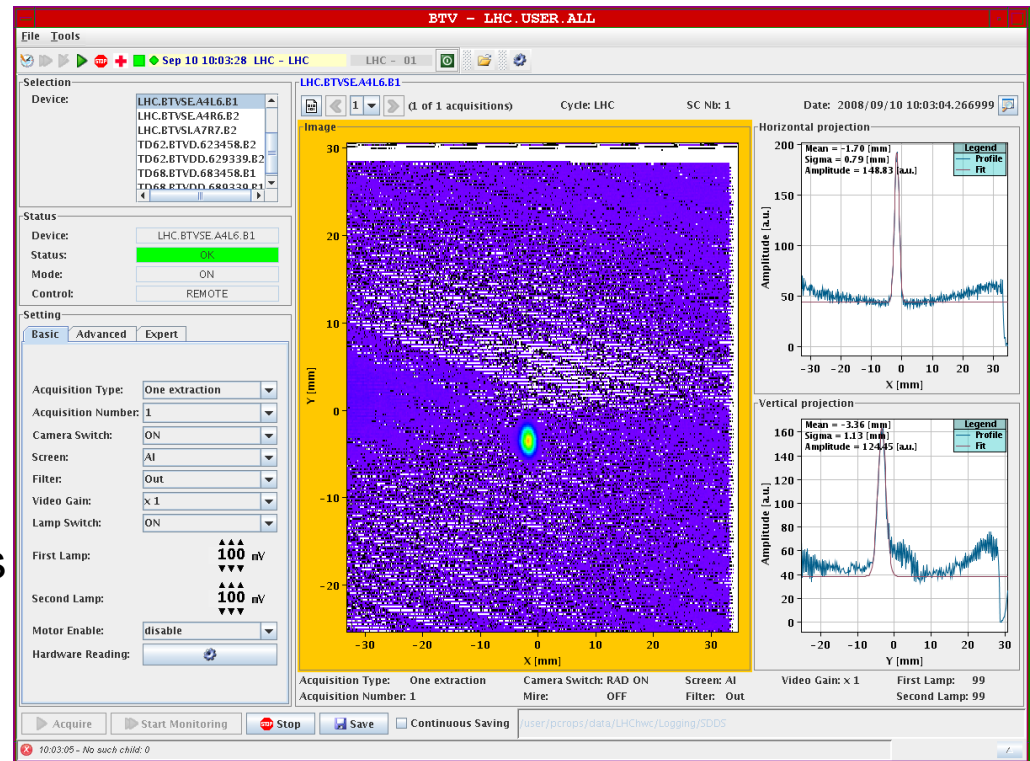


- For further evaluation the video signal is digitized, read-out and treated by program



Layout of a Faraday Cup



- Electrode: 1 mm stainless steel
- Only low energy particles can be measured
- Very low intensities (down to 1 pA) can be measured
- Creation of secondary electrons of low energy (below 20 eV)
- Repelling electrode with some 100 V polarisation voltage pushes secondary electrons back onto the electrode

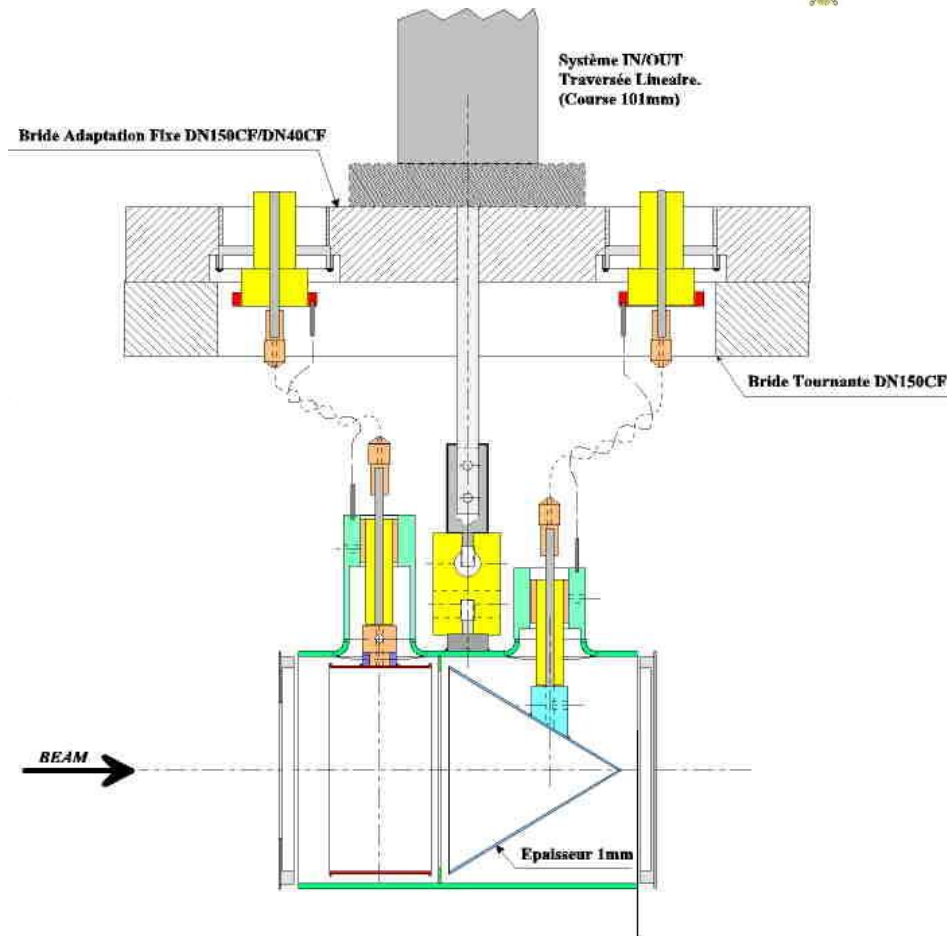

Faraday Cup

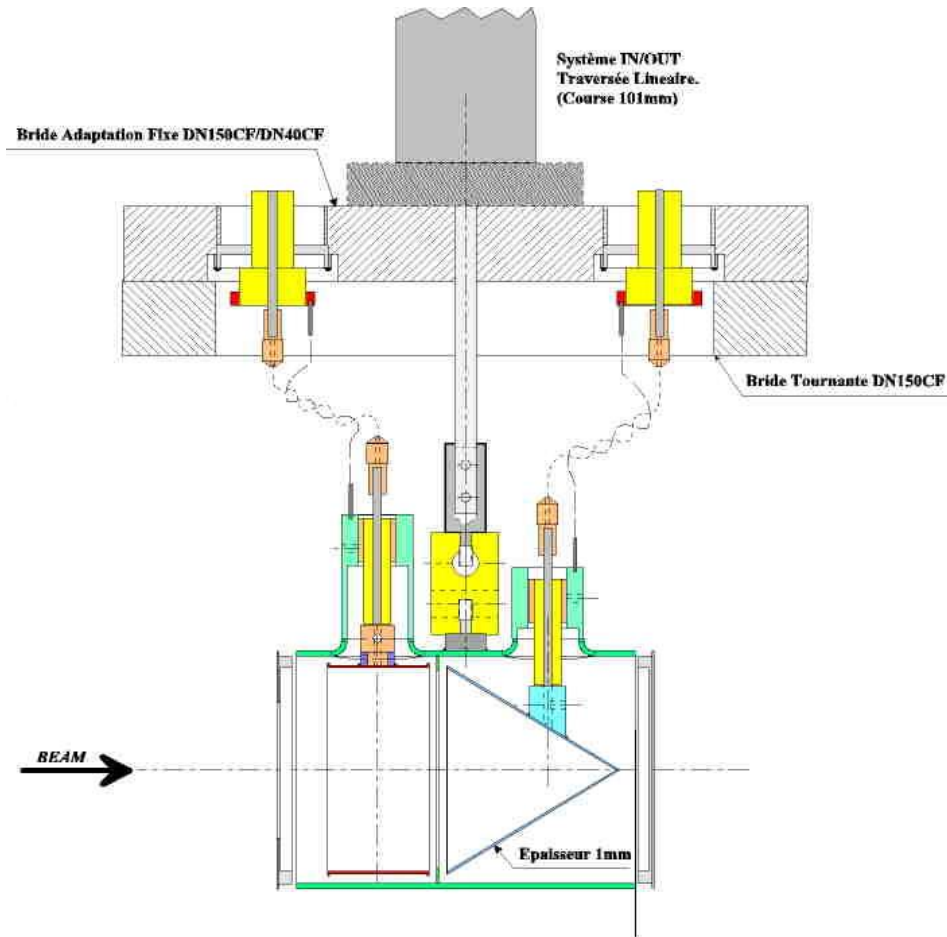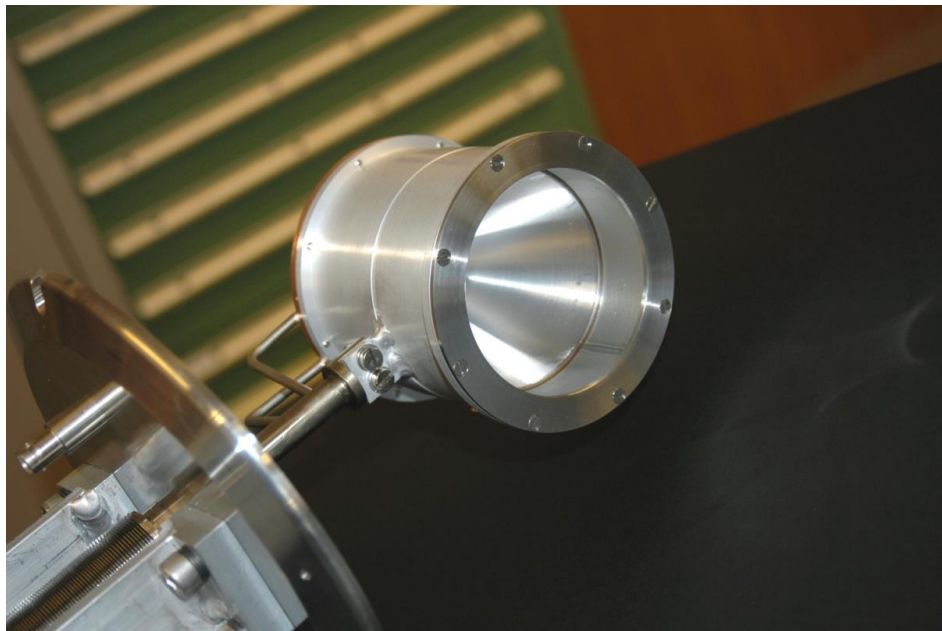




Electro-static Field in Faraday Cup



In order to keep secondary electrons within the cup a repelling voltage is applied to the polarization electrode

Since the electrons have energies of less than 20 eV some 100V repelling voltage is sufficient

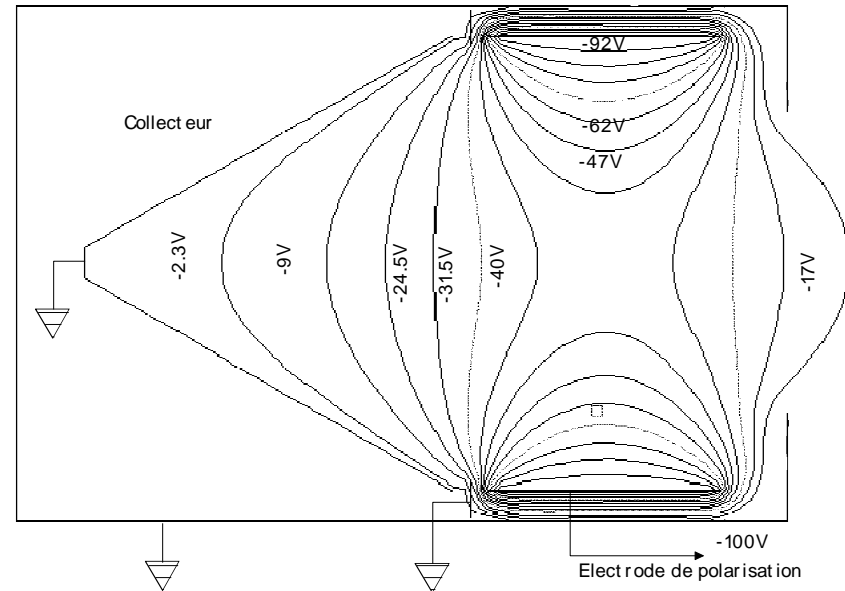




Energy of secondary emission electrons




- With increasing repelling voltage the electrons do not escape the Faraday Cup any more and the current measured stays stable.
- At 40V and above no decrease in the Cup current is observed any more

$I(\mu\text{A})$

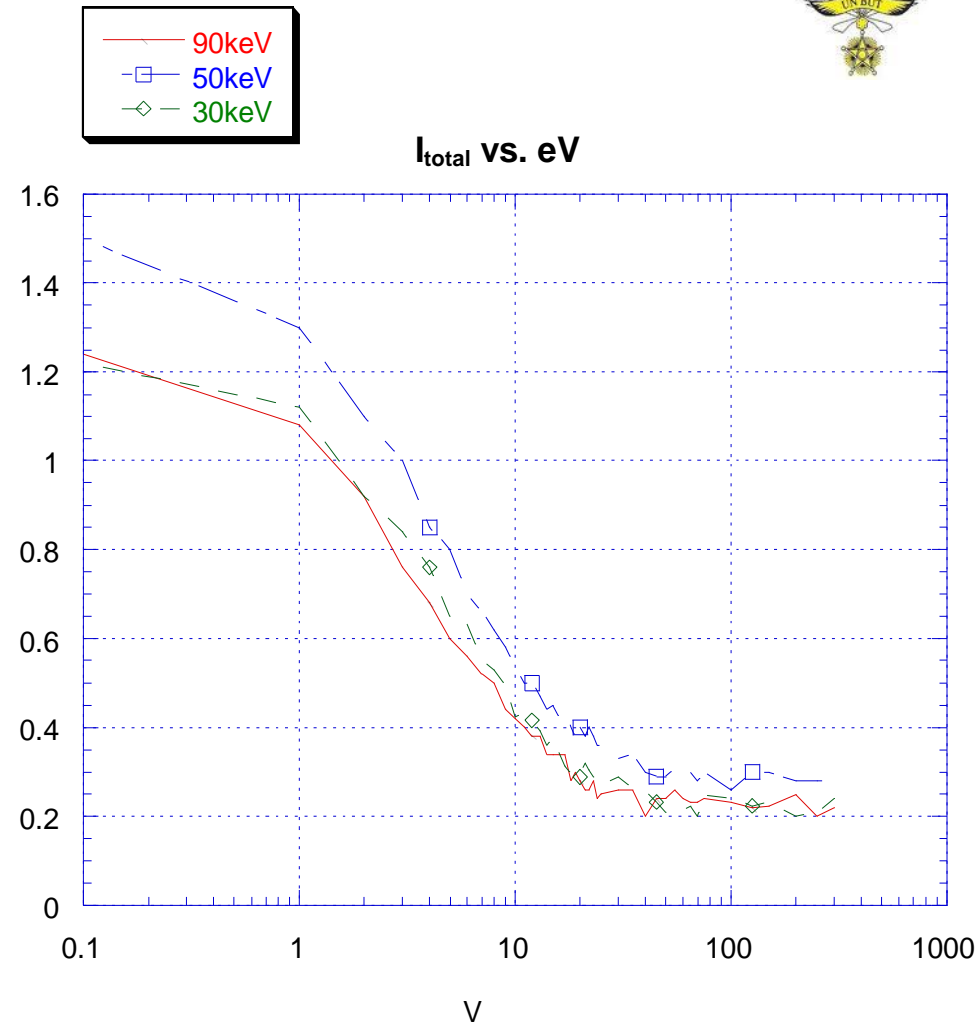

Current Transformers

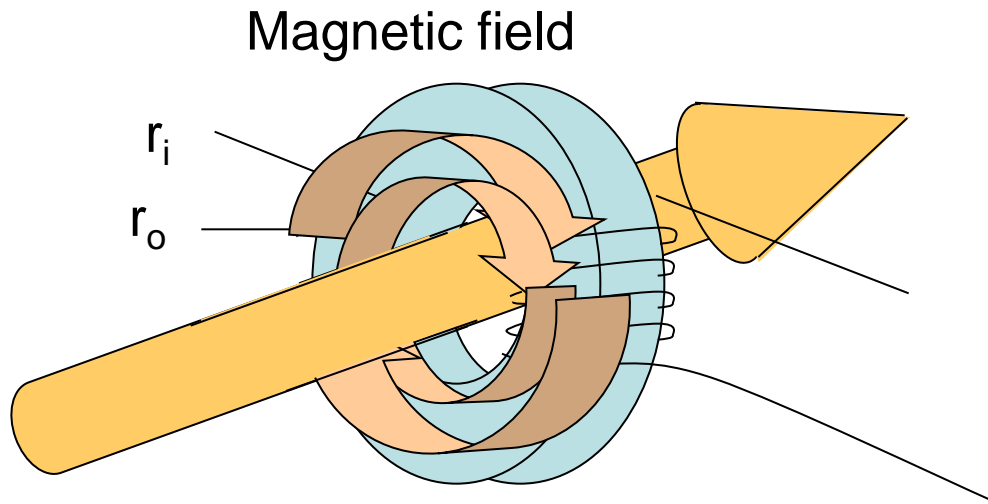

Fields are very low

Capture magnetic field lines with cores of high relative permeability

(CoFe based amorphous alloy Vitrovac: $\mu_r = 10^5$)


Beam current

$$I_{\text{beam}} = \frac{qeN}{t} = \frac{qeN\beta c}{l}$$

$$L = \frac{\mu_0 \mu_r}{2\pi} l N^2 \ln \frac{r_o}{r_i}$$





The Ideal AC transformer

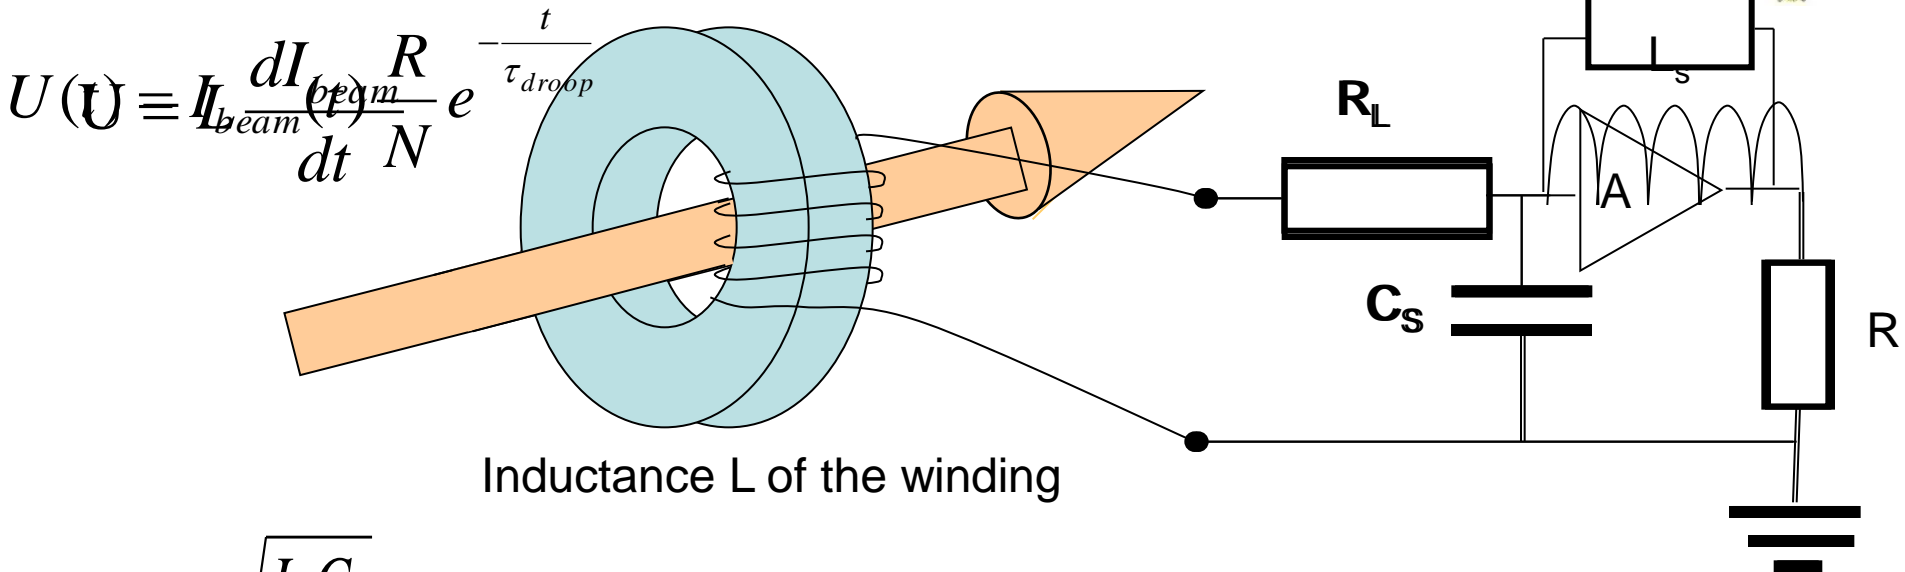

$$\tau_{rise} = \sqrt{L_s C_s}$$

$$\tau_{droop} = \frac{L_L}{\frac{R}{A} + R_L} \approx \frac{L}{R_L}$$

Transformer output signal

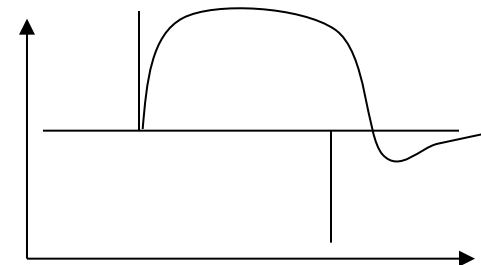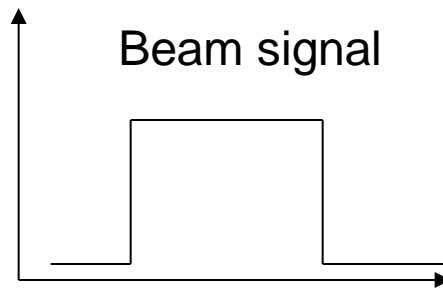

Principle of a fast current transformer


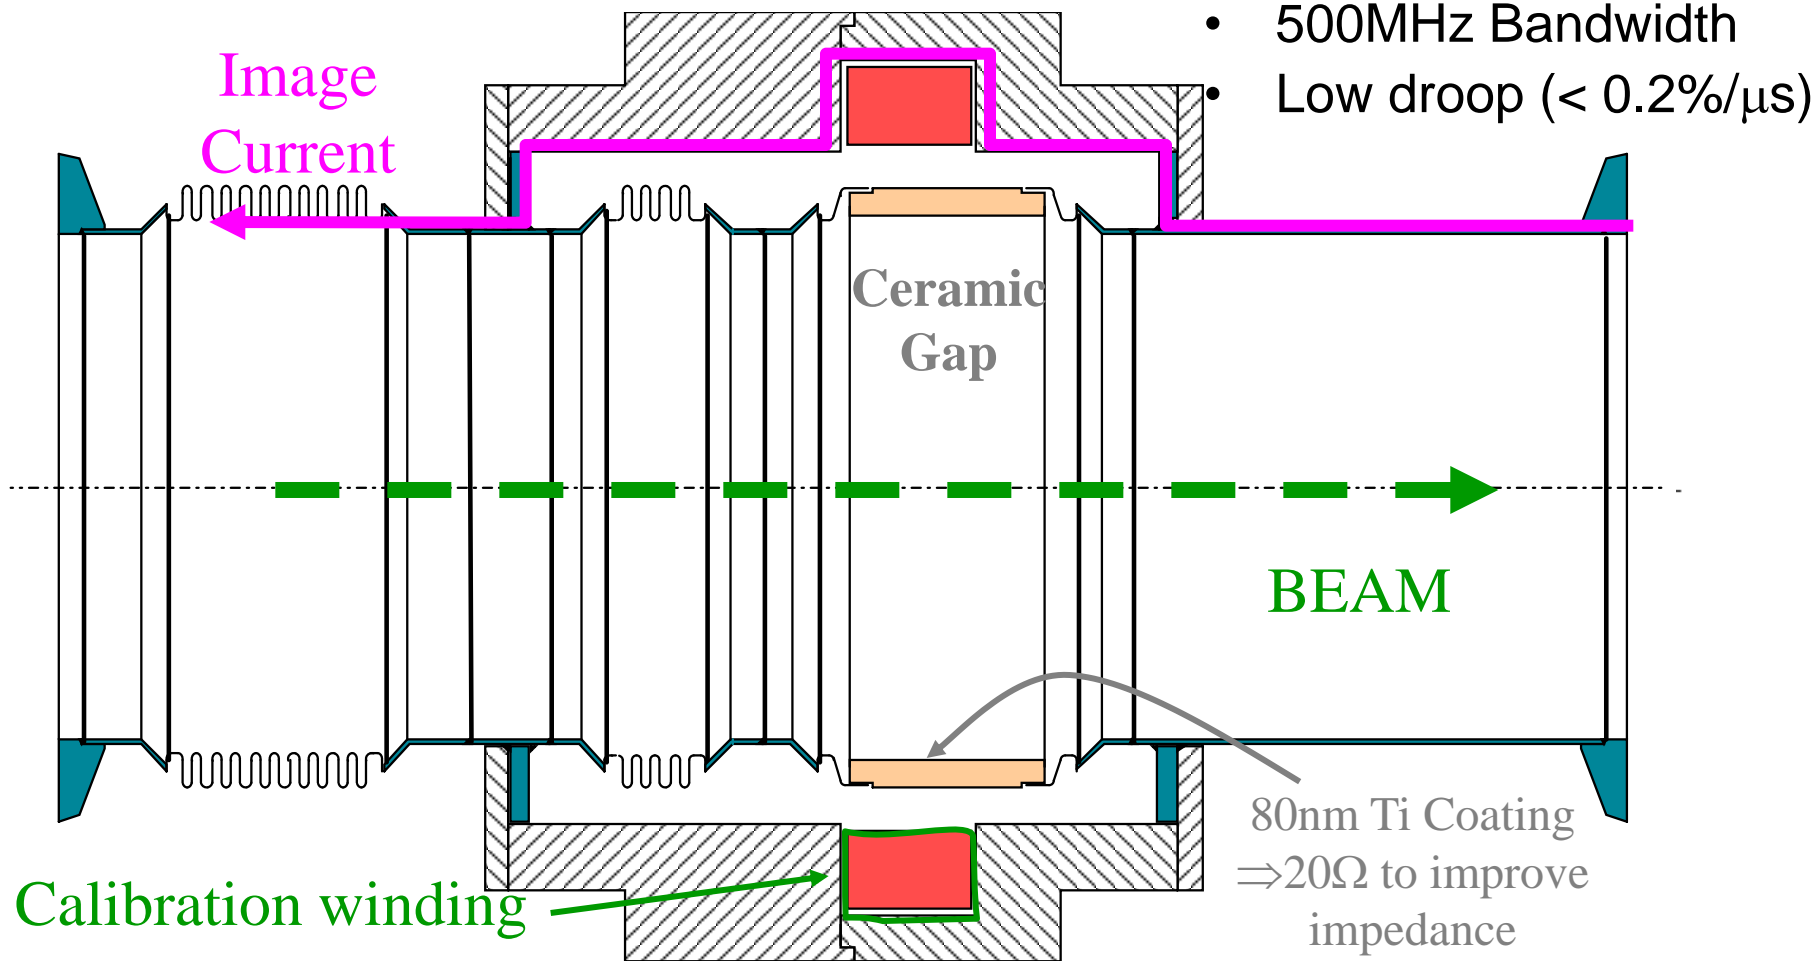



Diagram by H. Jakob




Fast current transformers for the LHC

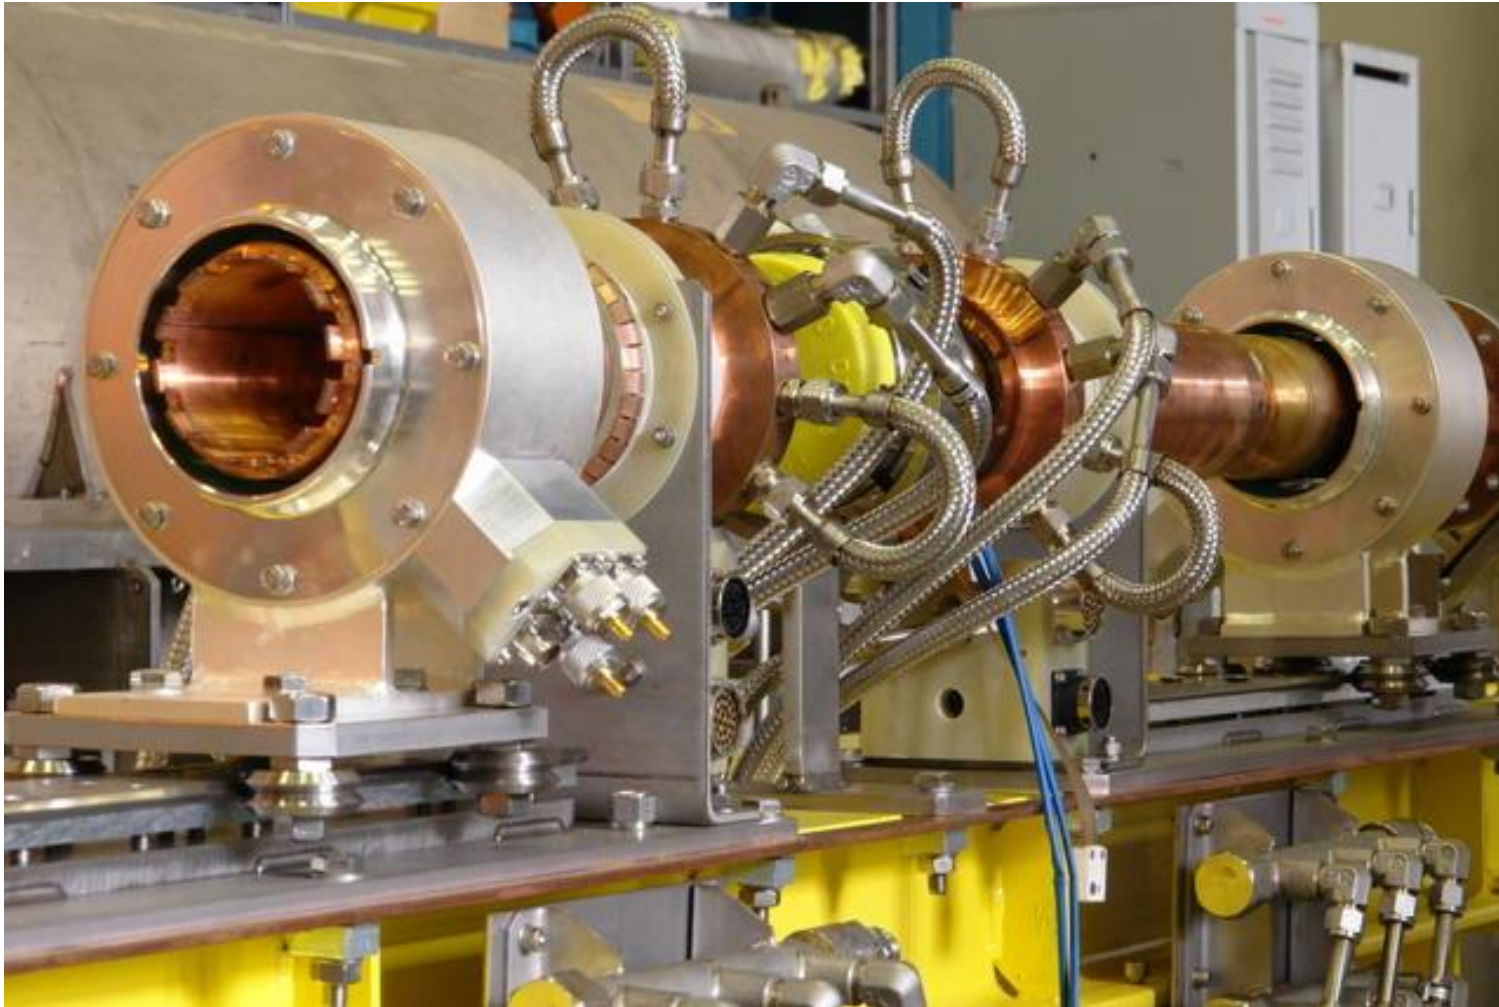

Magnetic shielding

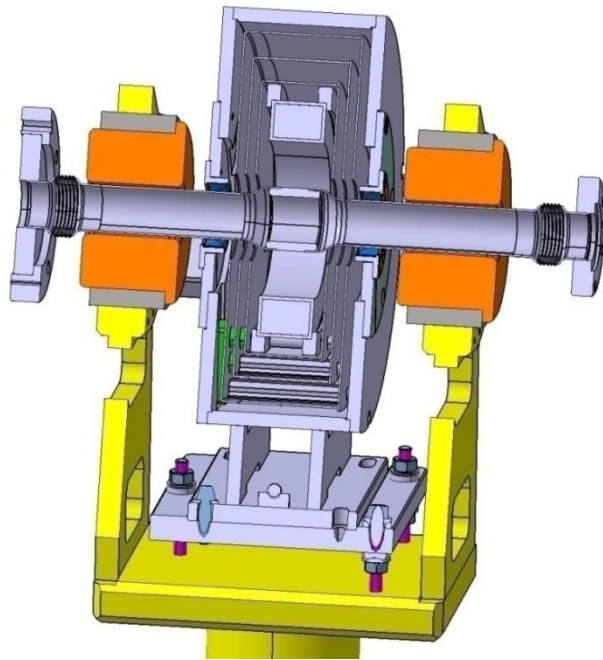


- Shield should extend along the vacuum chamber length $>$ diameter of opening
- Shield should be symmetrical to the beam axis
- Air gaps must be avoided especially along the beam axis
- Shield should have highest μ possible but should not saturate

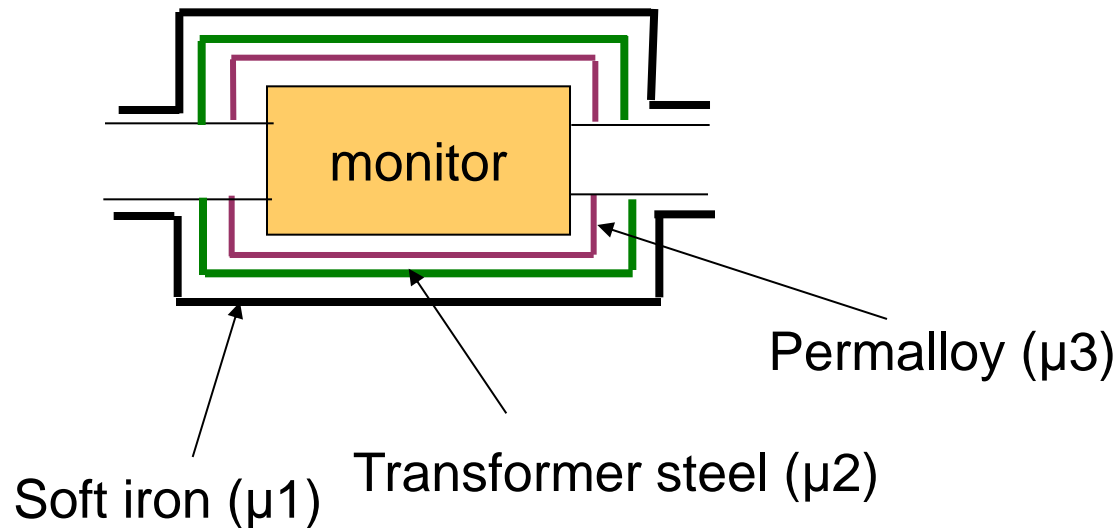



Calibration of AC current transformers

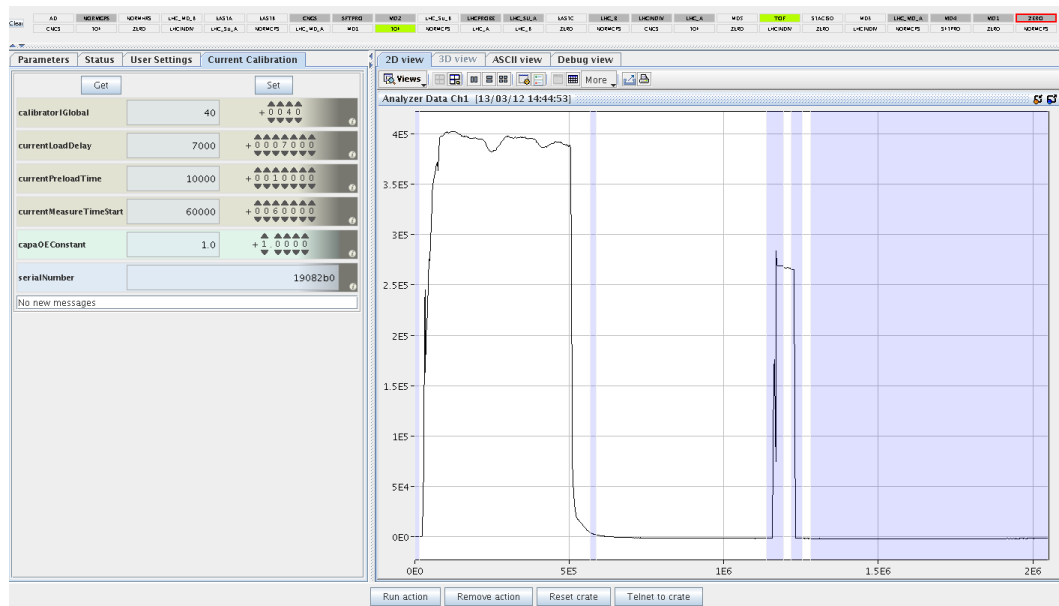


- The transformer is calibrated with a very precise current source
- The calibration signal is injected into a separate calibration winding
- A calibration procedure executed before the running period
- A calibration pulse before the beam pulse measured with the beam signal



The DC current transformer




- AC current transformer can be extended to very long droop times but not to DC
- Measuring DC currents is needed in storage rings
- Must provide a modulation frequency
- Takes advantage of non/linear magnetisation curve

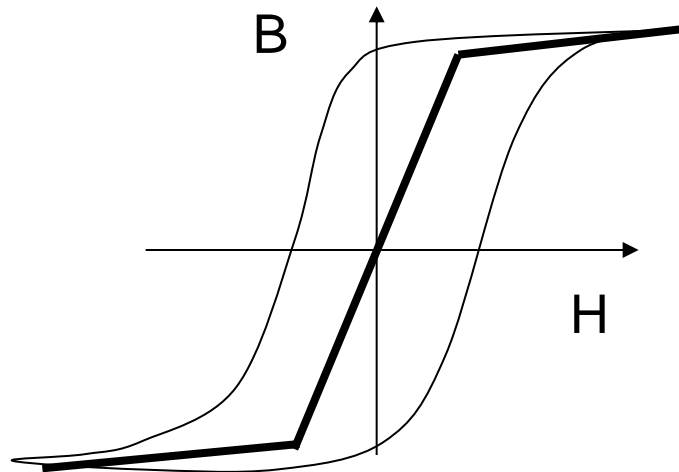




Principle of DCCT

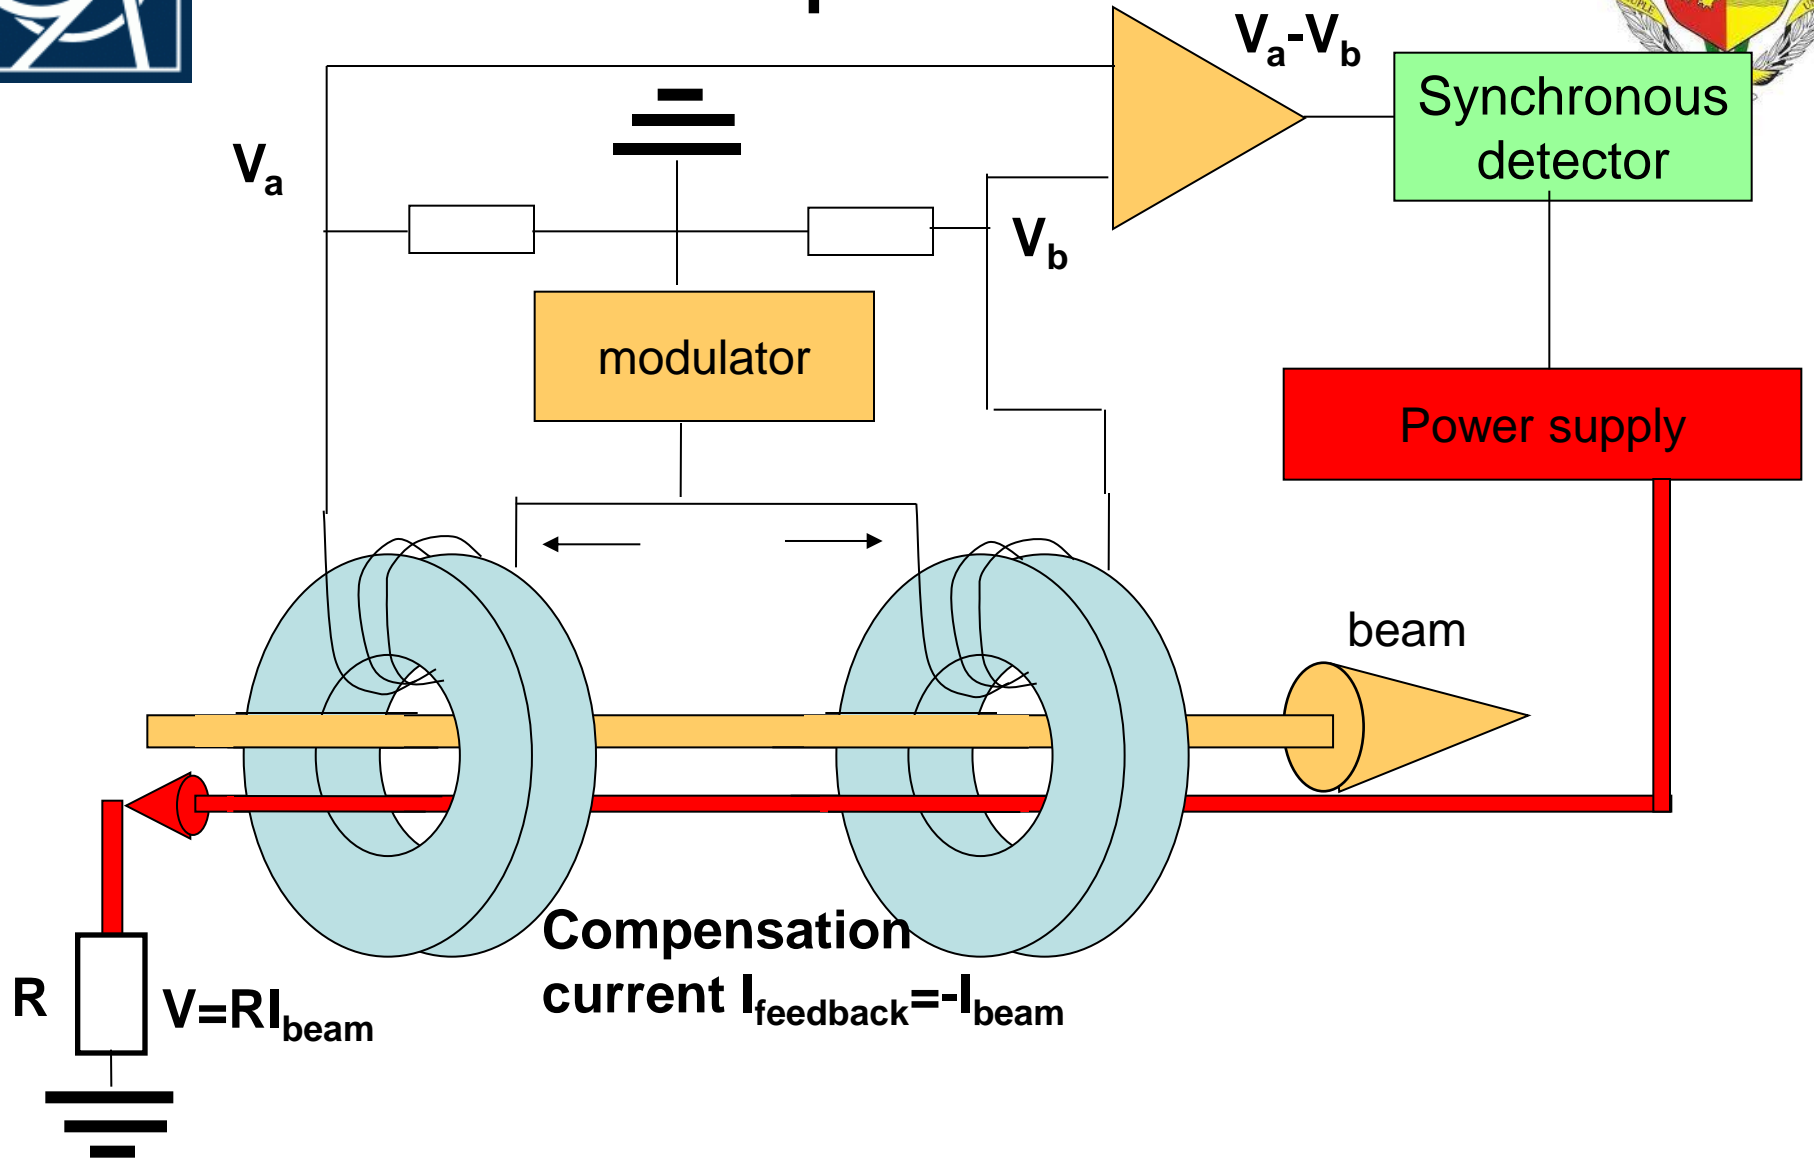



Modulation of a DCCT without beam

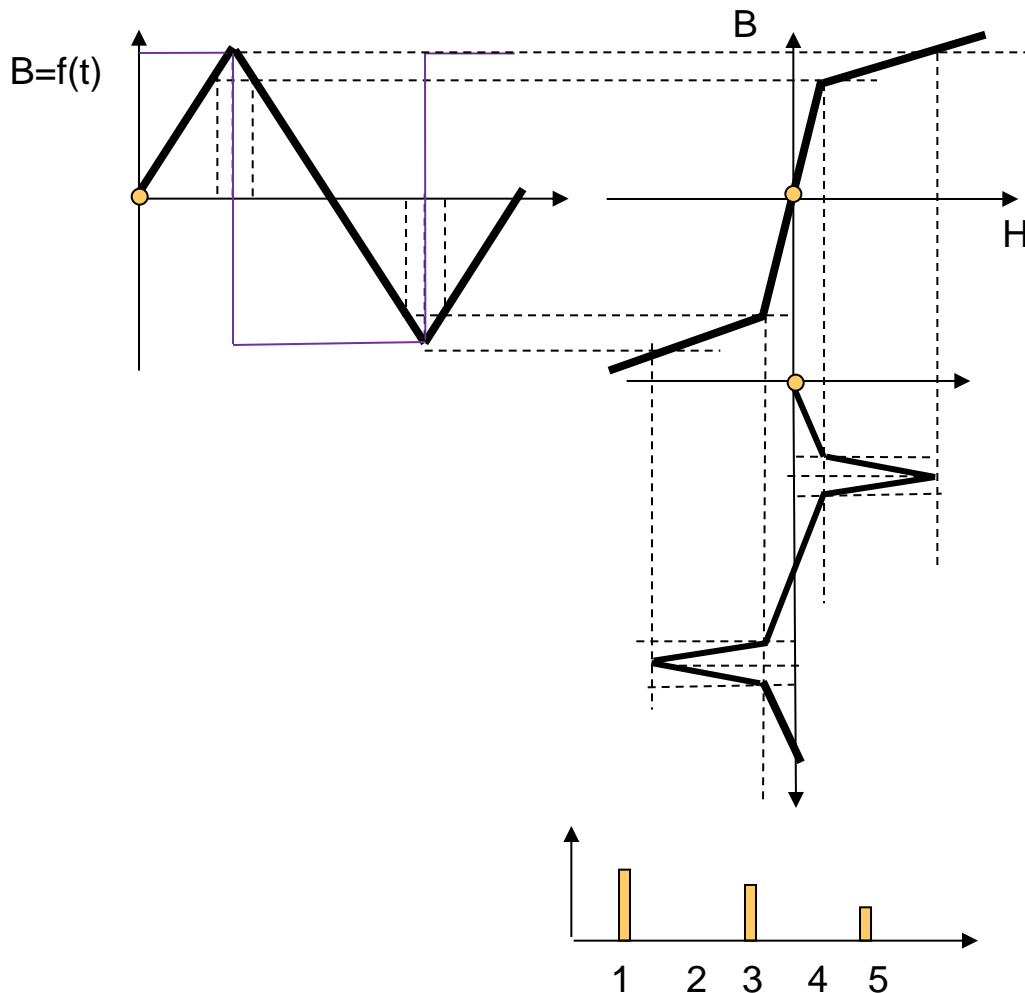


$$U = NA \frac{dB}{dt}$$

$$B = \frac{\int U dt}{NA} + B_0$$

Modulation current has only odd harmonic frequencies since the signal is symmetric



Modulation of a DCCT with beam

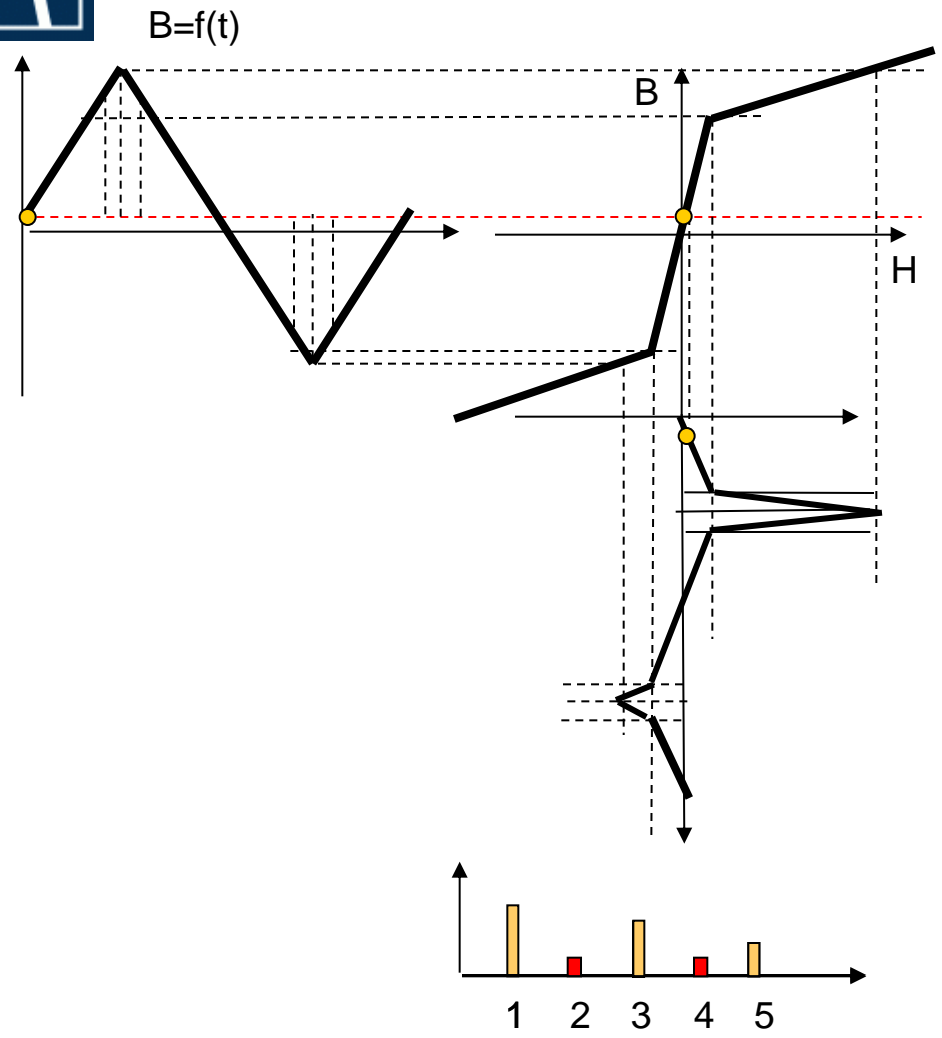

Sum signal becomes non-zero
Even harmonics appear



Modulation current difference signal with beam



- Difference signal has $2\omega_m$
- ω_m typically 200 Hz – 10 kHz
- Use low pass filter with $\omega_c \ll \omega_m$
- Provide a 3rd core, normal AC transformer to extend to higher frequencies

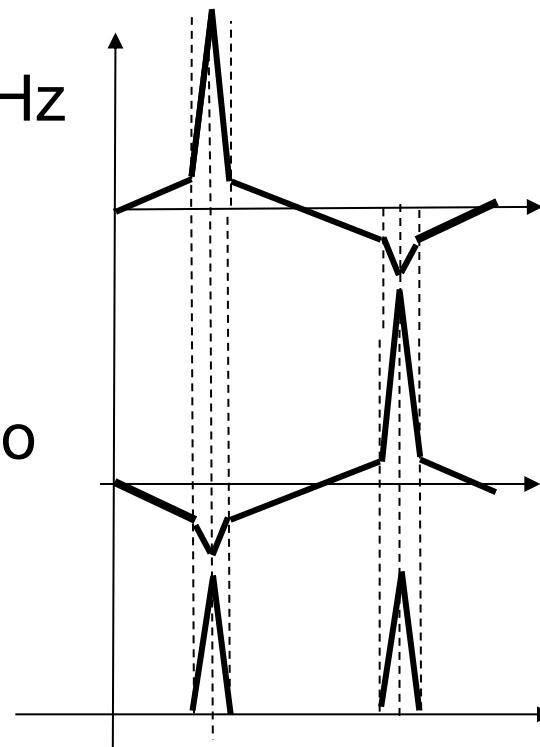




Photo of DCCT internals






Results from DCCT

Beam 2
DCCT sees first
circulating beam

Injections into LHC

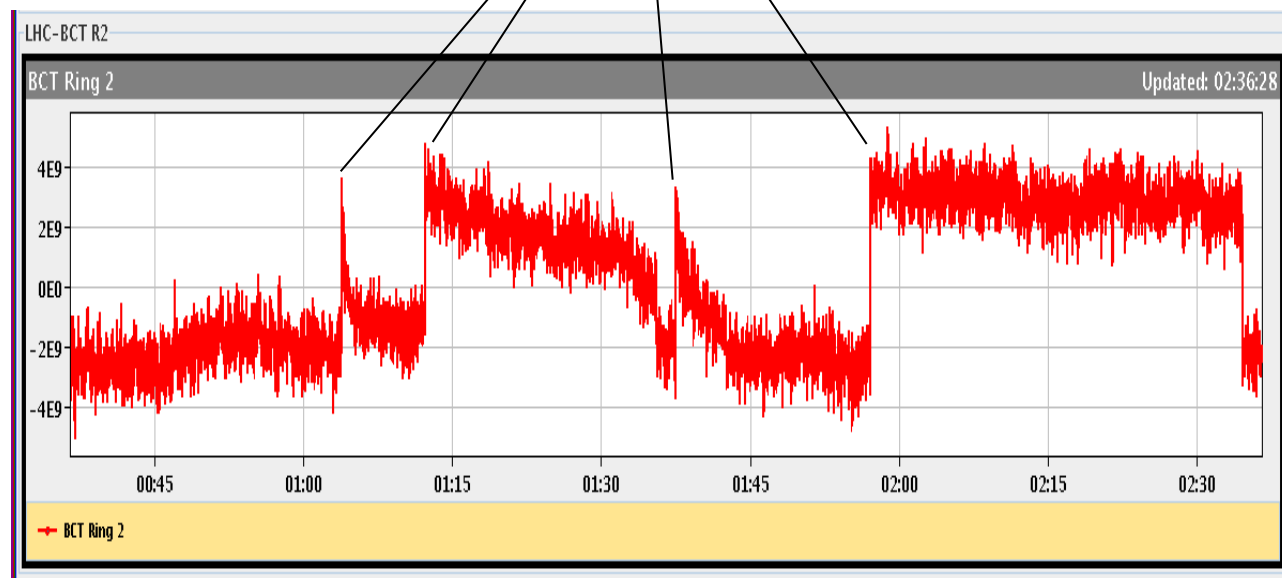




Measuring Beam Position – The Principle




Slide by R. Jones

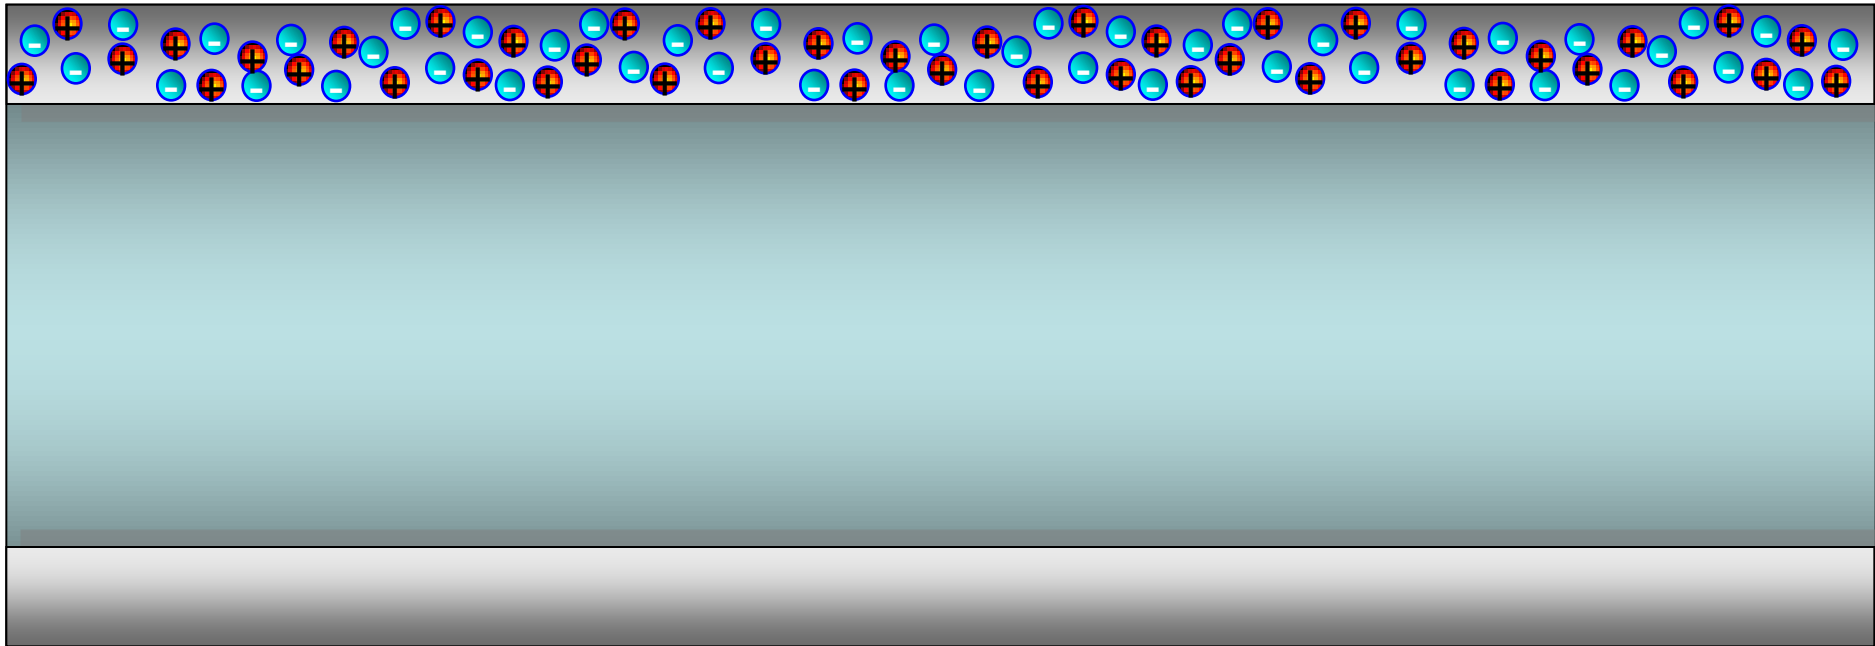




Wall Current Monitor – The Principle

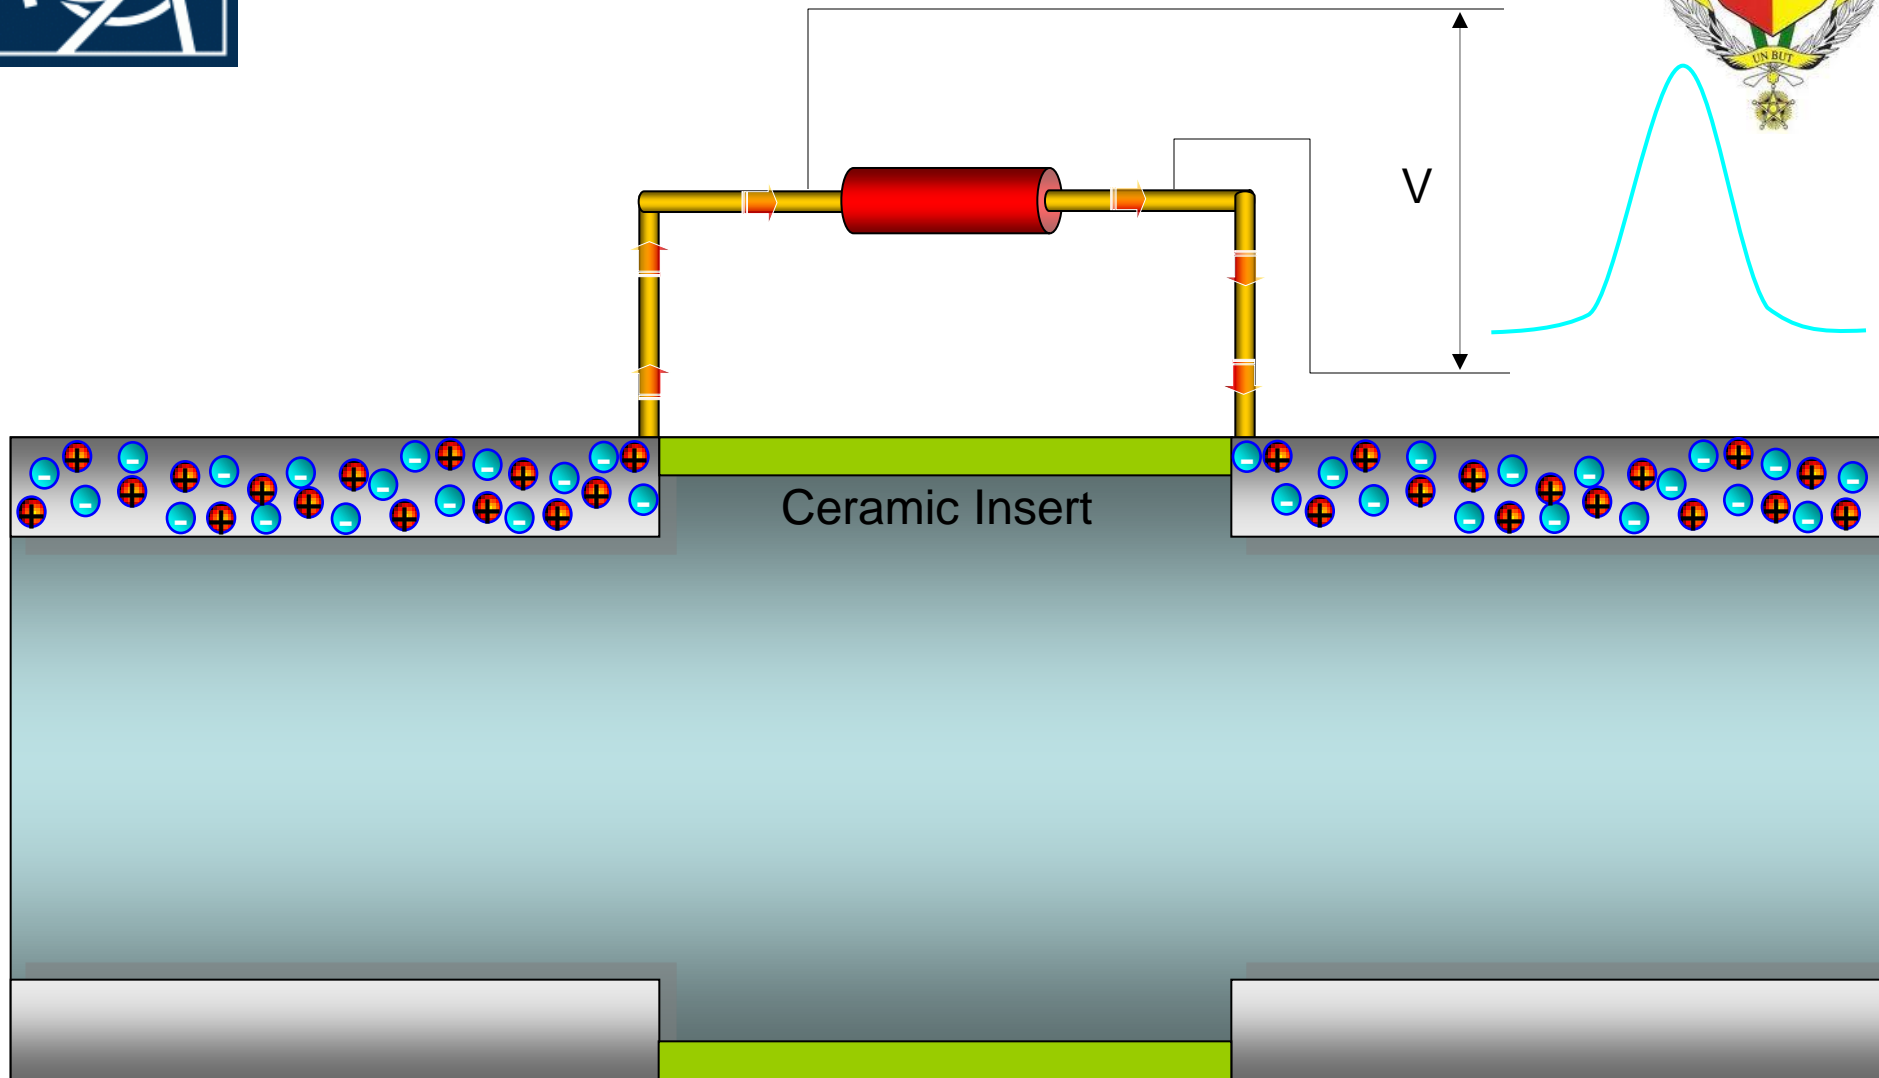




Electrostatic Monitor – The Principle

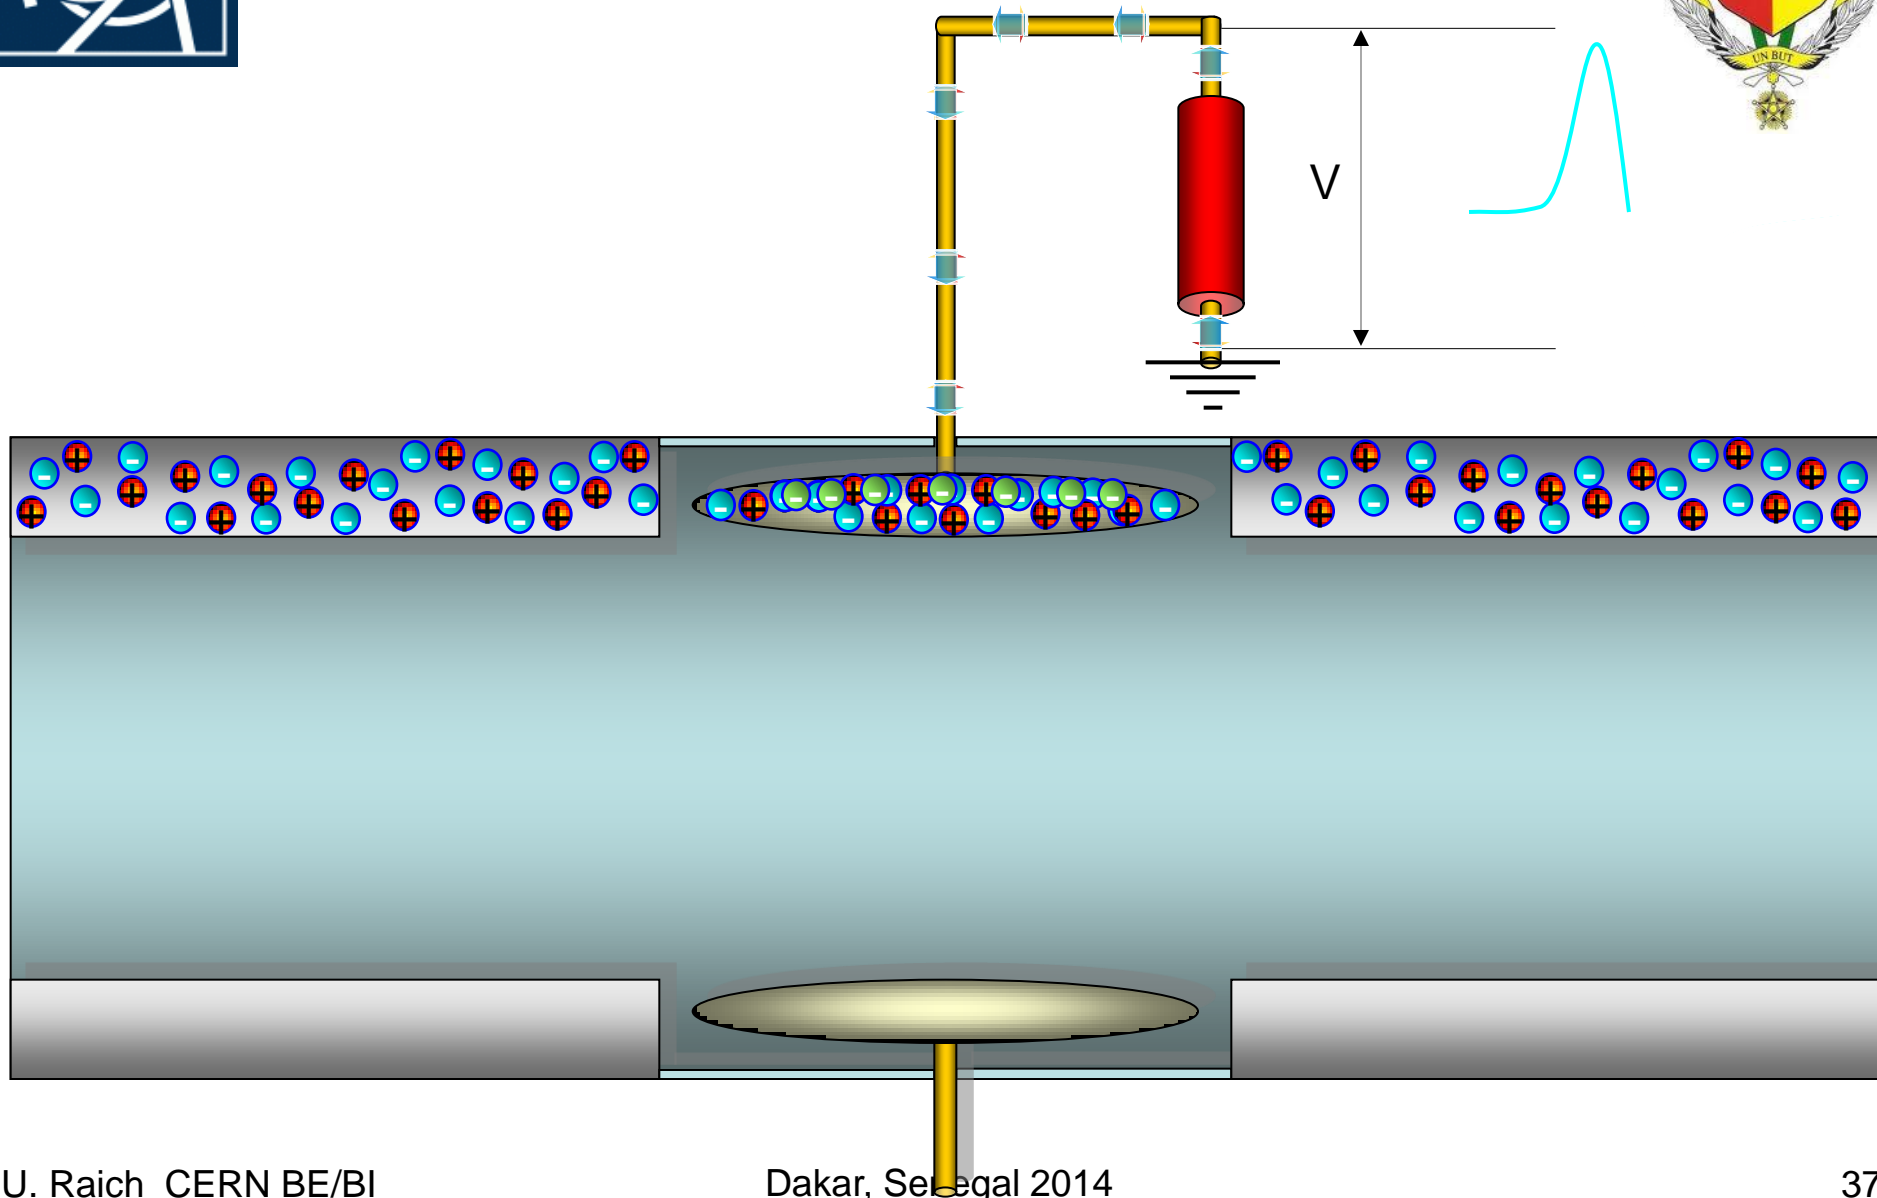


Position measurements

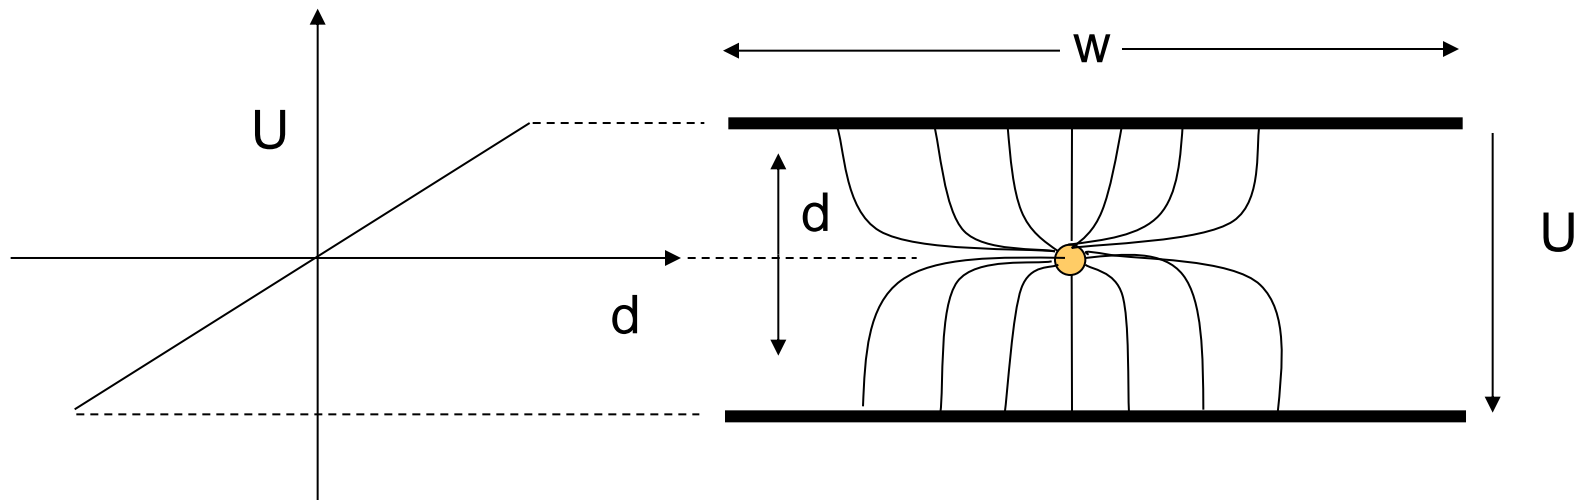


If the beam is much smaller than w , all field lines are captured and U is a linear function with replacement
 else: Linear cut (projection to measurement plane must be linear)

Shoebox pick-up

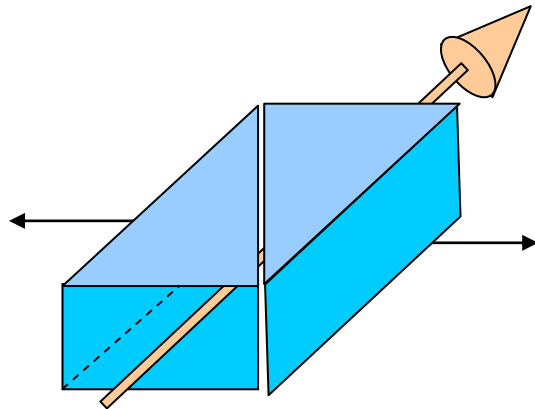

Linear cut through a shoebox

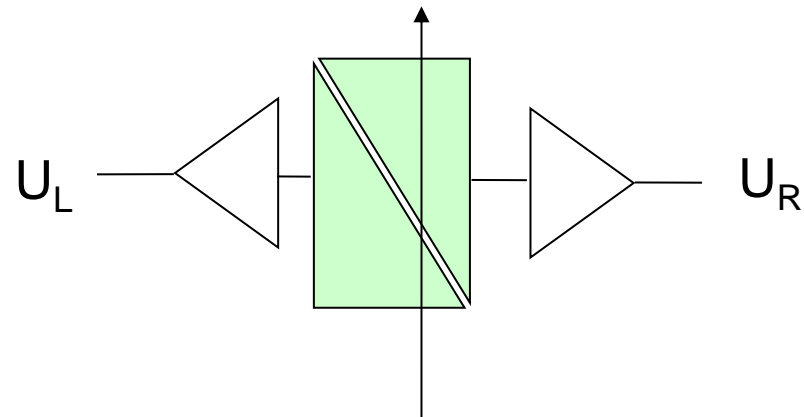


$$X \propto \frac{U_L - U_R}{U_L + U_R} = \frac{\Delta}{\Sigma}$$

Doubly cut shoebox




- Can measure horizontal and vertical position at once
- Has 4 electrodes

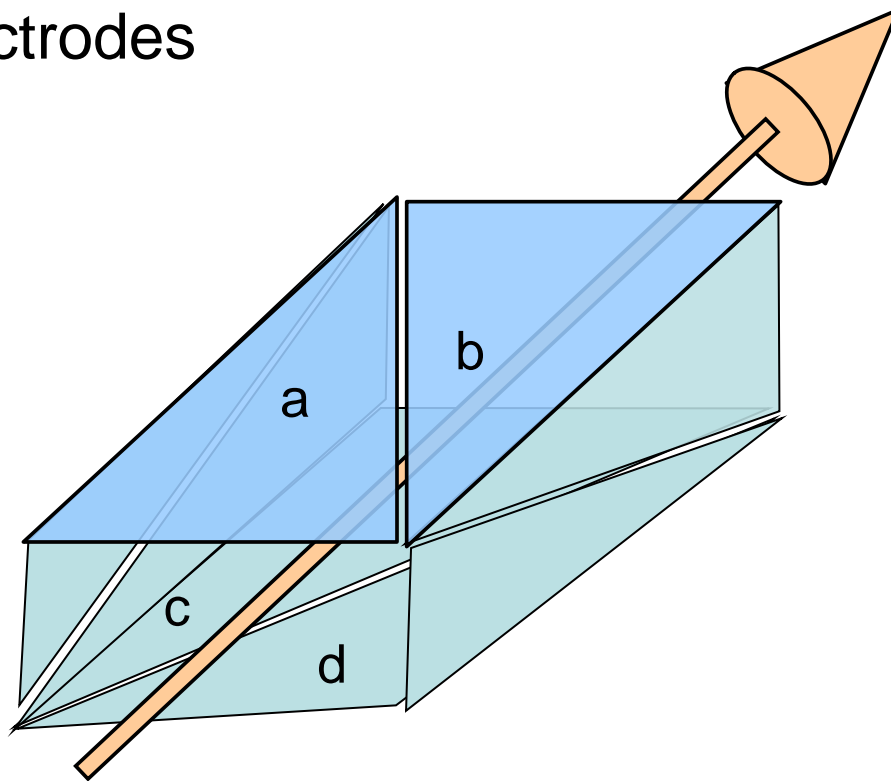

Simultaneous horizontal and vertical measurement




horizontal

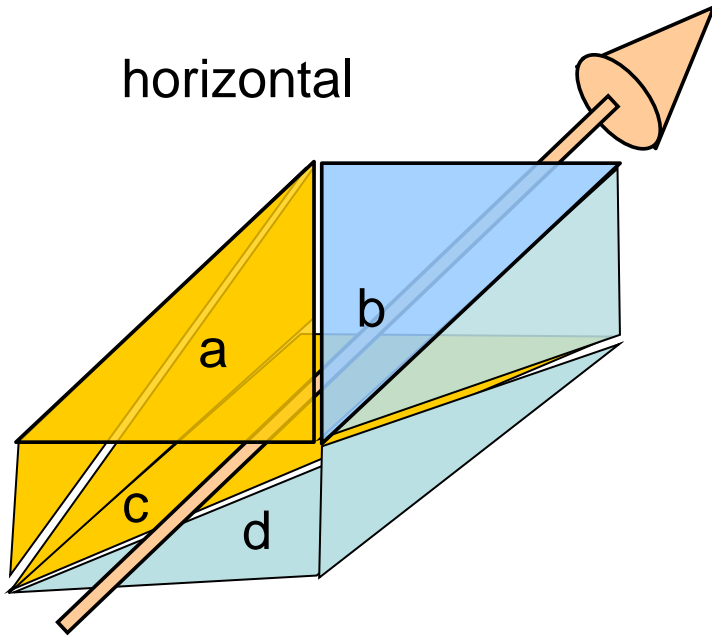

$$X = \frac{(U_a + U_c) - (U_b + U_d)}{\Sigma U}$$

vertical

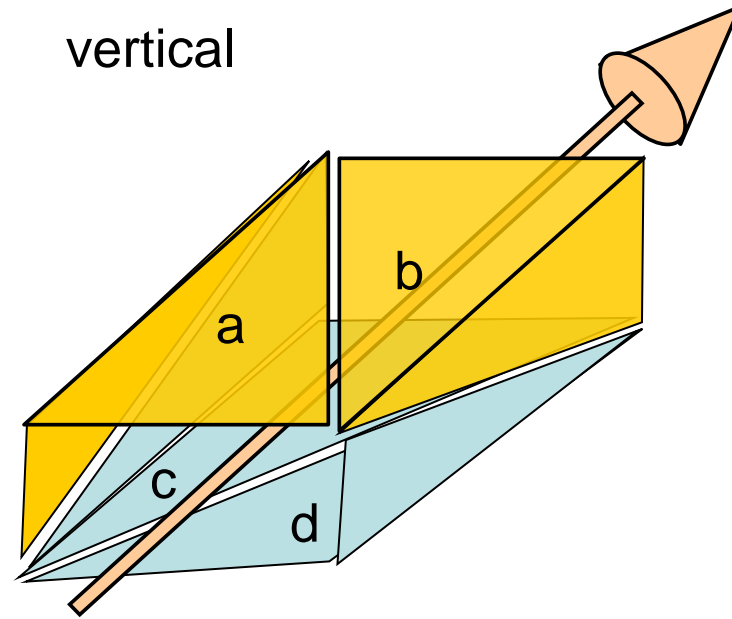


$$Y = \frac{(U_a + U_b) - (U_c + U_d)}{\Sigma U}$$



Interaction of particles with matter




- Coulomb interaction
- Average force in s-direction=0
- Average force in transverse direction $\langle \rangle 0$
- Mostly large impact parameter \Rightarrow low energy of ejected electron
- Electron mostly ejected transversely to the particle motion

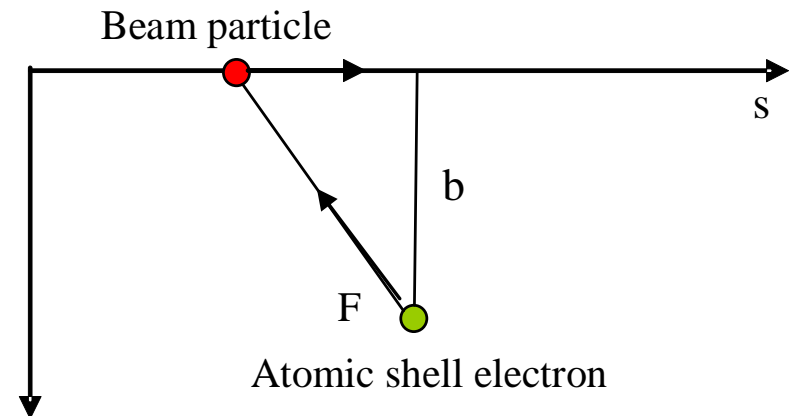

Profile measurements

- Secondary emission grids (SEMgrids)

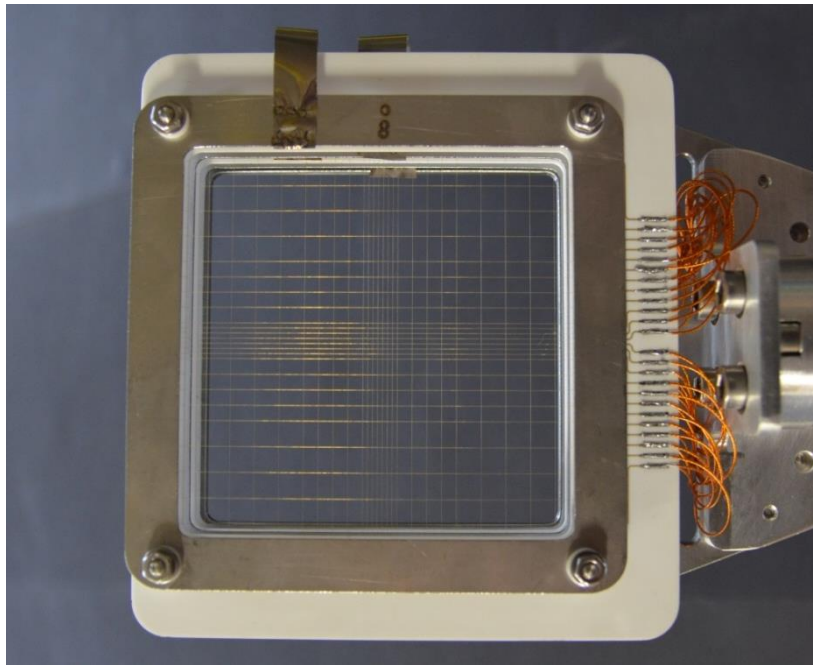

When the beam passes secondary electrons are ejected from the wires


The current flowing back onto the wires is measured



The ejected electrons are taken away by polarization voltage



Profiles from SEMgrids

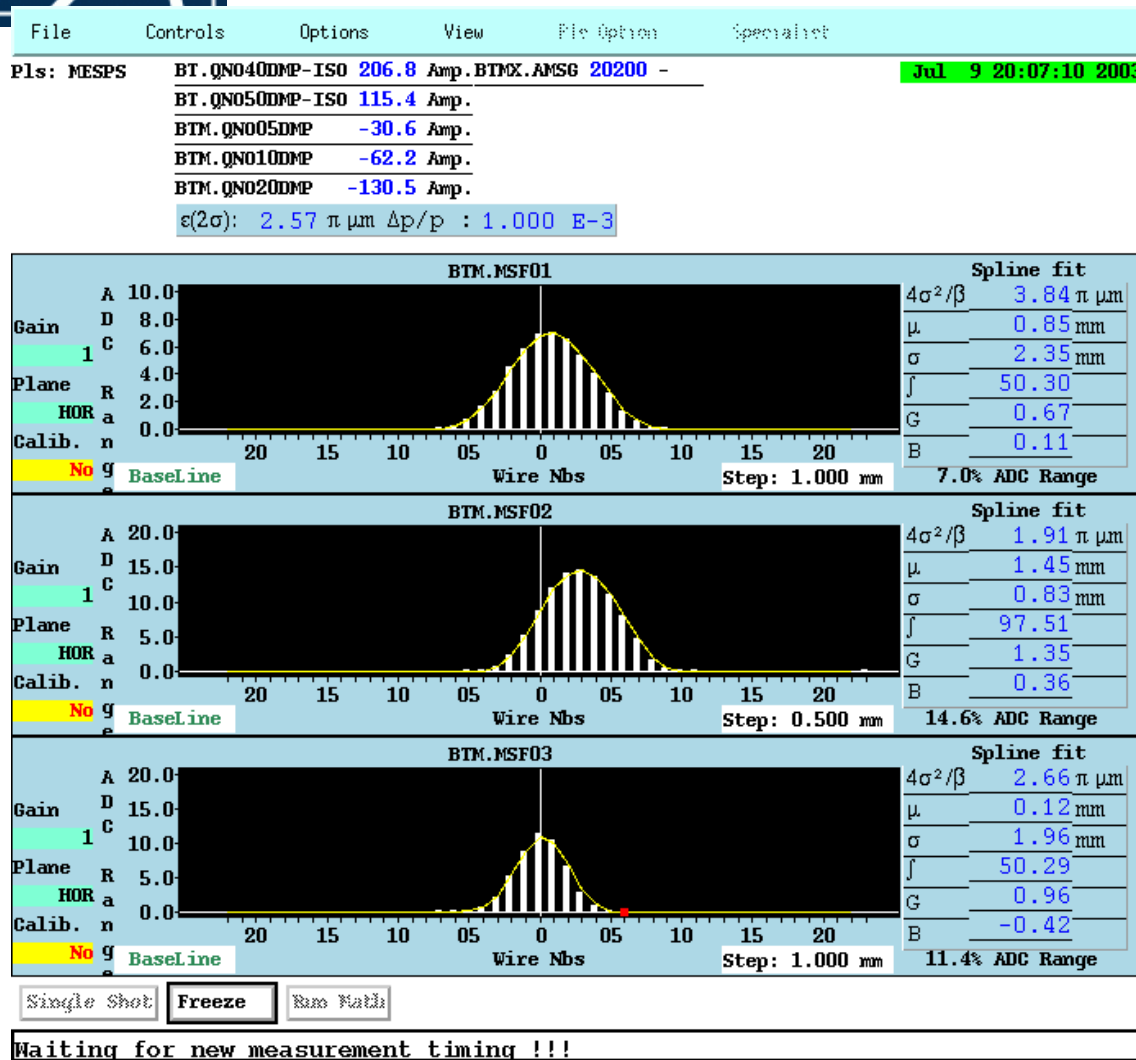

Charge density projected to x or y axis is measured

One amplifier/ADC per wire
Large dynamic range


Resolution is given by wire distance

Used only in transfer lines

Wire Scanners




A thin wire is quickly moved across the beam
Secondary particle shower is detected outside the vacuum chamber
on a scintillator/photo-multiplier assembly
Position and photo-multiplier signal are recorded simultaneously

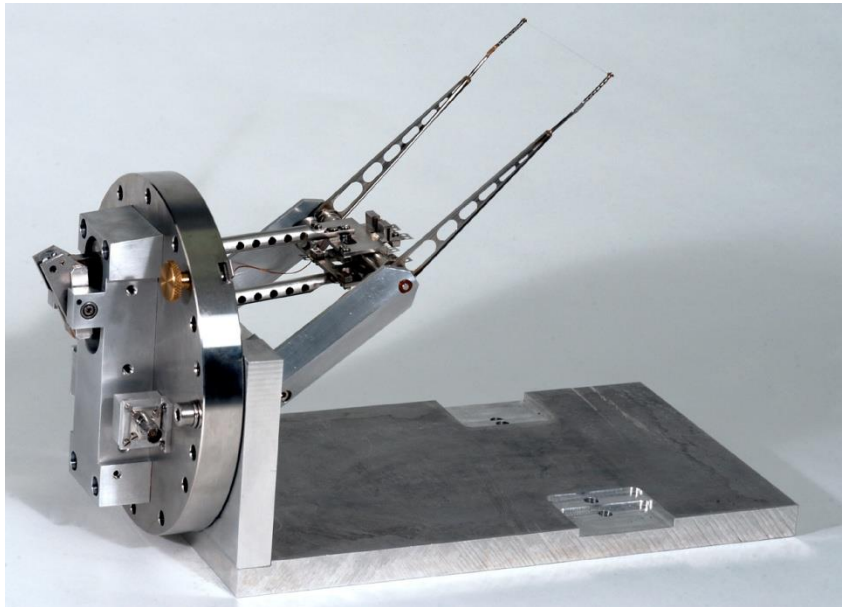



Wire scanner profile

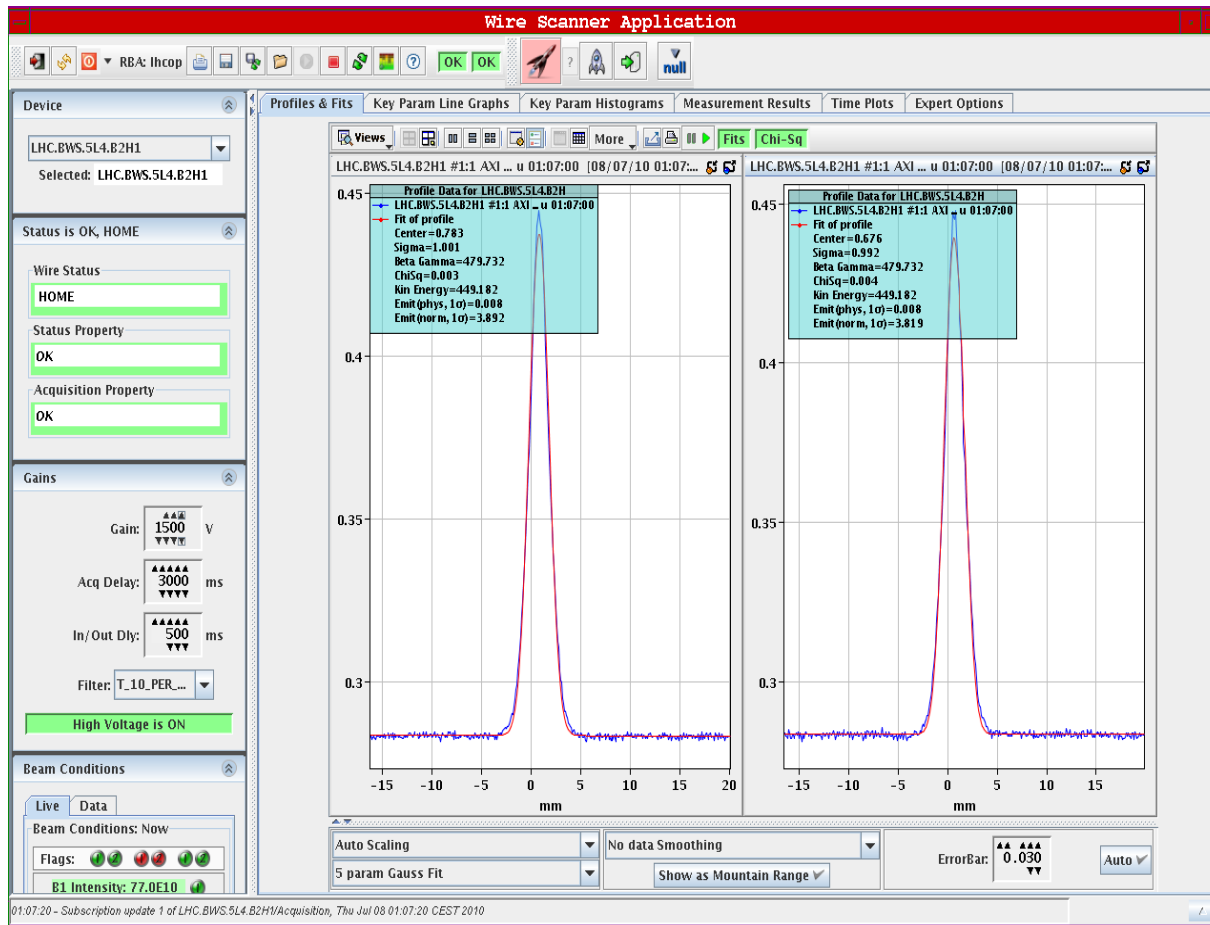

High speed needed because of heating.

Adiabatic damping


Current increase due to particle speed increase

Wire speeds of up to 20m/s
=> 200g acceleration



Stored Beam Energies


(Based on graph from R. Schmidt)

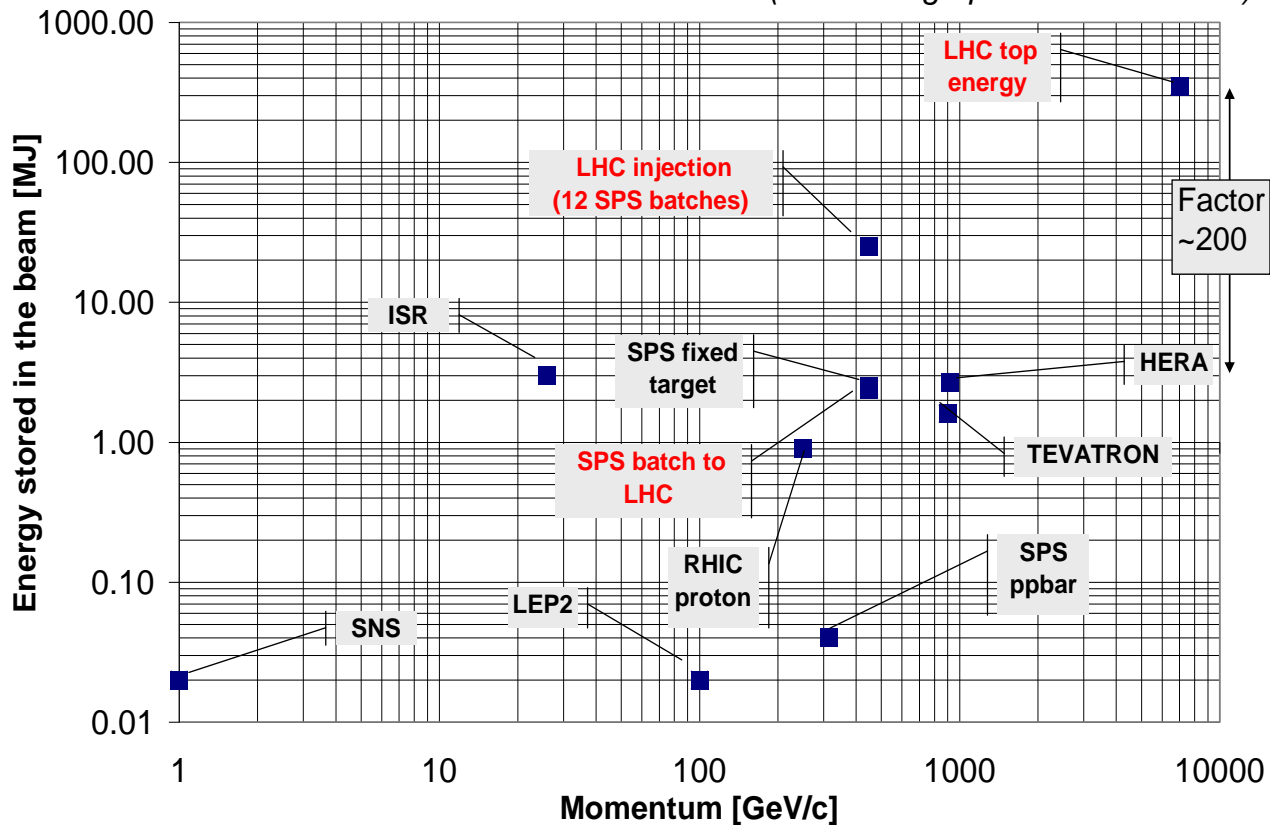

Quench Levels	Units	<i>Tevatron</i>	<i>RHIC</i>	<i>HERA</i>	<i>LHC</i>
<i>Instant loss (0.01 - 10 ms)</i>	[J/cm ³]	4.5 10 ⁻⁰³	1.8 10 ⁻⁰²	2.1 10 ⁻⁰³ - 6.6 10 ⁻⁰³	8.7 10 ⁻⁰⁴
<i>Steady loss (> 100 s)</i>	[W/cm ³]	7.5 10 ⁻⁰²	7.5 10 ⁻⁰²		5.3 10 ⁻⁰³



Beam power in the LHC

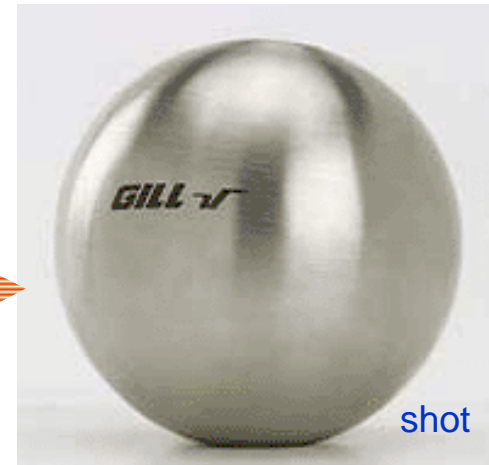


The Linac beam (160 mA, 200 μ s, 50 MeV, 1Hz) is enough to burn a hole into the vacuum chamber

What about the LHC beam: 2808 bunches of $15 \cdot 10^{11}$ particles at 7 TeV?
1 bunch corresponds to a 5 kg bullet at 800 km/h



Beam Dammage

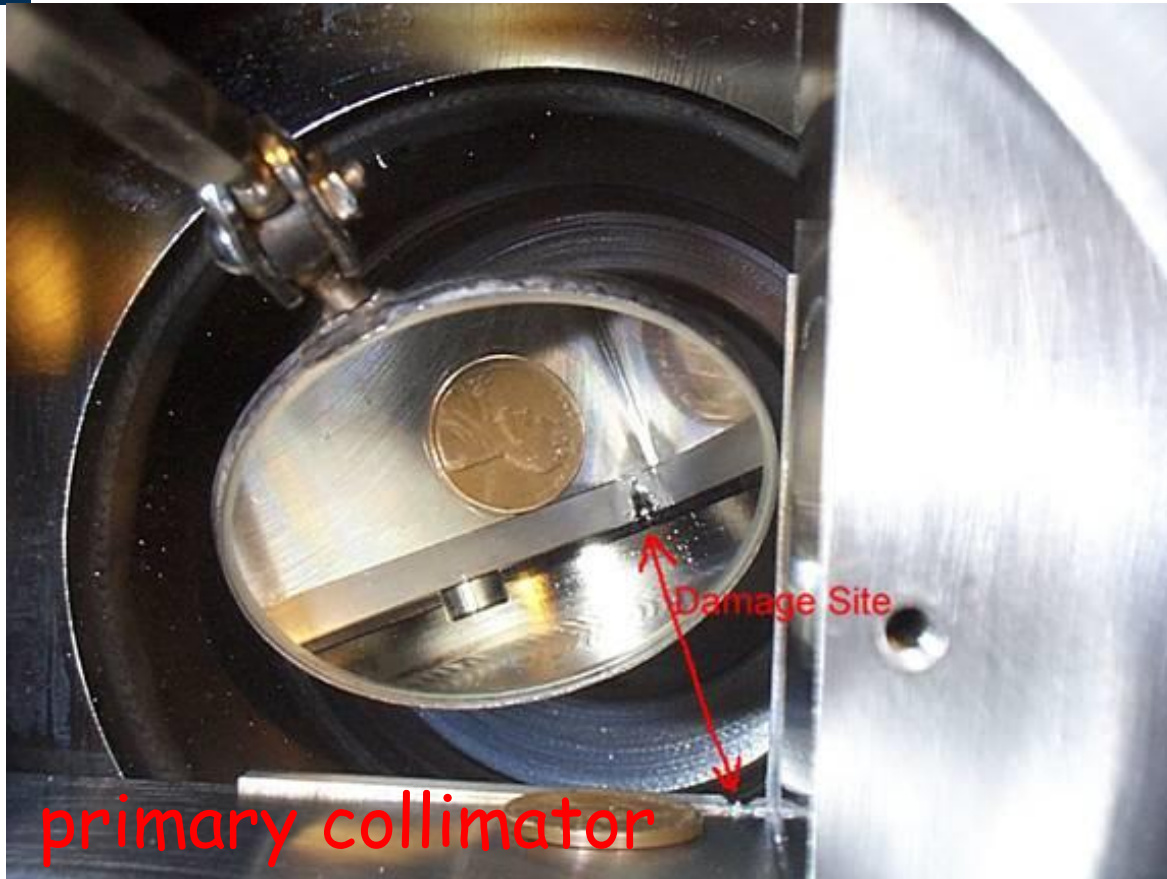

Fermi Lab's Tevatron has 200 times less beam power than LHC!



Beam Loss Monitor Types



- Design criteria: Signal speed and robustness
- Dynamic range ($> 10^9$) limited by leakage current through insulator ceramics (lower) and saturation due to space charge (upper limit).

Secondary Emission Monitor

(SEM):

- Length 10 cm
- $P < 10^{-7}$ bar
- ~ 30000 times smaller gain



Ionization chamber:


- N_2 gas filling at 100 mbar over-pressure
- Length 50 cm
- Sensitive volume 1.5 l
- Ion collection time 85 μ s

- Both monitors:
 - Parallel electrodes (Al, SEM: Ti) separated by 0.5 cm
 - Low pass filter at the HV input
 - Voltage 1.5 kV






Quench levels

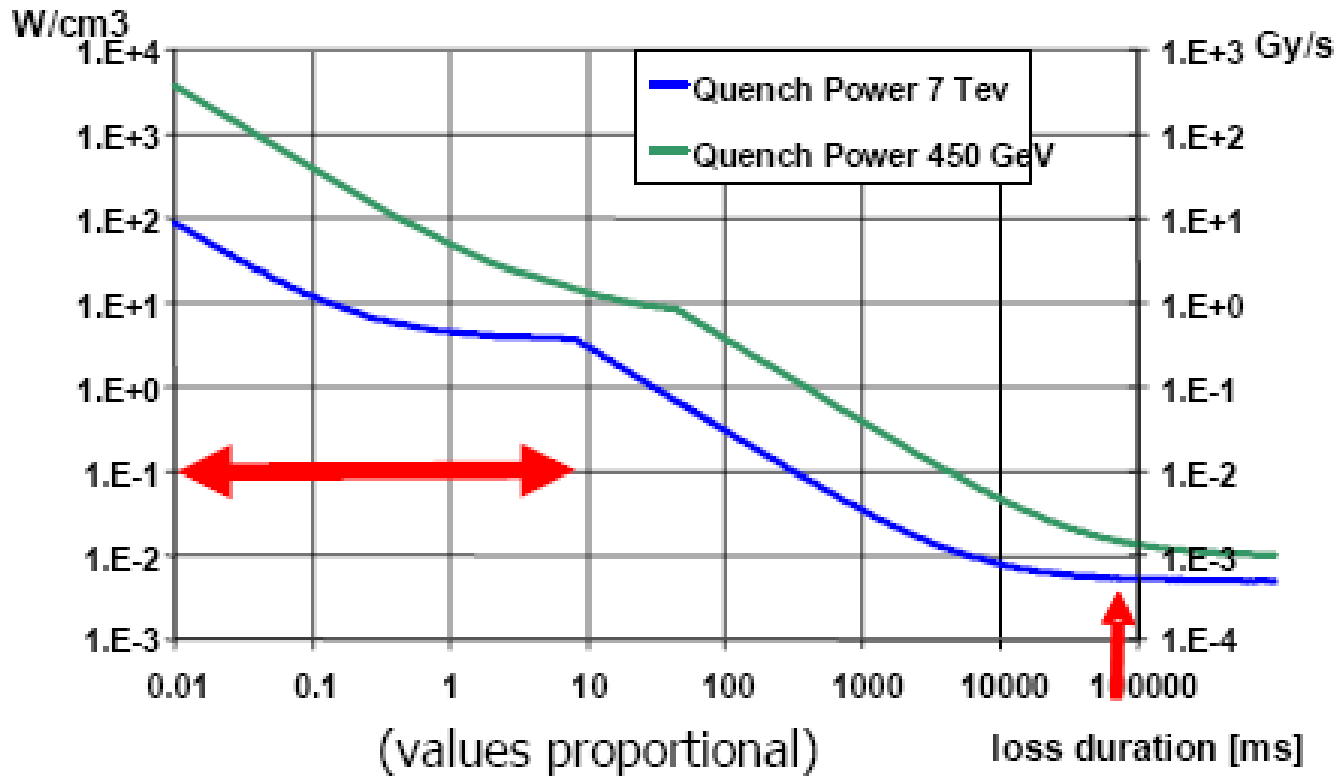




Industrial production of chambers

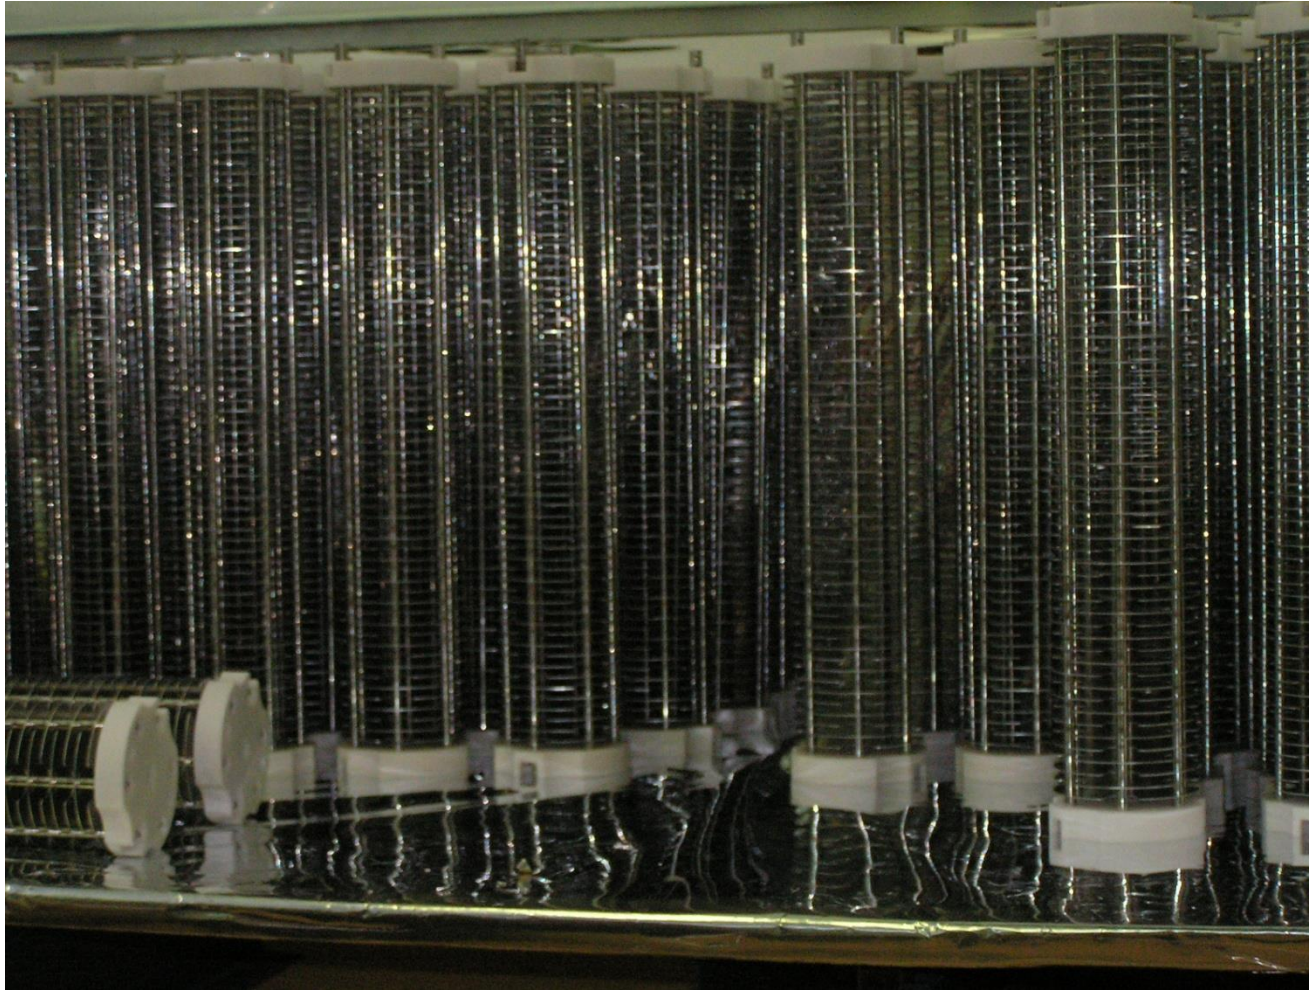

Beam loss must be measured all around the ring
=> 4000 sensors!



System layout

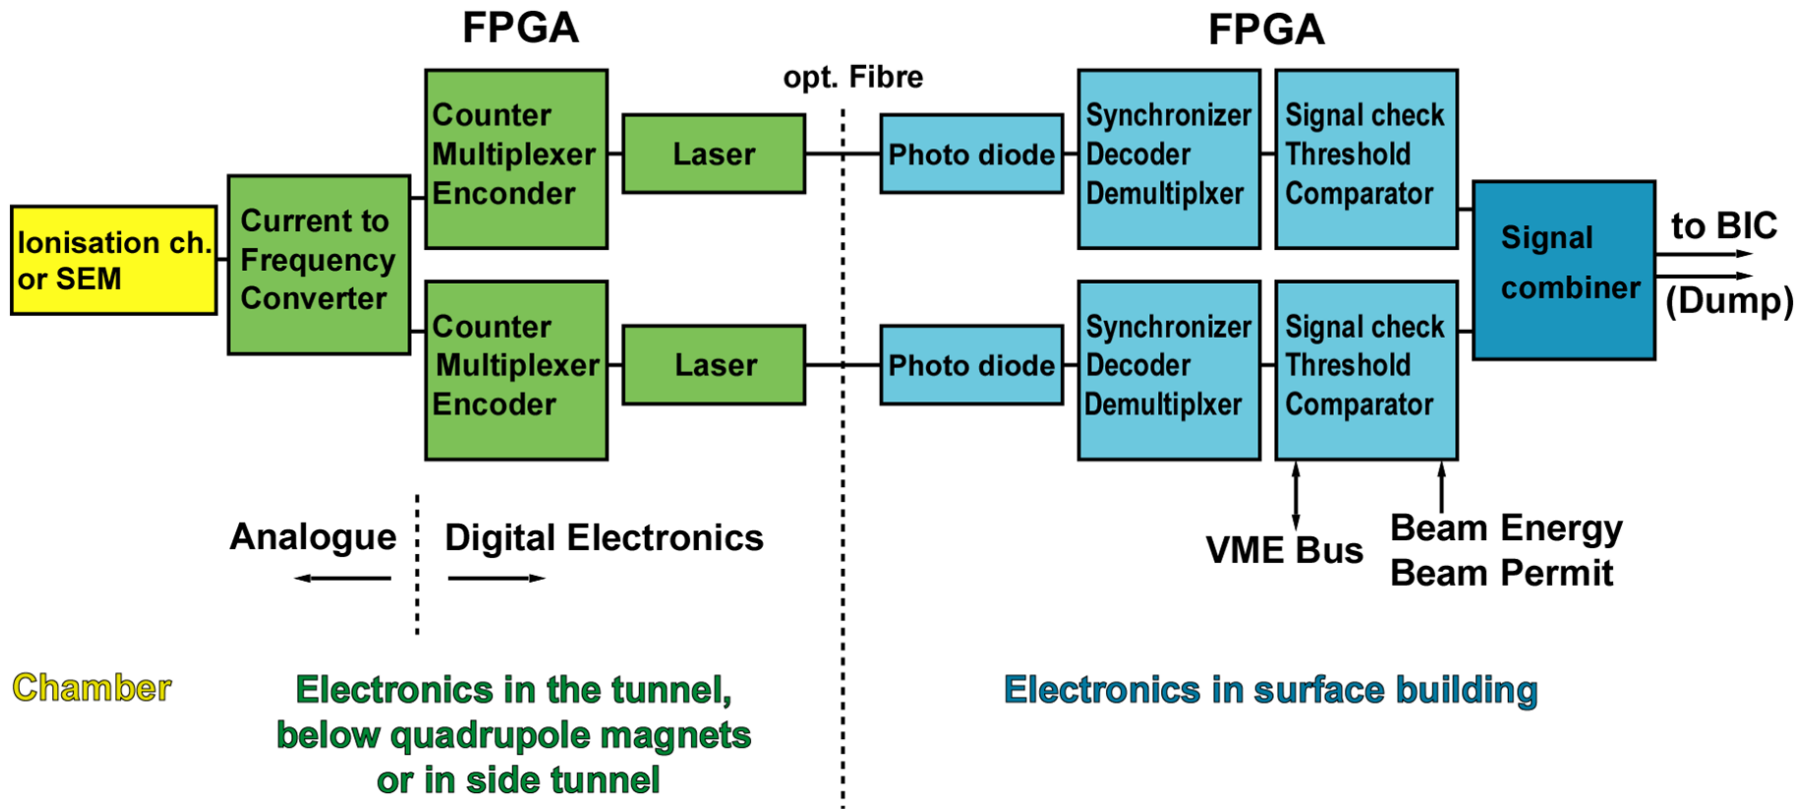

Successive running sums

