



# Beam Diagnostics Instruments

Uli Raich  
CERN BE - BI  
(Beam Instrumentation)




# Overview

- First part:
  - Introduction
  - Overview of measurement instruments
    - TV Screens
    - Scintillating screens
    - Faraday Cup
    - Beam Current Transformer
    - Beam Position Monitor
    - Profile Detectors
      - SEMGrids
      - Wire Scanners
    - Beam Loss Monitors
- Second part
  - Some depicted examples of beam parameter measurements




# Introduction

**An accelerator can never be better than the instruments measuring its performance!**

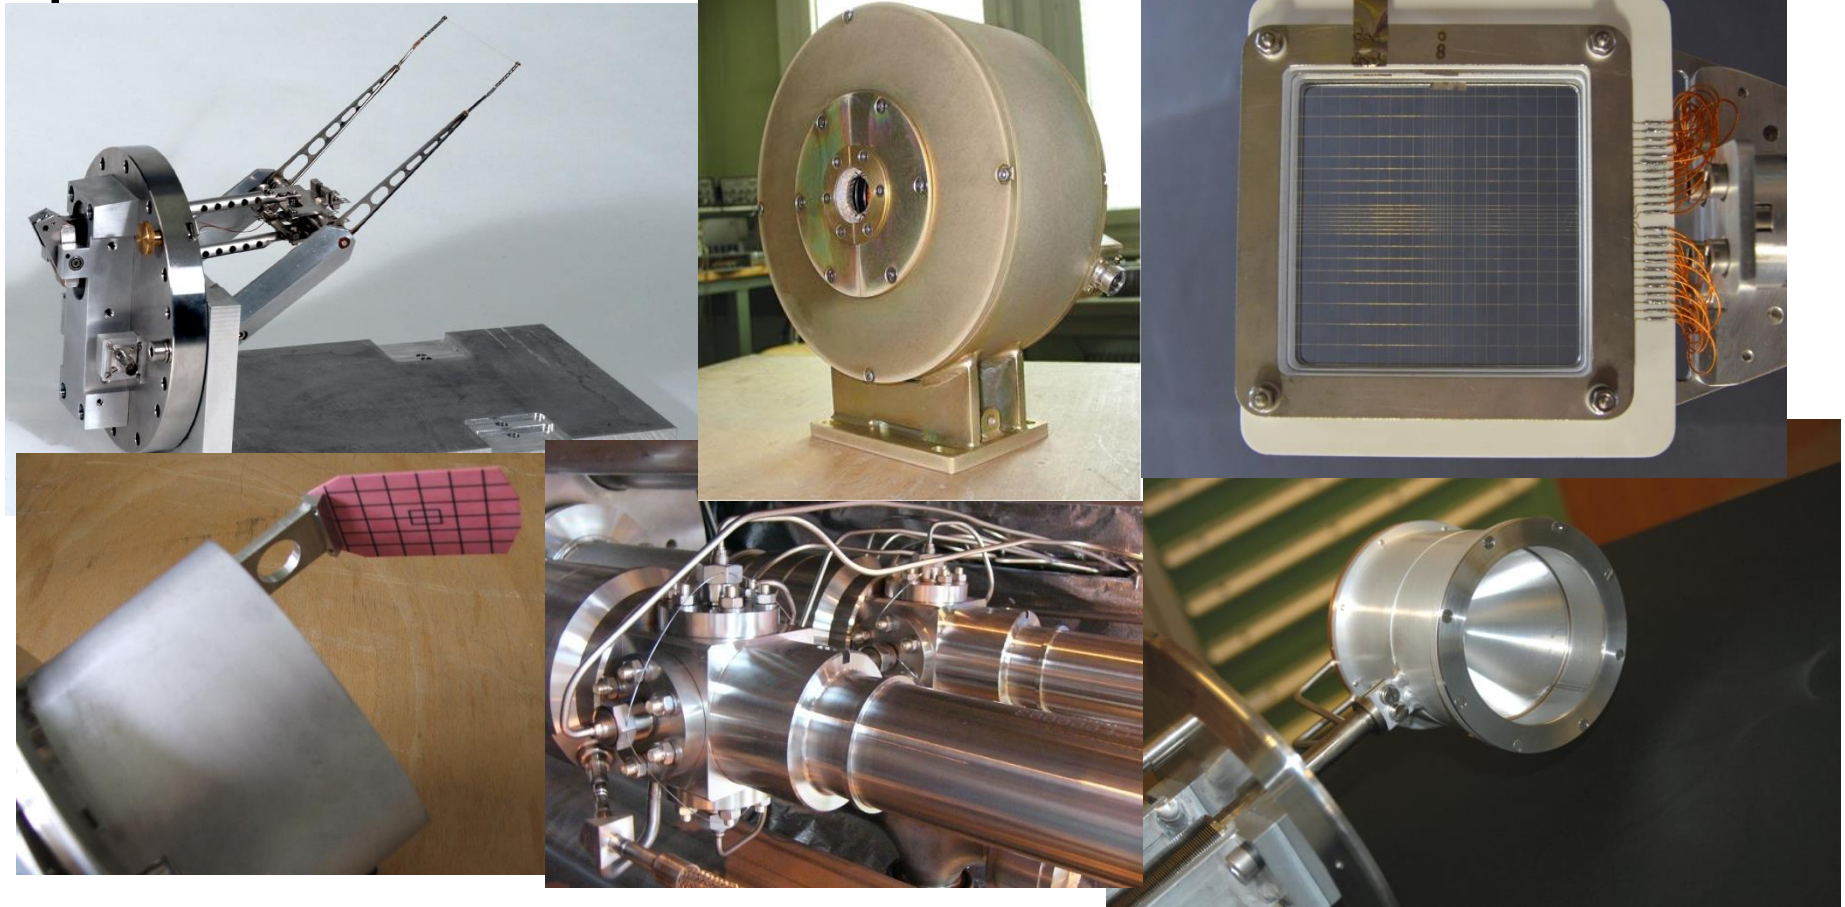



# CERN's Accelerator Complex

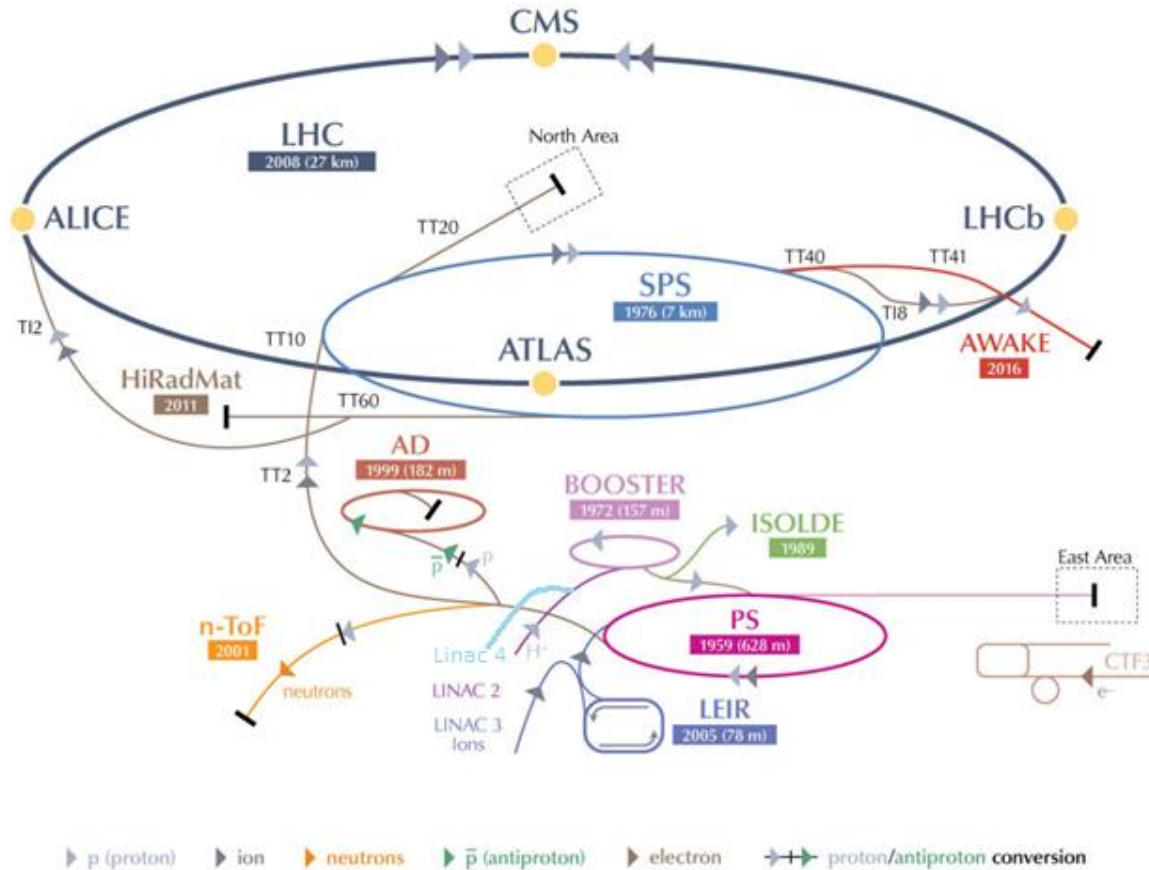

LHC Large Hadron Collider    SPS Super Proton Synchrotron    PS Proton Synchrotron

AD Antiproton Decelerator    CTF3 Clic Test Facility    AWAKE Advanced WAKEfield Experiment    ISOLDE Isotope Separator OnLine DEvice


LEIR Low Energy Ion Ring    LINAC LINEar ACcelerator    n-ToF Neutrons Time Of Flight    HiRadMat High-Radiation to Materials

© CERN 2013






# Linac-4 layout

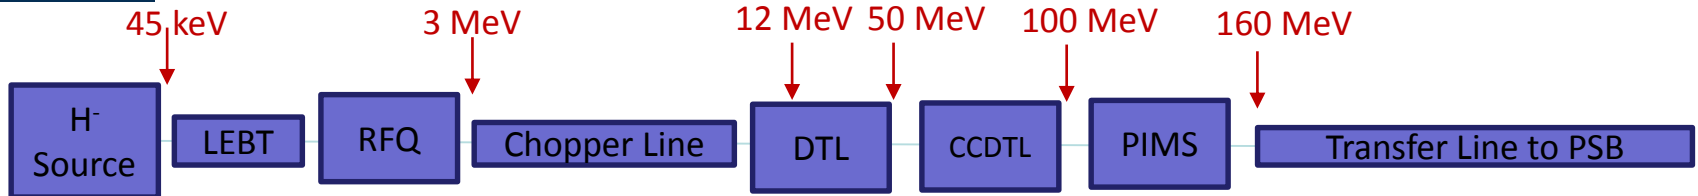

Com

- The L meter
- MEBT
- Temp
- Temp
- Beam

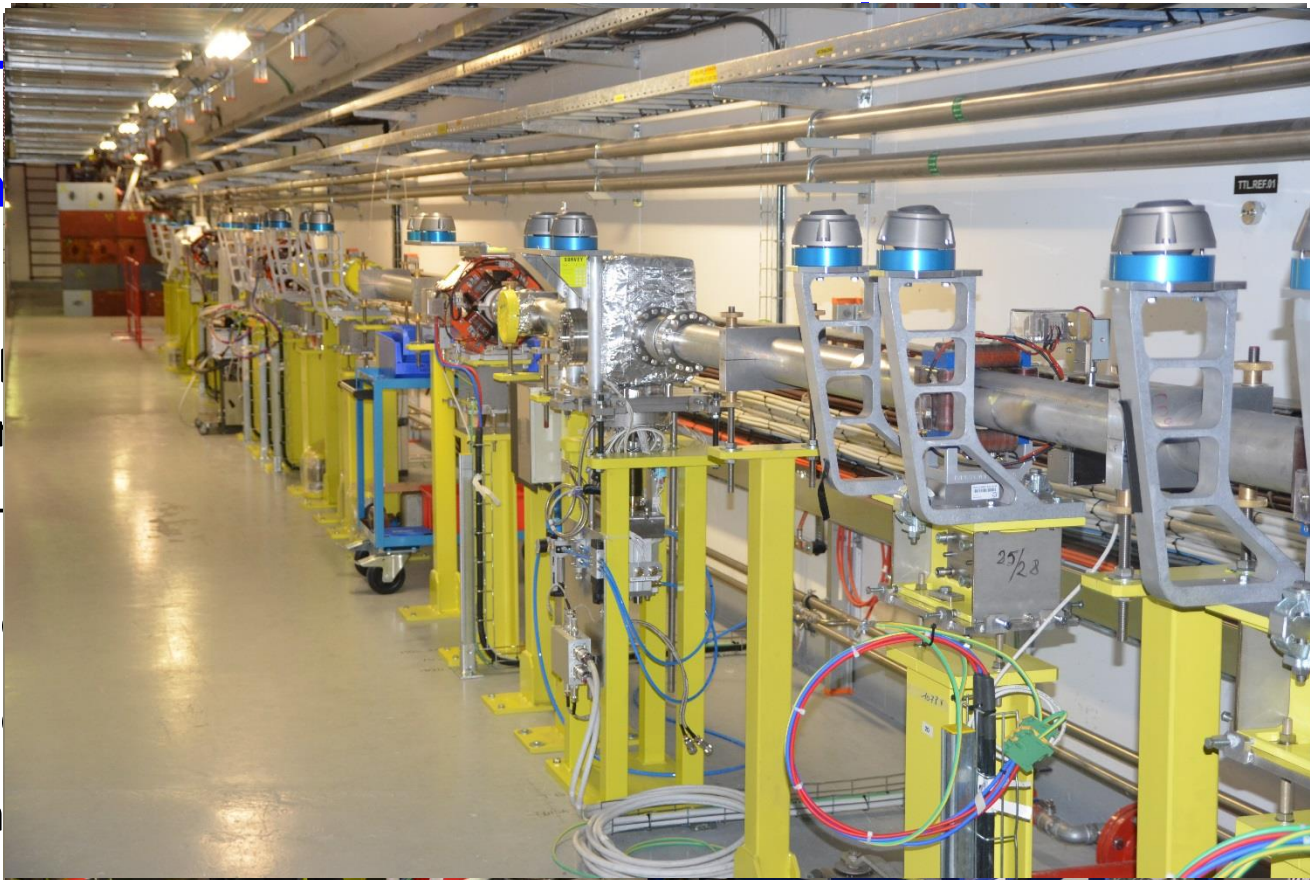

emittance  
nce




# Diagnostic devices and quantity measured

<b>Instrument</b>	<b>Physical Effect</b>	<b>Measured Quantity</b>	<b>Effect on beam</b>
<b>Faraday Cup</b>	<b>Charge collection</b>	<b>Intensity</b>	<b>Destructive</b>
<b>Current Transformer</b>	<b>Magnetic field</b>	<b>Intensity</b>	<b>Non destructive</b>
<b>Wall current monitor</b>	<b>Image Current</b>	<b>Intensity</b> <b>Longitudinal beam shape</b>	<b>Non destructive</b>
<b>Pick-up</b>	<b>Electric/magnetic field</b>	<b>Position</b>	<b>Non destructive</b>
<b>Secondary emission monitor</b>	<b>Secondary electron emission</b>	<b>Transverse size/shape, emittance</b>	<b>Disturbing, can be destructive at low energies</b>
<b>Wire Scanner</b>	<b>Secondary particle creation</b>	<b>Transverse size/shape</b>	<b>Slightly disturbing</b>
<b>Scintillator screen</b>	<b>Atomic excitation with light emission</b>	<b>Transverse size/shape (position)</b>	<b>Destructive</b>
<b>Residual Gas monitor</b>	<b>Ionization</b>	<b>Transverse size/shape</b>	<b>Non destructive</b>



# A beam parameter measurement

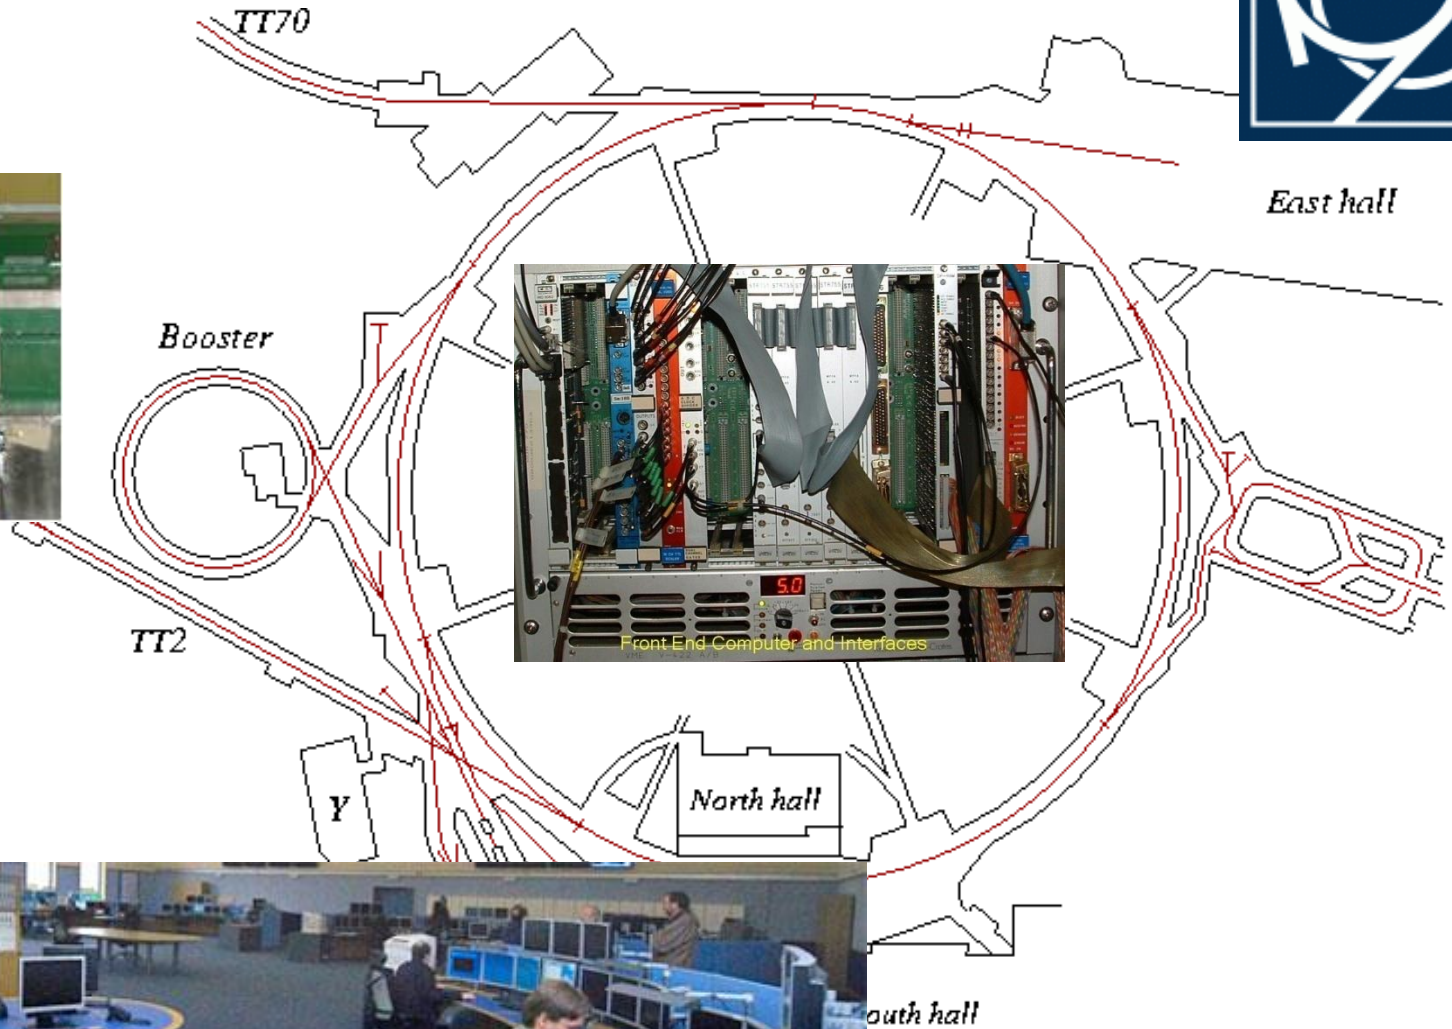



# Scintillating Screens

Method already applied in cosmic ray experiments


- Very simple
- Very convincing

Needed:

- Scintillating Material
- TV camera
- In/out mechanism

Problems:

- Radiation resistance
- Heating of screen (absorption of beam energy)
- Evacuation of electric charges

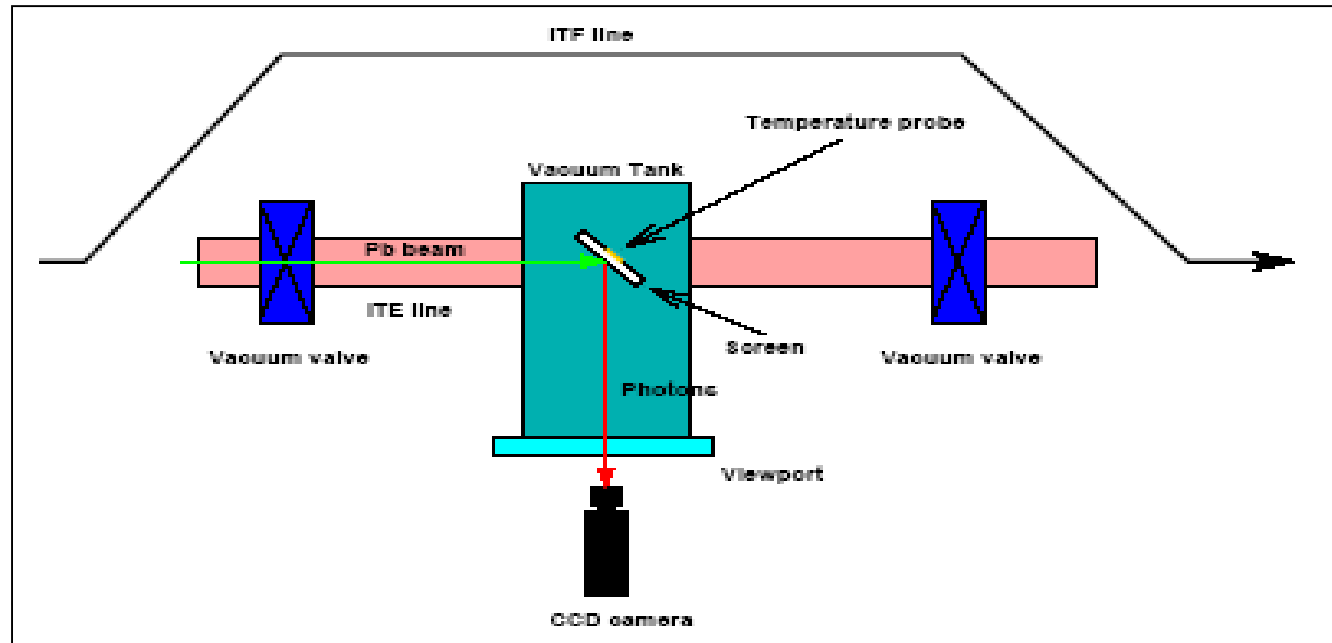







# Interaction of particles with matter

- Coulomb interaction
- Average force in s-direction=0
- Average force in transverse direction  $\langle \rangle 0$
- Mostly large impact parameter  $\Rightarrow$  low energy of ejected electron
- Electron mostly ejected transversely to the particle motion

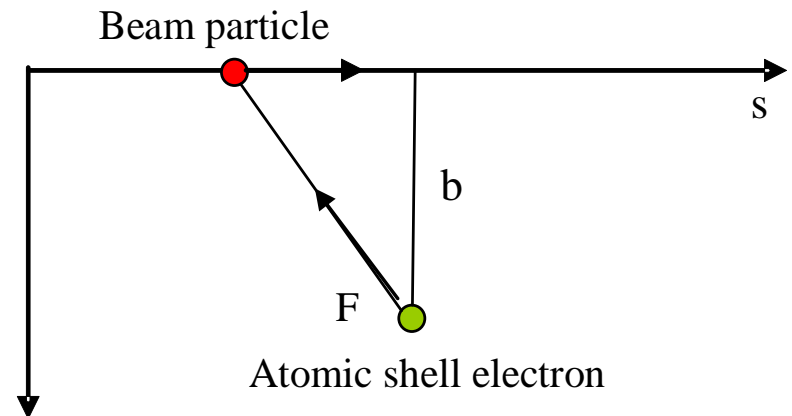



# High energy loss a low energies

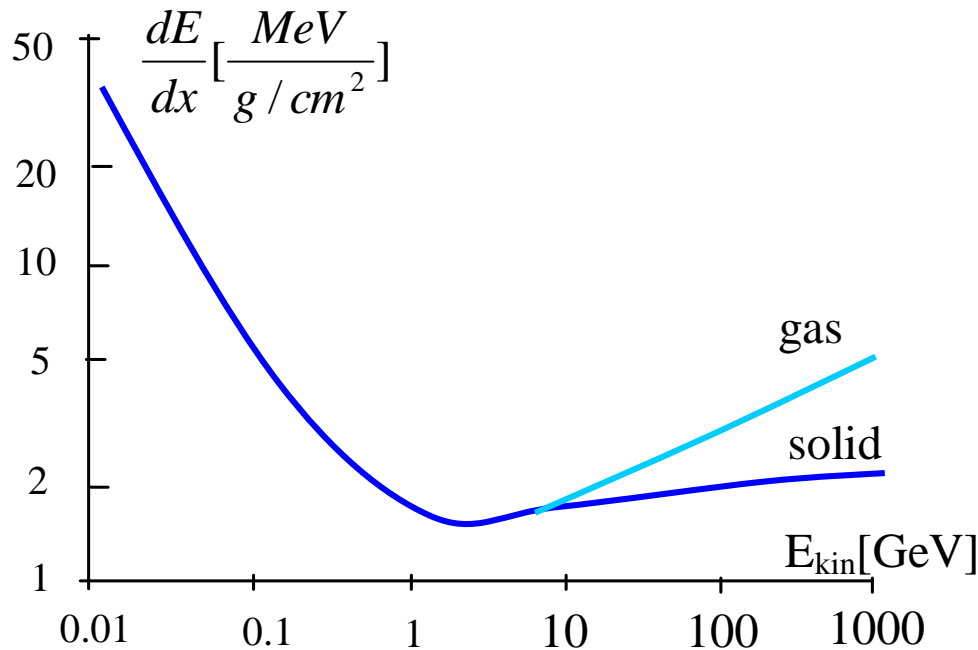


Heavy ions at low energy are stopped within a few micro-meters  
All energy is deposited in a very small volume




# Screen mechanism

- Screen with graticule

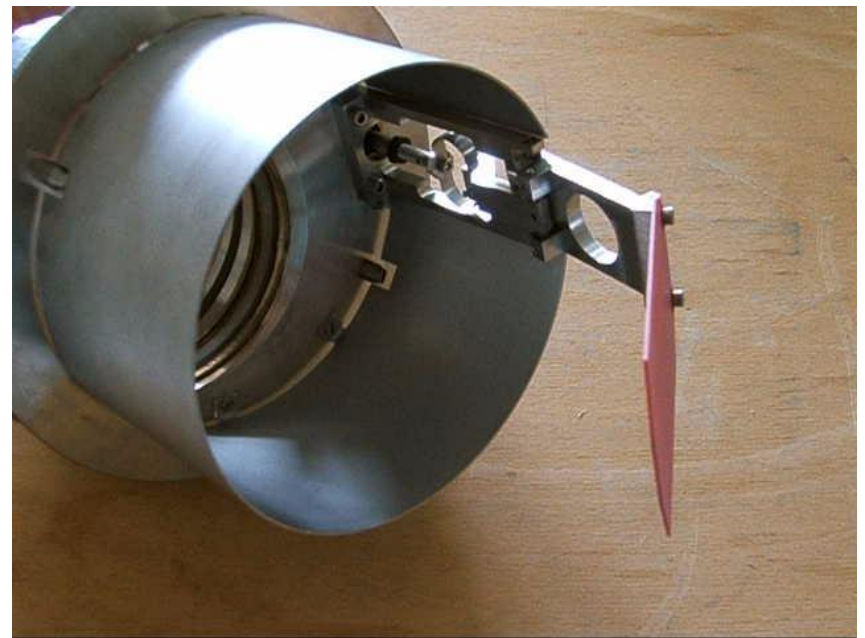





# Results from TV Frame grabber

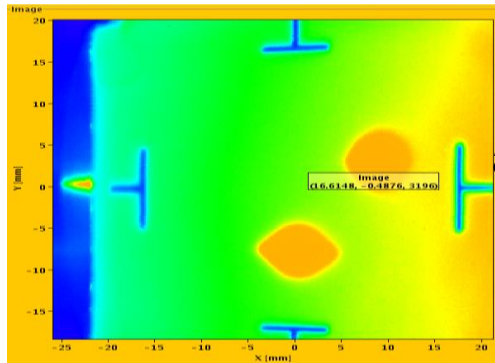

First full turn  
as seen by the  
BTV  
10/9/2008

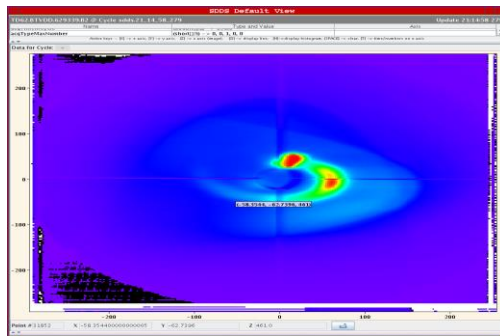

Uncaptured  
beam sweeps  
through the  
dump line

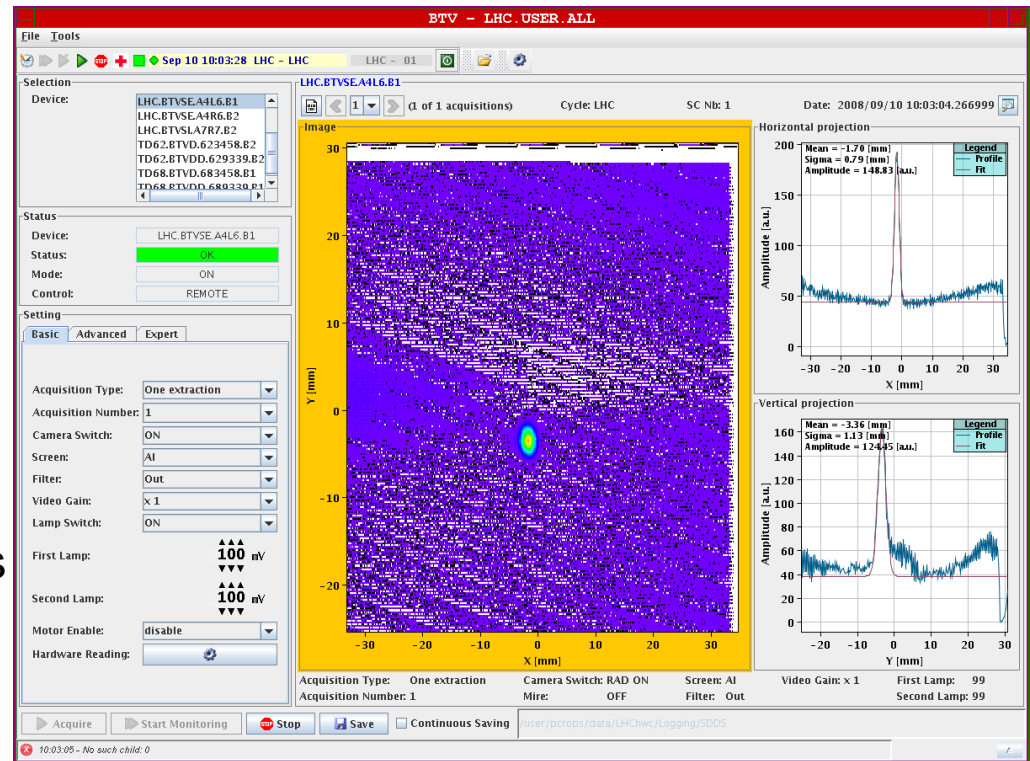


- For further evaluation the video signal is digitized, read-out and treated by program





# Layout of a Faraday Cup

- Electrode: 1 mm stainless steel
- Only low energy particles can be measured
- Very low intensities (down to 1 pA) can be measured
- Creation of secondary electrons of low energy (below 20 eV)
- Repelling electrode with some 100 V polarisation voltage pushes secondary electrons back onto the electrode

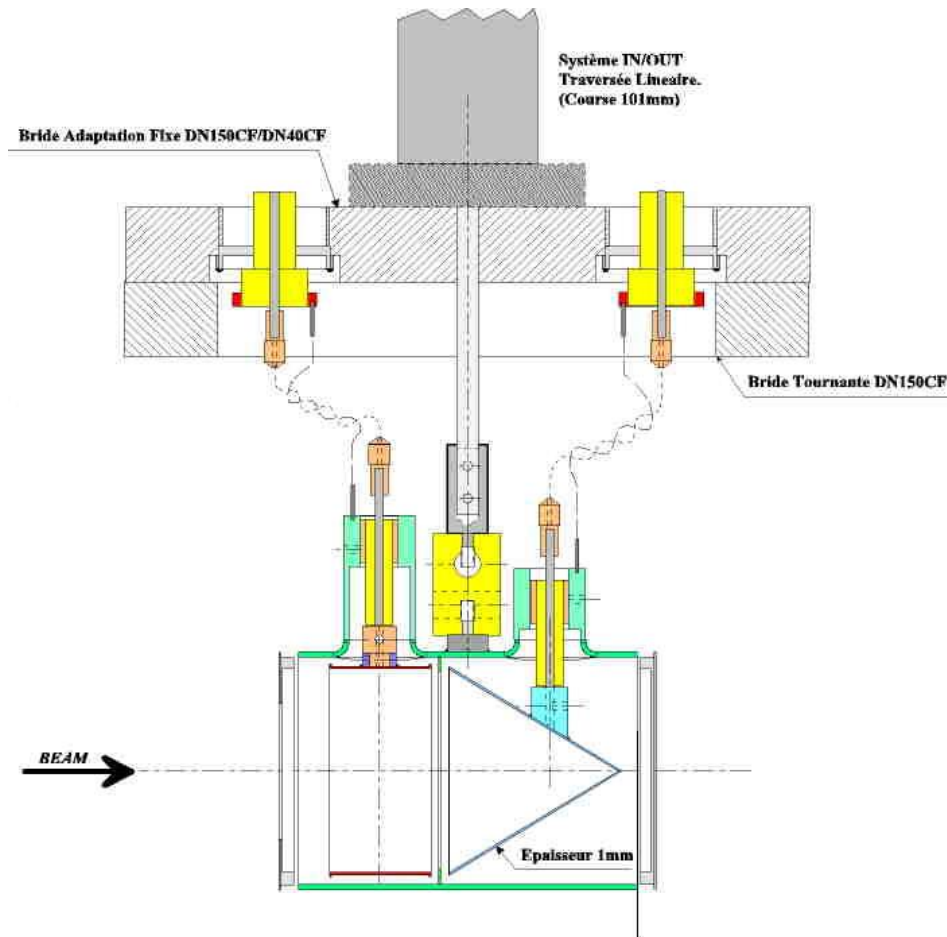



# Faraday Cup

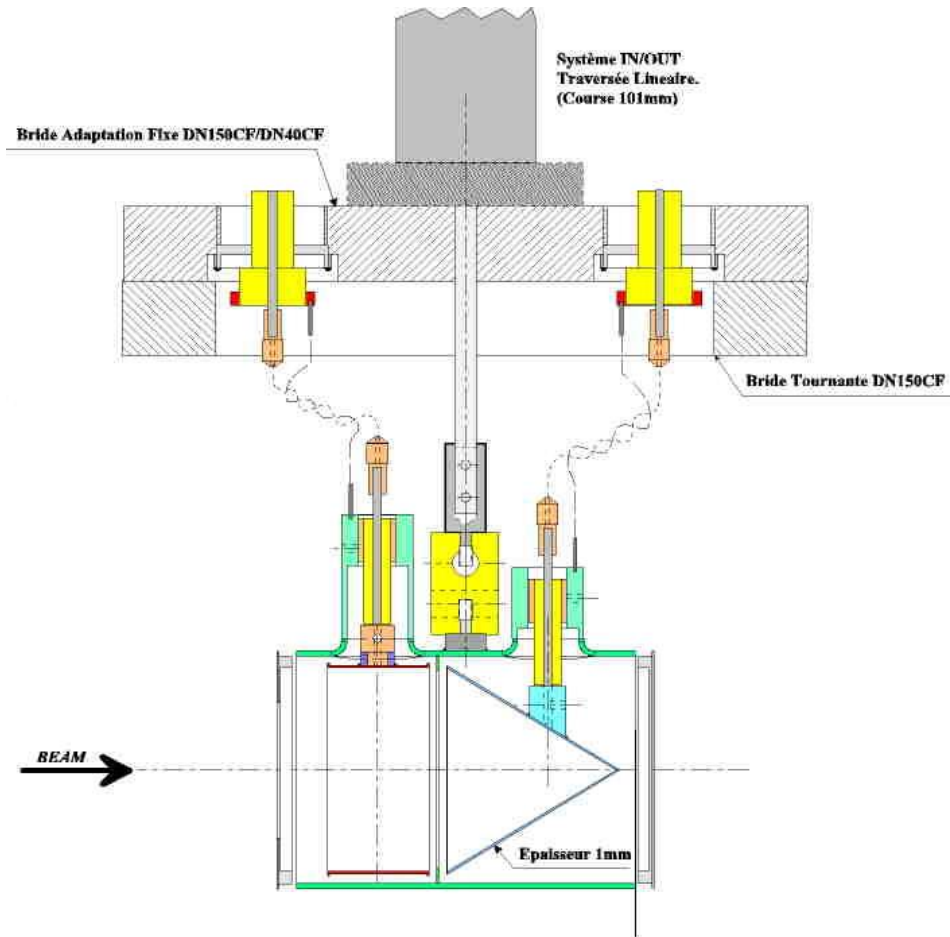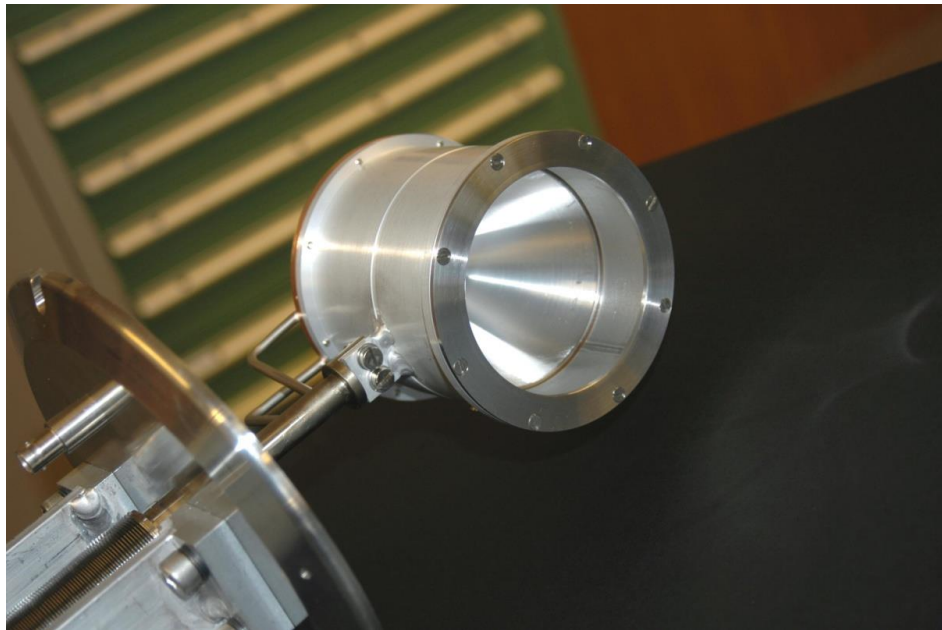




# Electro-static Field in Faraday Cup

In order to keep secondary electrons within the cup a repelling voltage is applied to the polarization electrode

Since the electrons have energies of less than 20 eV some 100V repelling voltage is sufficient

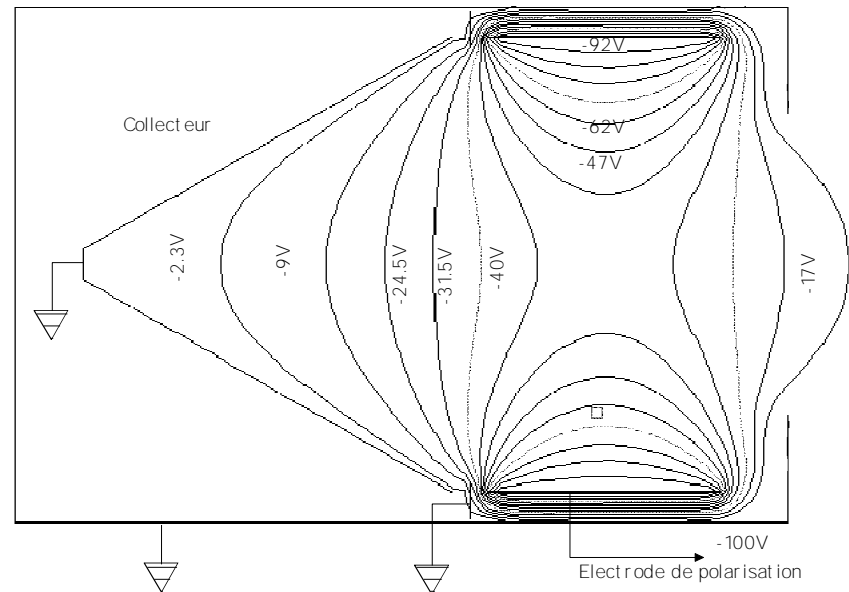




# Energy of secondary emission electrons


- With increasing repelling voltage the electrons do not escape the Faraday Cup any more and the current measured stays stable.
- At 40V and above no decrease in the Cup current is observed any more

$I(\mu\text{A})$

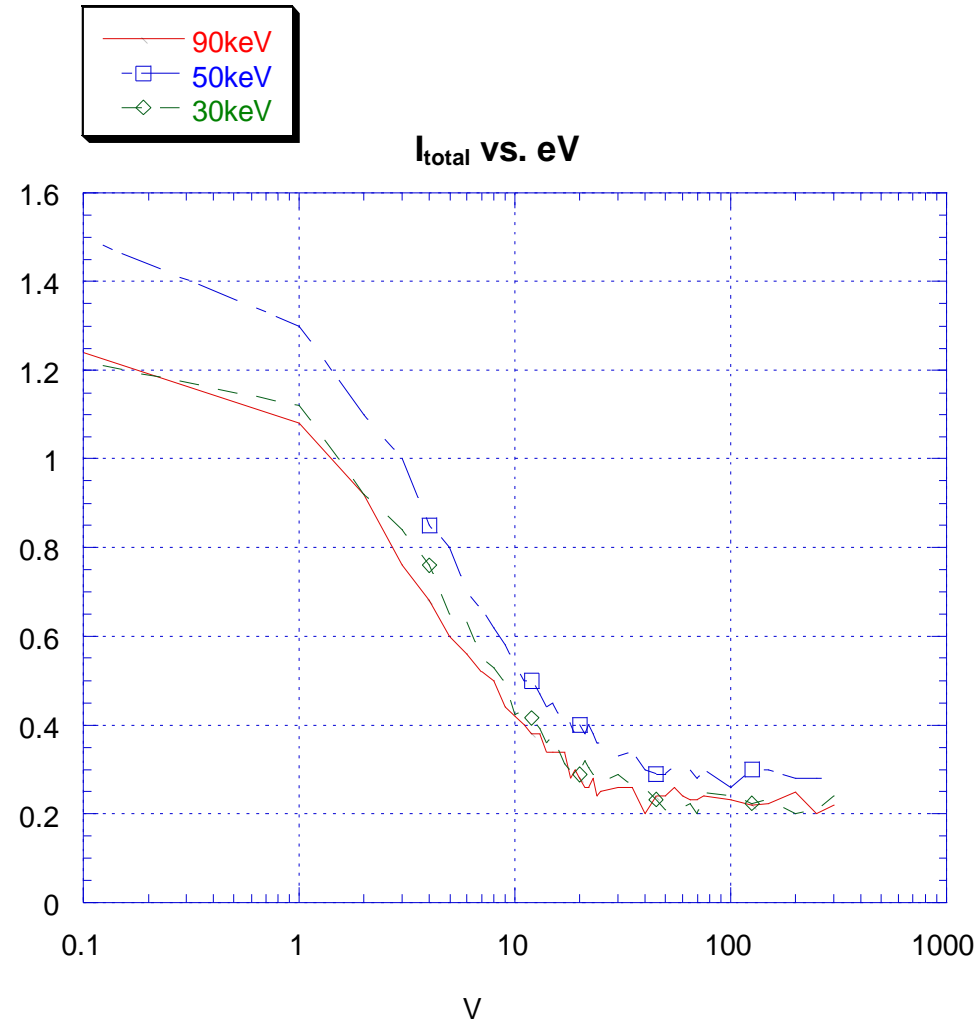



# Current Transformers

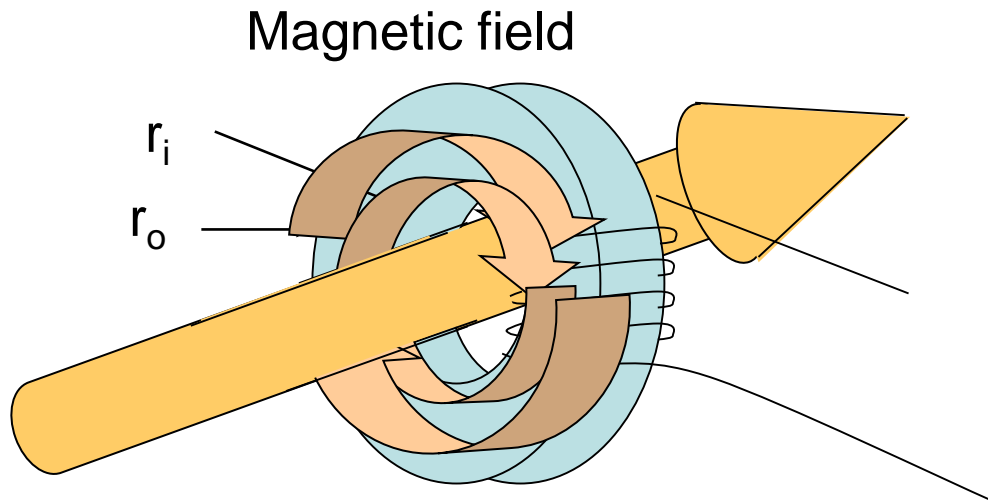

Fields are very low

Capture magnetic field lines with cores of high relative permeability

(CoFe based amorphous alloy Vitrovac:  $\mu_r = 10^5$ )

Beam current


$$I_{\text{beam}} = \frac{qeN}{t} = \frac{qeN\beta c}{l}$$

$$L = \frac{\mu_0 \mu_r}{2\pi} l N^2 \ln \frac{r_o}{r_i}$$



# The Ideal Transformer



$$U(U) \equiv I_{beam} \frac{dI_{beam}(t)}{dt} \frac{R}{N} e^{-\frac{t}{\tau_{droop}}}$$

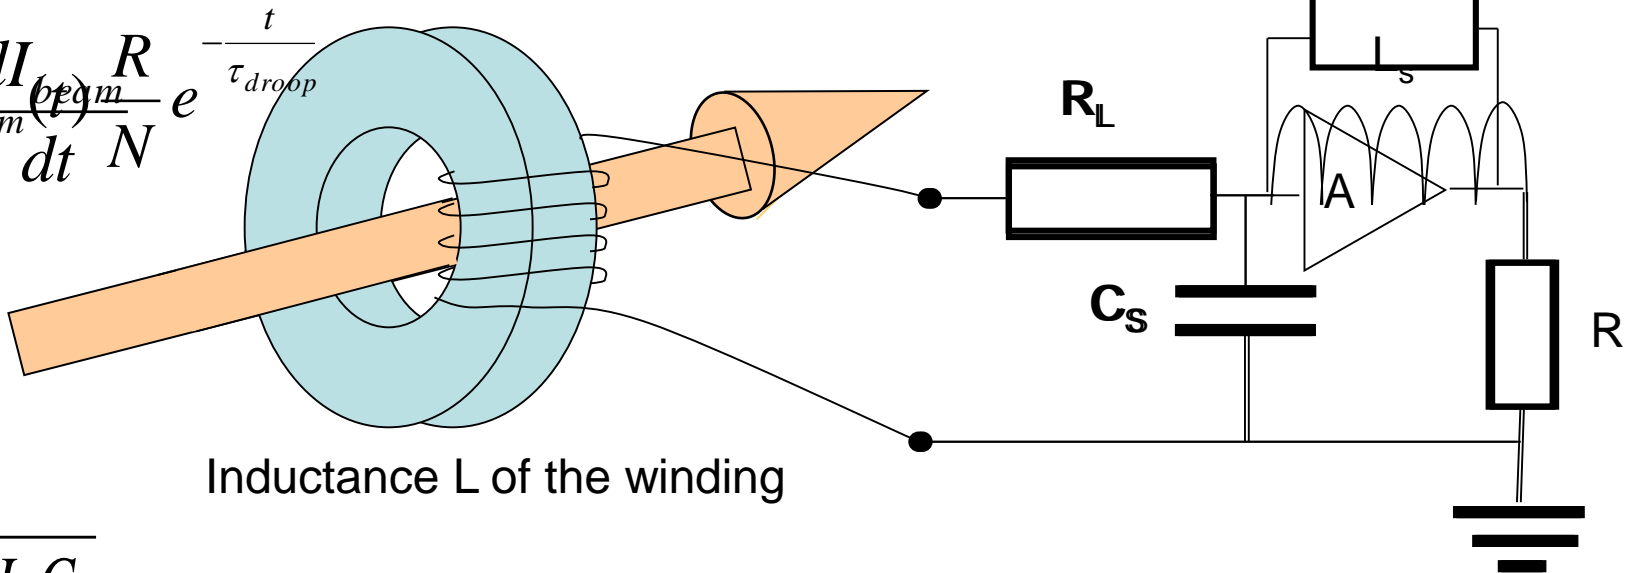

$$\tau_{rise} = \sqrt{L_s C_s}$$

$$\tau_{droop} = \frac{L_L}{\frac{R_f}{R + R_L}} \approx \frac{L}{R_L}$$

Transformer output signal

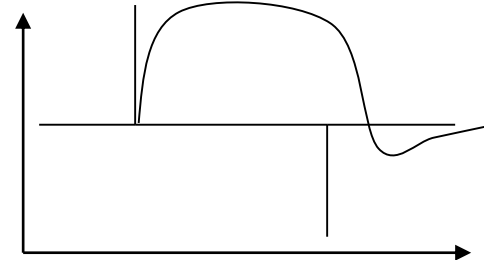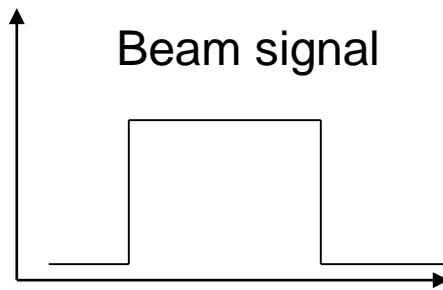



# Principle of a fast current transformer


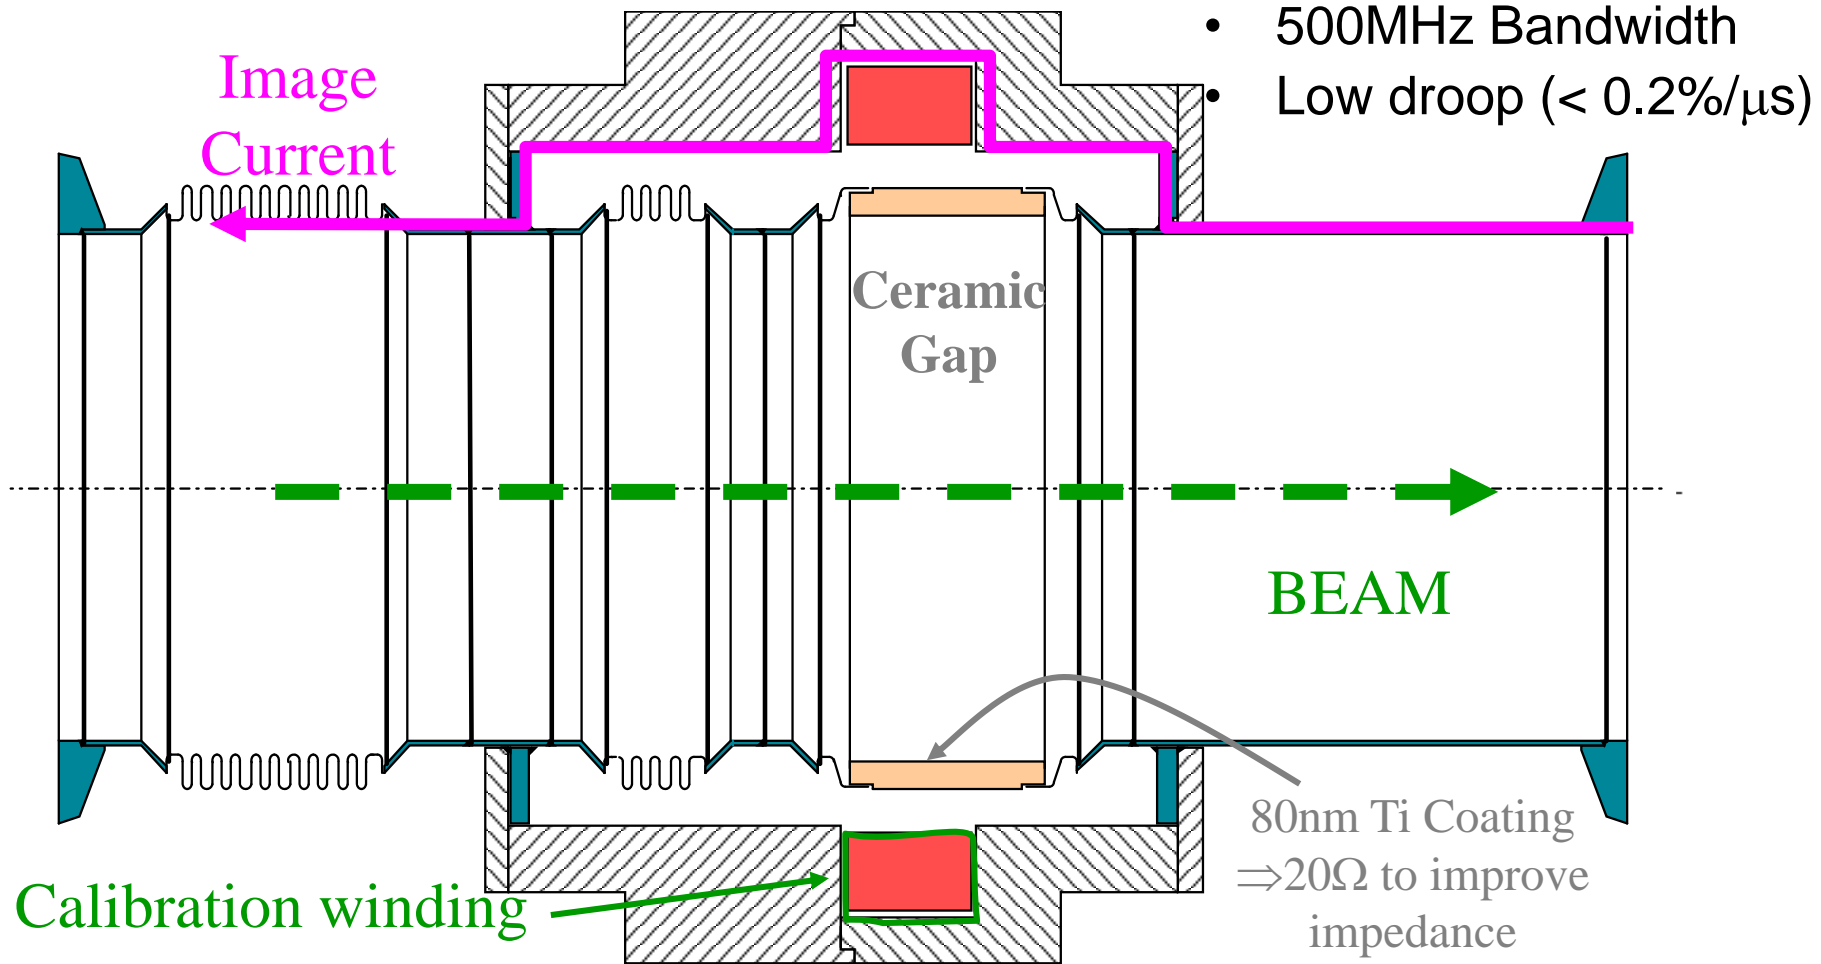




Diagram by H. Jakob



# Fast current transformers for the LHC

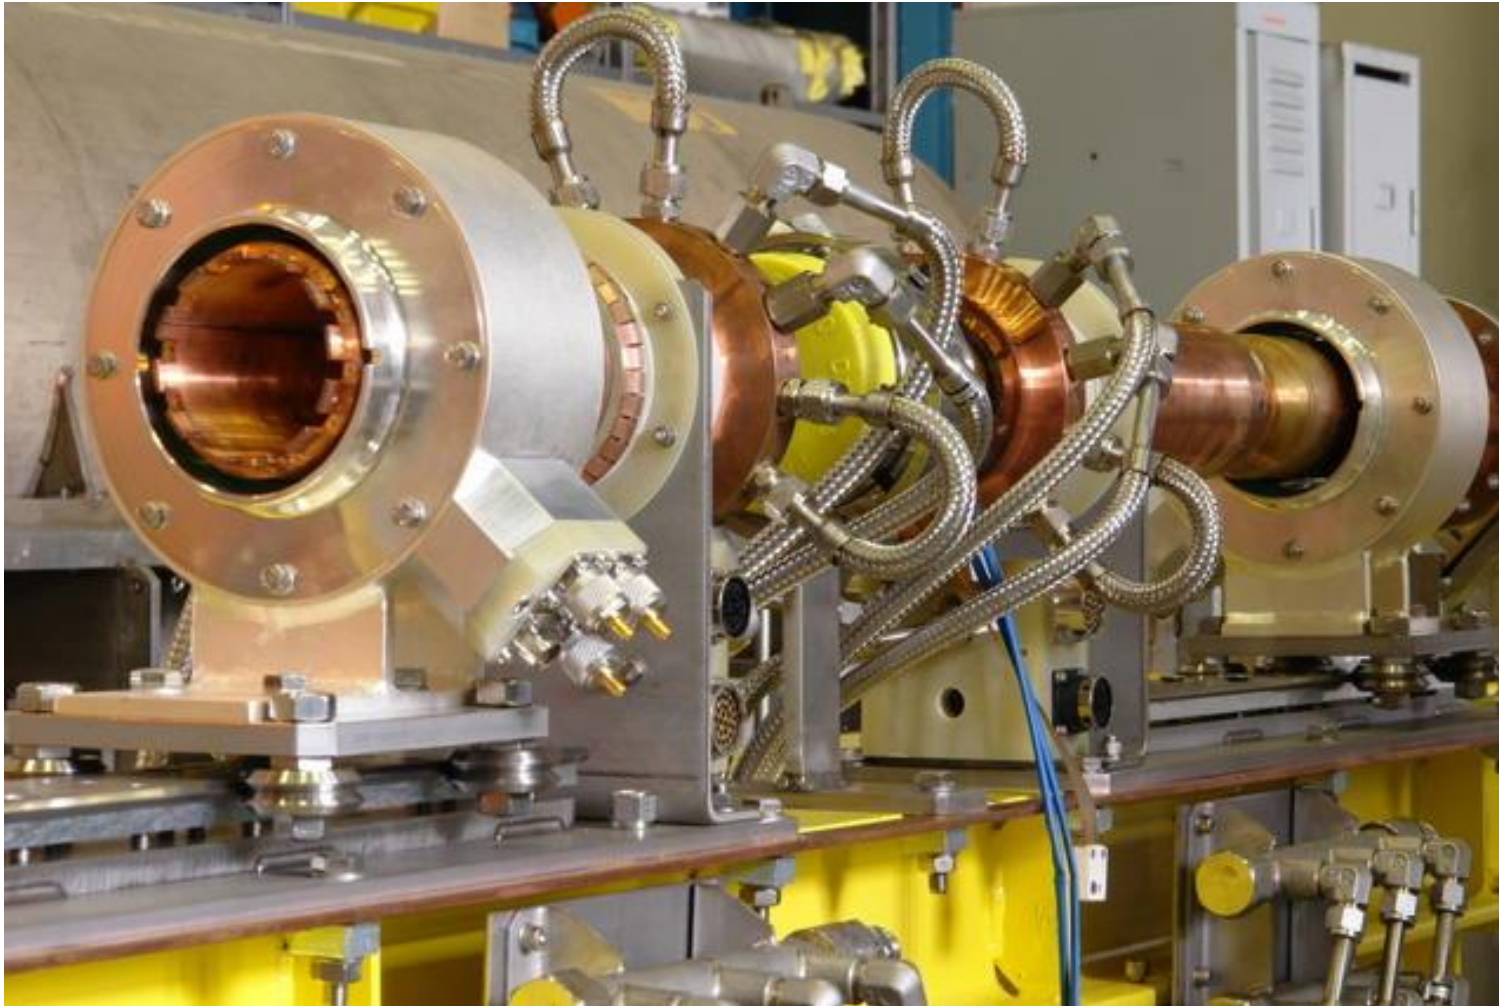


# Magnetic shielding

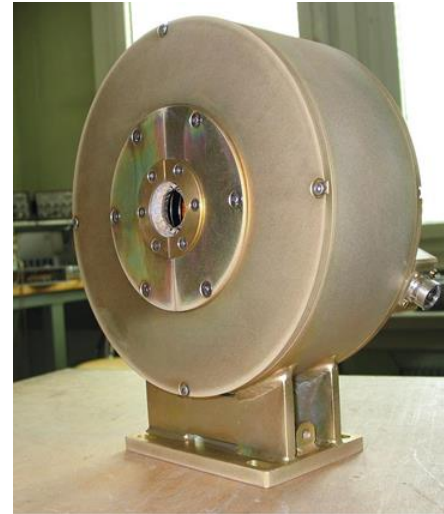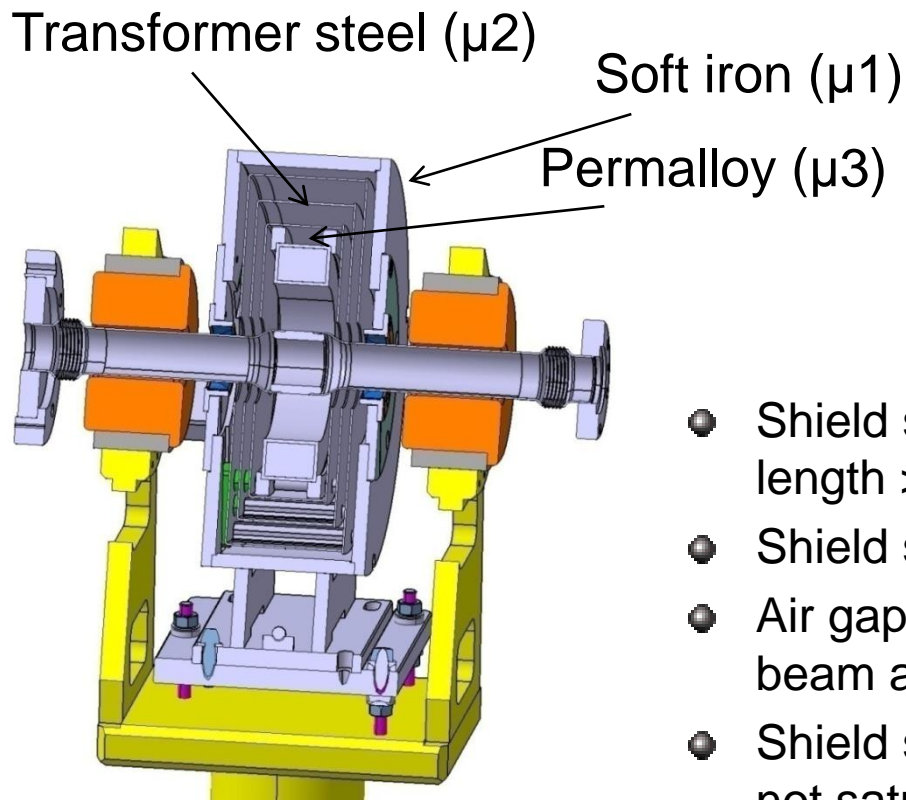

- Shield should extend along the vacuum chamber length  $>$  diameter of opening
- Shield should be symmetrical to the beam axis
- Air gaps must be avoided especially along the beam axis
- Shield should have highest  $\mu$  possible but should not saturate



# Calibration of AC current transformers

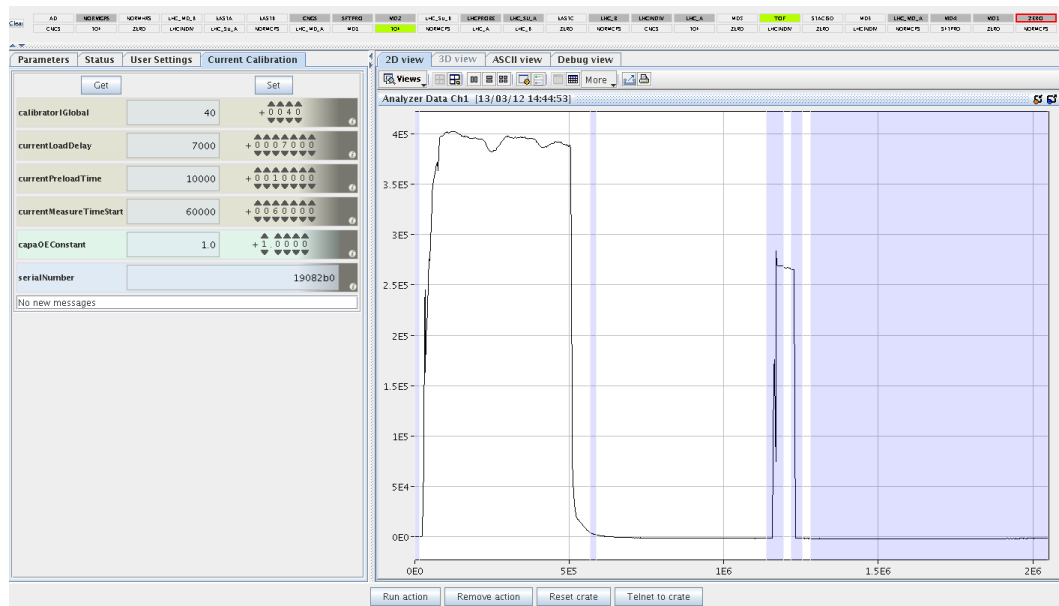


- The transformer is calibrated with a very precise current source
- The calibration signal is injected into a separate calibration winding
- A calibration procedure executed before the running period
- A calibration pulse before the beam pulse measured with the beam signal




# Measuring Beam Position – The Principle

Slide by R. Jones

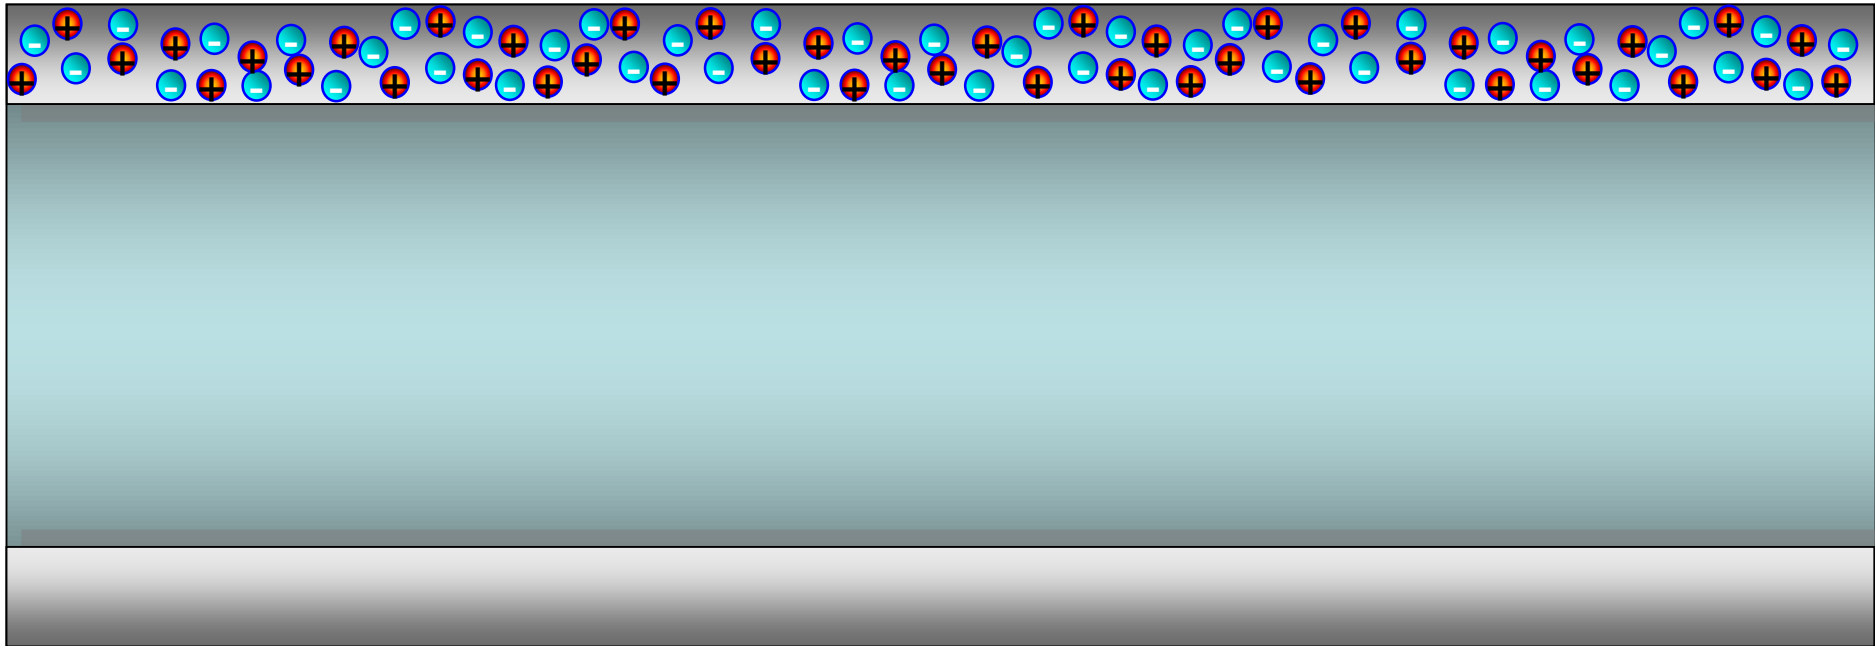




# Wall Current Monitor – The Principle

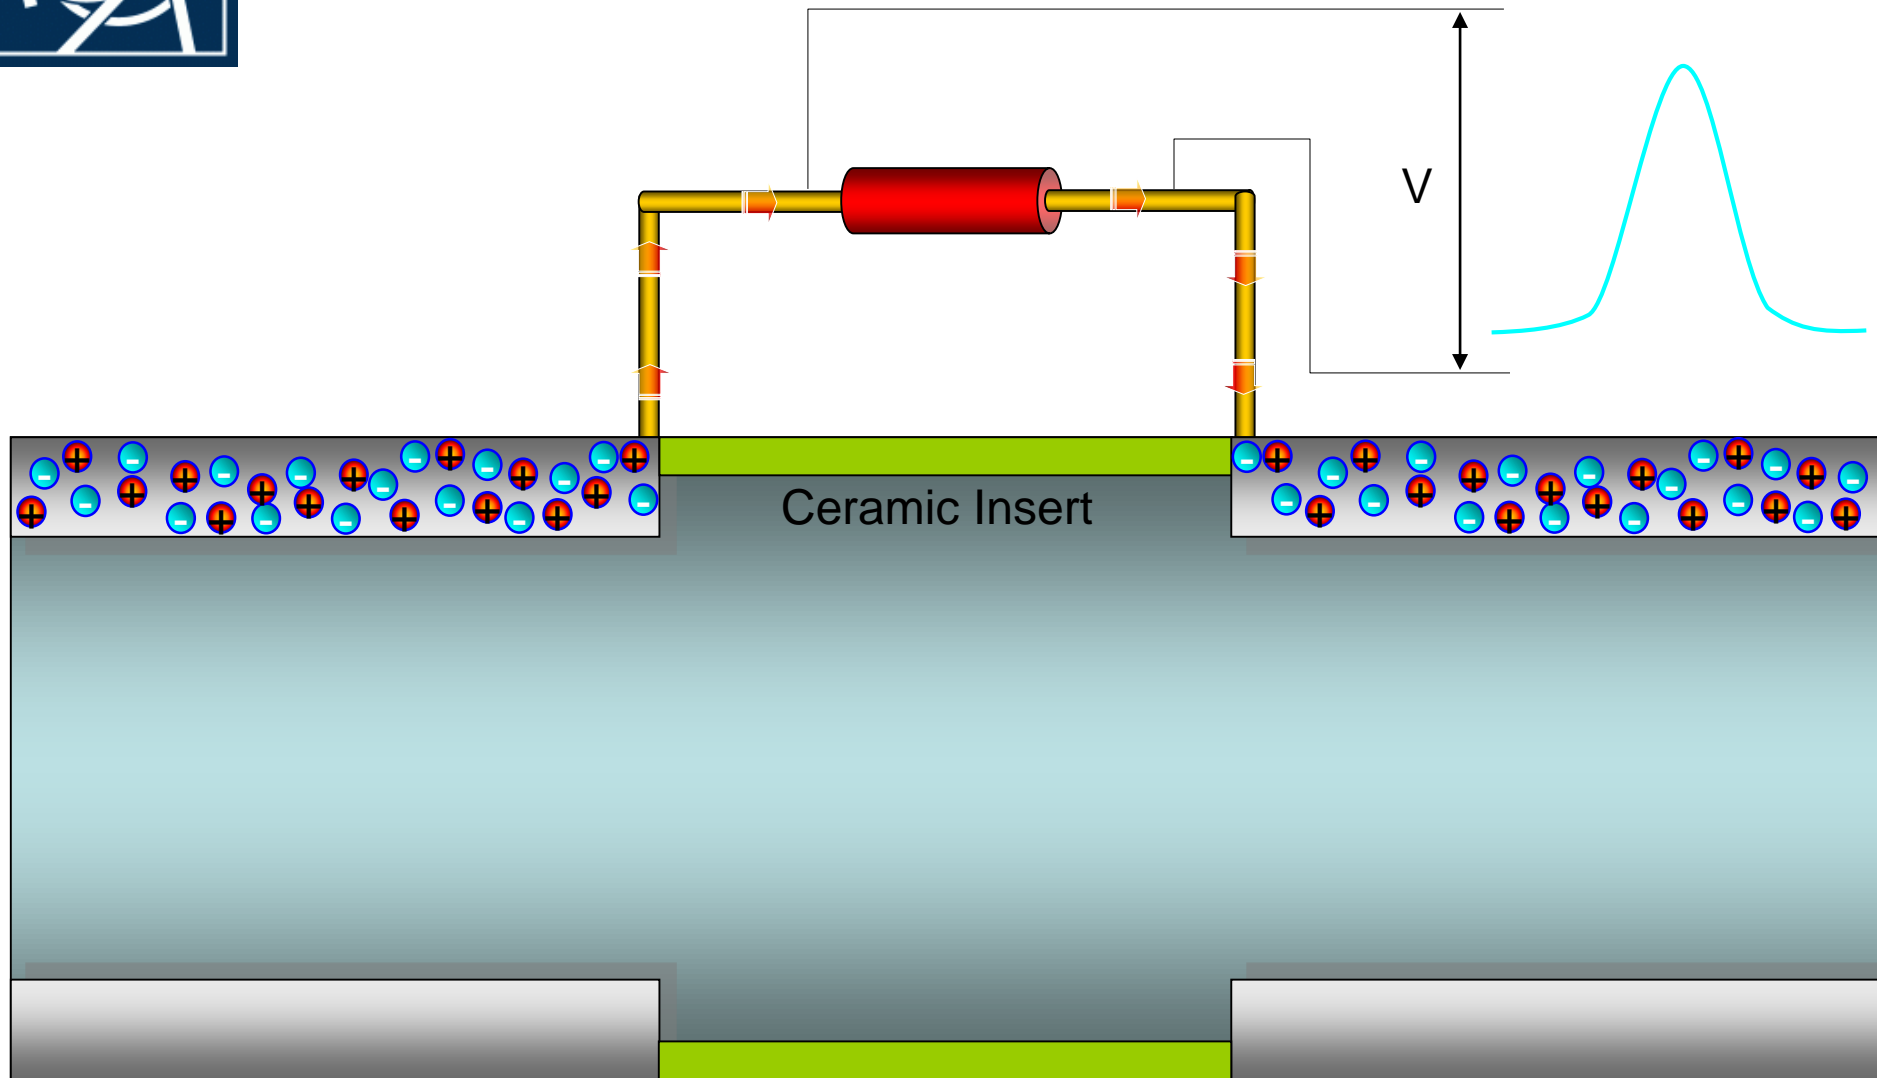






# Electrostatic Monitor – The Principle

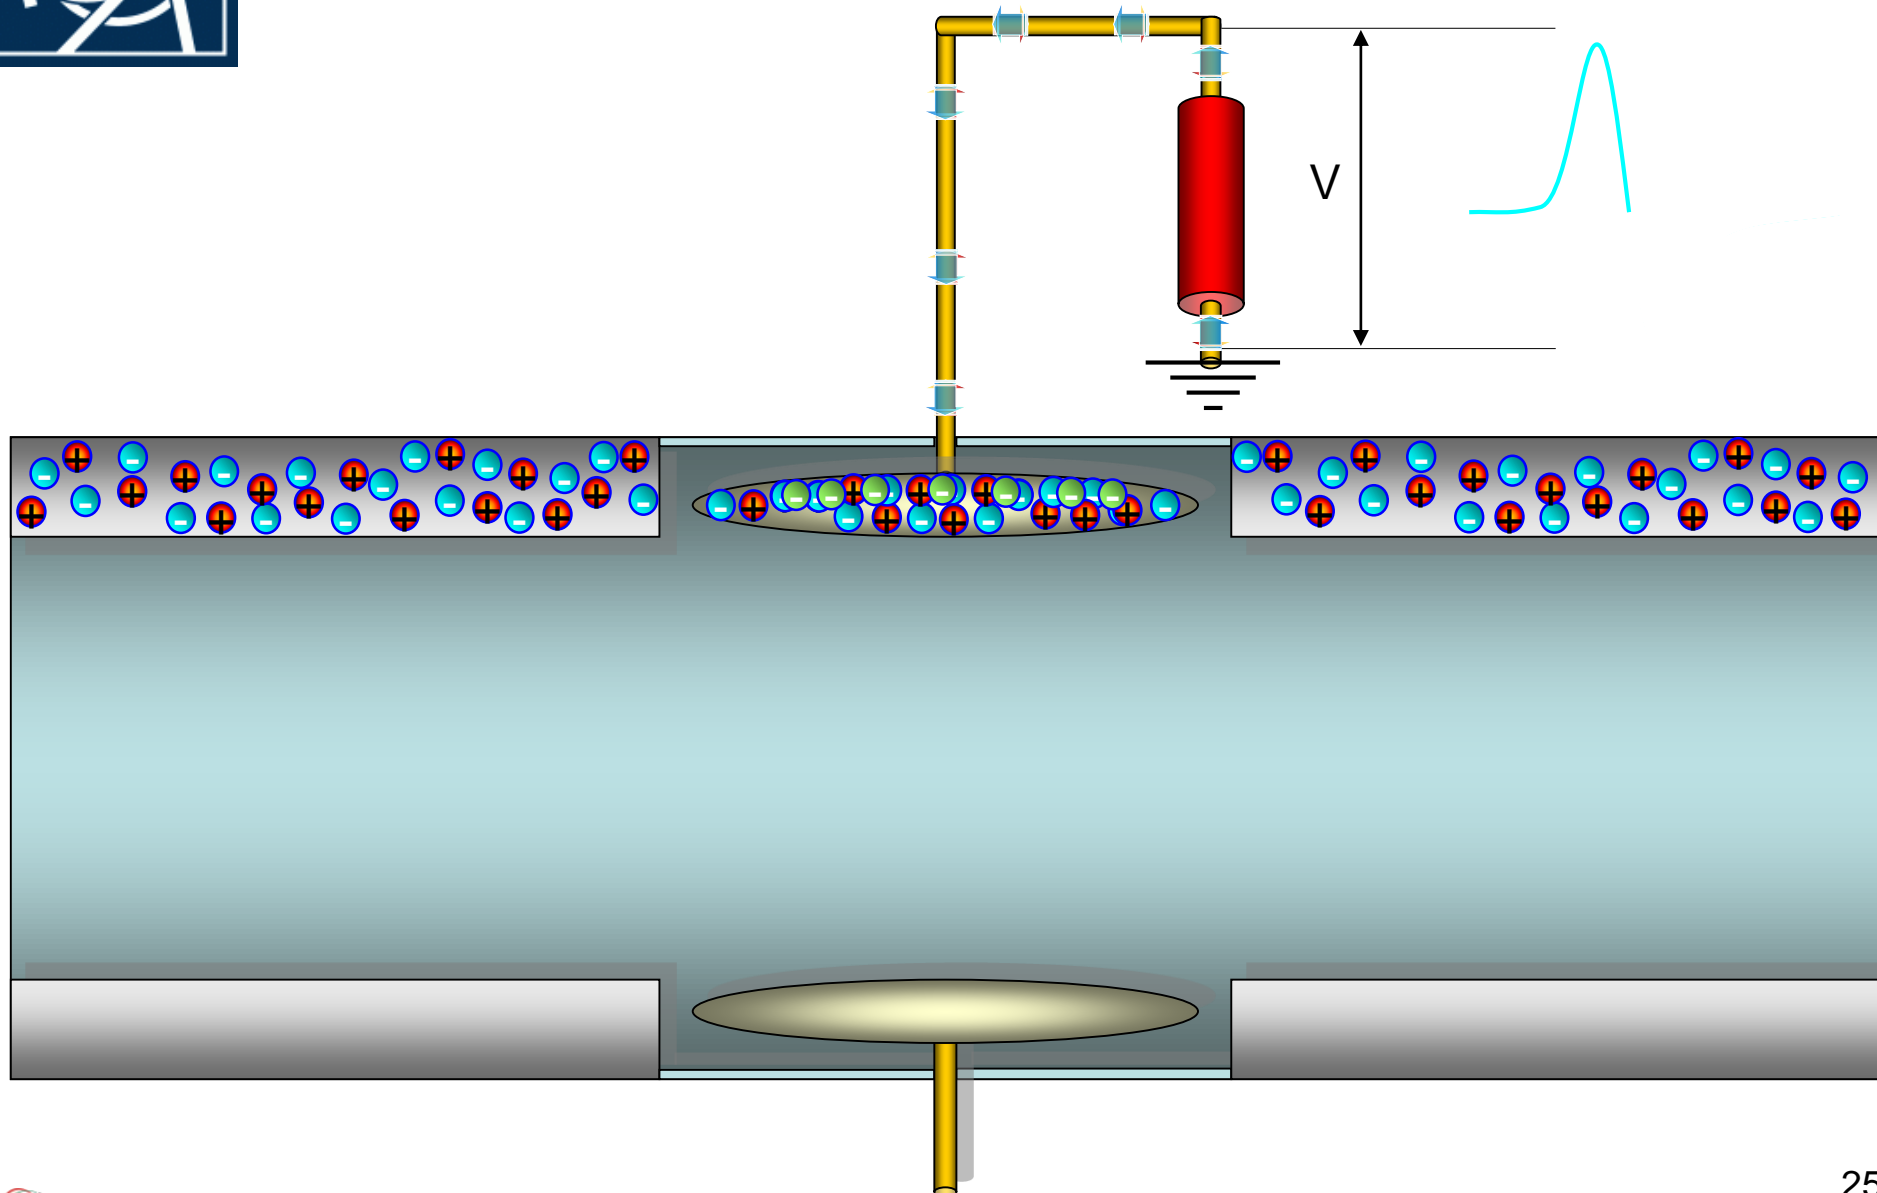




# Position measurements

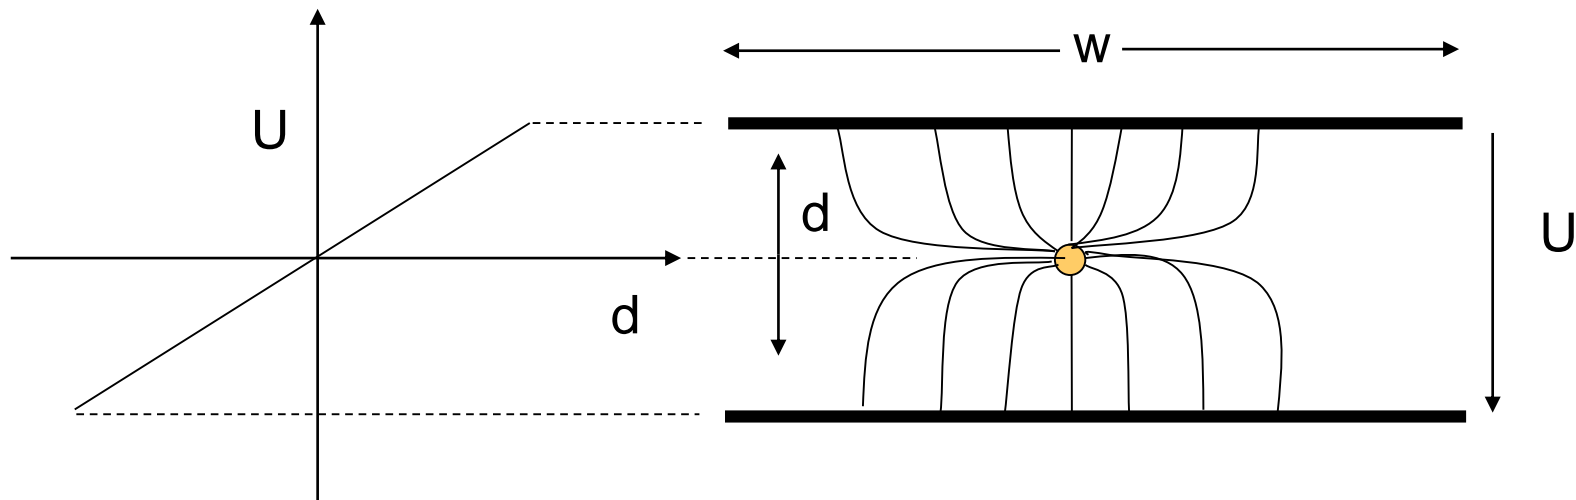


If the beam is much smaller than  $w$ , all field lines are captured and  $U$  is a linear function with replacement  
else: Linear cut (projection to measurement plane must be linear)



# Shoebox pick-up

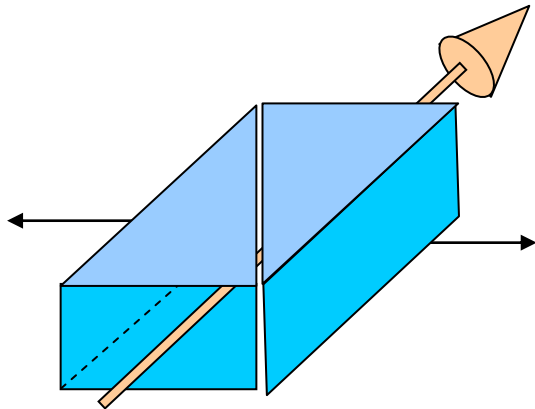

Linear cut through a shoebox

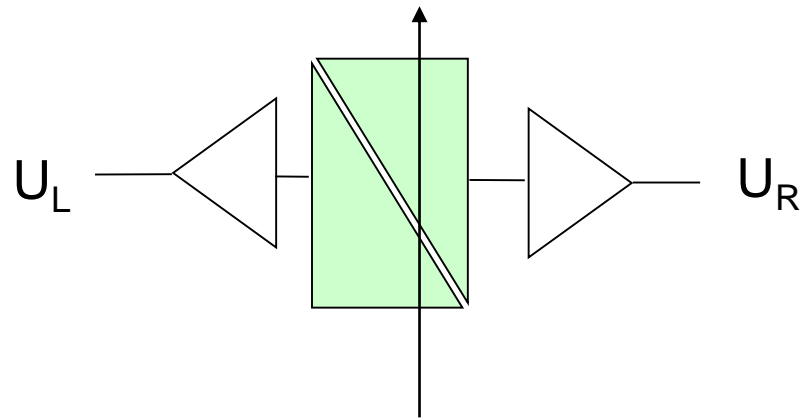


$$X \propto \frac{U_L - U_R}{U_L + U_R} = \frac{\Delta}{\Sigma}$$



# Doubly cut shoebox


- Can measure horizontal and vertical position at once
- Has 4 electrodes

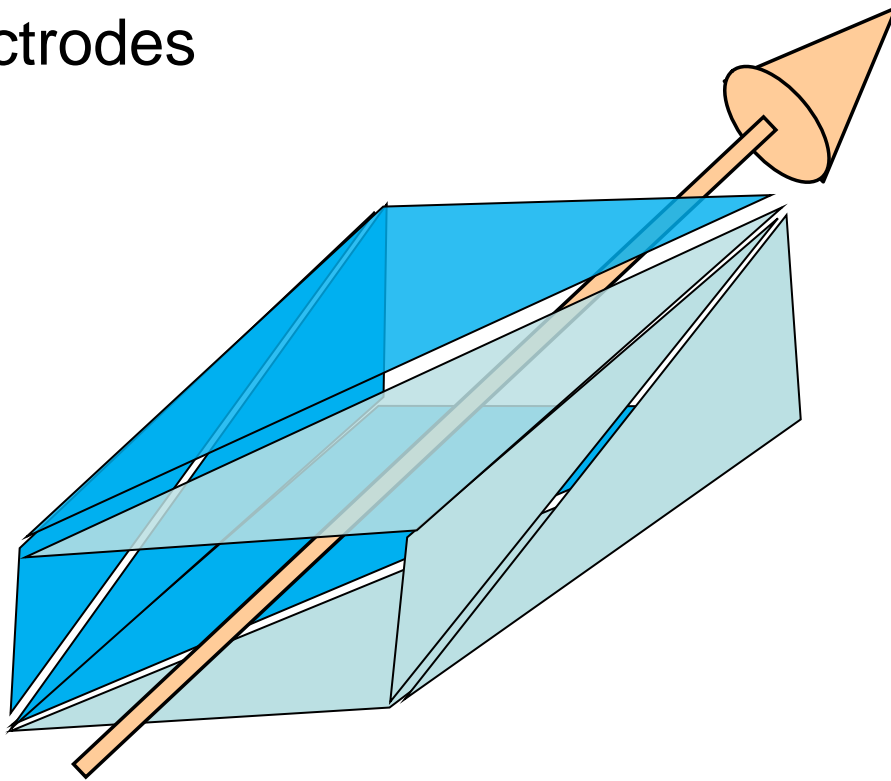




# Simultaneous horizontal and vertical measurement

horizontal

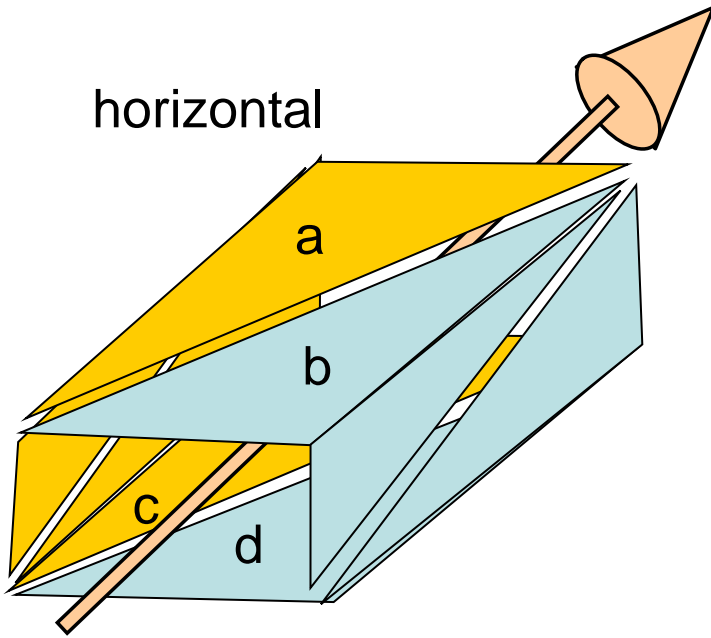

vertical

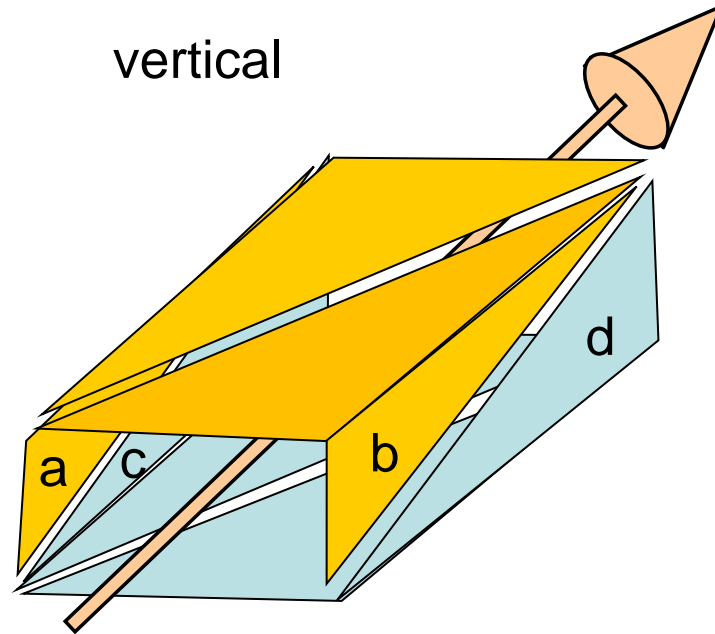


$$X = \frac{(U_a + U_c) - (U_b + U_d)}{\Sigma U}$$

$$Y = \frac{(U_a + U_b) - (U_c + U_d)}{\Sigma U}$$

# Profile measurements


- Secondary emission grids (SEMgrids)

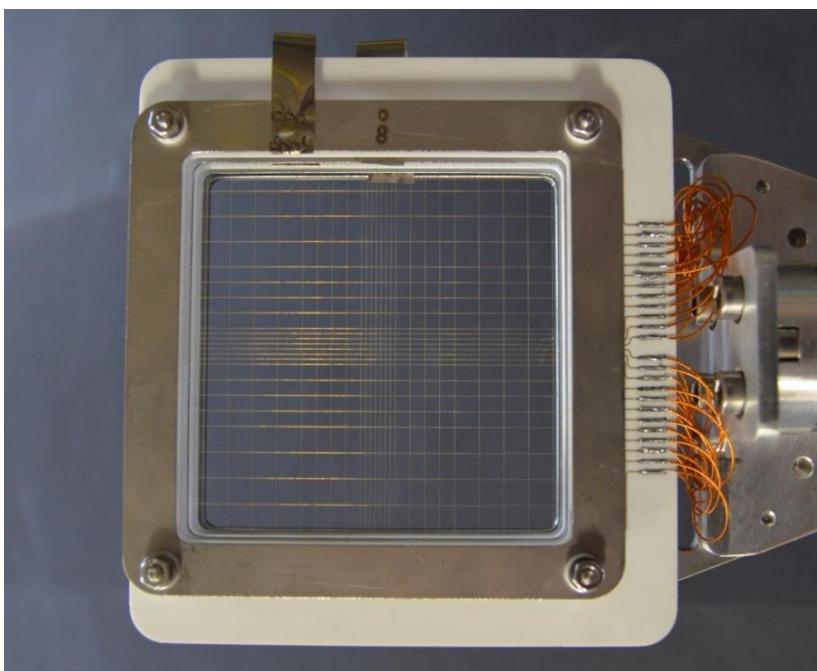

When the beam passes secondary electrons are ejected from the wires


The current flowing back onto the wires is measured

The ejected electrons are taken away by polarization voltage

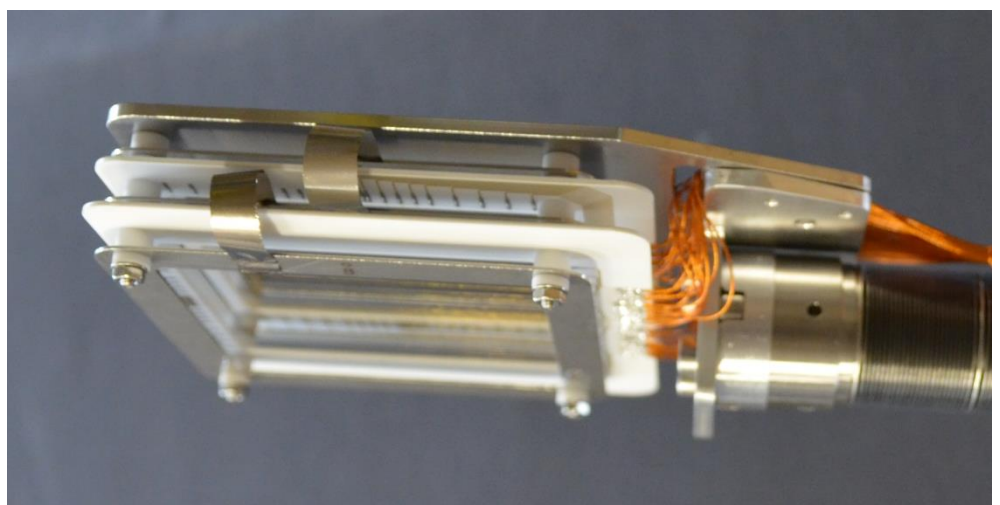



# Profiles from SEMgrids

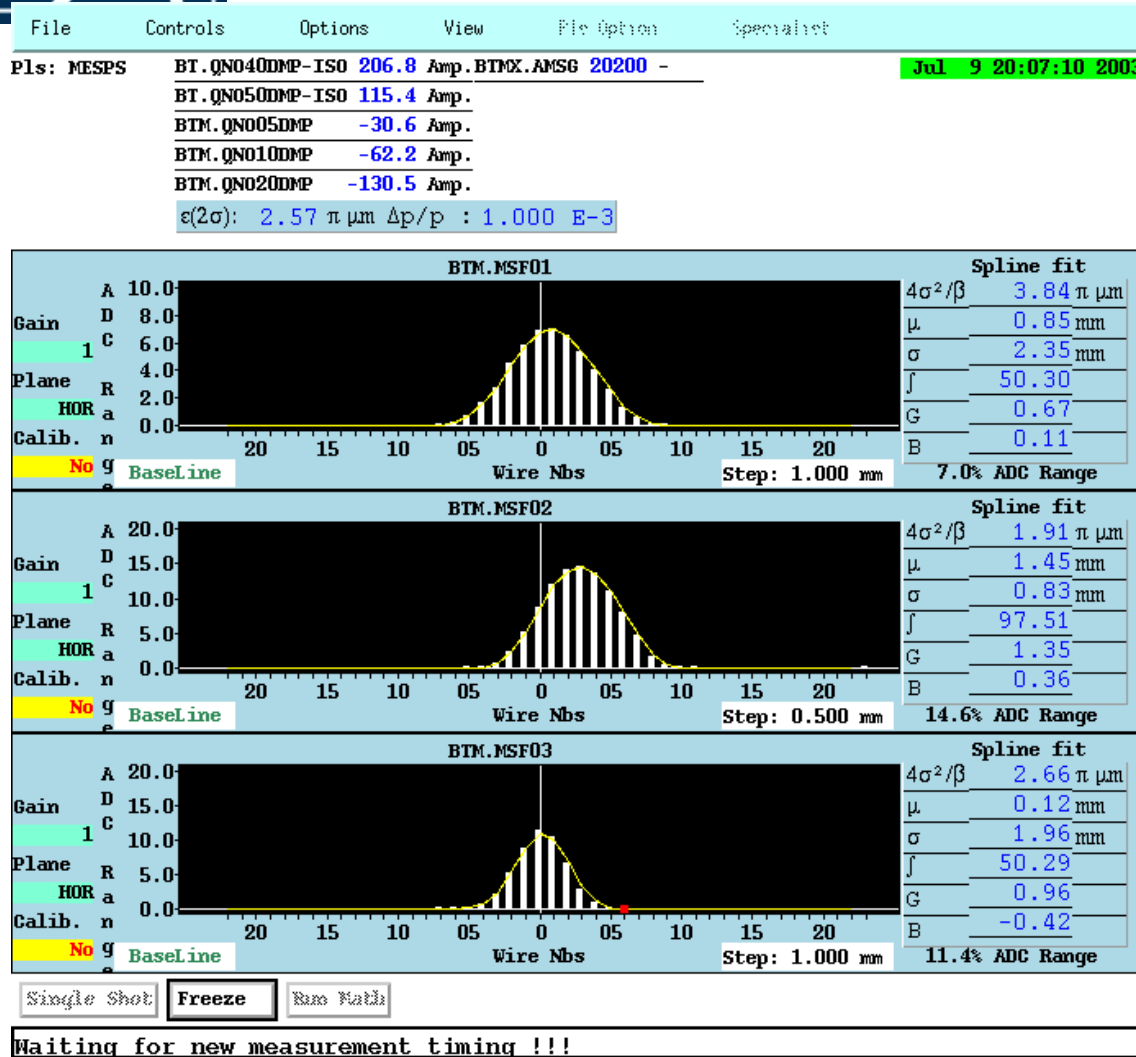

Charge density projected to x or y axis is measured

One amplifier/ADC per wire  
Large dynamic range




Resolution is given by wire distance

Used only in transfer lines



# Slow Wire scanners

- 33  $\mu\text{m}$  Carbon wires mounted in L-shape on the same fork support and scanning the beam at 45 degrees (one scanning position per pulse)

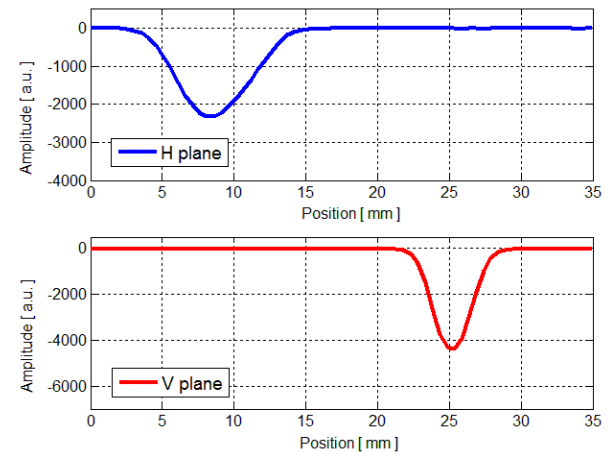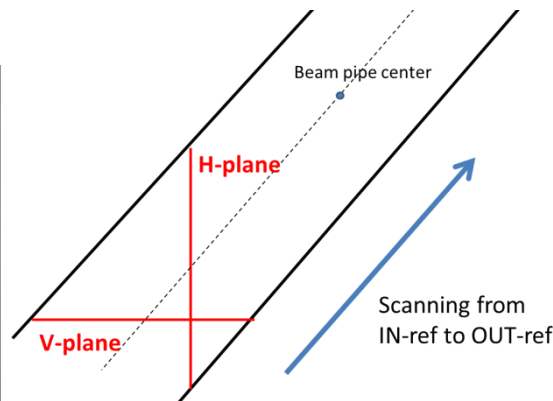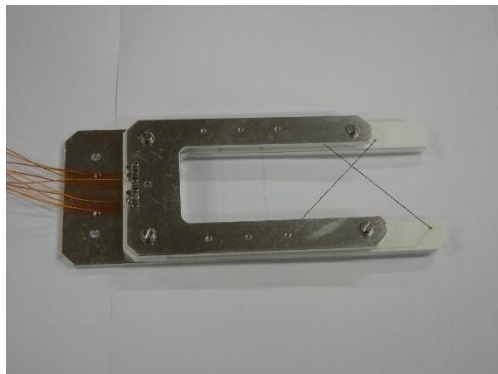


- Time resolution of 4  $\mu\text{s}$  within the beam pulse (250 kHz ADC)






# Fast Wire Scanners

A thin wire is quickly moved across the beam  
Secondary particle shower is detected outside the vacuum chamber  
on a scintillator/photo-multiplier assembly  
Position and photo-multiplier signal are recorded simultaneously

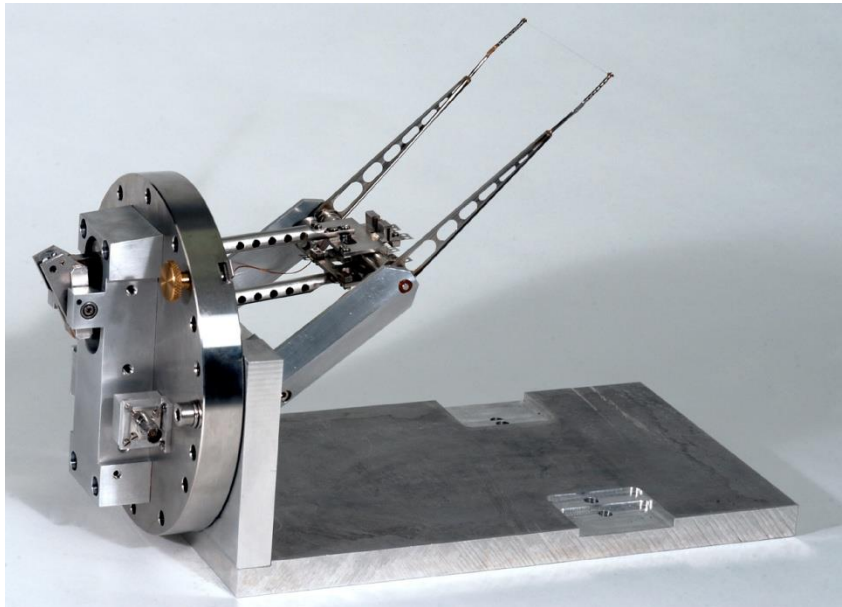



# Wire scanner profile

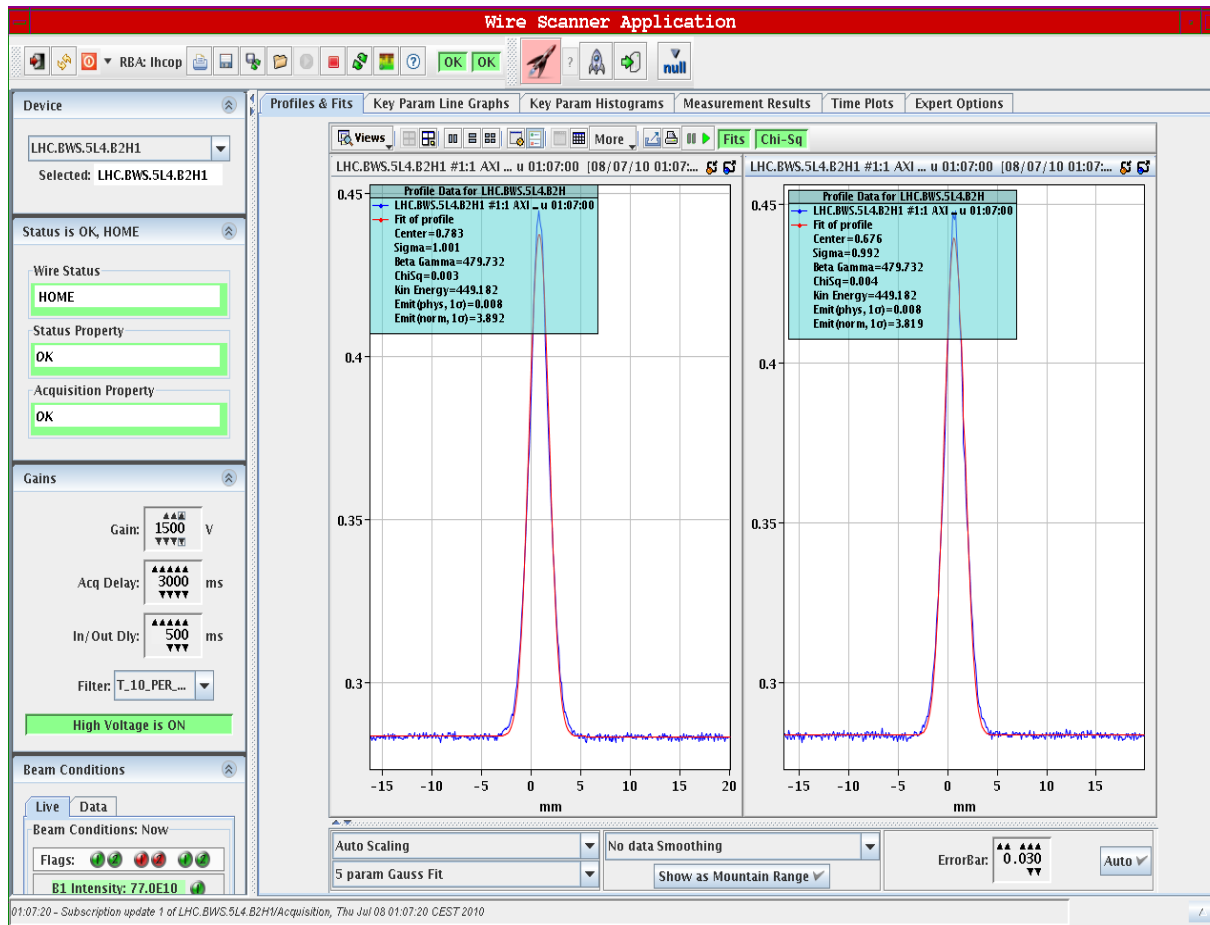

High speed needed because of heating.

Adiabatic damping


Current increase due to particle speed increase

Wire speeds of up to 20m/s  
=> 200g acceleration



# Stored Beam Energies


(Based on graph from R. Schmidt)

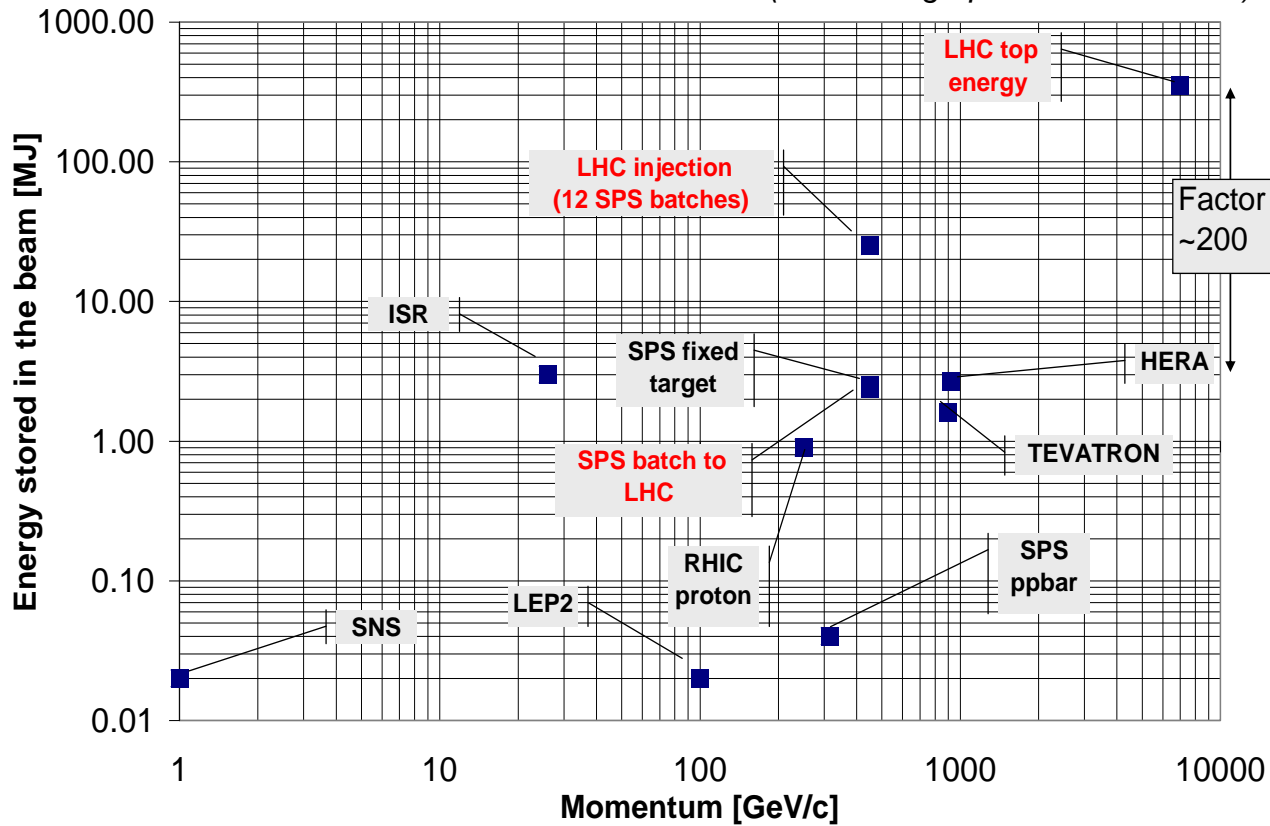

Quench Levels	Units	<i>Tevatron</i>	<i>RHIC</i>	<i>HERA</i>	<i>LHC</i>
<i>Instant loss (0.01 - 10 ms)</i>	[J/cm <sup>3</sup> ]	4.5 10 <sup>-03</sup>	1.8 10 <sup>-02</sup>	2.1 10 <sup>-03</sup> - 6.6 10 <sup>-03</sup>	8.7 10 <sup>-04</sup>
<i>Steady loss (&gt; 100 s)</i>	[W/cm <sup>3</sup> ]	7.5 10 <sup>-02</sup>	7.5 10 <sup>-02</sup>		5.3 10 <sup>-03</sup>



# Beam power in the LHC

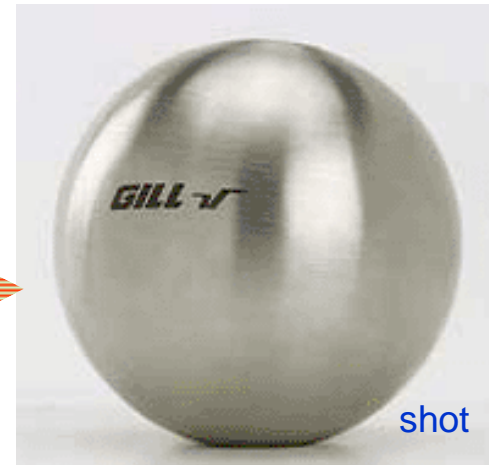


The Linac beam (160 mA, 200 $\mu$ s, 50 MeV, 1Hz) is enough to burn a hole into the vacuum chamber

What about the LHC beam: 2808 bunches of  $15 \cdot 10^{11}$  particles at 7 TeV?  
1 bunch corresponds to a 5 kg bullet at 800 km/h



# Beam Dammage

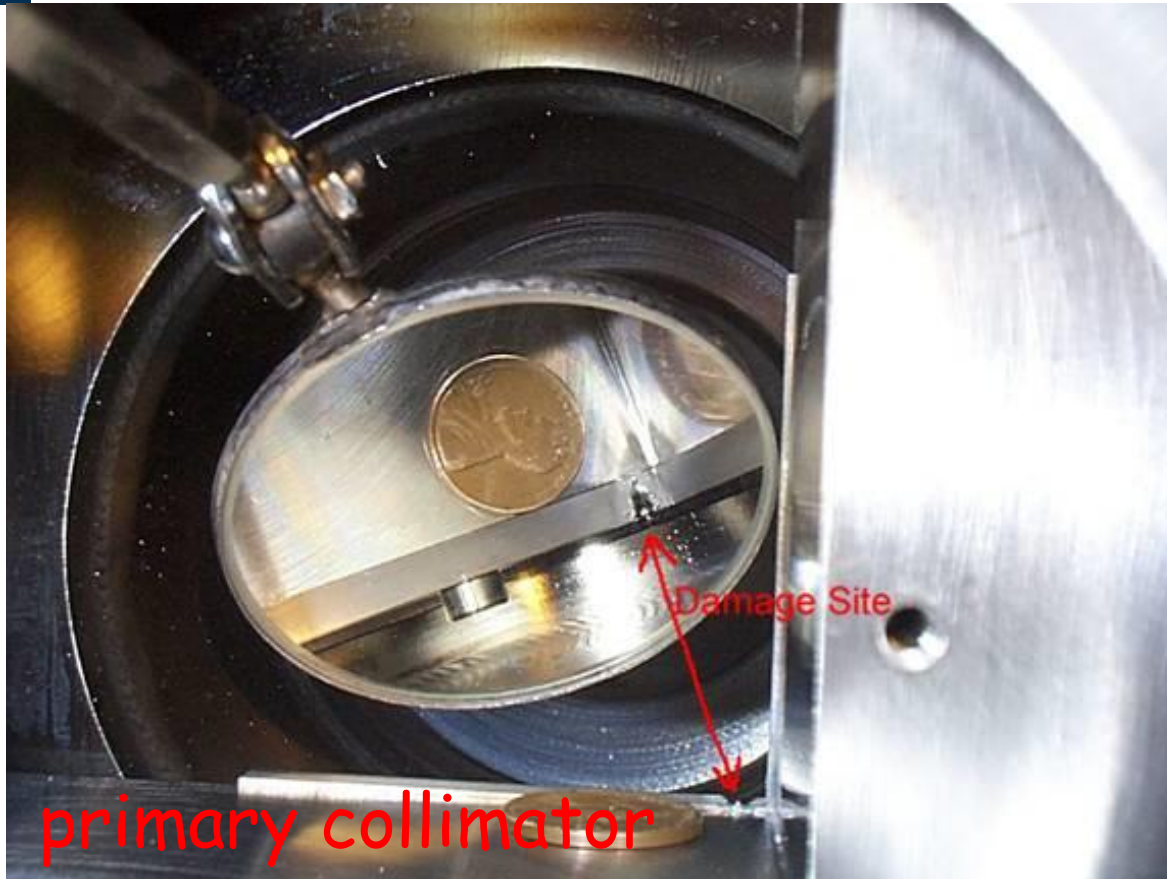

Fermi Lab's Tevatron has 200 times less beam power than LHC!



# Beam Loss Monitor Types



- Design criteria: Signal speed and robustness
- Dynamic range ( $> 10^9$ ) limited by leakage current through insulator ceramics (lower) and saturation due to space charge (upper limit).

## Secondary Emission Monitor

(SEM):


- Length 10 cm
- $P < 10^{-7}$  bar
- $\sim 30000$  times smaller gain



## Ionization chamber:


- $N_2$  gas filling at 100 mbar over-pressure
- Length 50 cm
- Sensitive volume 1.5 l
- Ion collection time 85  $\mu$ s

- Both monitors:
  - Parallel electrodes (Al, SEM: Ti) separated by 0.5 cm
  - Low pass filter at the HV input
  - Voltage 1.5 kV

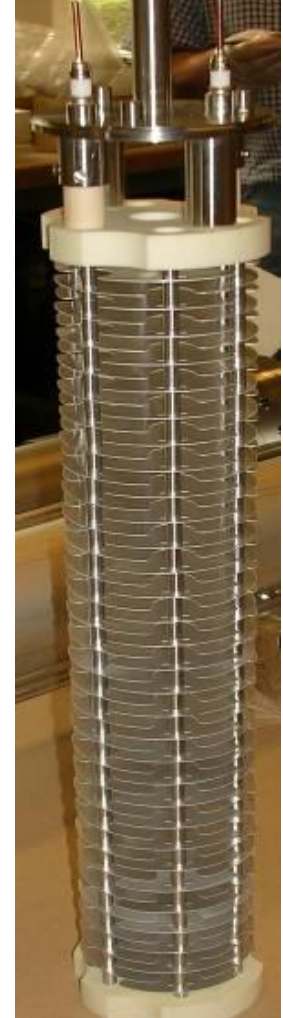




# Quench levels

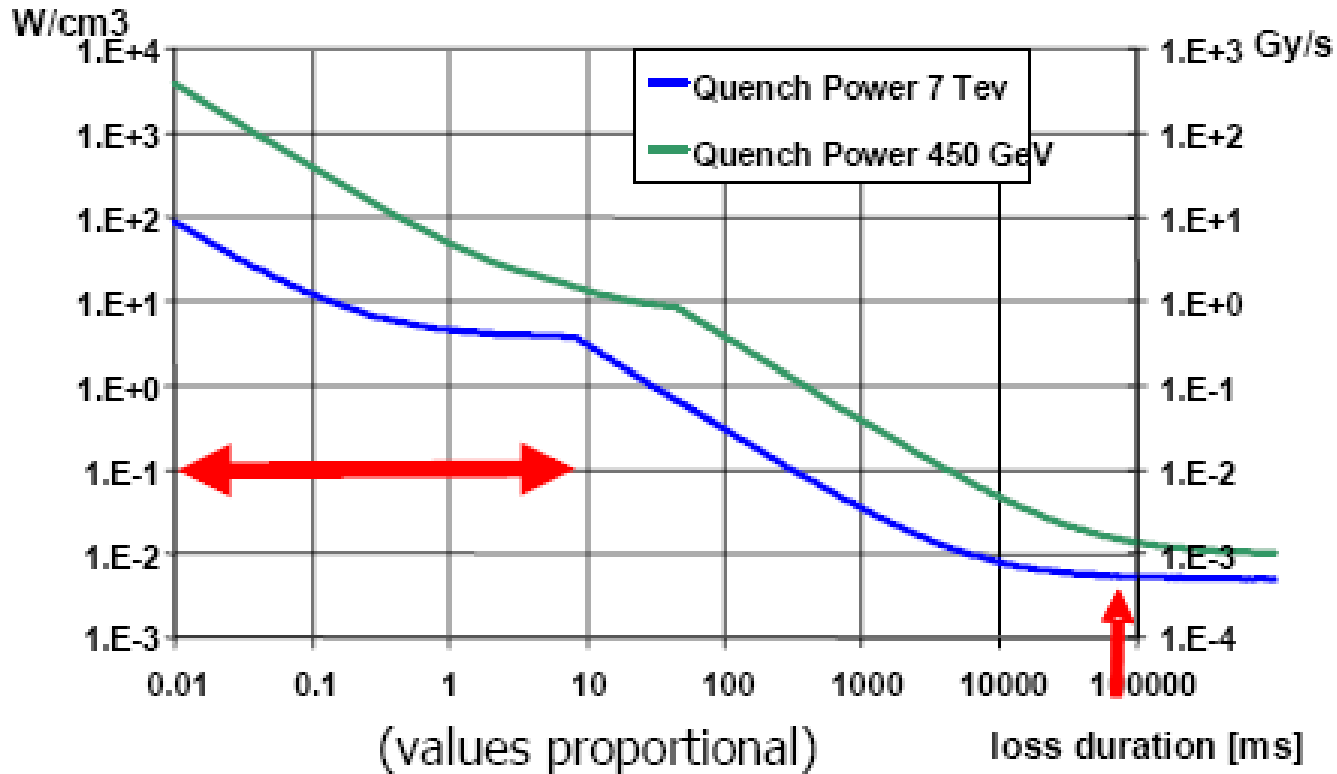



# Industrial production of chambers

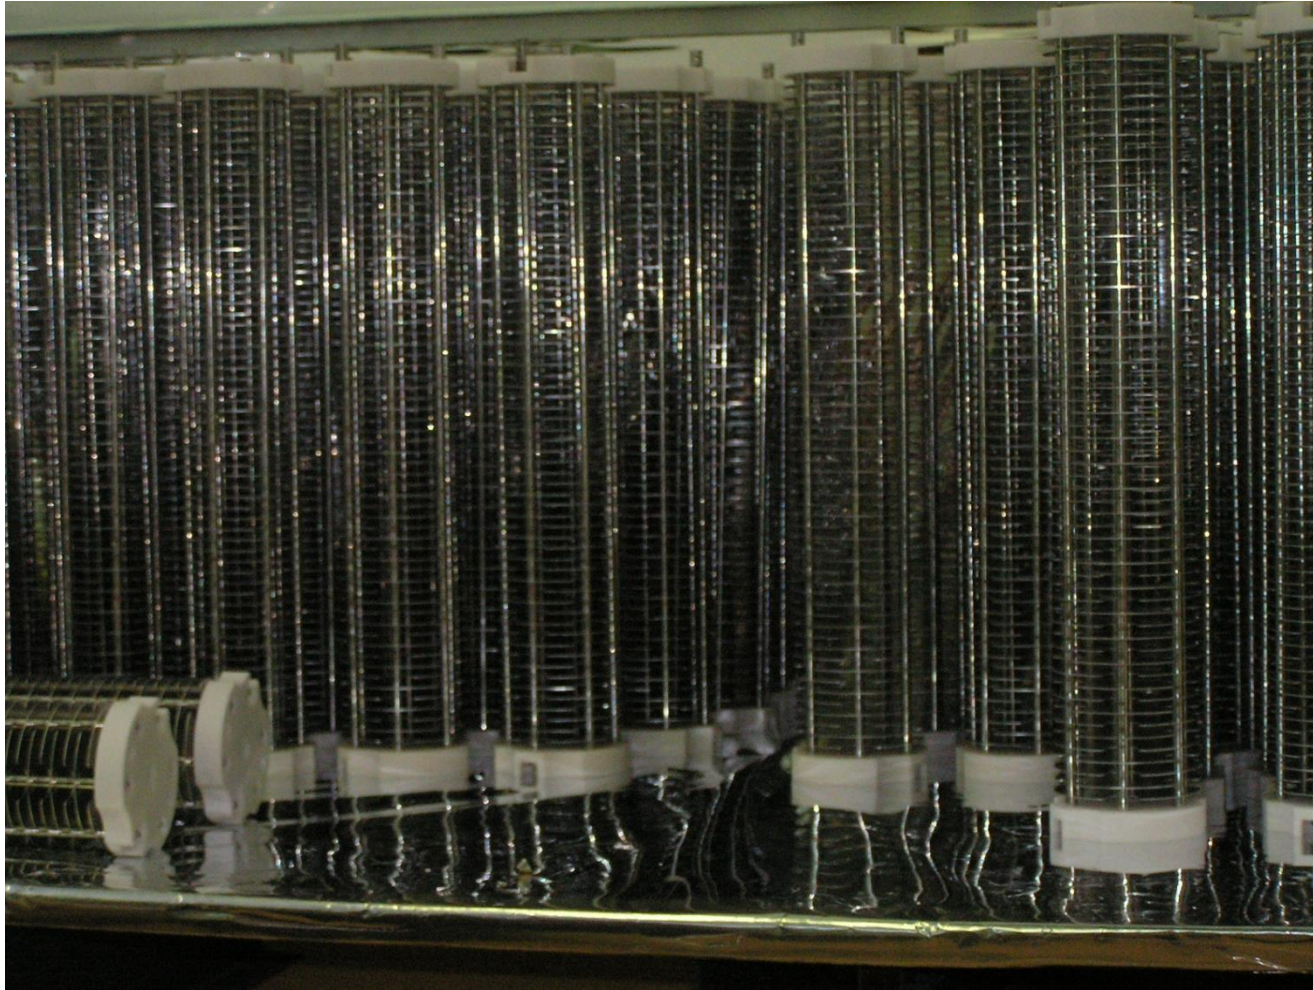


Beam loss must be measured all around the ring  
=> 4000 sensors!





# System layout

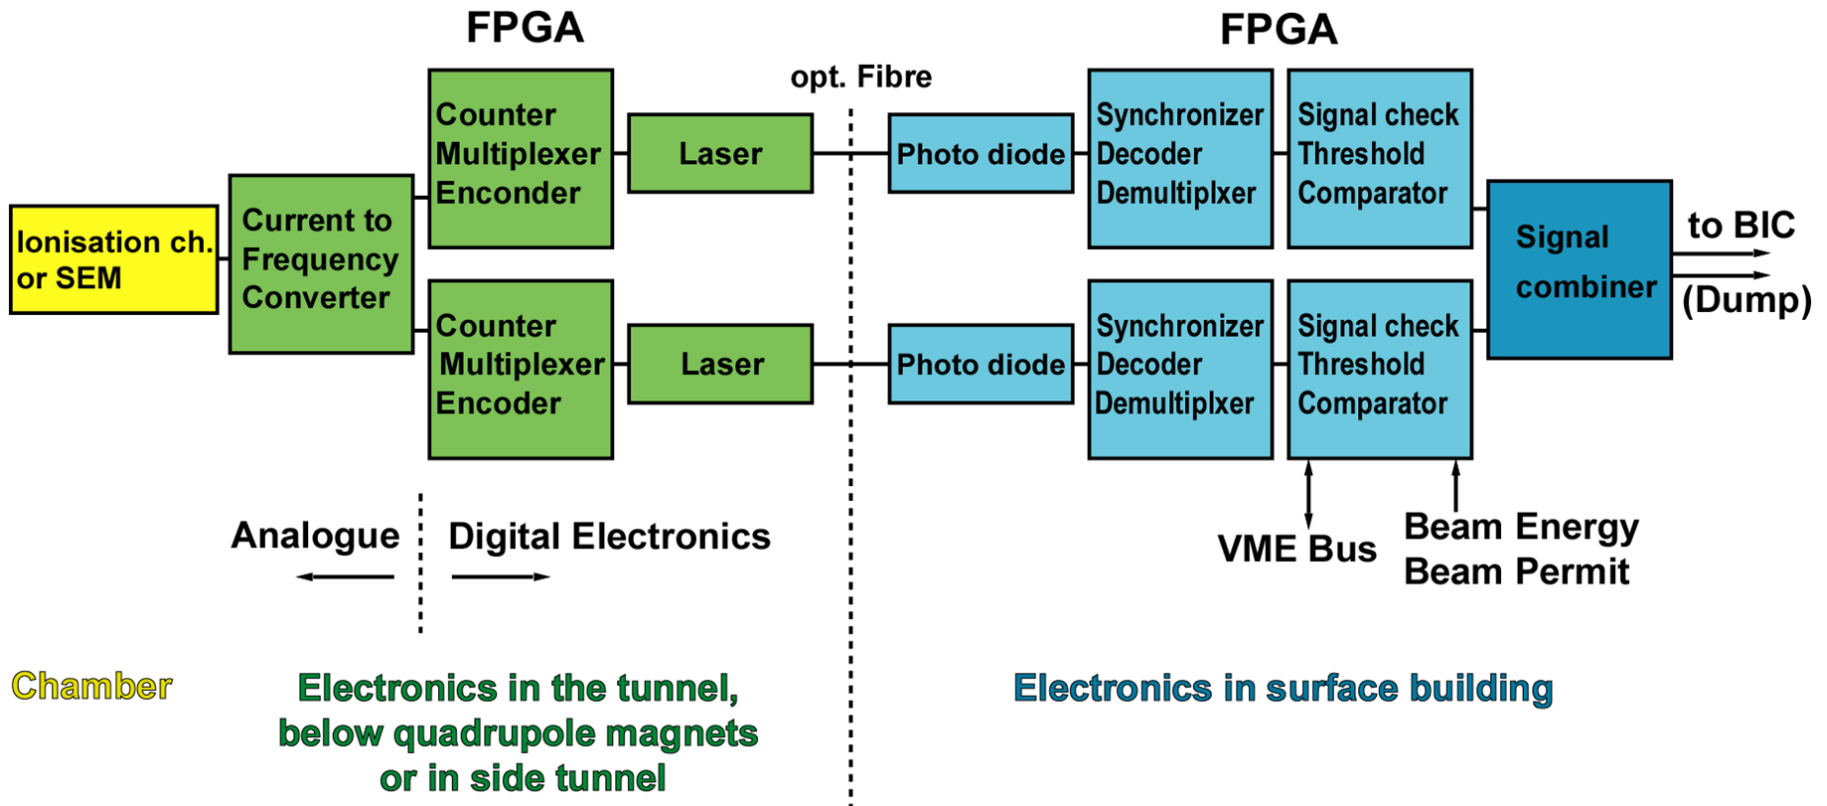



# Successive running sums

