



Beam Diagnostics Lecture 2

Measuring Complex Accelerator Parameters

Uli Raich

CERN BE-BI





Contents of lecture 2

- Some examples of measurements done with the instruments explained during the last lecture
 - Spectroscopy
 - Trajectory and Orbit measurements
 - Tune measurements
 - Traditional method
 - BBQ method
 - Multi-turn extraction
 - Bunch Shape
 - Transverse and longitudinal emittance measurements
 - Longitudinal phase space tomography




Setup for charge state measurement

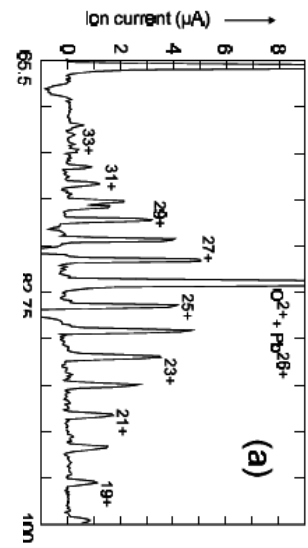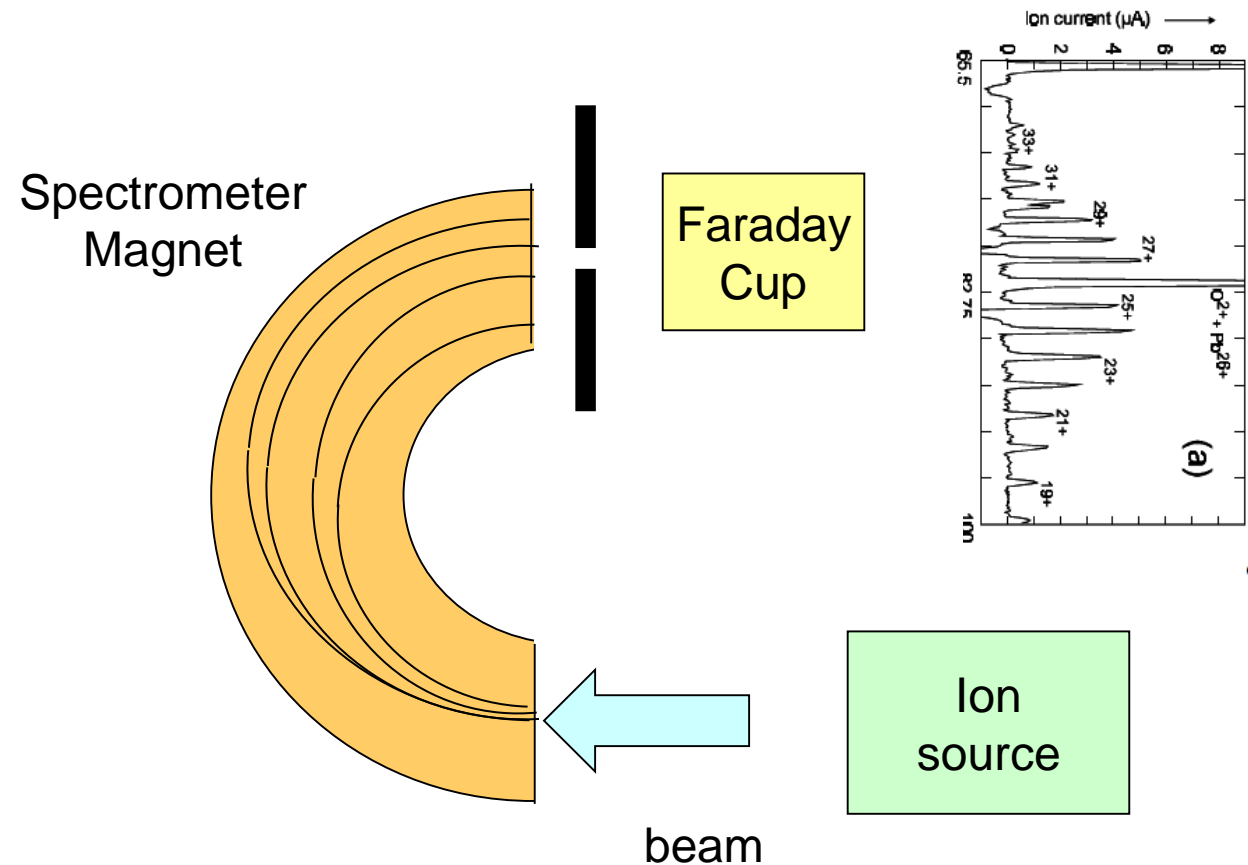

- The spectrometer magnet is swept and the current passing the slit is measured



Measuring charge state distribution

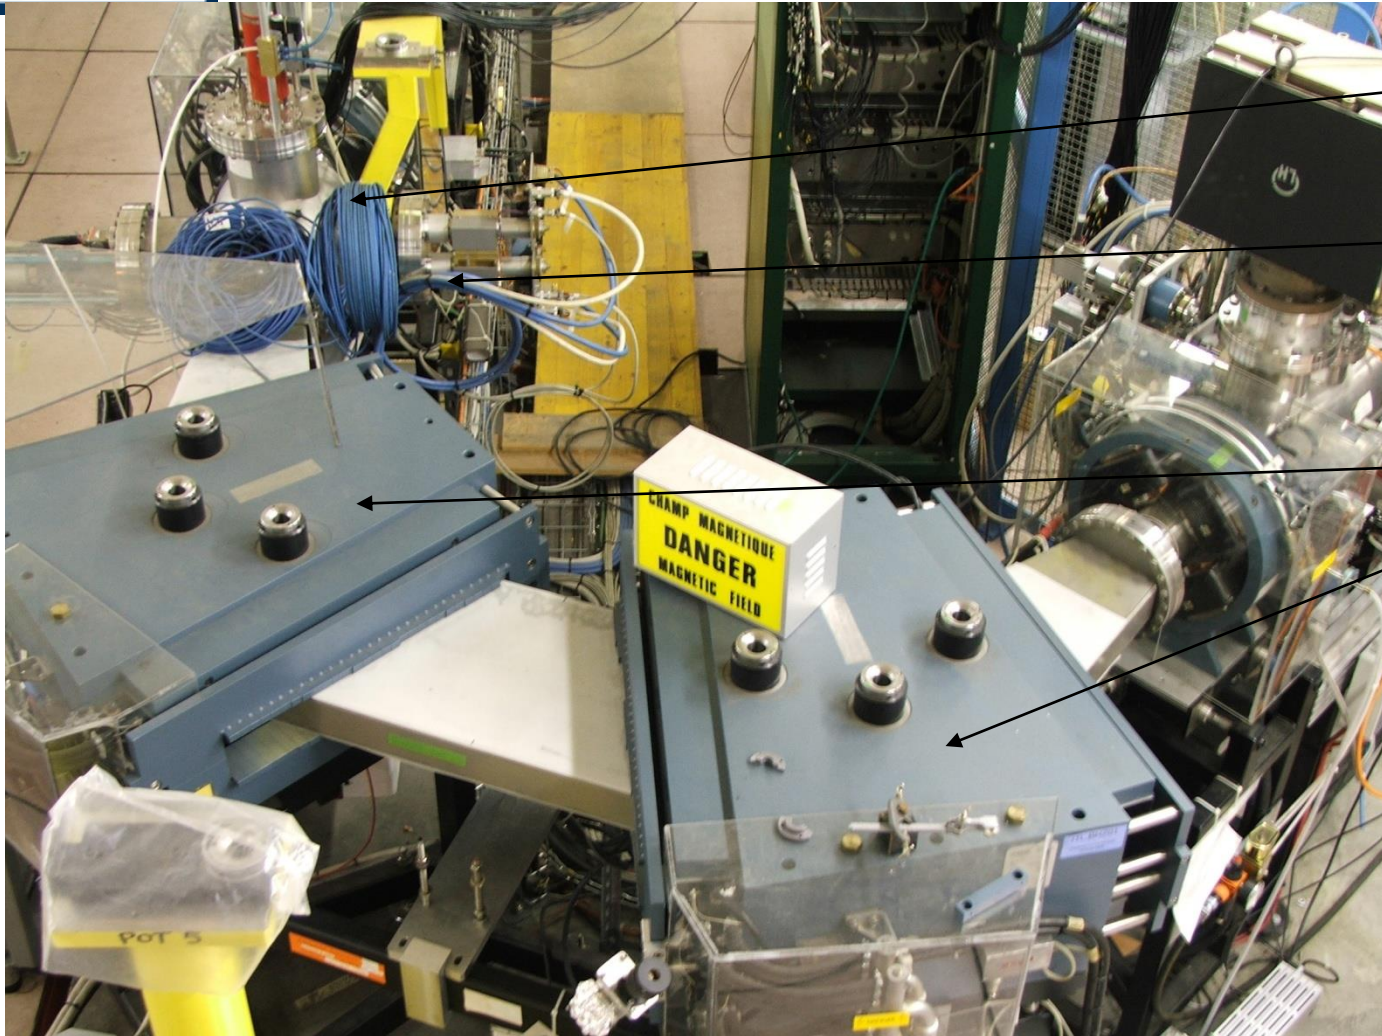


Faraday Cup

Slit

Spectrometer magnets



Charge state distribution measured with a Faraday Cup on a heavy ion source

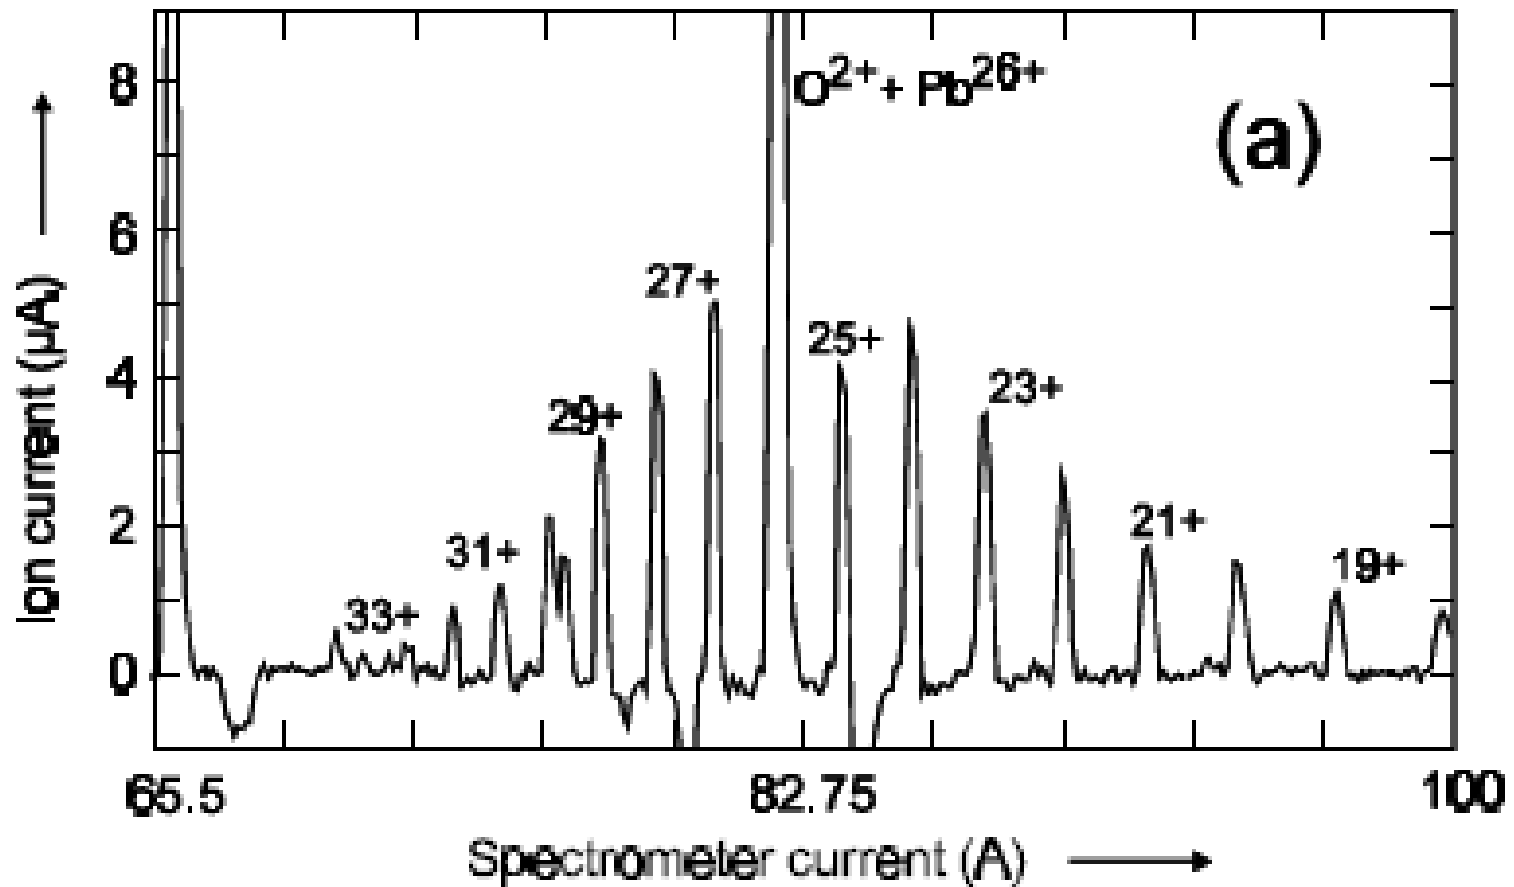



Trajectory Measurement at LHC



Knowing the optics one can deduce the orbit correction from the measurement




The PUs





The PS, a universal machine

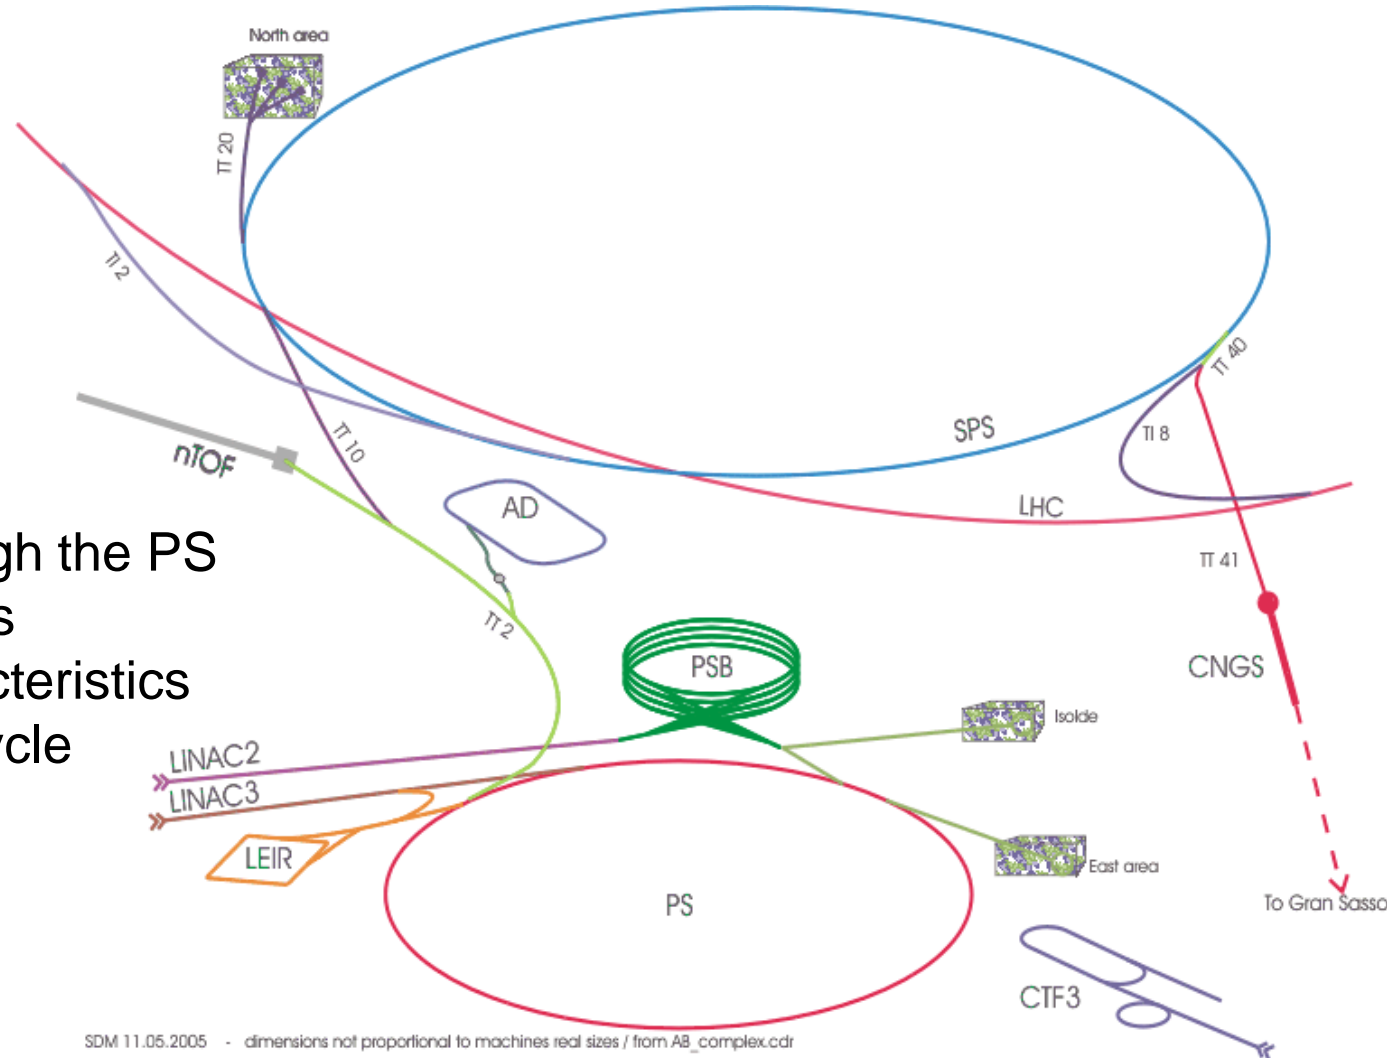


SDM 11.05.2005 - dimensions not proportional to machines real sizes / from AB_complex.cdr

- All beams pass through the PS
- Different particle types
- Different beam characteristics
- Concept of a super cycle



The super cycle

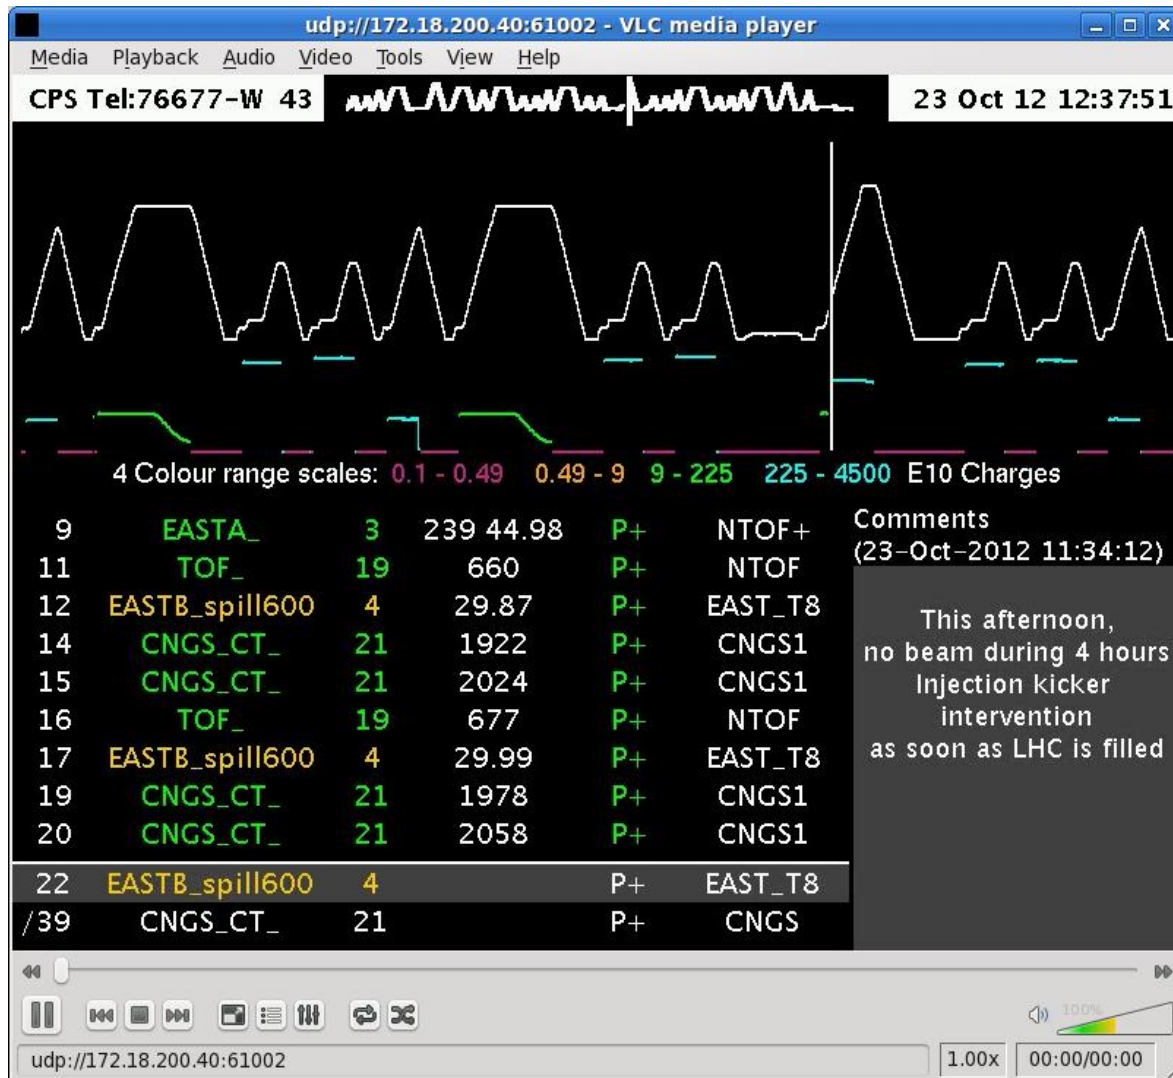



Position Measurements

Red: The sum signal

Green: The difference signal

Procedure:

Produce integration gates and

Baseline signals


Baseline correct both signals

Integrate sum and difference signals
and store results in memory

Take external timing events into
account e.g. harmonic number
change, γ -transition etc.


Revolution time: $\sim 1 \mu\text{s}$

Sampling frequency: 120 MHz

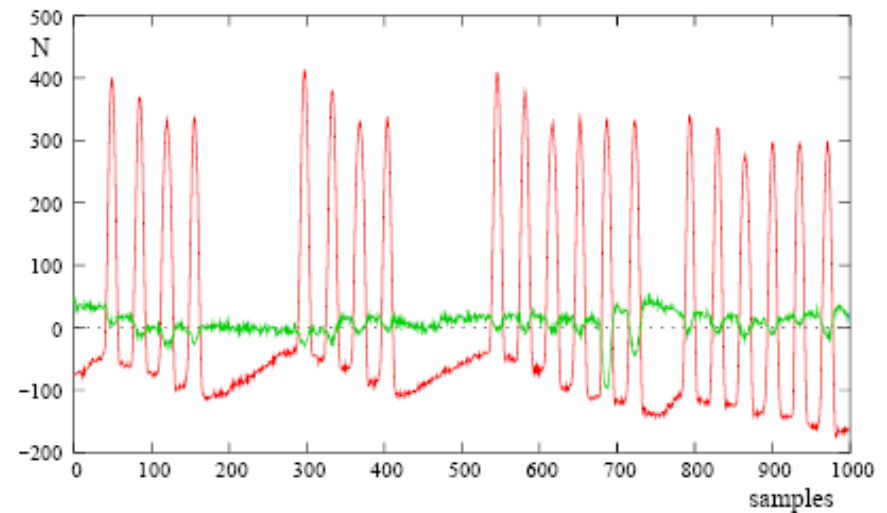




Trajectory readout electronics

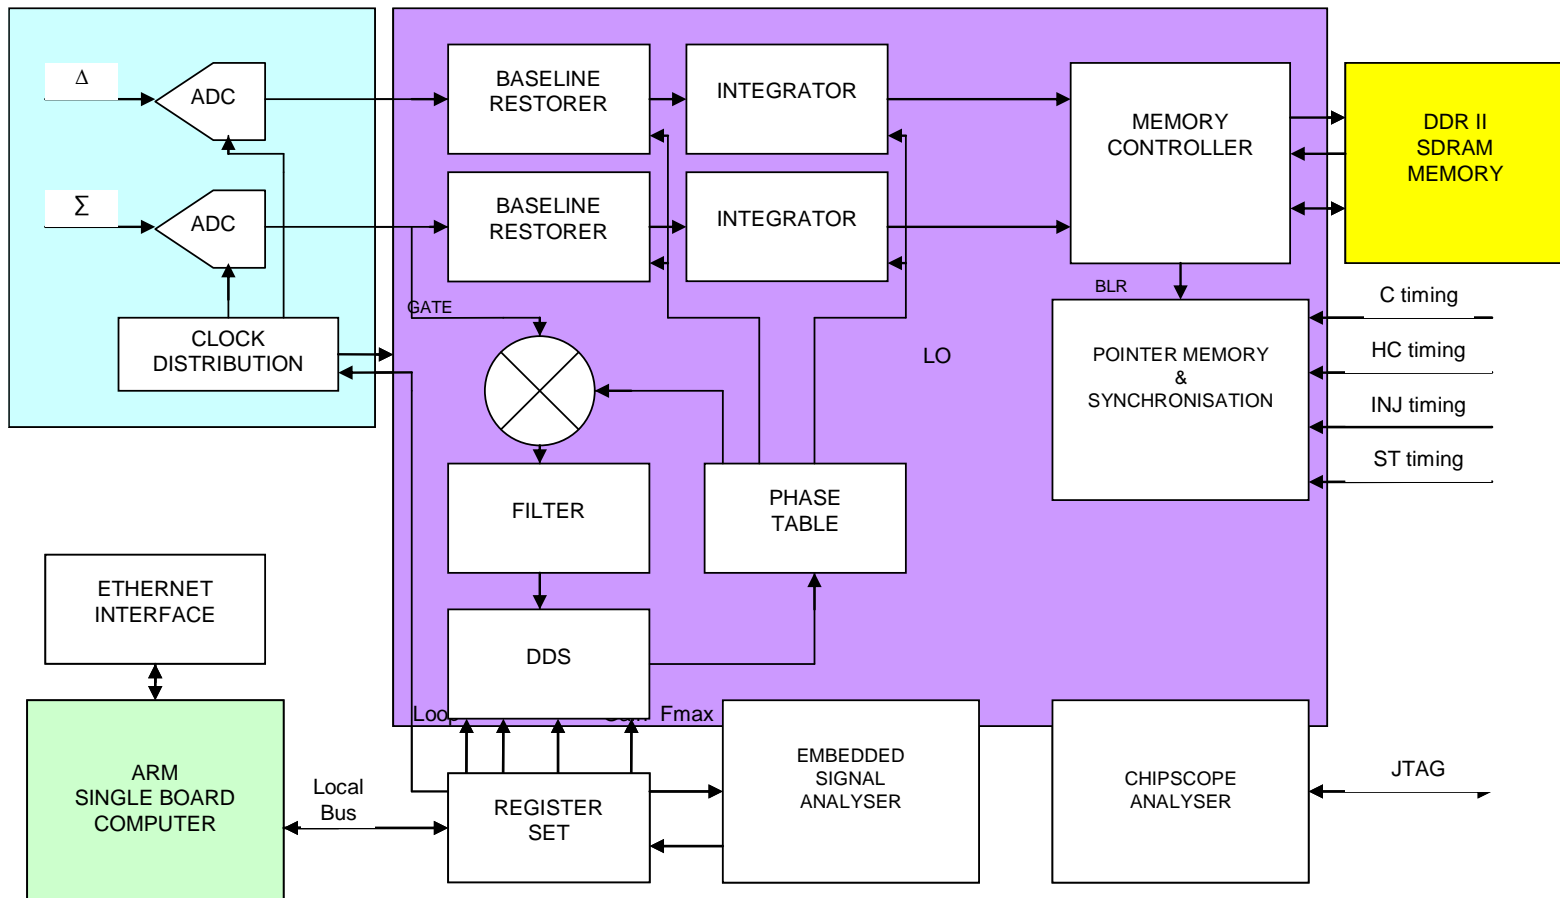



Trajectory measurements in circular machines






Needs integration gate
Can be rather tricky
Distance between bunches
changes with acceleration
Number of bunches
may change

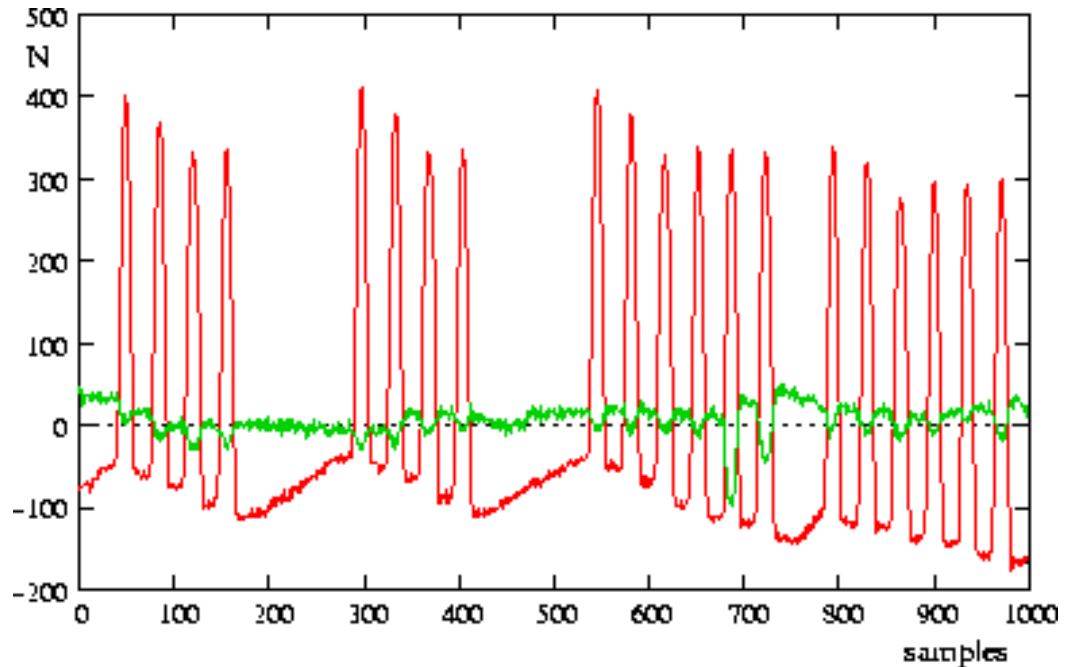

Raw data from pick-ups
double batch injection





Beams in the PS

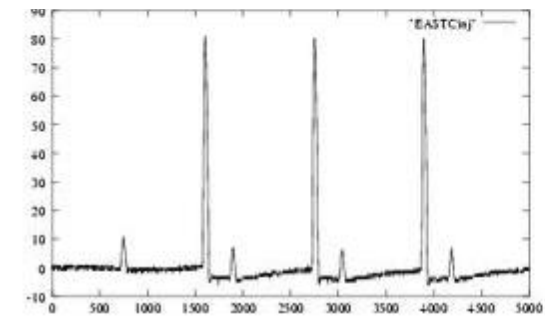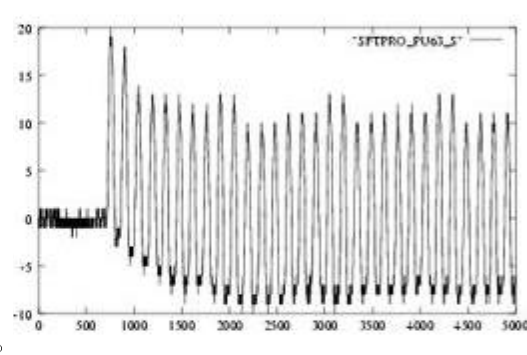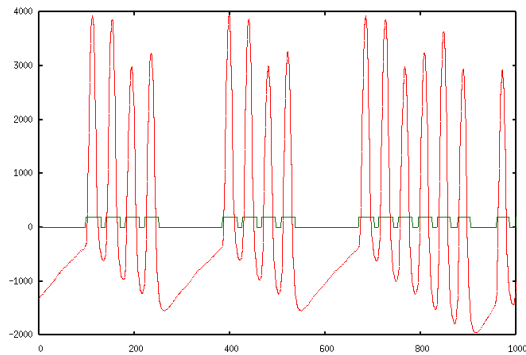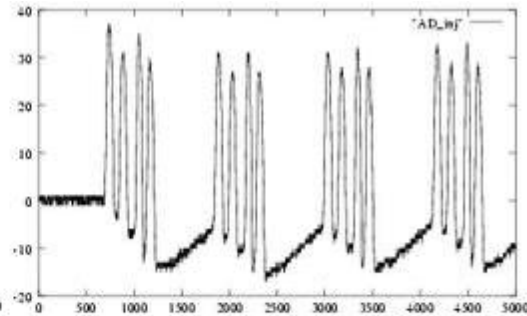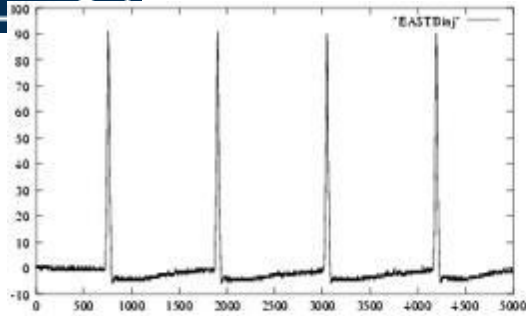




Baseline restoration

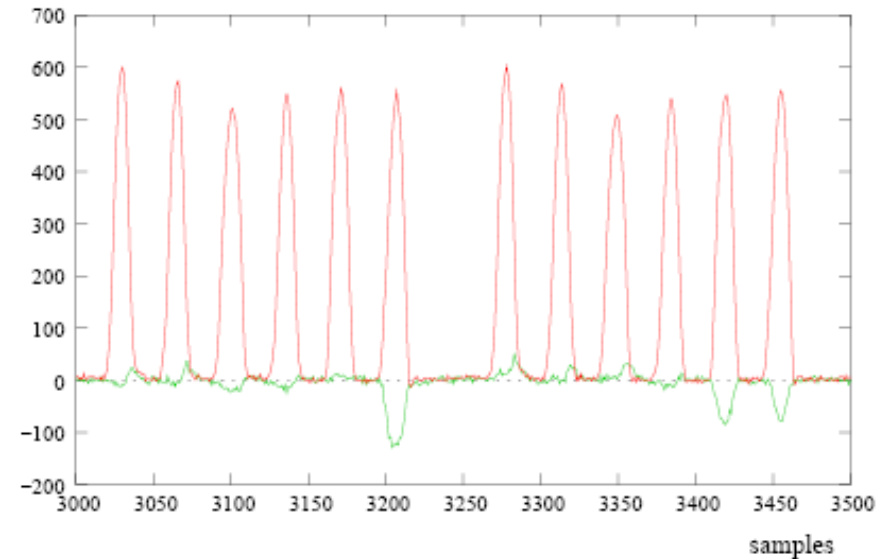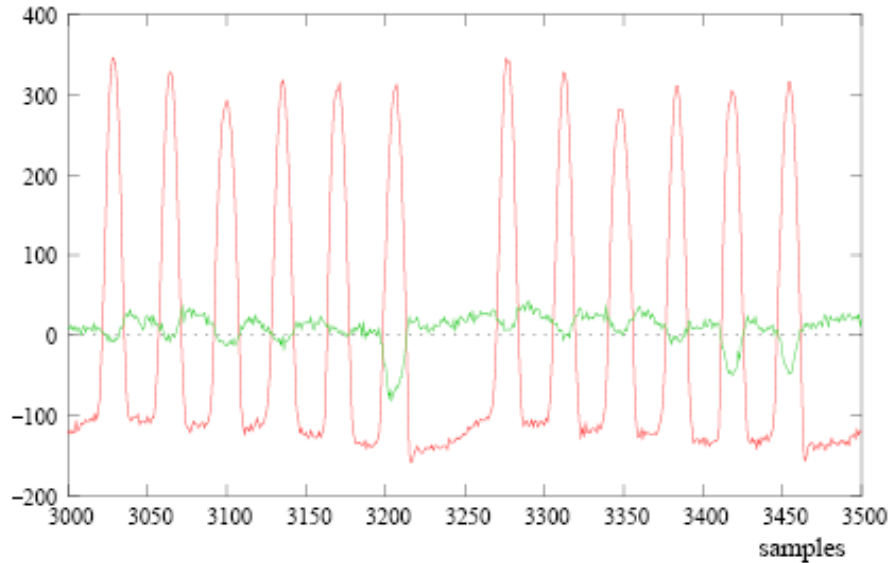


Low pass filter the signal to get an estimate of the base line
Add this to the original signal




RF Gymnastics

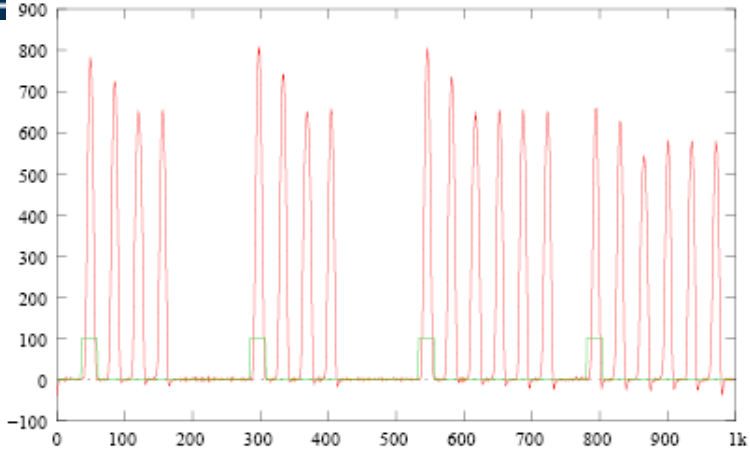

Example of generated gate around 2nd injection

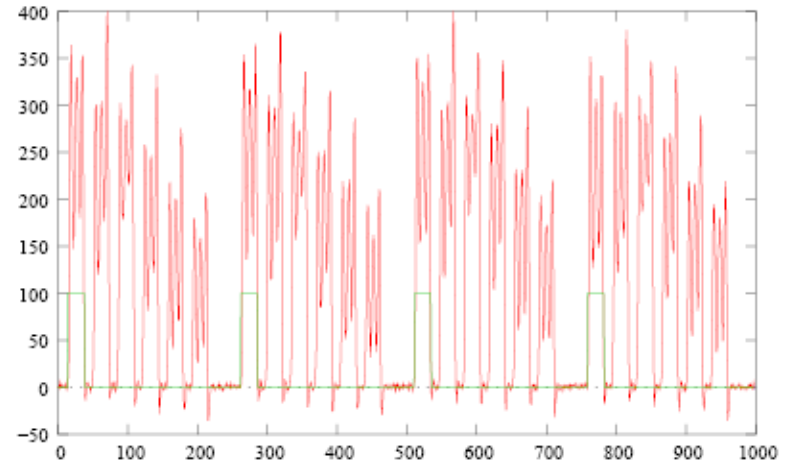

Idem, during bunch splitting

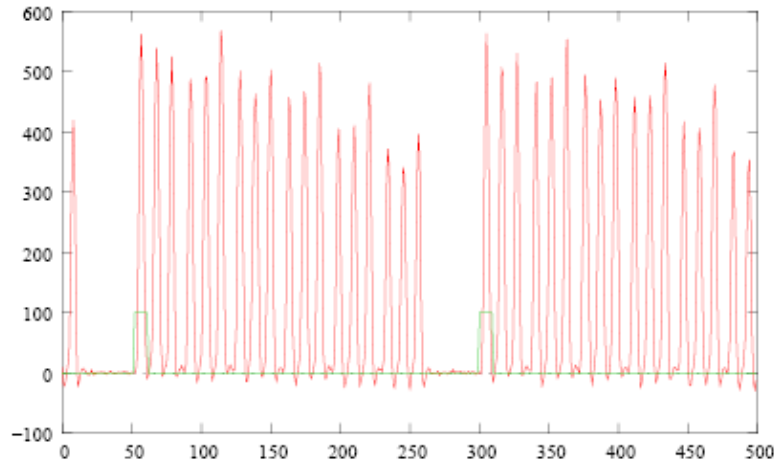




Changing bunch frequency

- Bunch splitting or recombination
- One RF frequency is gradually decreased while the other one is increased
- Batch compression


For all these cases the gate generator must be synchronized

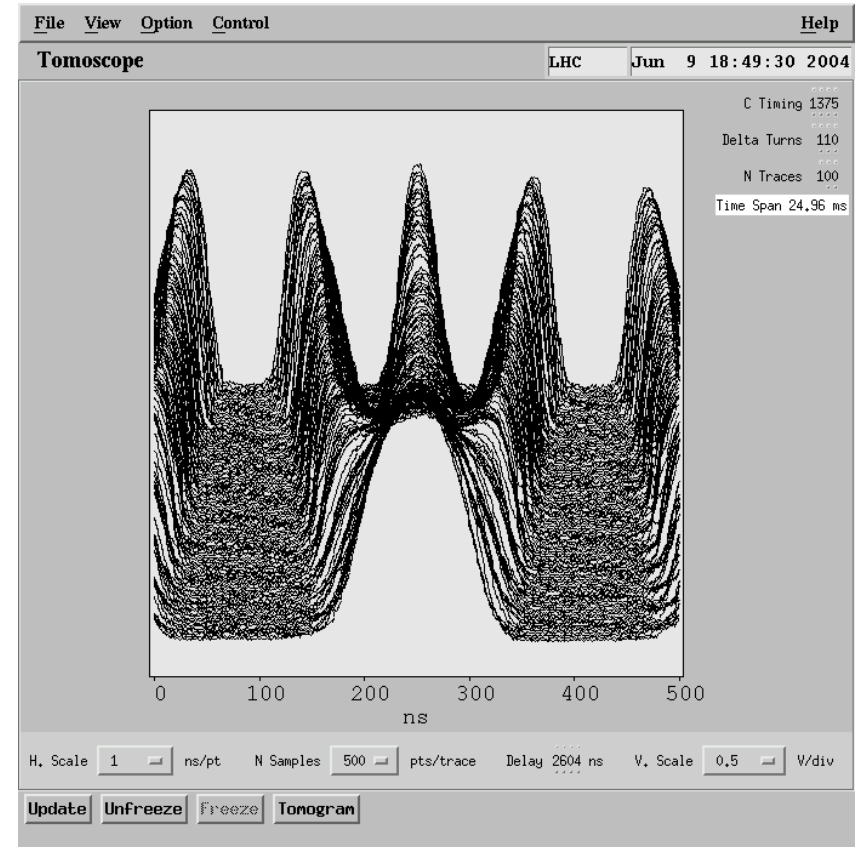



Tune measurements


- When the beam is displaced (e.g. at injection or with a deliberate kick), it starts to oscillate around its nominal orbit (betatron oscillations)
- Measure the trajectory
- Fit a sine curve to it
- Follow it during one revolution

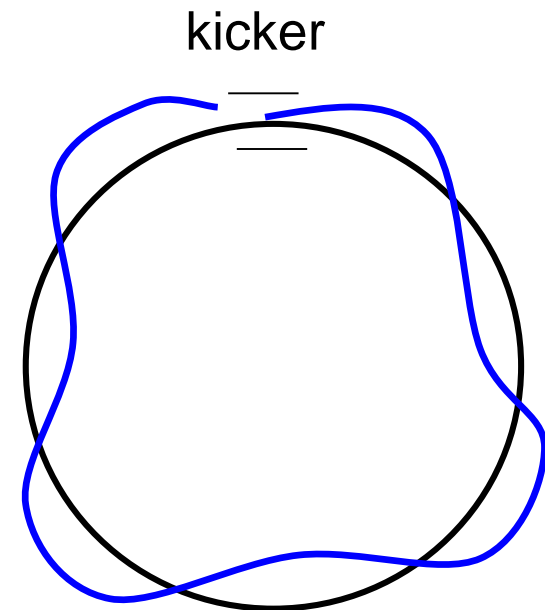





The Sensors

Shoebbox pick-up
with linear cut

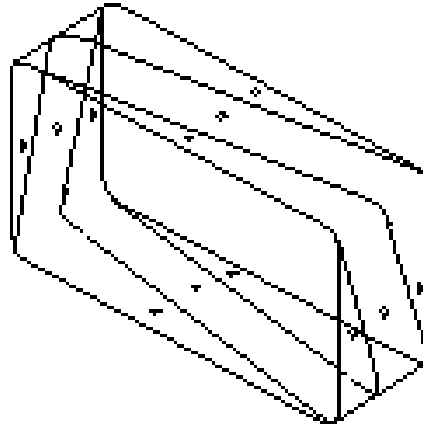


The kicker

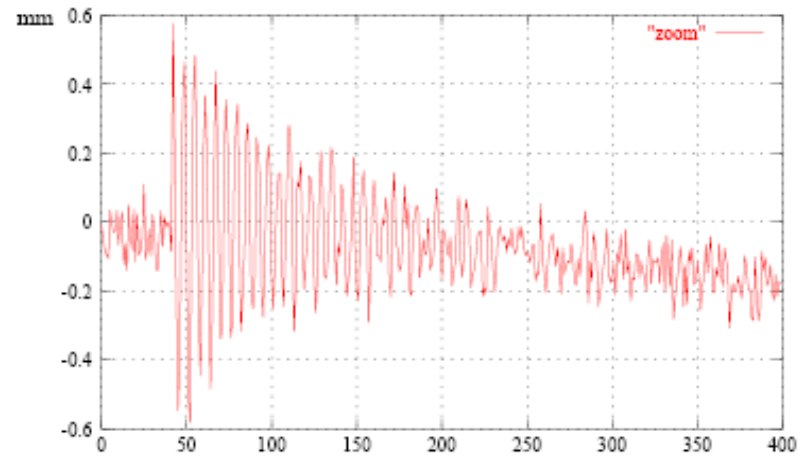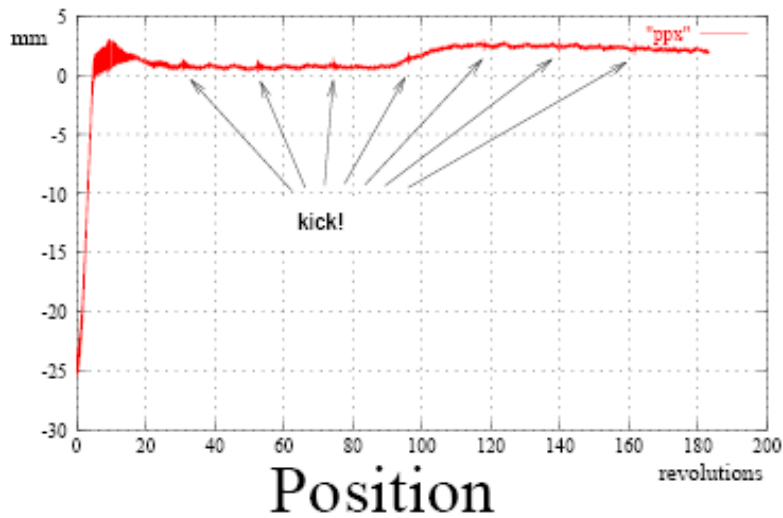



Tune measurements with a single PU


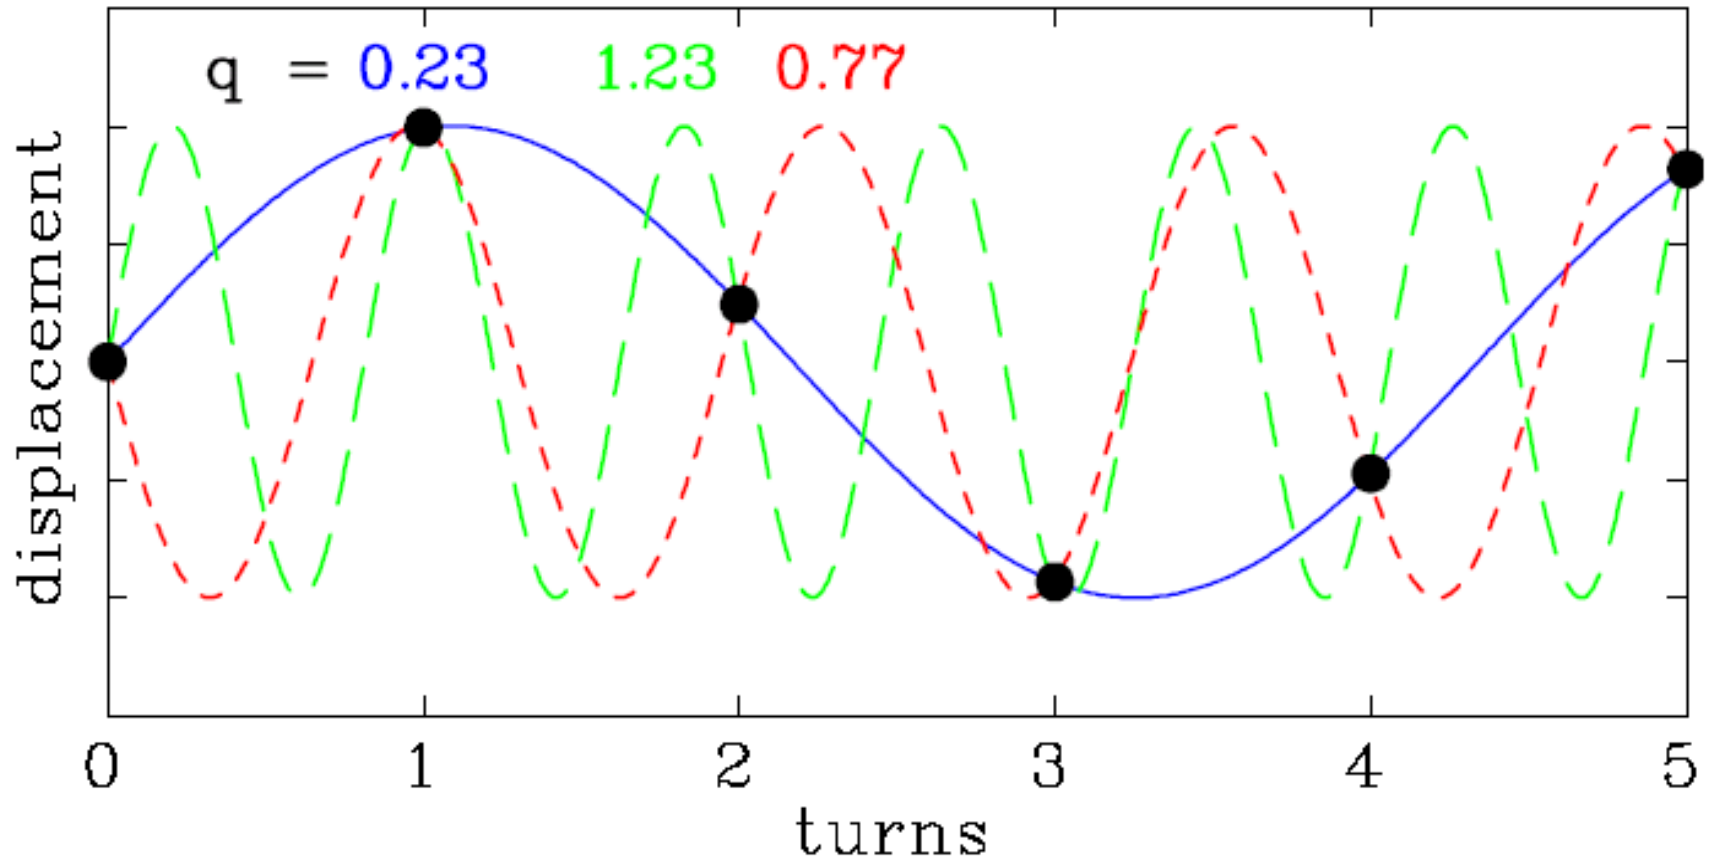


Design by P. Forck



Kicker + 1 pick-up


- Measures only non-integral part of Q
- Measure a beam position at each revolution

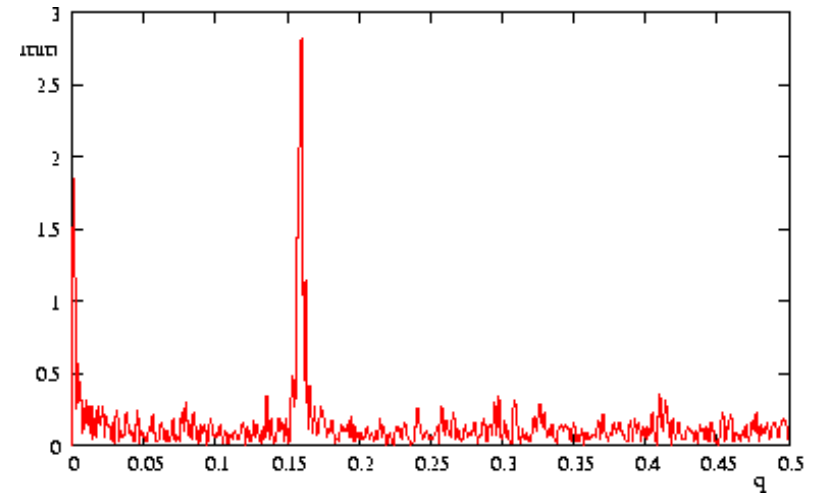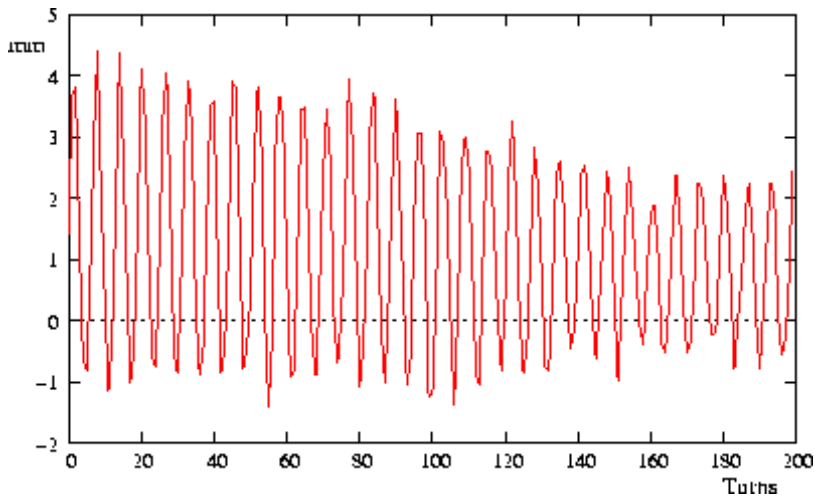

Fourier transform of pick-up signal



Periodic extension of the signal and Windowing

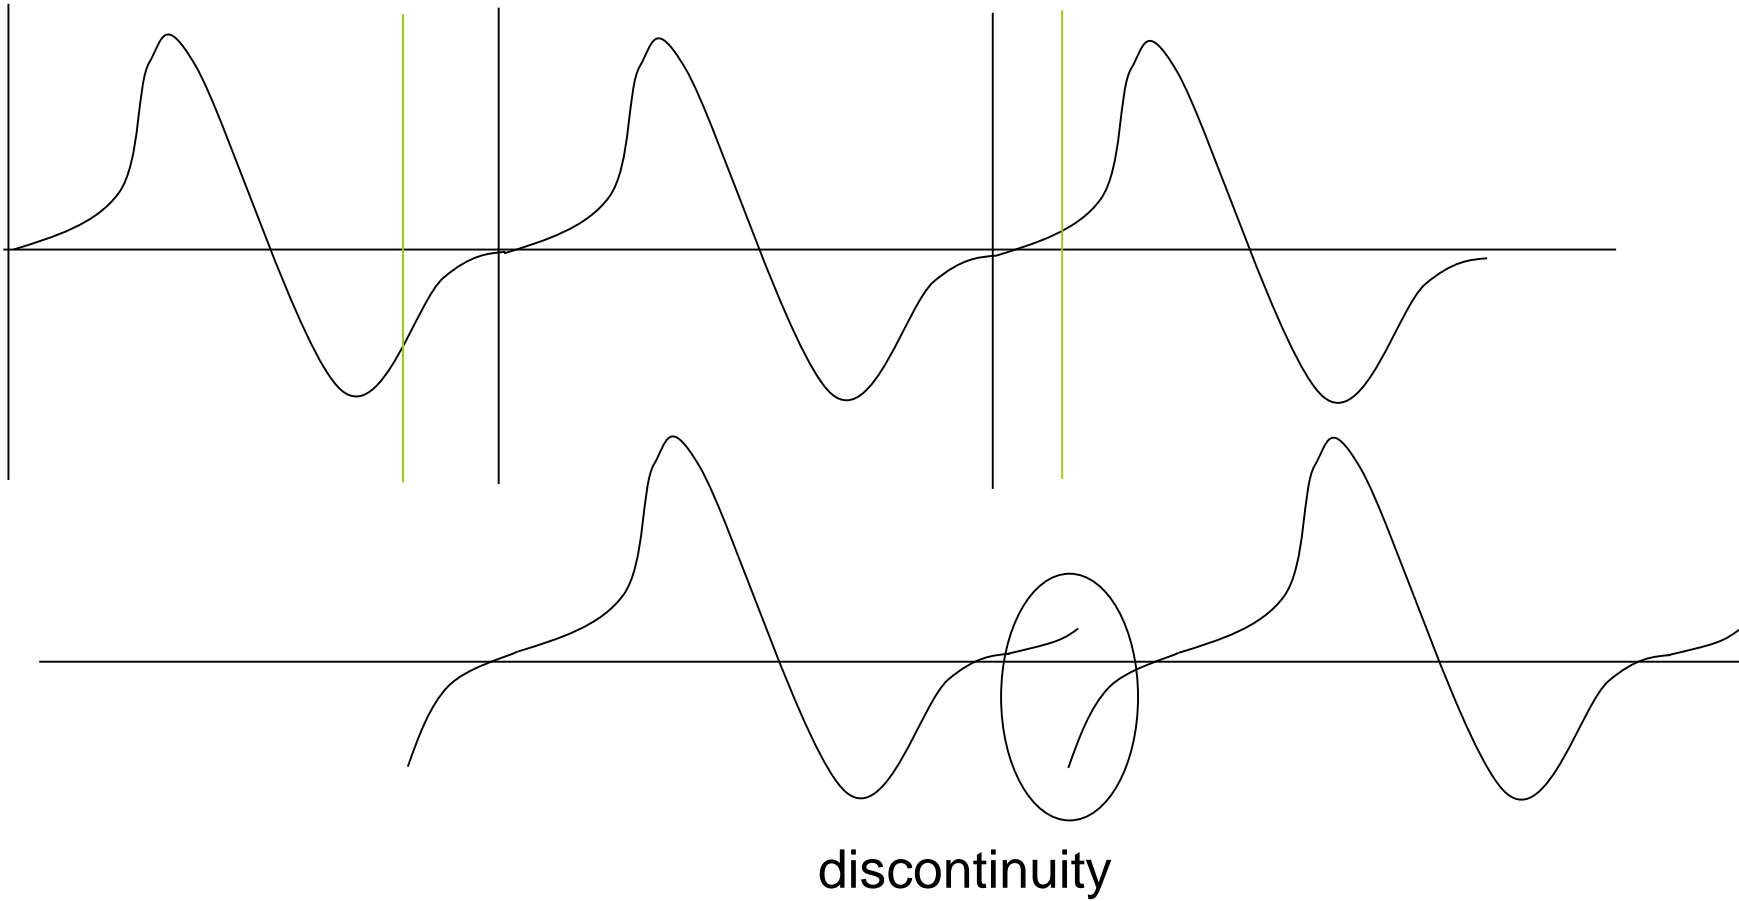




Windowing

The Discrete Fourier assumes one cycle of a repetitive signal.

Blackman-Harris Window is used

Each sample is multiplied with a coefficient


Coefficients are pre-calculated and stored in a table

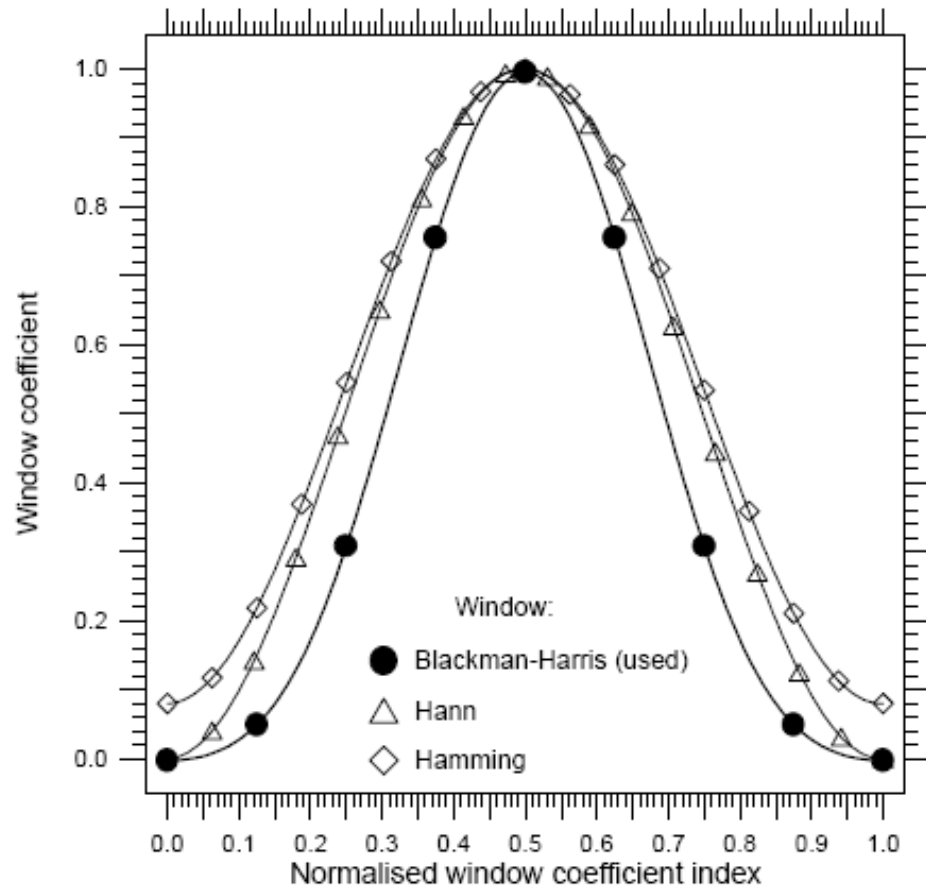



Peak search algorithm

- Power value is bigger than its predecessor
- Power value is bigger than its successor
- Power value is biggest in the whole spectrum
- The power value is at least 3 times bigger than the arithmetic mean of all power bins.

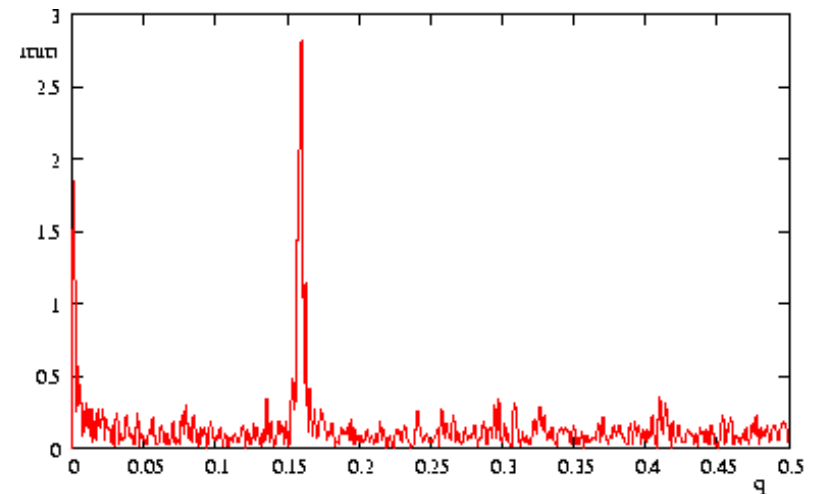



Q interpolation

Betatron signal is not a pure Harmonic but includes rev. freq Harmonics, noise ...


The windowing process is not Perfect

Coherent betatron signal is Damped in the time domain

$$V(n_\beta - 1) = a(n_\beta - 1)^2 + b(n_\beta - 1) + c$$


$$V(n_\beta) = an_\beta^2 + bn_\beta + c$$

$$V(n_\beta + 1) = a(n_\beta + 1)^2 + b(n_\beta + 1) + c$$

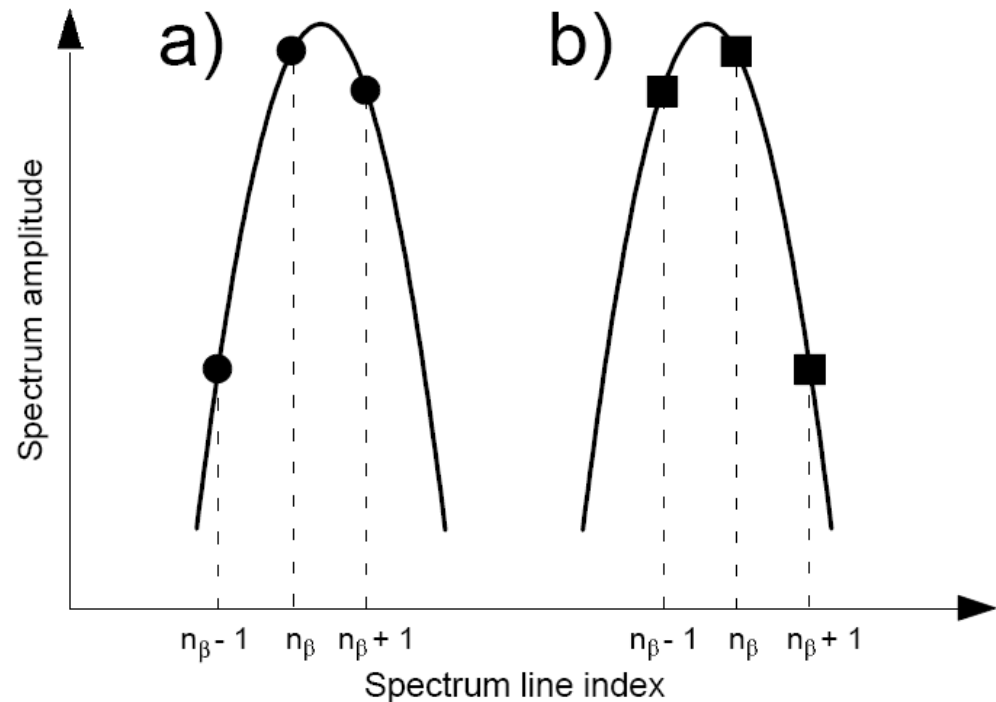




Q-Measurement Results

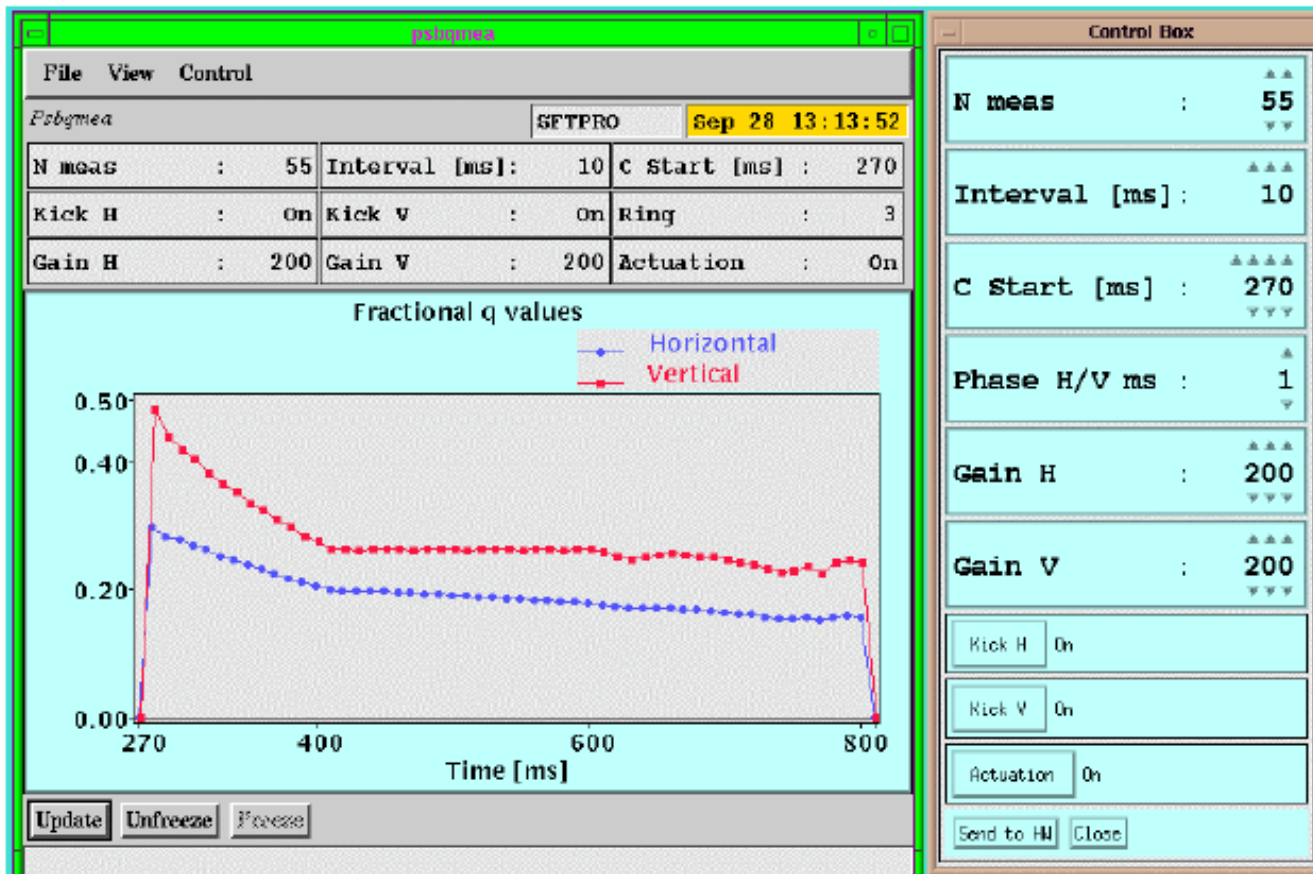



Direct Diode Detection Base Band Q measurement

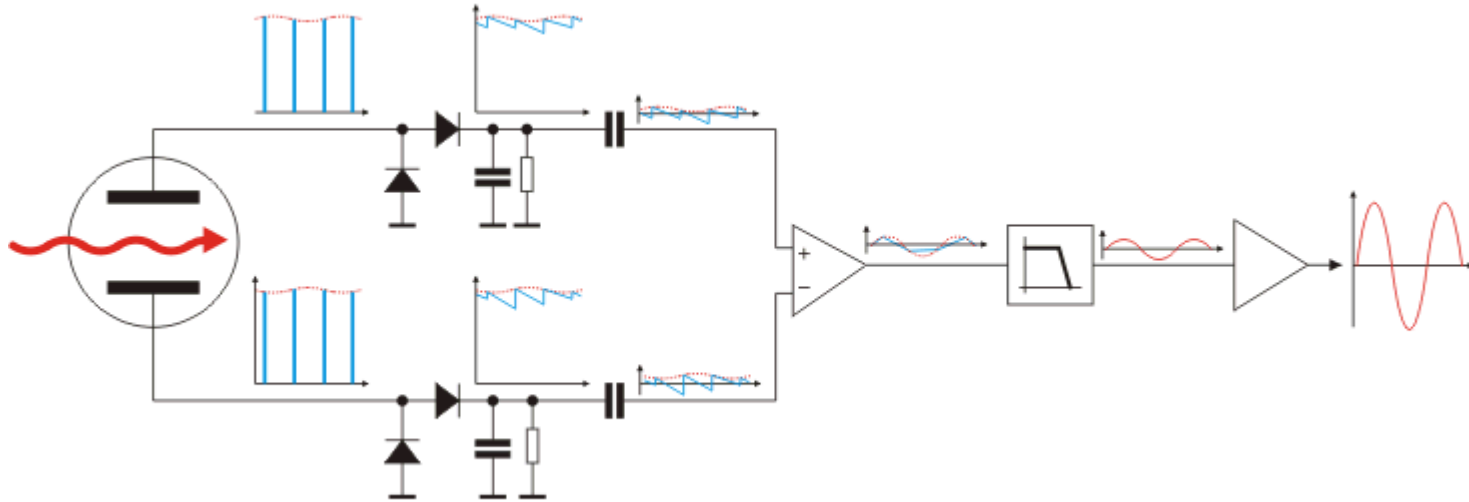

Diode Detectors convert spikes to saw-tooth waveform

Signal is connected to differential amplifier to cut out DC level

Curtesy M. Gasior


Filter eliminates most of the revolution frequency content

Output amplifier brings the signal level to amplitudes suitable for long distance transmission




BBQ Results from CERN SPS

Results from Sampling


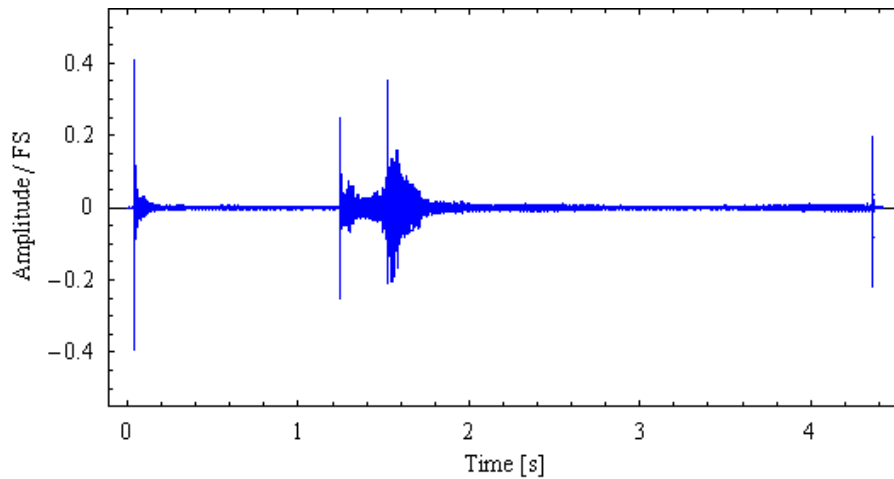


After Fourier Transform

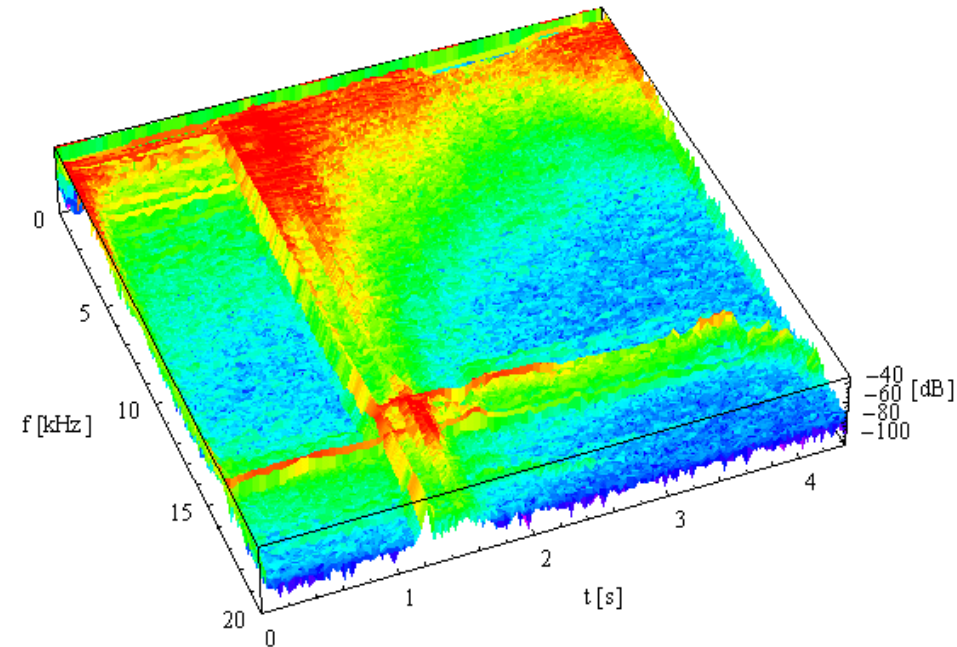




Tune feedback at the LHC

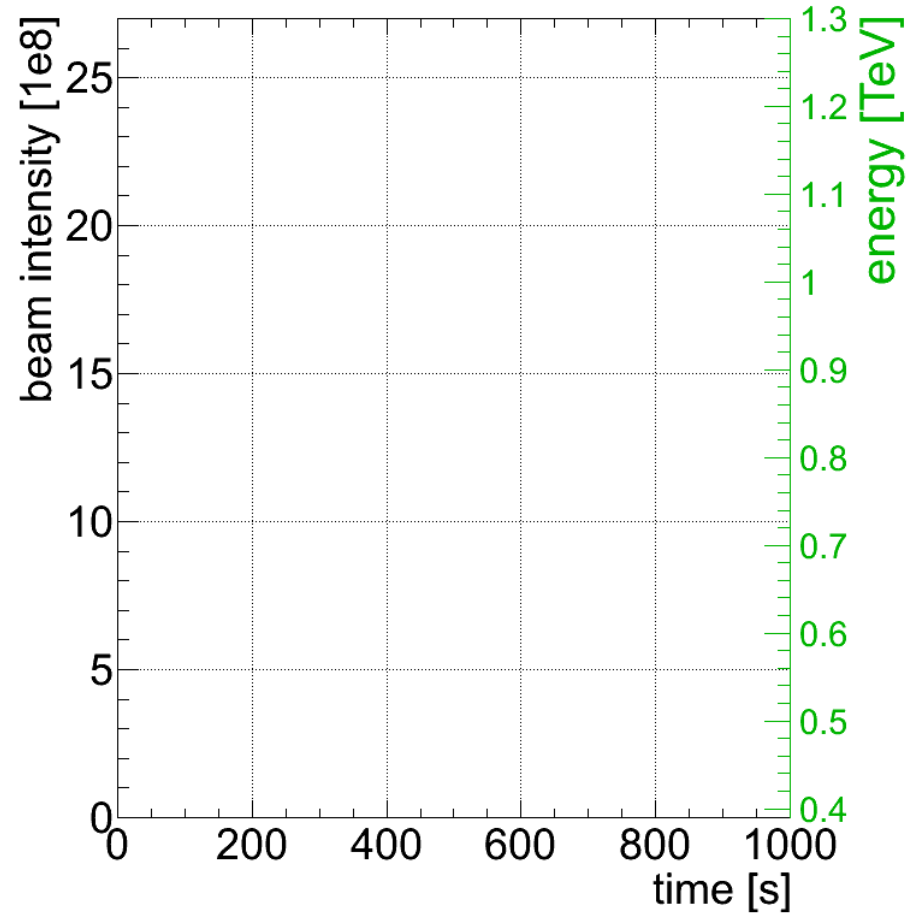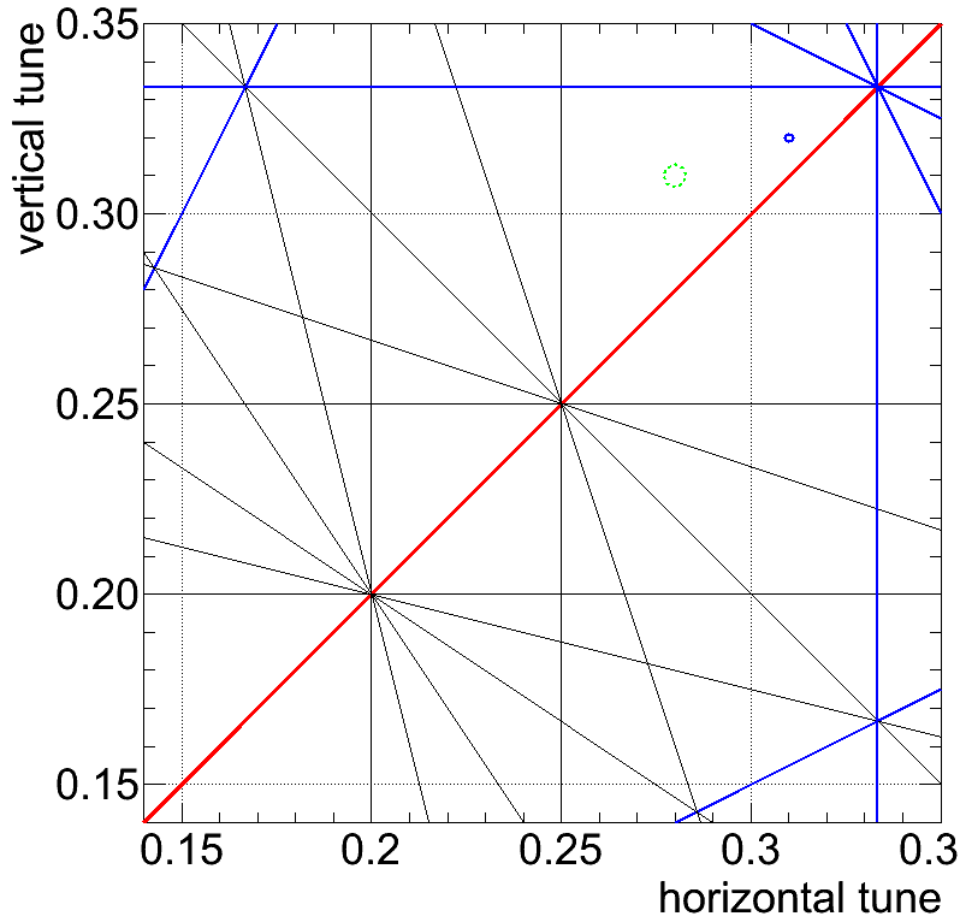



Emittance measurements

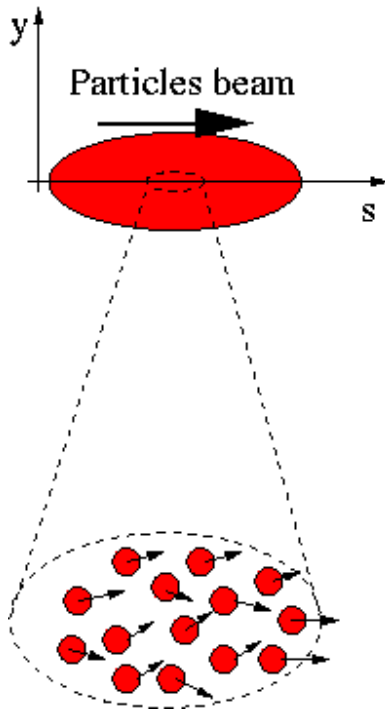

A beam is made of many many particles, each one of these particles is moving with a given velocity. Most of the velocity vector of a single particle is parallel to the direction of the beam as a whole (s). There is however a smaller component of the particles velocity which is perpendicular to it (x or y).


$$\vec{v}_{particle} = v_s \hat{u}_s + v_x \hat{u}_x + v_y \hat{u}_y$$

Design by E. Bravin



Emittance measurements


- If for each beam particle we plot its position and its transverse angle we get a particle distribution whose boundary is an usually ellipse.
- The projection onto the x axis is the beam size

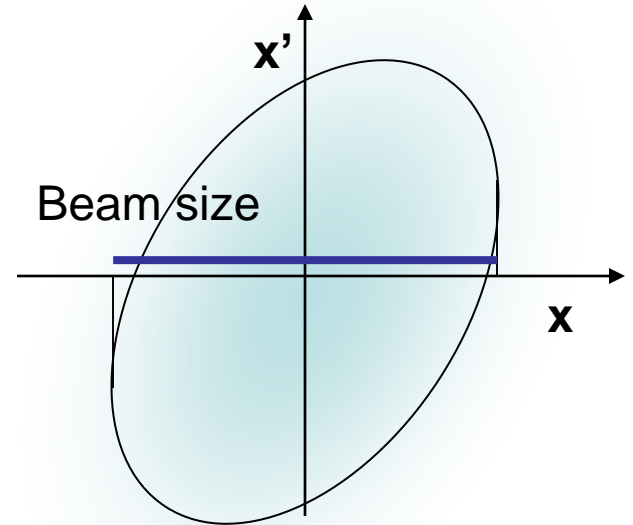



The slit method


- If we place a slit into the beam we cut out a small vertical slice of phase space
- Converting the angles into position through a drift space allows to reconstruct the angular distribution at the position defined by the slit

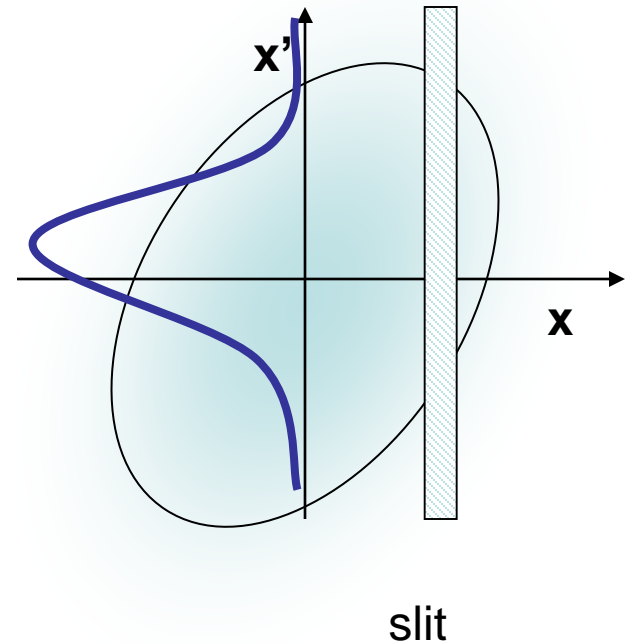




Transforming angular distribution to profile

- When moving through a **drift space** the angles don't change (**horizontal move** in phase space)
- When moving through a **quadrupole** the position does not change but the angle does (**vertical move** in phase space)

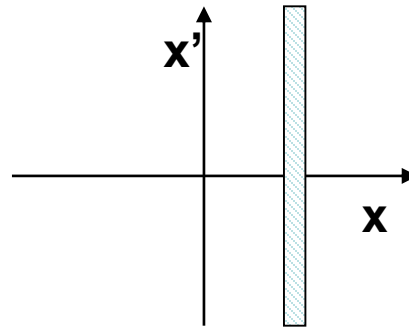


slit

Influence of a drift space

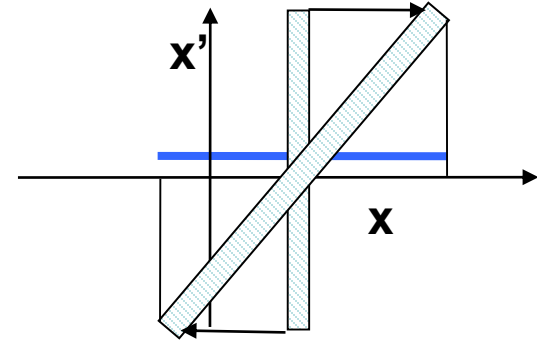

slit



Influence of a quadrupole

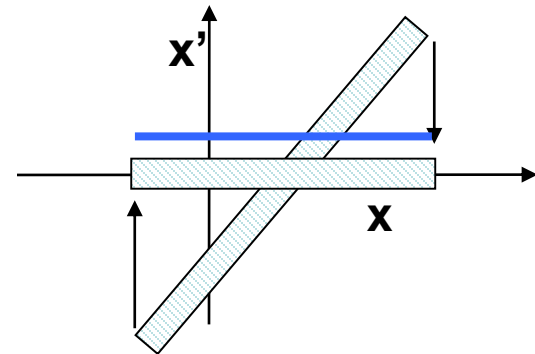

slit





The Slit Method

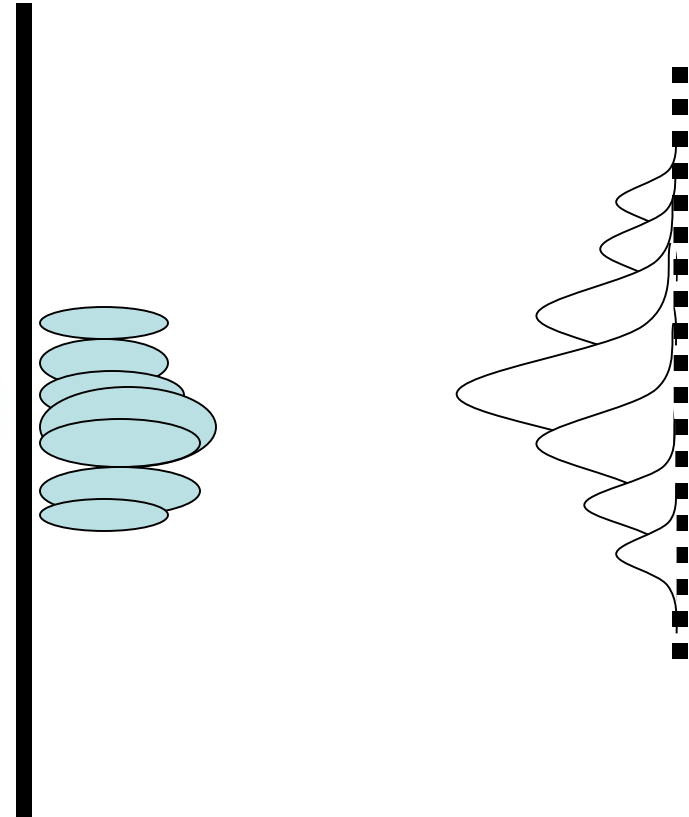
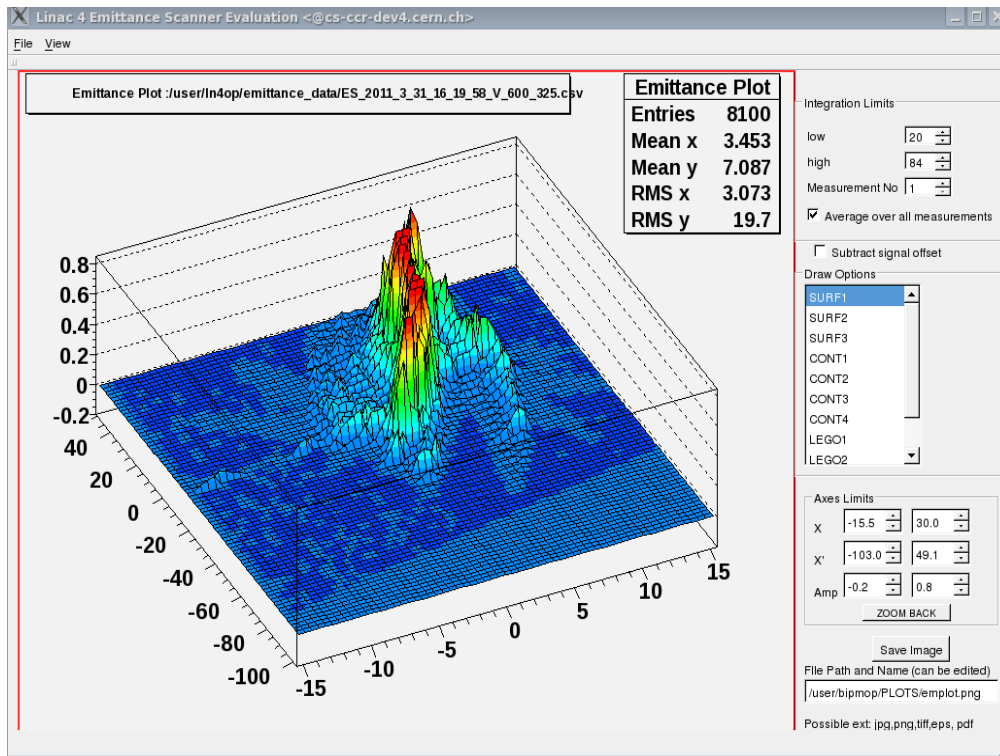




Phase Space Scanner

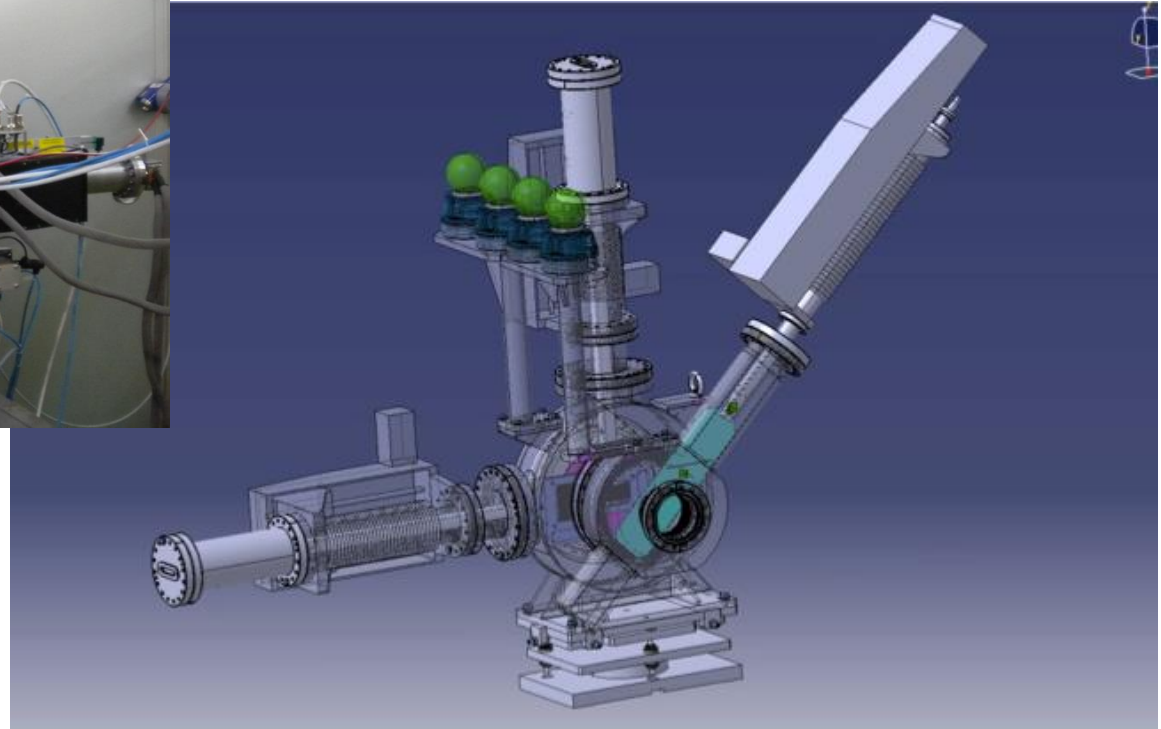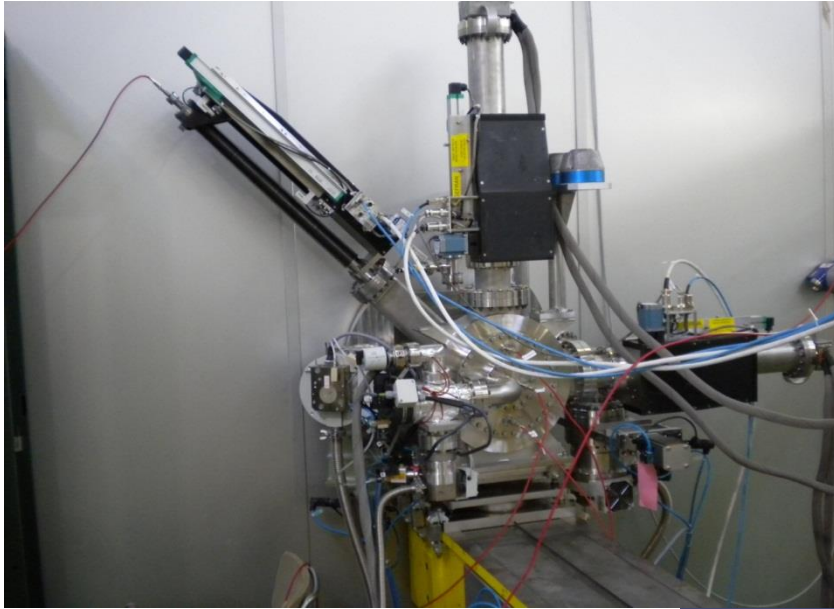


Emittance plot Solenoid

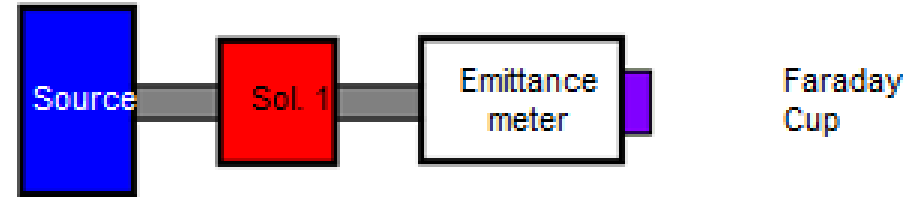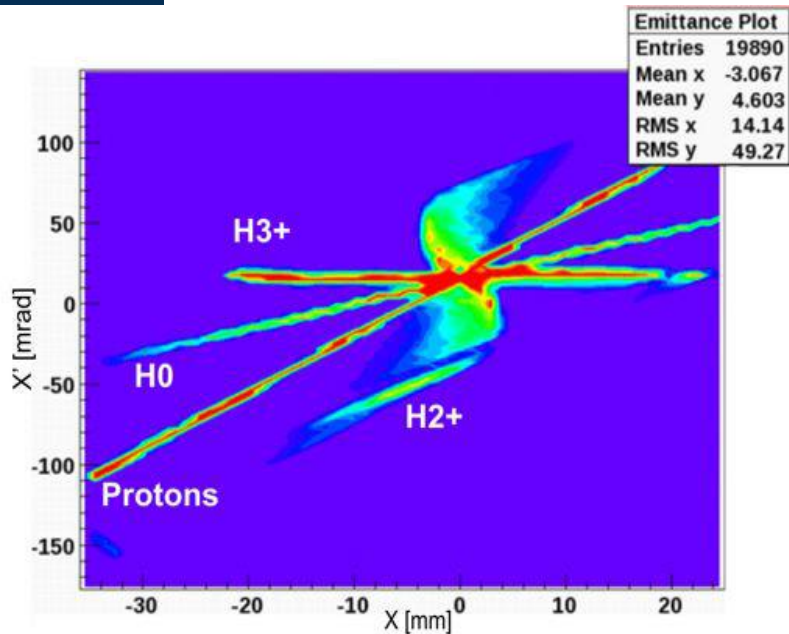

The solenoid splits the trajectories according to particle type.

The source produces

- protons
- H^0
- H_2^+
- H_3^+

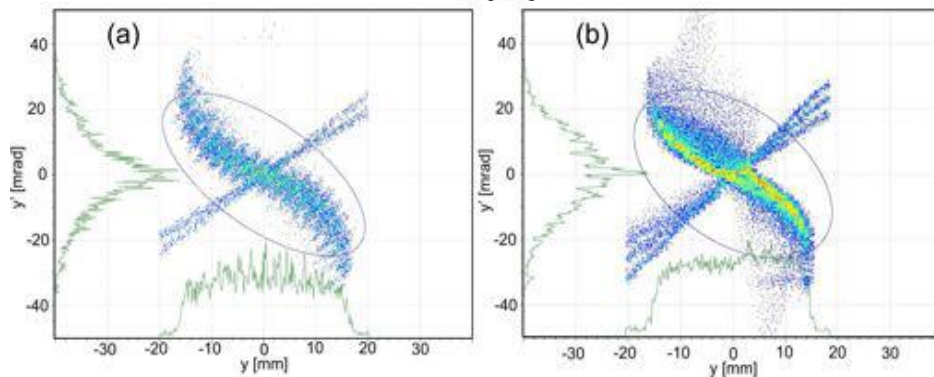




Moving slit emittance measurement

- Position resolution given by slit size and displacement
- Angle resolution depends on resolution of profile measurement device and drift distance
- High position resolution \rightarrow many slit positions \rightarrow slow
- Shot to shot differences result in measurement errors



Multi-slit measurement

- Needs high resolution profile detector
- Must make sure that profiles don't overlap

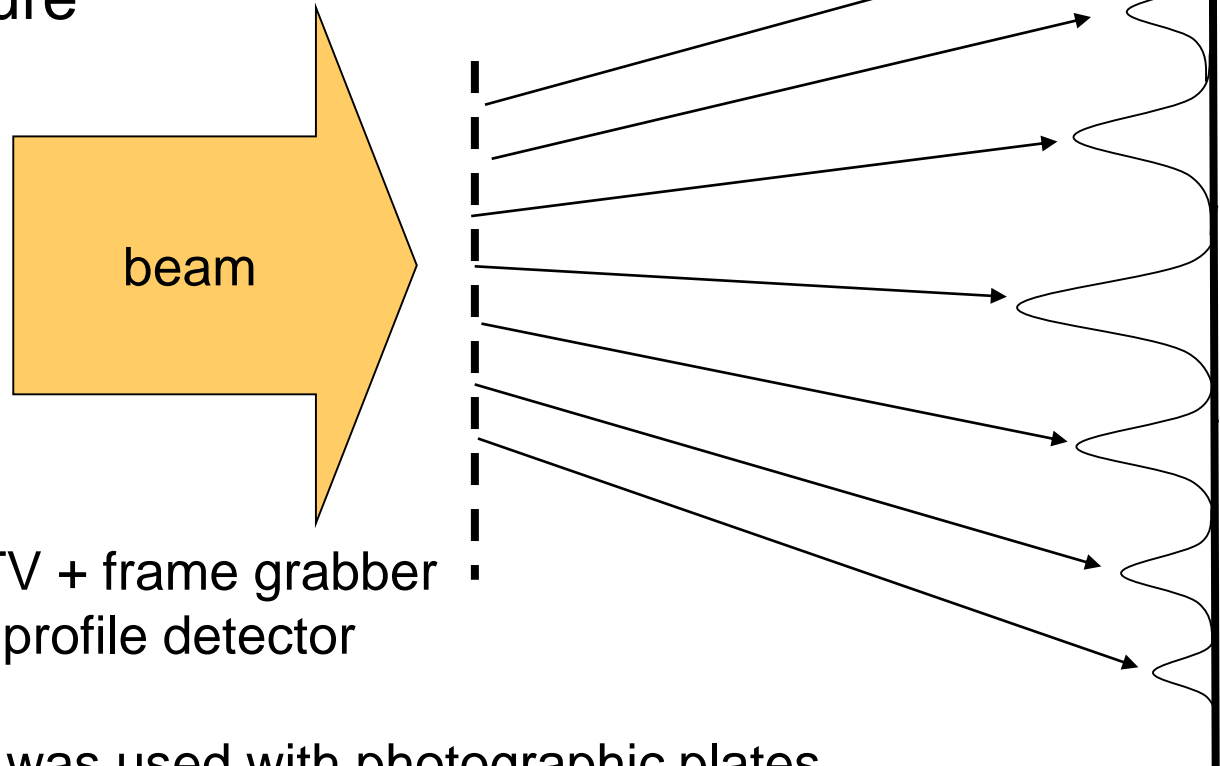

Scintillator + TV + frame grabber
often used as profile detector

Very old idea, was used with photographic plates



Pepperpot

Uses small holes instead of slits

Measures horizontal and vertical emittance in a single shot




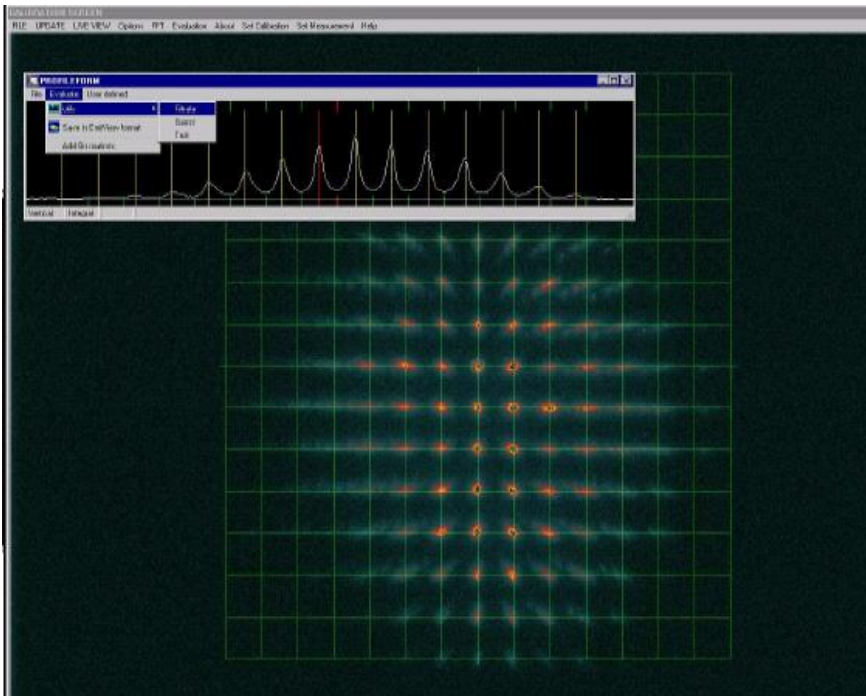


Photo P. Forck

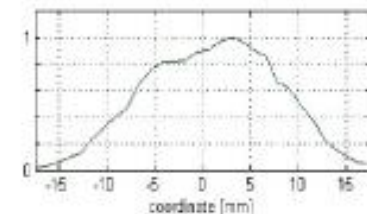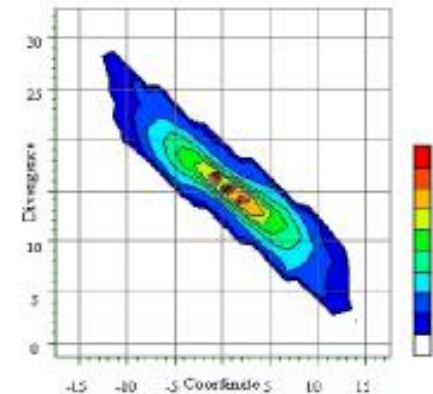

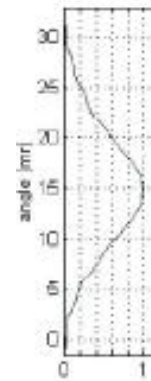


Measuring the Bunch Shape

A very crude estimation:

- RF at 352 MHz \rightarrow RF-cycle: ~ 2.7 ns
- Bunch width $\sim 20\%$: 540 ps
- want at least 20 points: resolution in the order of some ten ps


Principle of the BSM

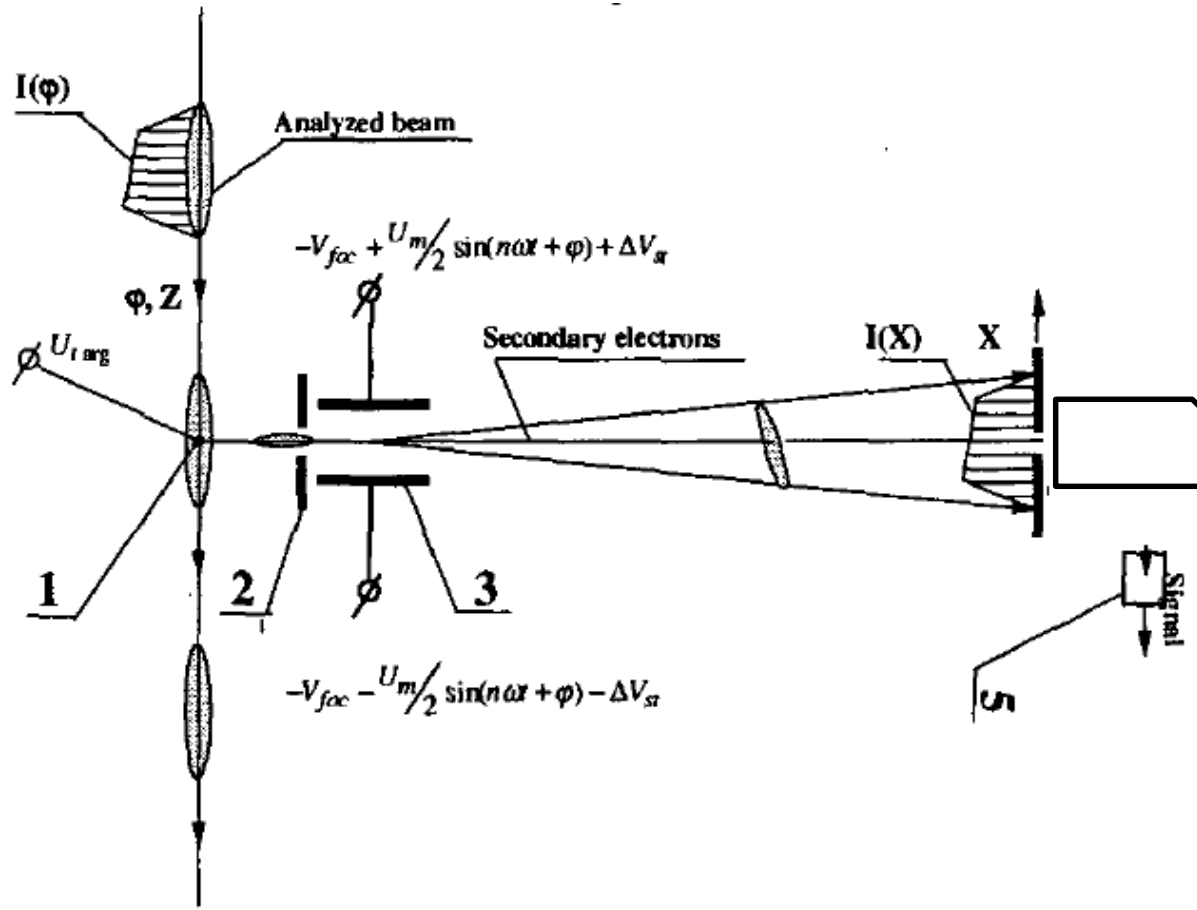

Put a target wire into the beam (100 μm Tungsten wire).
 Secondary electrons are created and accelerated due to HV on the target wire
 The electrons pass through a slit followed by an RF deflector synchronous to the accelerator RF

An electron detector detects particles with a defined phase
 The deflector RF is shifted with a phase shifter


Photo of Linac-4 BSM

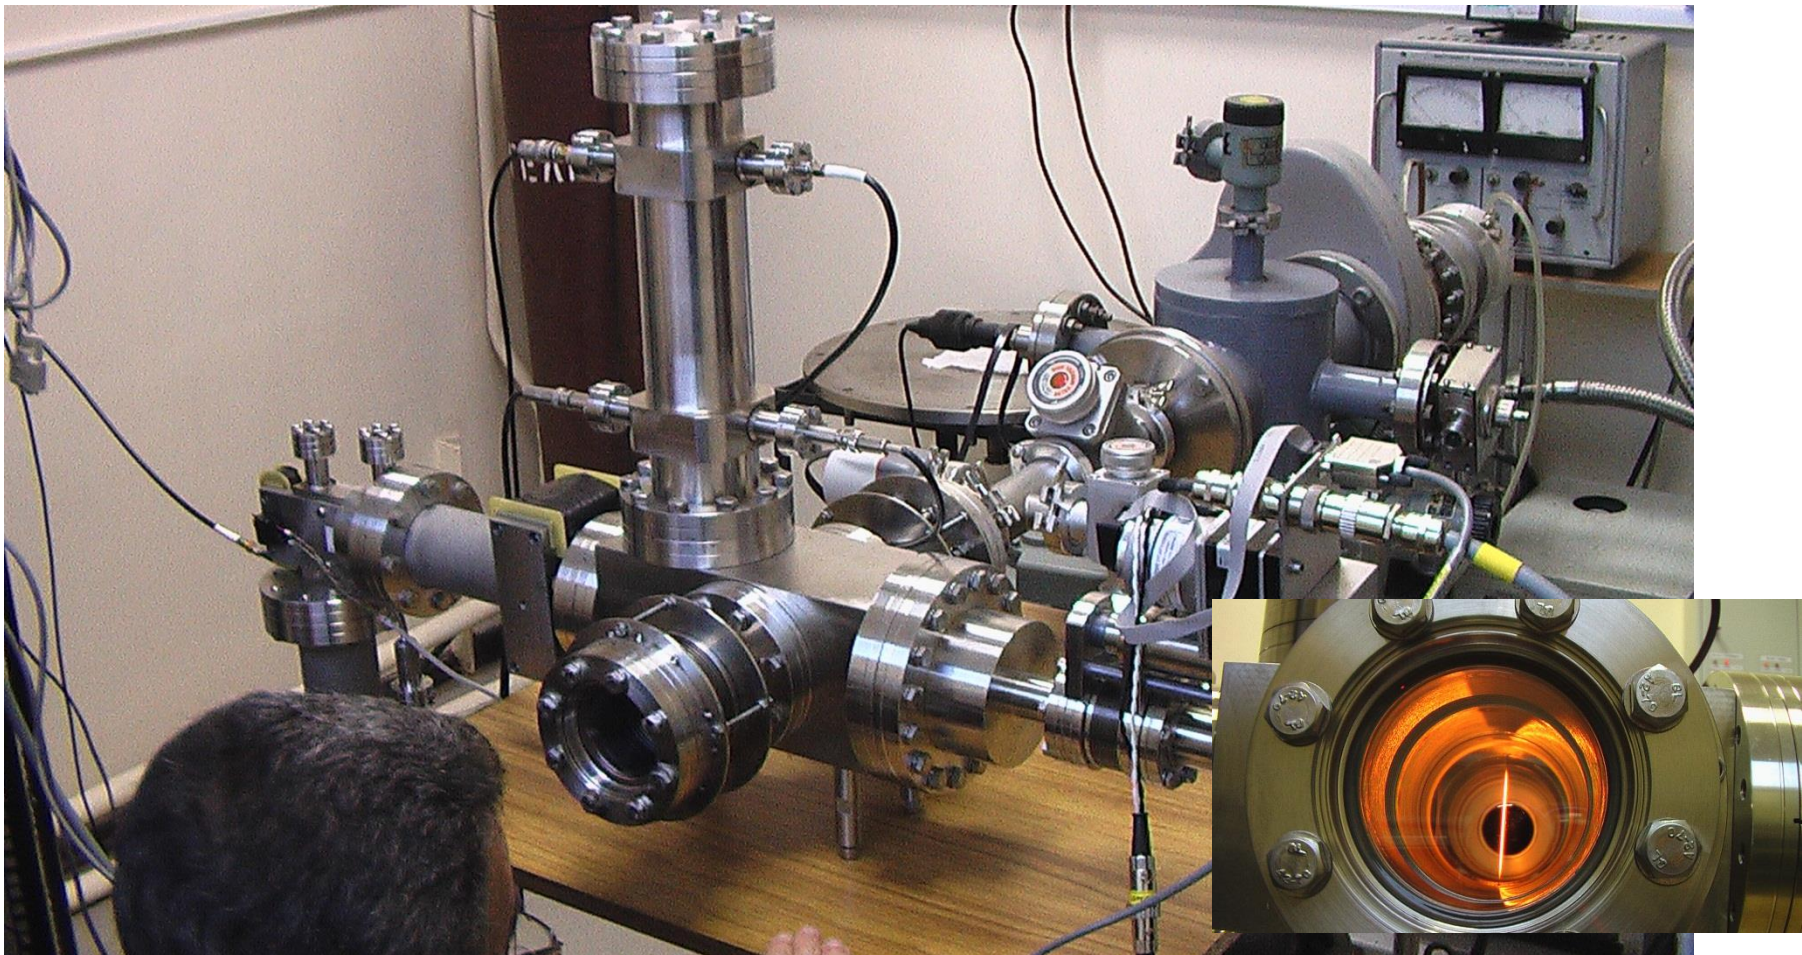




Typical BSM results


Typical BSM plot

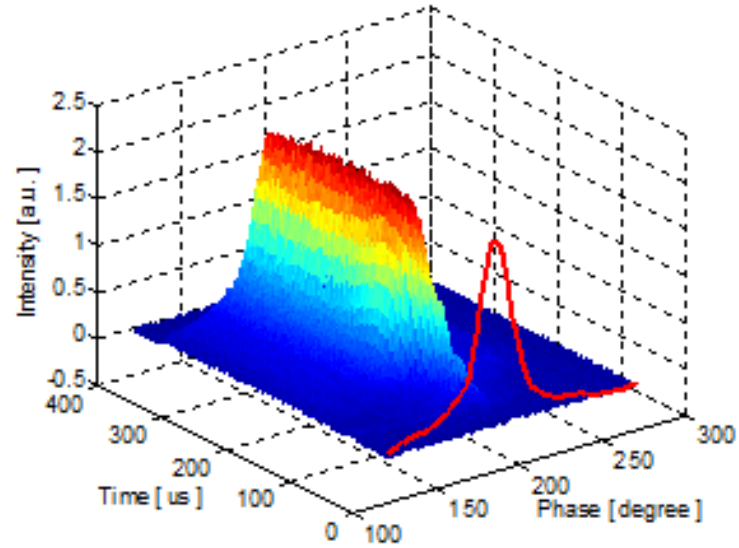

Bunch Shape

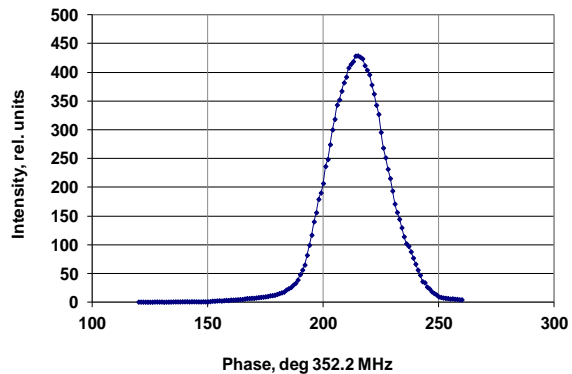

Bunch position vs RF amplitude

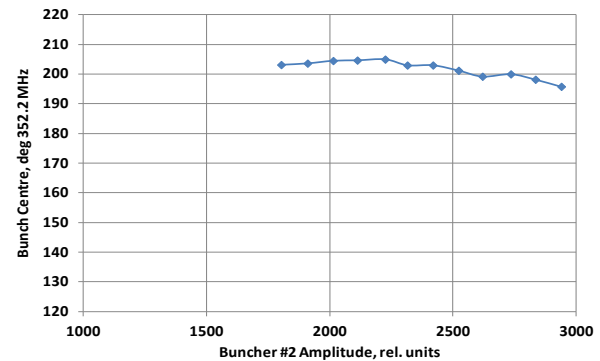



Computed Tomography (CT)


Principle of Tomography:

- Take many 2-dimensional Images at different angles
- Reconstruct a 3-dimensional picture using mathematical techniques (Algebraic Reconstruction Technique, ART)







The reconstruction

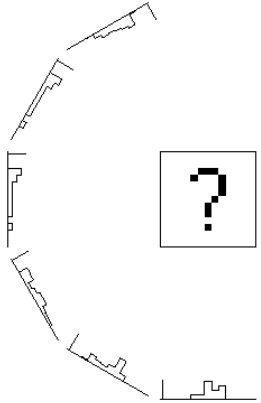

Produce many projections of the object to be reconstructed

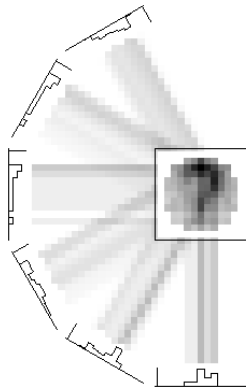

Back project and overlay the “projection rays”


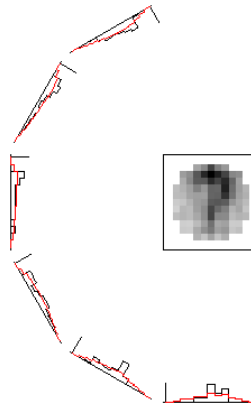


Project the back-projected object and calculate the difference



Iteratively back-project the differences to reconstruct the original object


Some CT results

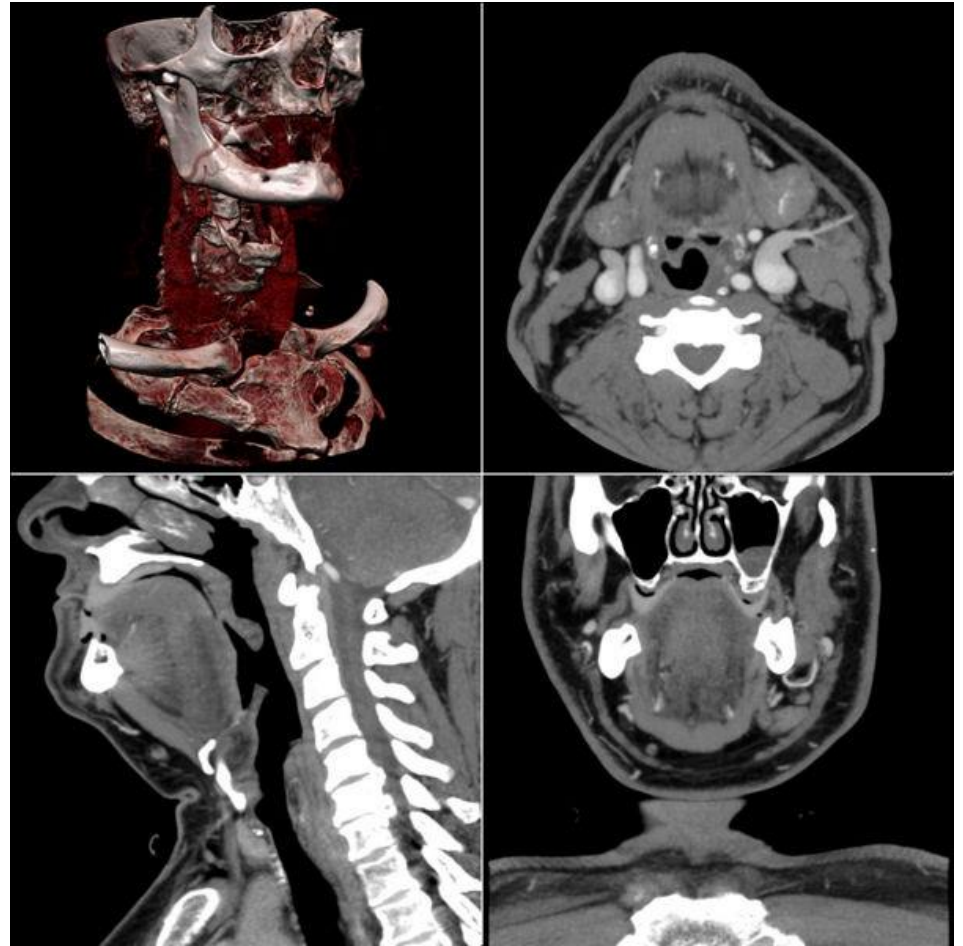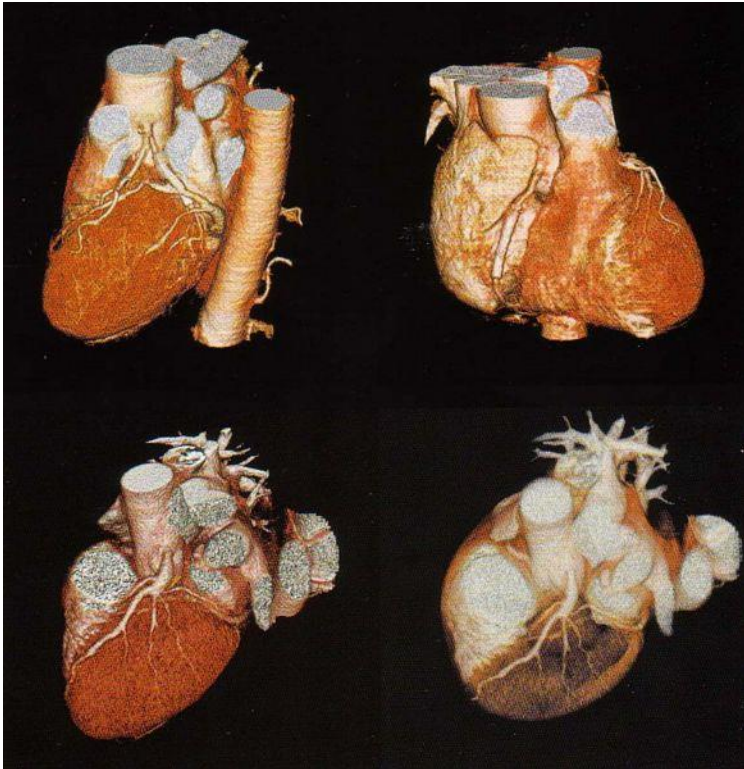




Computed Tomography and Accelerators


RF voltage

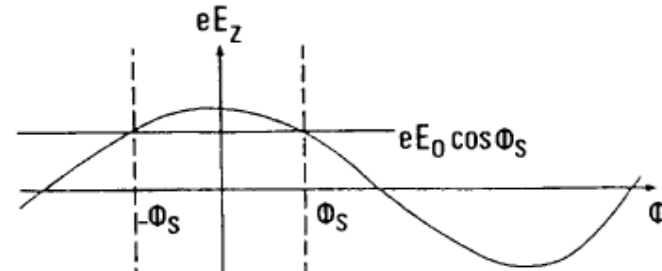

Restoring force for non-synchronous particle

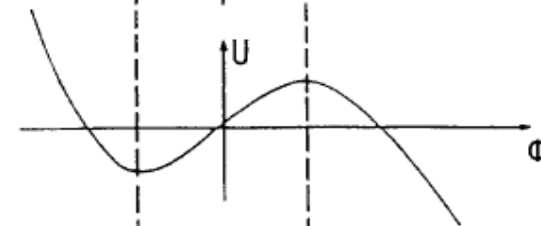


Longitudinal phase space

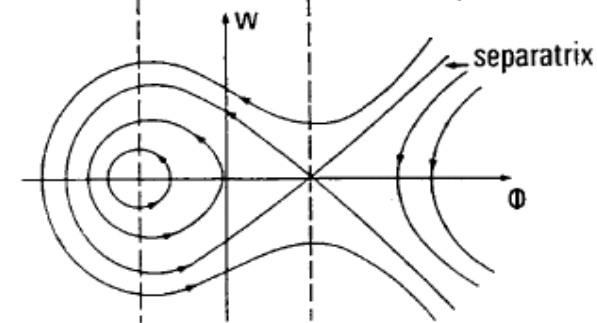

Projection onto Φ axis corresponds to bunch profile



Reconstructed Longitudinal Phase Space

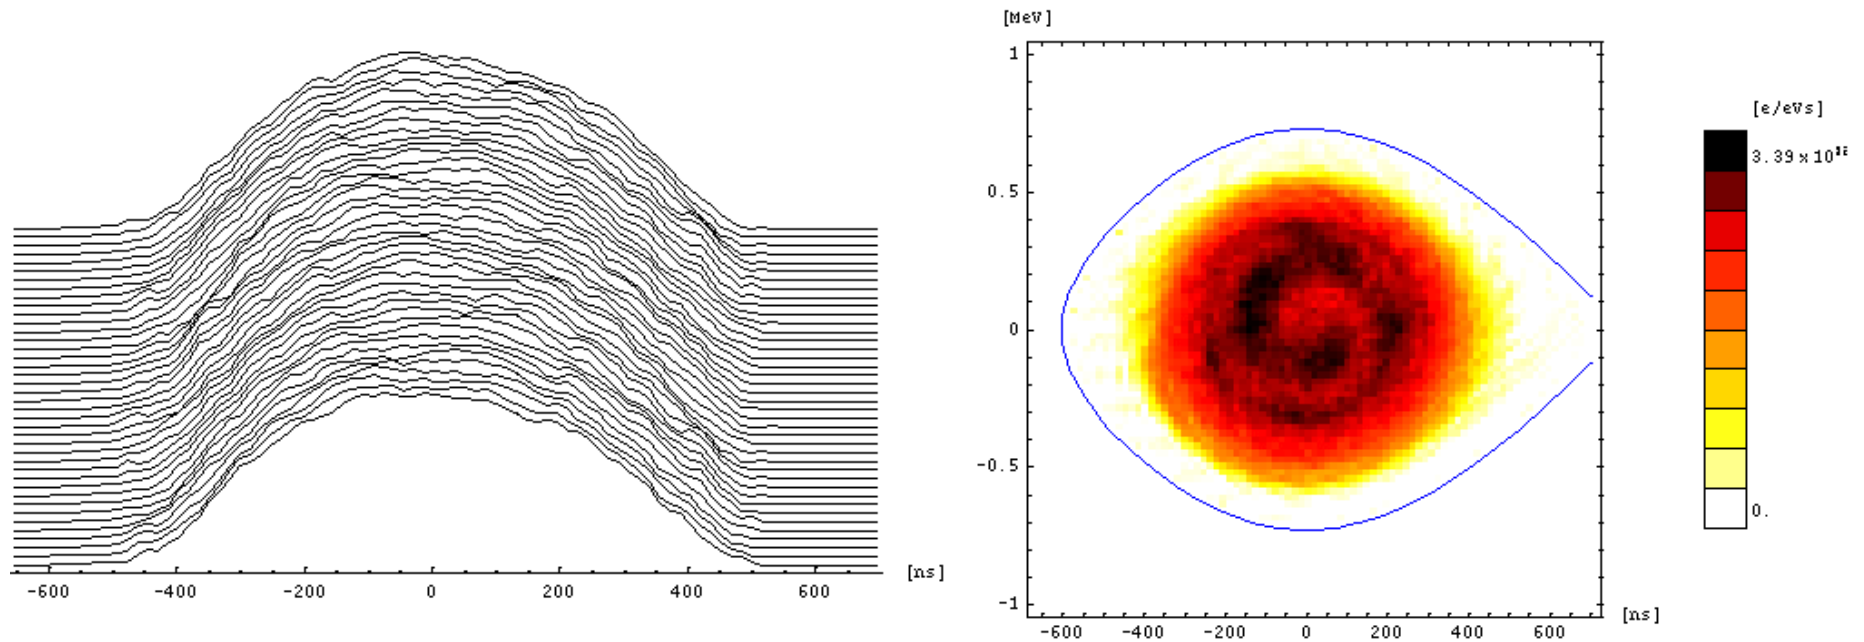



Bunch Splitting

