


# **CALICE Prototype Calorimeters** for linear collider detectors

**Lei Xia**  
**Argonne National Laboratory**




# CALICE leads R&D effort for Imaging Calorimetry

- The next lepton collider detector will be optimized for Particle Flow Algorithms (PFA's) → calls for Imaging Calrimetry
- CALICE collaboration developed new concepts and technologies for such kind of devices
- Many 1<sup>st</sup> generation prototypes has been tested is beam

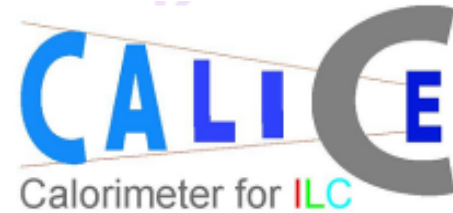

- 2005
  - 2006-07
  - 2008-09
  - 2010-11
- Year of beam test

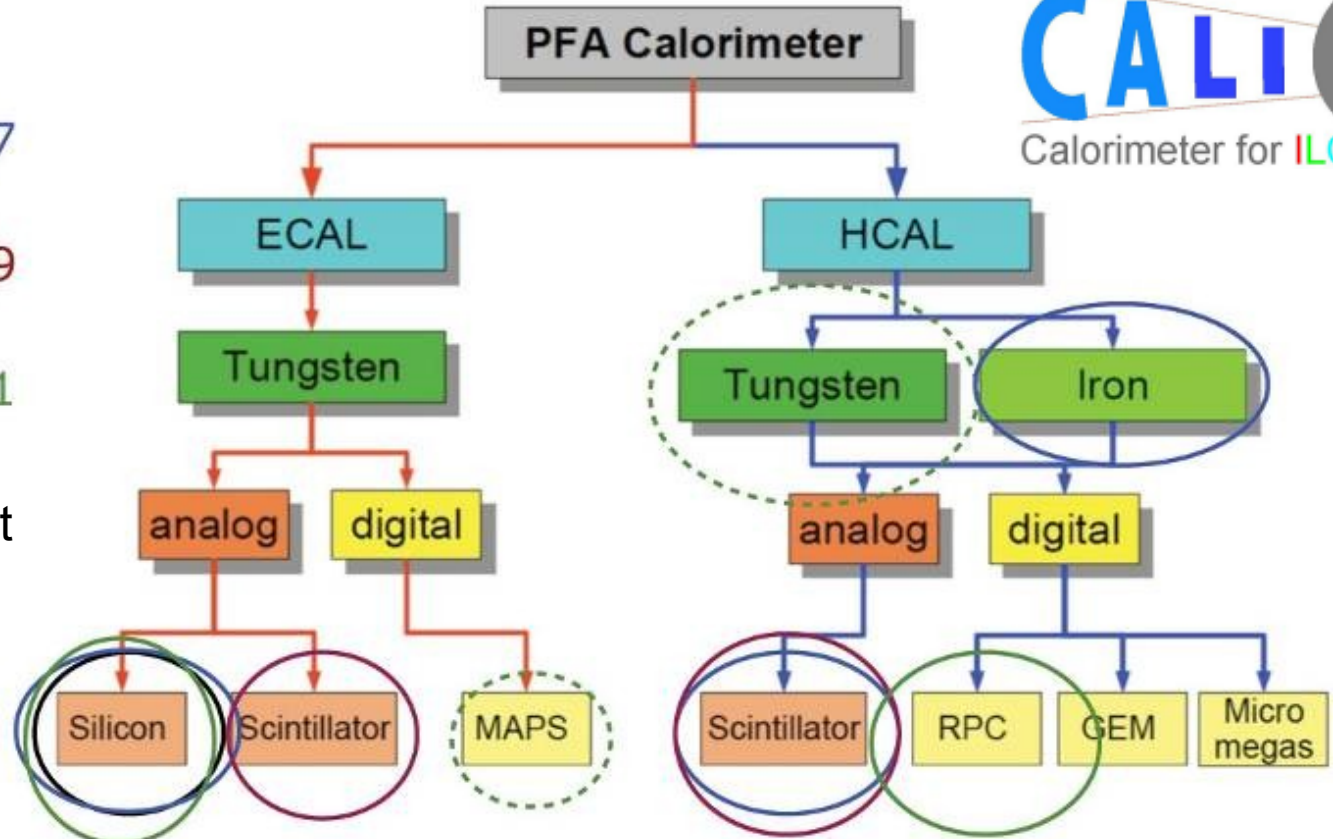


**Readout cell size:** 144 - 9 cm<sup>2</sup> → 4.5 cm<sup>2</sup> → 1 cm<sup>2</sup> → 0.25 cm<sup>2</sup> → 0.13 cm<sup>2</sup> → 2.5x10<sup>-5</sup> cm<sup>2</sup>


**Technology:** Scintillator + SiPM/MPPC    Scintillator + SiPM/MPPC    Gas detectors Silicon    Silicon    Silicon    Silicon (MAPS)

# CALICE 1<sup>st</sup> generation calorimeter prototypes

- **These prototypes (often called ‘physics prototypes’) address ‘proof of principle’**
  - Some technical issues for a real detector are left out, to get physics results in early stage
- **The analog prototypes have finished beam test and was a great success**
  - Analog: measuring energy in each cell, with Silicon, or Scintillator+SiPM
  - The beam data produced excellent physics results, please see Misha’s talk
- **The digital/semi-digital prototypes using gas detector as active medium are being tested now / will be tested soon**
  - Using gas detector for calorimeter is a new/reviving idea
  - Digital readout: count particles in shower → perfect match for gas detectors
  - Current status
    - RPC DHCAL: has been in test beam for ~ 1 year, data analysis started
    - RPC sDHCAL: started test beam this summer, 1<sup>st</sup> physics data expected this fall
    - Micromegas, GEM based (s)DHCAL: preparing for test beam

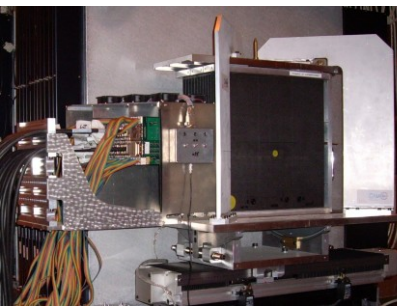

Si-W ECAL




Sci-W ECAL



Sci-Fe AHCAL



RPC-Fe DHCAL

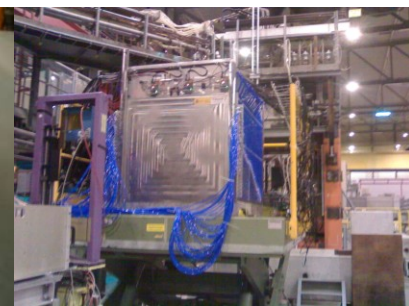

RPC-Fe SDHCAL

# RPC DHCAL prototype

- **Main features**

- 1cm<sup>2</sup> readout pads
- Digital readout (1 threshold, yes or no)
- ~1m<sup>2</sup> for each layer (cassette)
- 52 (38 + 14) layers in total
- ~2cm Fe absorber for each first 38 layers, thicker Fe absorber for last 14
- **Total CH. count: ~500,000**

- **RPC's**




- Glass electrodes
- 36 x 96 cm<sup>2</sup> in size, readout by 2 FEB's
- 3 RPC's for each layer/cassette

- **Readout system: very challenging**

- **Embedded FE readout (2<sup>nd</sup> gen. feature)**
- Signal ~100fC to ~1pC
- Built around a 64-ch asic (DCAL)
- FEB host 24 asic's + data concentrator
- FEB & pad board glued together with conductive epoxy
- 2 levels of data concentration (data concentrator[x24] + collector[x12])
- VME readout at the end
- Triggered & **Trigger-less readout**



- **Construction**

- Started 2008, ended 2/2011
- 1<sup>st</sup> beam test 10/2010

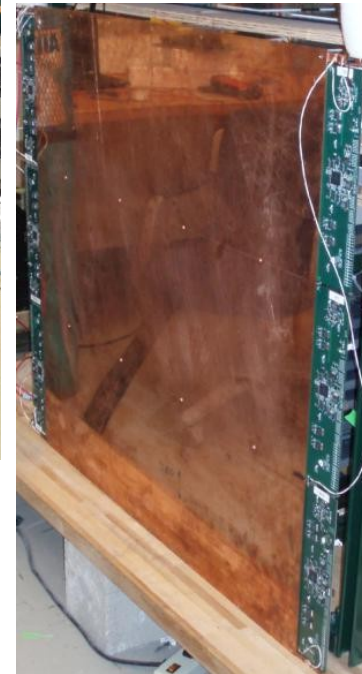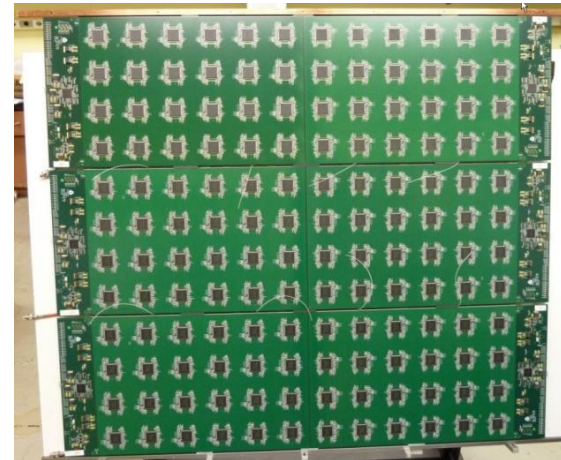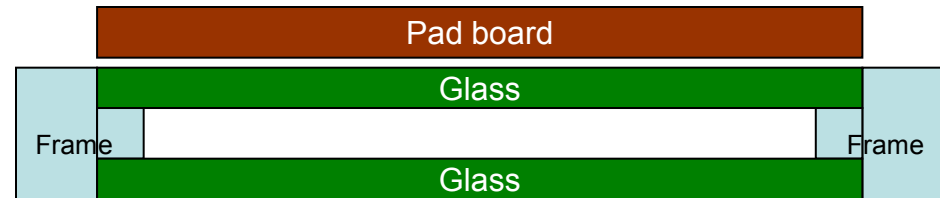


# RPC DHCAL test beam at Fermilab

- **Had 4 test beam runs so far**
  - 10/2010: 38 layers
  - 2/2011: completed 38 + 14 during run
  - 4/2011: SiW ECAL + RPC DHCAL
  - 6/2011: RPC DHCAL alone
  - More test beam in 2011 - 2013
- **Both RPC's and readout system worked amazingly well**

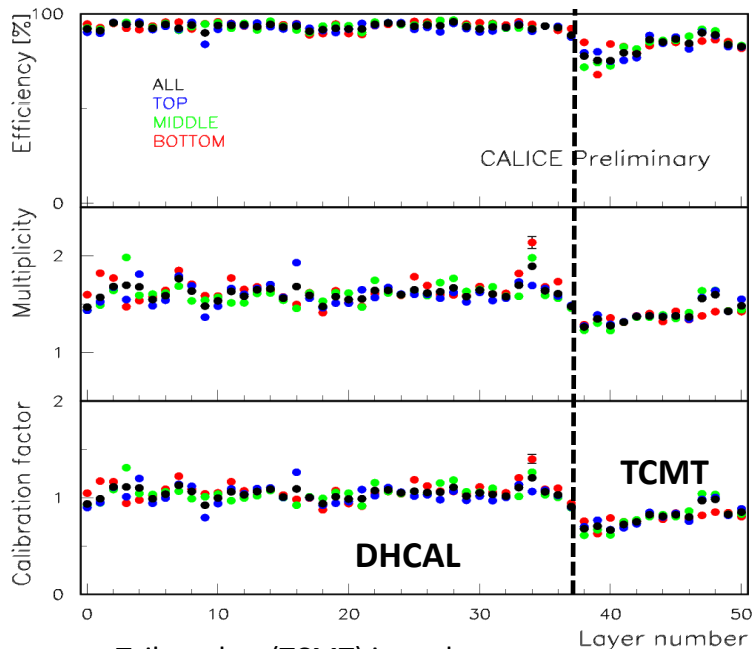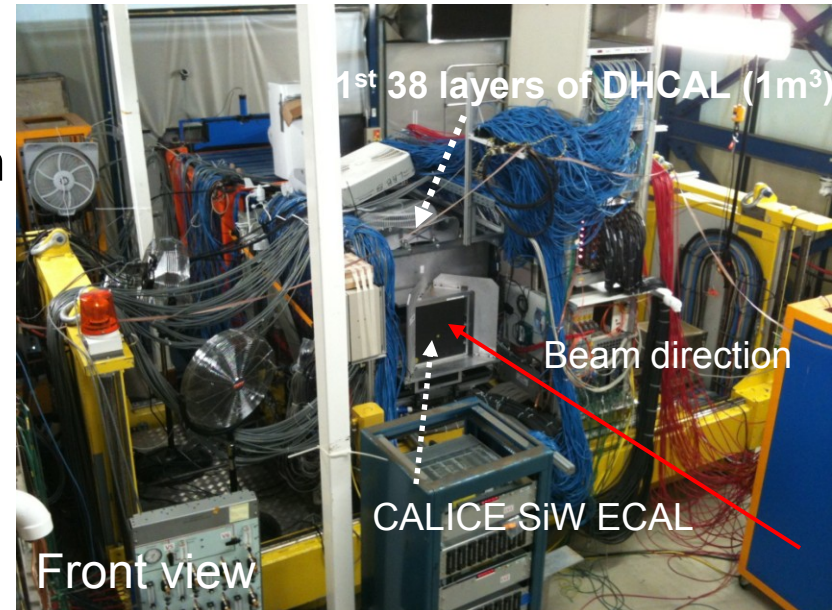


Tail catcher (TCMT) is cooler  
→ lower efficiency, multiplicity

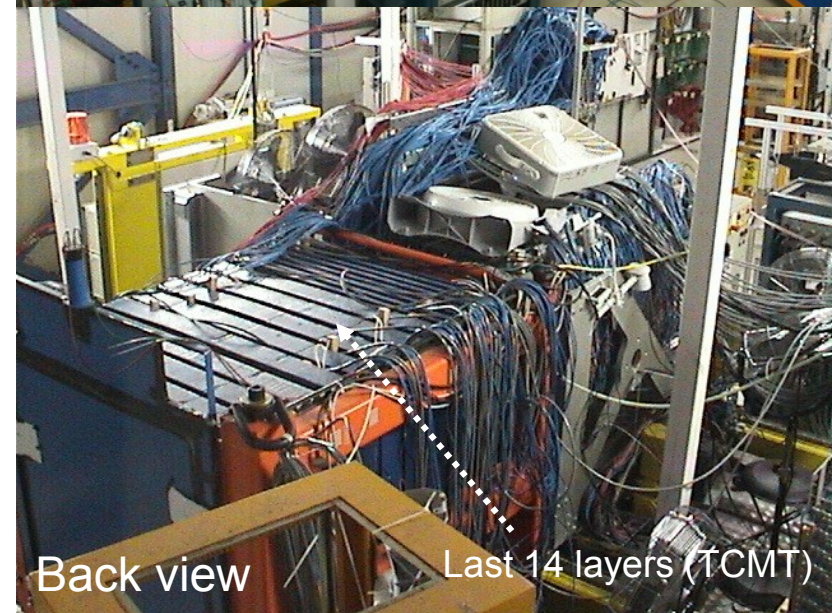


# RPC DHCAL: 1<sup>st</sup> look at data



**Preliminary results: no calibration yet!**

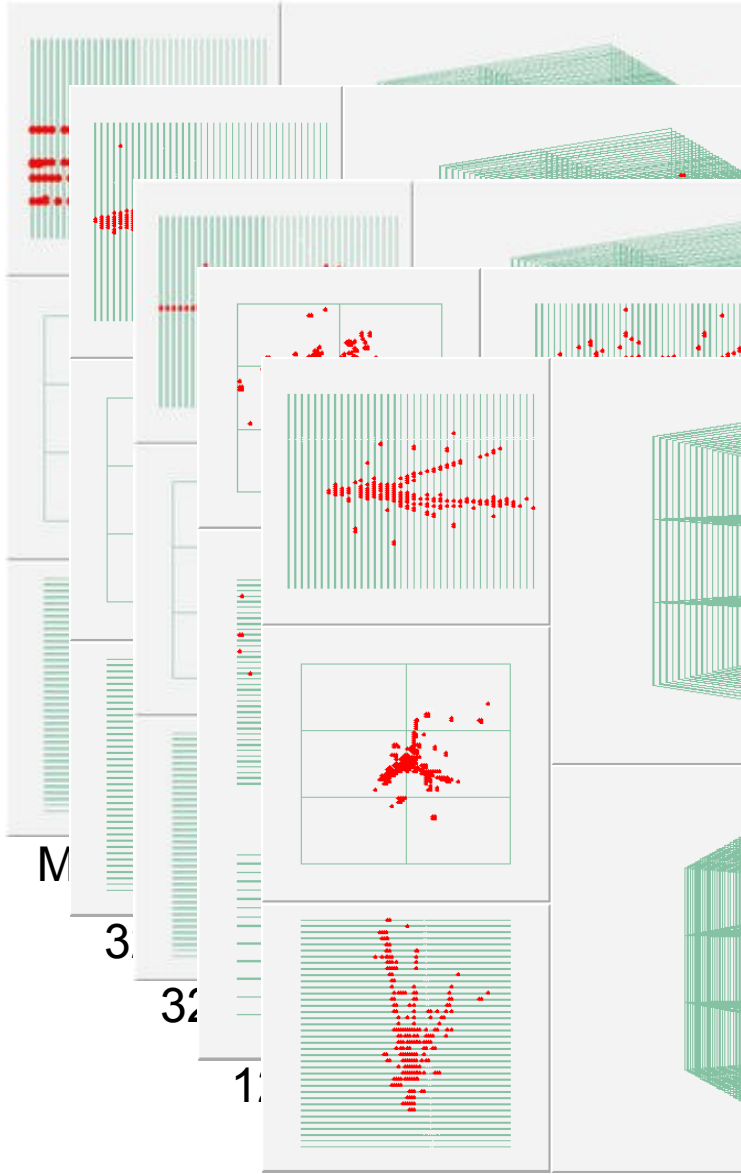


Positron response/resolution

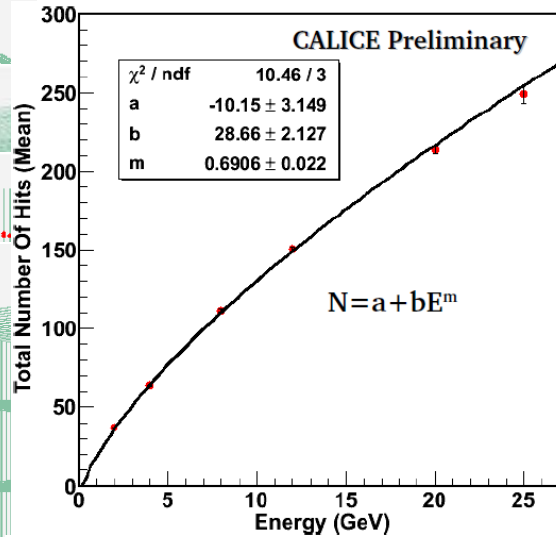

Pion response/resolution

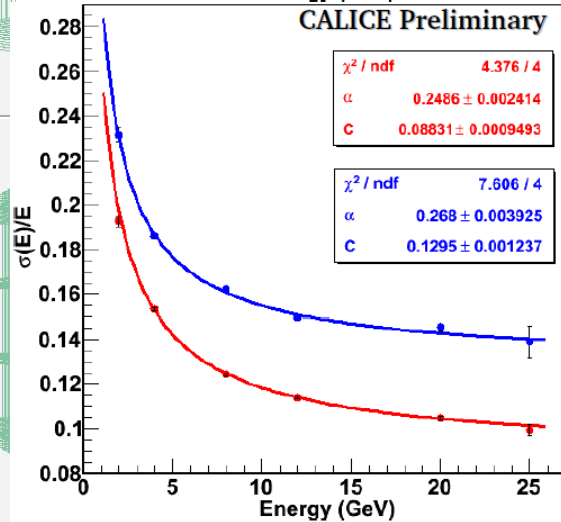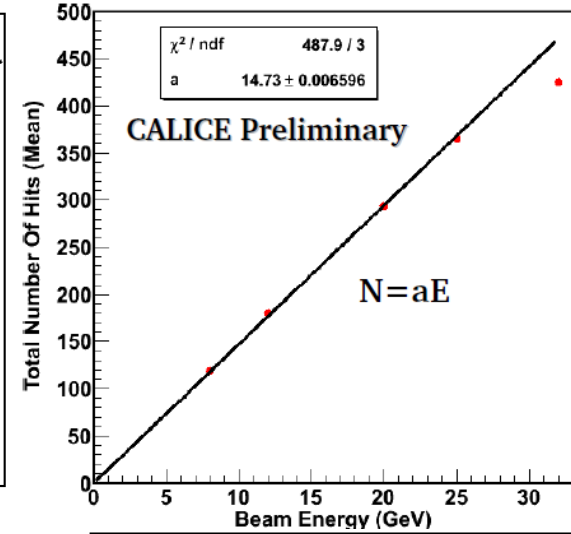

Uncorrected for non-linearity  
Corrected for non-linearity




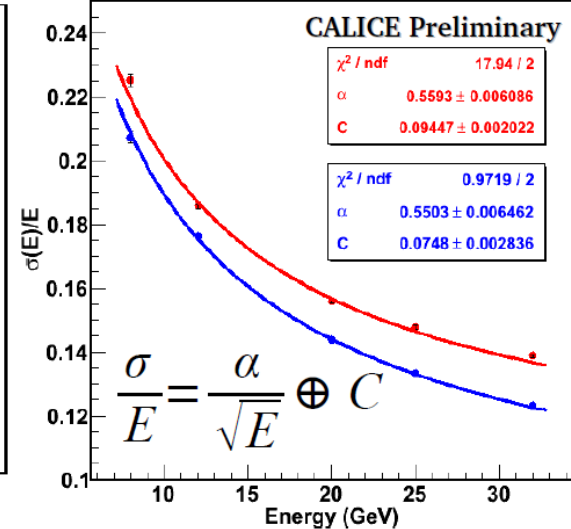


Standard pion selection  
+ No hits in last two layers

Neutral hadron!

# RPC semi-DHCAL prototype

- **Semi-digital approach**
  - 2-bit / 3-threshold readout to improve particle counting
    - Thresholds at 0.2, 5, 10 MIP
    - Distinguishing 0, 1, several and a lot of particle on one pad
  - Have the potential to improve
    - Linearity
    - Energy resolution at high E
- **Main features**
  - 1cm<sup>2</sup> pad / 1m<sup>2</sup> cassette
  - 1m<sup>2</sup> RPC's
  - 2-bit, **embedded readout**
  - **FE asic power pulsed**
  - **2 FEB chained together and readout from one side**
  - **Thin cassette (~6mm)**
  - **Self-supporting structure**
- **Construction status**
  - Finished ~40 layers by 6/2011
  - First beam run 6-7/2011
  - Next beam run 9-10/2011

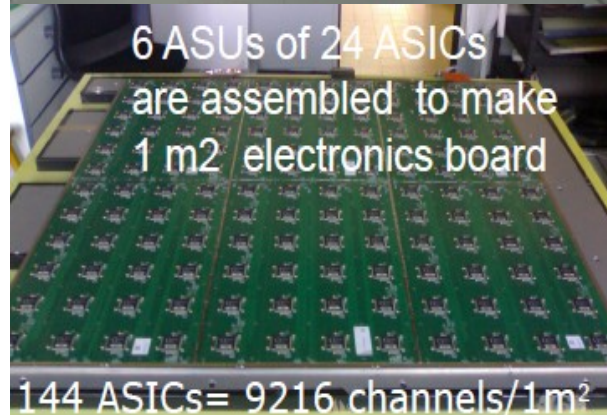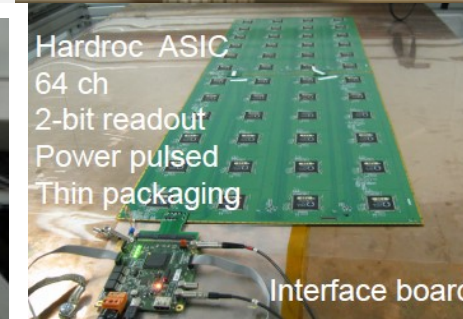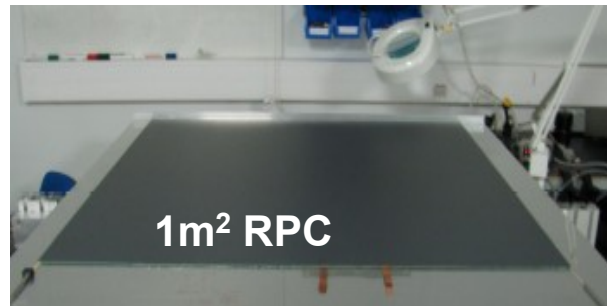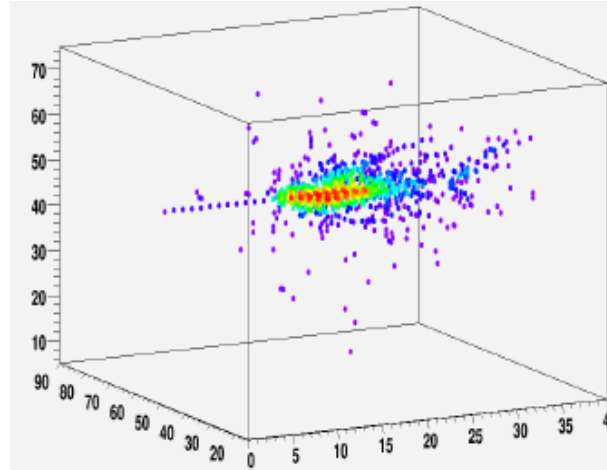


**Red:** 2<sup>nd</sup> generation features

# RPC semi-DHCAL test beam at CERN

- The prototype successfully assembled at CERN
- Tested readout and detector with beam
- More beam test / physics run expected in 9-10/2011




#Run 81682 #Event 422 (48/84)  
No TimeStamp

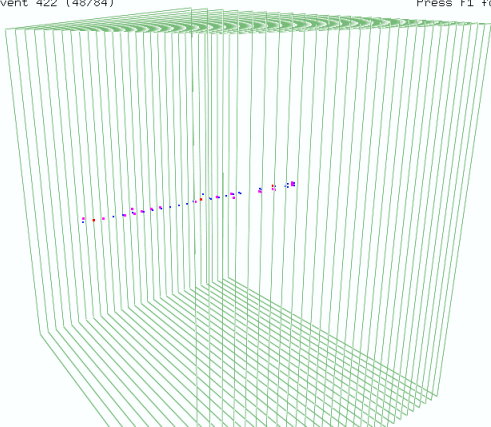


Press F1 for Help  
28 FPS

#Run 81682 #Event 229 (25/84)  
No TimeStamp

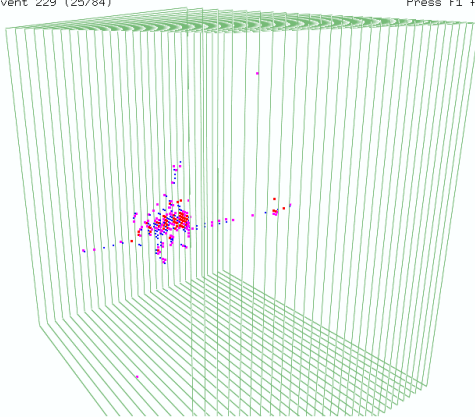

Press F1 for Help  
223 FPS


#Run 81682 #Event 335 (39/84)  
No TimeStamp

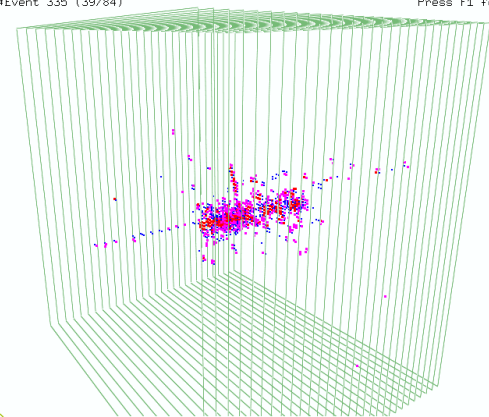

Press F1 for Help  
54 FPS




# Micromegas and GEM (s)DHCAL prototypes

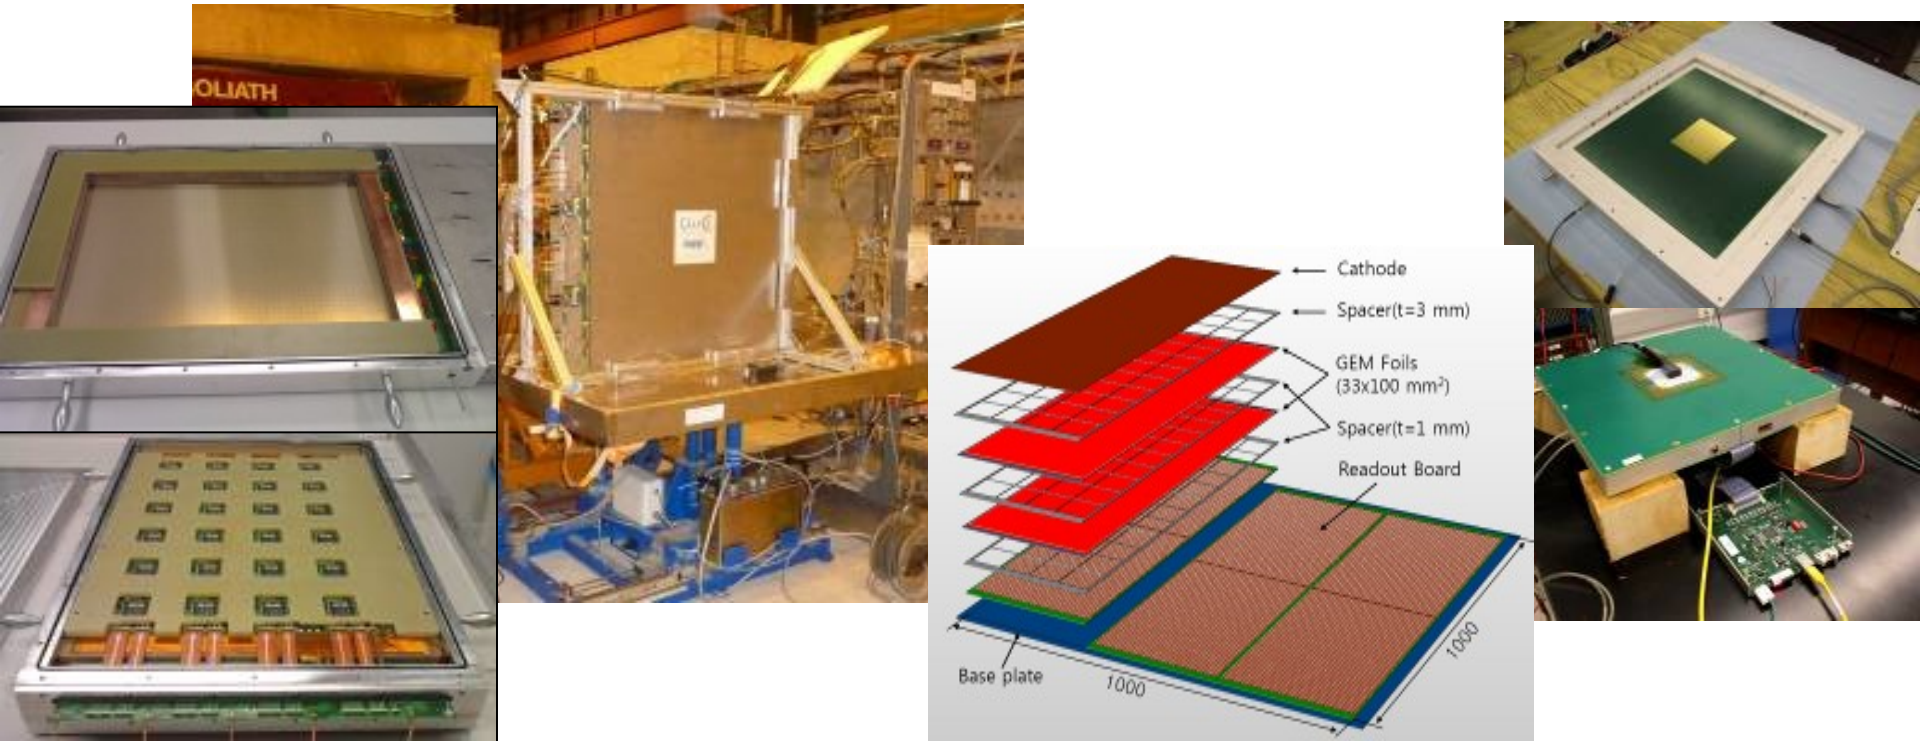


- **CALICE collaboration is also developing (s)DHCAL with Micromegas and GEM detectors**
  - Both detectors can handle very high rate
  - Prototype layers has been constructed / expected (1cm<sup>2</sup> pad, 1m<sup>2</sup> layer)
  - Beam test of prototype layer is done / expected

# Calice 2<sup>nd</sup> generation calorimeter prototype

- **These prototypes address all issues in building a ‘real detector’**
  - Embedded readout
  - Embedded calibration system
  - Compact geometry with minimum dead space
  - Power reduction / heat dissipation / cooling
  - Cables / connections / service / supplies
  - Mechanical structure
  - Realistic detector geometry
- **Several such prototypes are being developed/constructed, or planned**

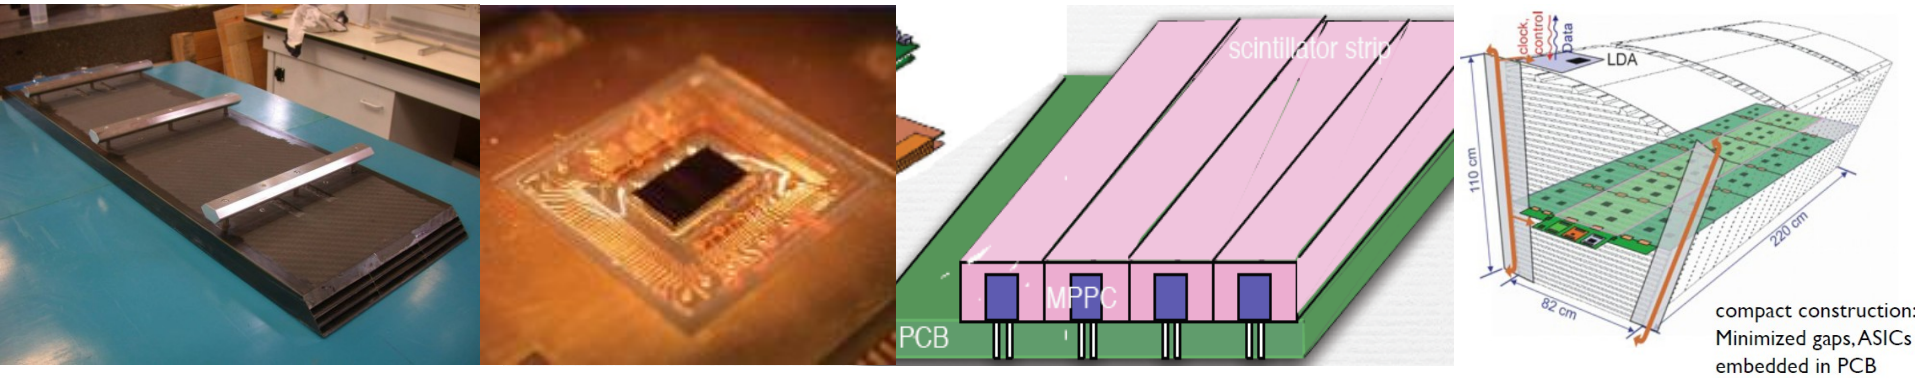


# Si-W ECAL 2<sup>nd</sup> gen. prototype

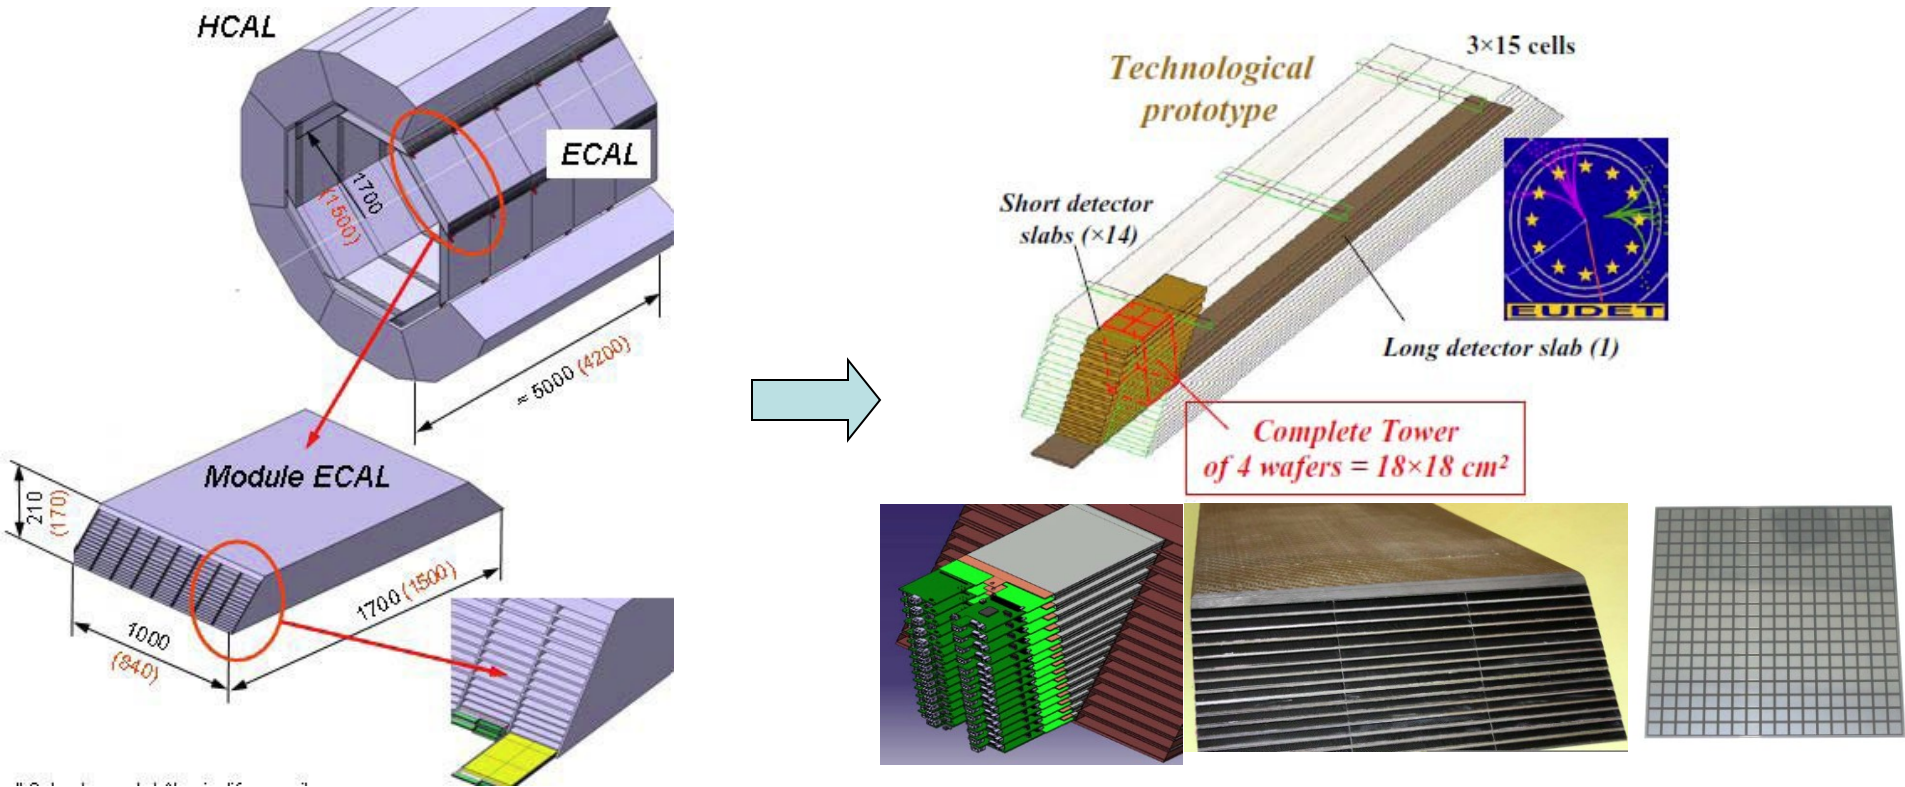

- ~2/3 of final module size (partially instrumented, 18 x 18 cm<sup>2</sup> tower)
- 9x9 cm<sup>2</sup> sensors, with 0.5 x 0.5 cm<sup>2</sup> cell size (factor of 4 smaller than 1<sup>st</sup> gen.)
- FE power pulsed (0.25 μw / ch), FE readout embedded
- FEB's chained together, extremely compact design
- Realistic cooling scheme (leak less water cooling)

# Some of the challenges

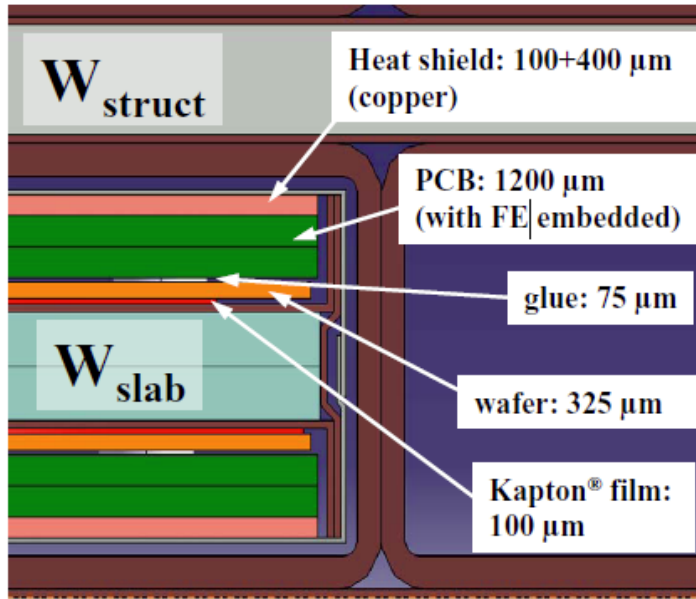

Results  
Barrel : (1.5m)



$\Delta T = 2,2\text{C}$


End Cap : (2.5m)



$\Delta T = 6\text{C}$


Thermal simulation

## Leak less water cooling

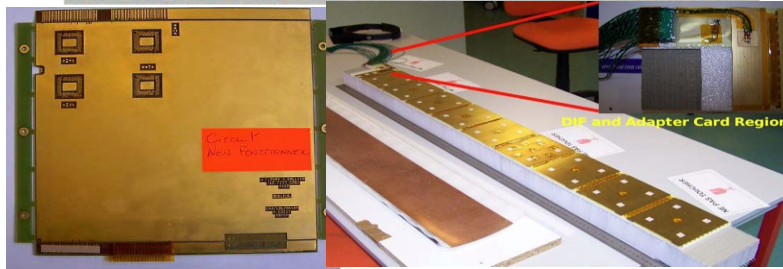

## Detector slab

- Compact assembly of 2 layers of 1 to 8 ASU's + W core
  - ASU = 1 Kapton cable + Si wafer + PCB + thermal drain (copper)
- PCB is critical: 1mm thick, 8 layers
  - 1% flatness
  - chips bounded into the board

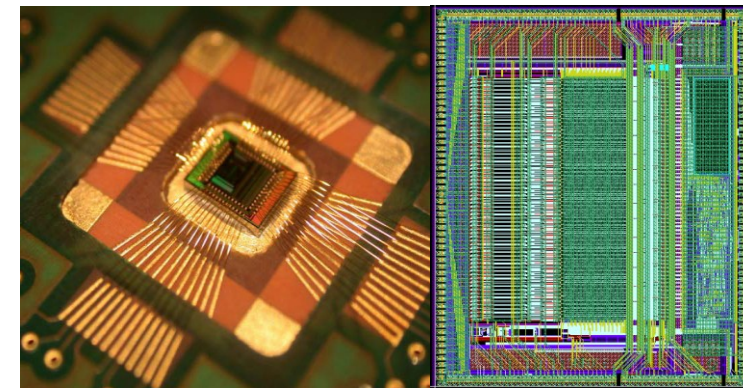


## SKIROC chip

(Silicon Kalorimeter Integrated ReadOut Chip)

- Technology: SiGe 0.35  $\mu\text{m}$  AMS
- 64-ch, variable gain charge amp
- 12-bit ADC, digital logic
- Power pulsed  $\rightarrow$  25  $\mu\text{w}$  / ch




# Scintillator AHCAL 2<sup>nd</sup> generation prototype

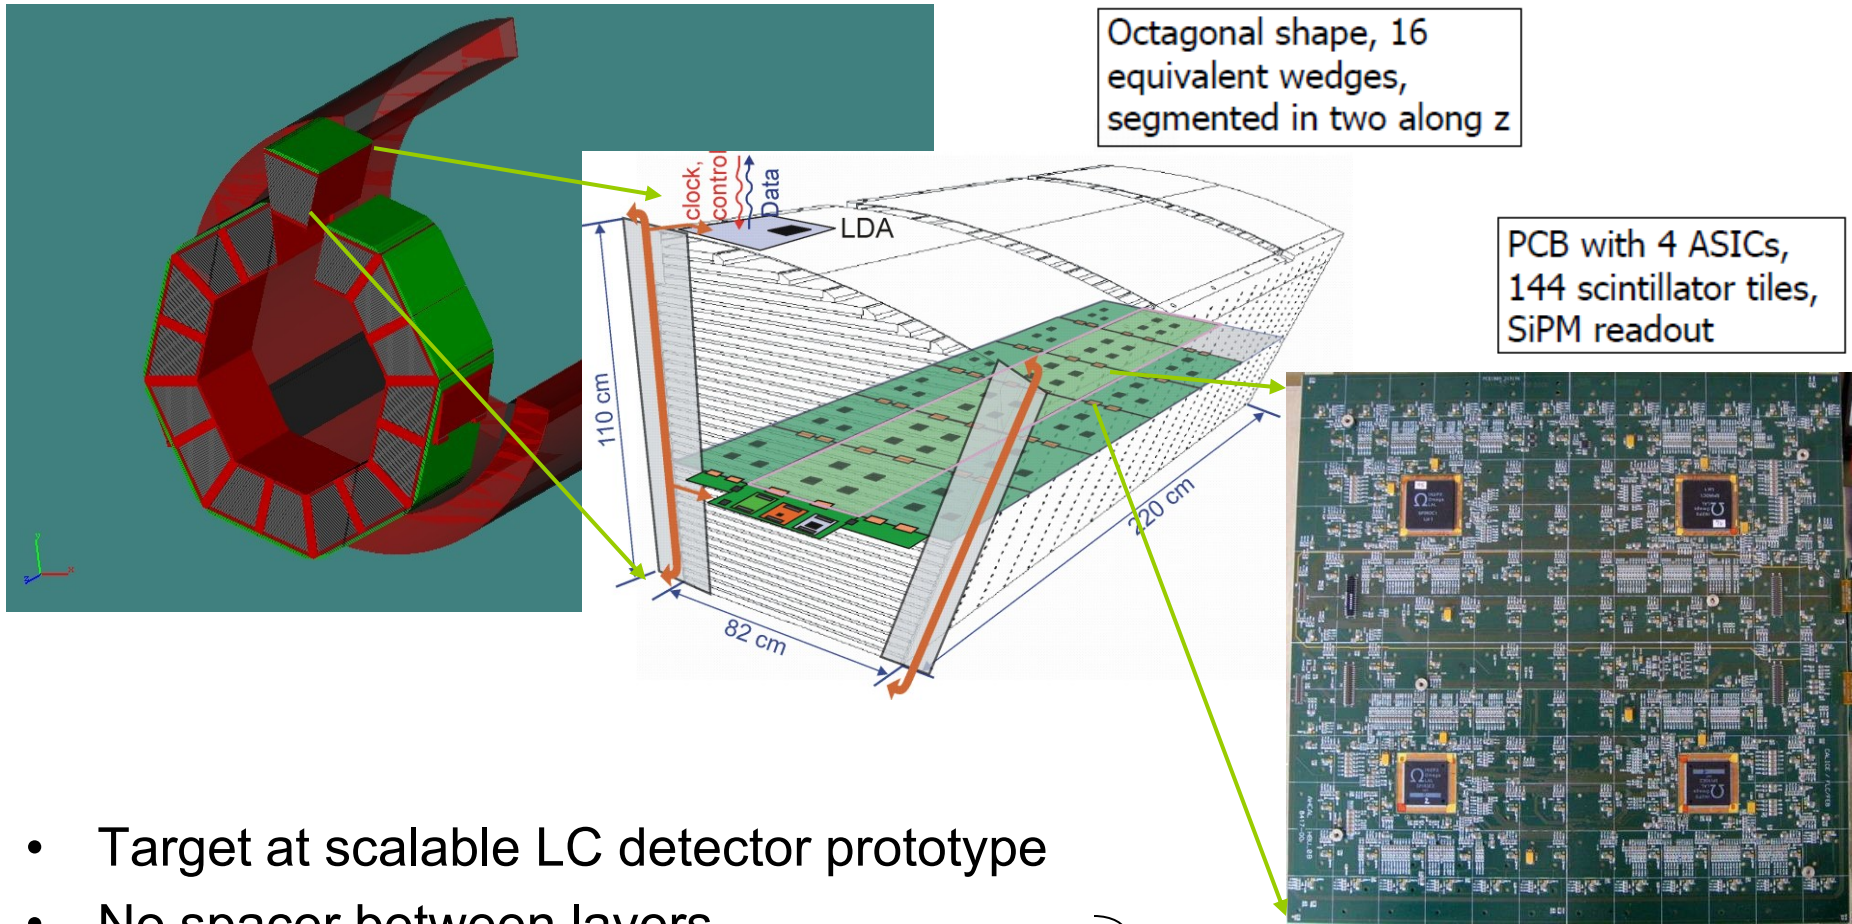

- Target at scalable LC detector prototype
- No spacer between layers
- Minimize dead space between wedges
- Minimize gap between barrel and endcap


Integrated readout electronics

# Some of the challenges

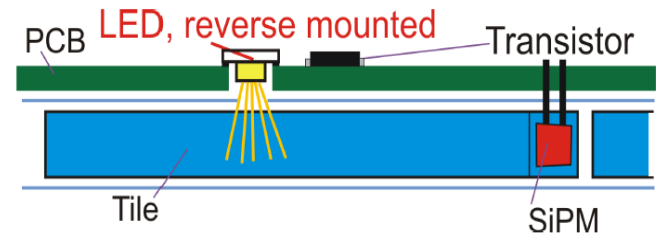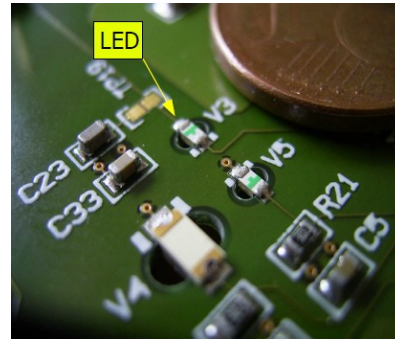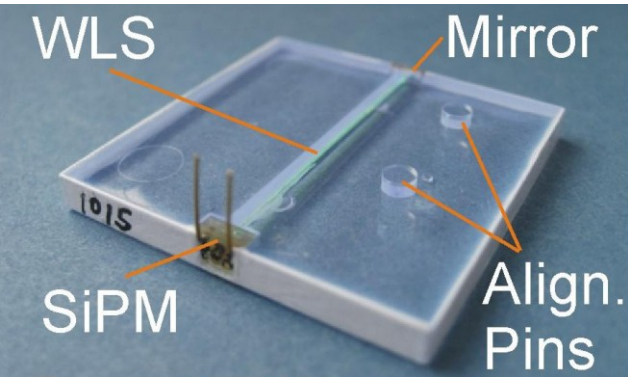


## Embedded LED calibration system

- Provide Gain / saturation calibration for SiPM
- LED mounted on PCB, couple directly to tile

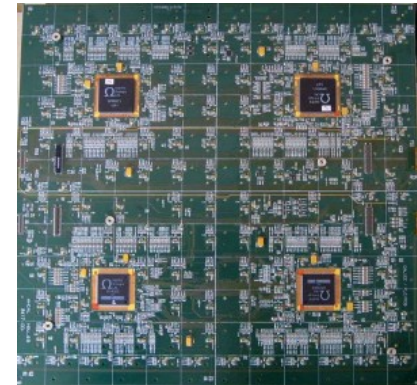

## SPIROC2: specific chip for SiPM readout

- Input DAC for channel-wise bias adjustment (36-ch)
- Power pulsing  $\rightarrow 25 \mu\text{w} / \text{ch}$
- (Auto) dual-gain setup per channel
- Auto-trigger mode
- Timestamp (300ns ramp, 12-bit TDC)
- PCB hosts 4 asics (144 ch), 6 PCB's are chained together in a row

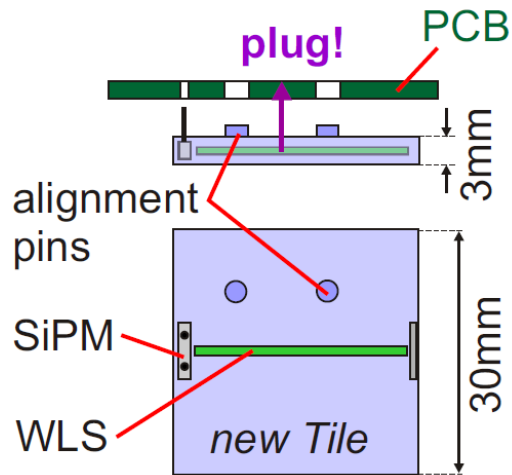

- Active elements are scintillator tiles of  $3 \times 3 \times 0.3 \text{ cm}^3$
- Wavelength shifting fiber embedded into tile, and coupled to SiPM
- Tiles plugged into PCB with 'lego' like pins: nominal tile distance  $100 \mu\text{m}$

# Summary

- Imaging calorimeter is a key ingredient of a detector system optimized for PFA
- CALICE collaboration devoted the last ~10 years into the R&D and developed 2 generations of prototypes
  - The 1<sup>st</sup> generations provide ‘proof of principle’
    - SiW, SciW ECal and Sci AHCAL achieved the goal
    - Gaseous DHCAL, sDHCAL are almost there
  - The 2<sup>nd</sup> generations provide scalable prototypes for a real detector system
    - Several prototypes are being developed / planned