

Pion-production target design for Mu2e-II: status update


Vitaly Pronskikh
Fermilab

On behalf of the LDRD team: I.Fang, K.Lynch, D.Neuffer, J.Popp, D.Pushka

1st Muon Community Meeting
05/20/21

The Mu2e experiment and its upgrade Mu2e-II

- The Mu2e experiment at Fermilab will search for evidence of charged lepton flavor violation by observing the conversion of a negative muon into an electron in the Coulomb field of a nucleus without emission of neutrinos. It will probe effective new-physics mass scales in the 10^3 - 10^4 TeV range.
- The Mu2e-II improved sensitivity would be enabled by the PIP-II accelerator upgrade project, which is a 250-meter-long linac capable of accelerating a 2 mA proton beam to a kinetic energy of 800 MeV corresponding to 1.6 MW of power (Mu2e-II is planning to use 100 kW).

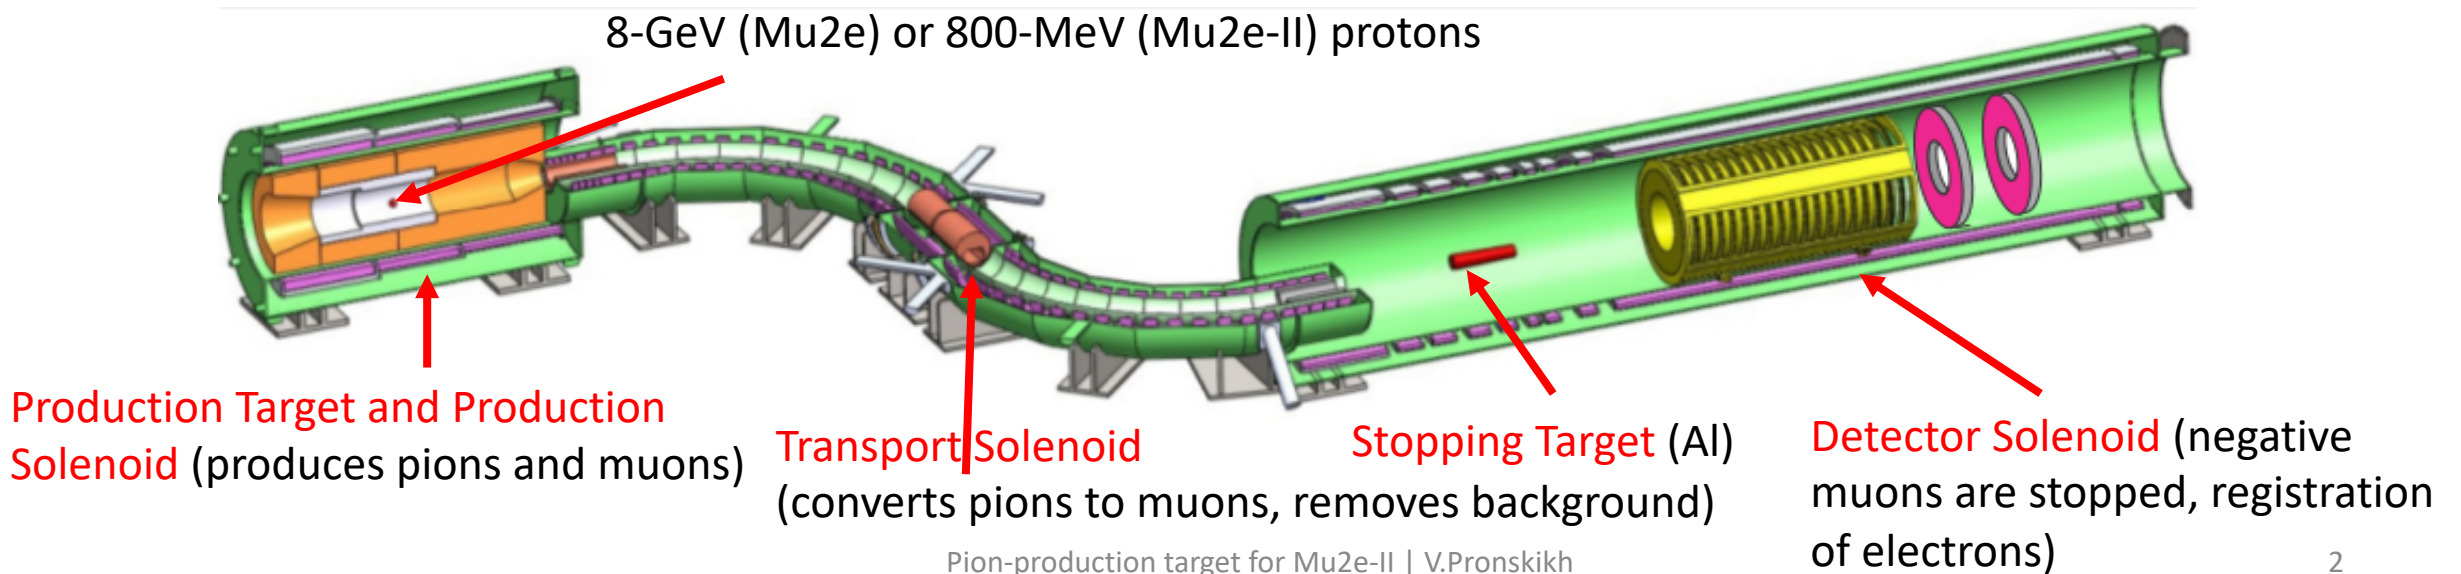


Scope of LDRD (Laboratory-Driven R&D)


- Project for the **PIP-II era**: proton current on the Mu2e target could be higher by as much as a factor of 100 compared to the baseline Mu2e (**~x10 improvement** in the single event sensitivity).
- There is no Mu2e upgrade target concept close to satisfying the new requirements (for a **100-kW 800-MeV** proton beam). (We are aware of a 50-W target prototype designed for MECO and PRISM at Irvine CA: MECO Production Target Development”, J.L.Popp, AIP V.721, p.321, 2003.)
- We are developing a **conceptual design using the MARS15 and G4beamline Monte-Carlo codes, Mathematica** and utilize the most favorable aspects of the **granular, “conveyor”, and rotating cylindrical targets**. We are simulating the **overall target pion production performance and durability at beam induced pulsed energy deposition spikes**, thermal stress, radiation damage, muon stopping rates, residual activation and radiation loads.
- The project is aimed at the **design of the prototype** of the Mu2e-II pion-production target for the **100-kW 800-MeV** proton beam and its mechanical tests.
- **Deliverables:**
- **Mid-2020 – Mid-2021**: the **plausible design** for the Mu2e-II target.
- **Mid-2021 – Mid-2022**: designed, printed, and tested. Conclusions regarding **feasibility** to be drawn.

Designs under consideration


To simulate the overall target pion production performance and durability at beam induced pulsed energy deposition spikes, thermal stress, radiation damage, muon stopping rates, residual activation and radiation loads

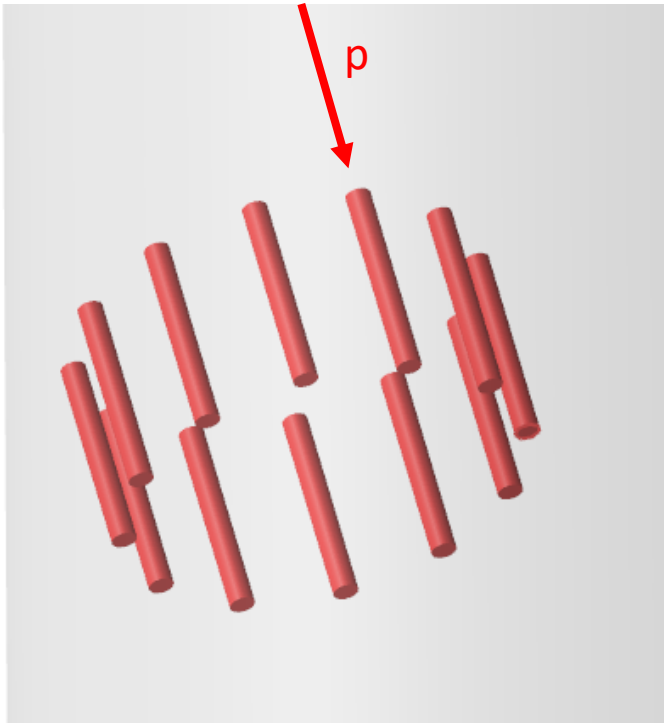

Rotating Elements

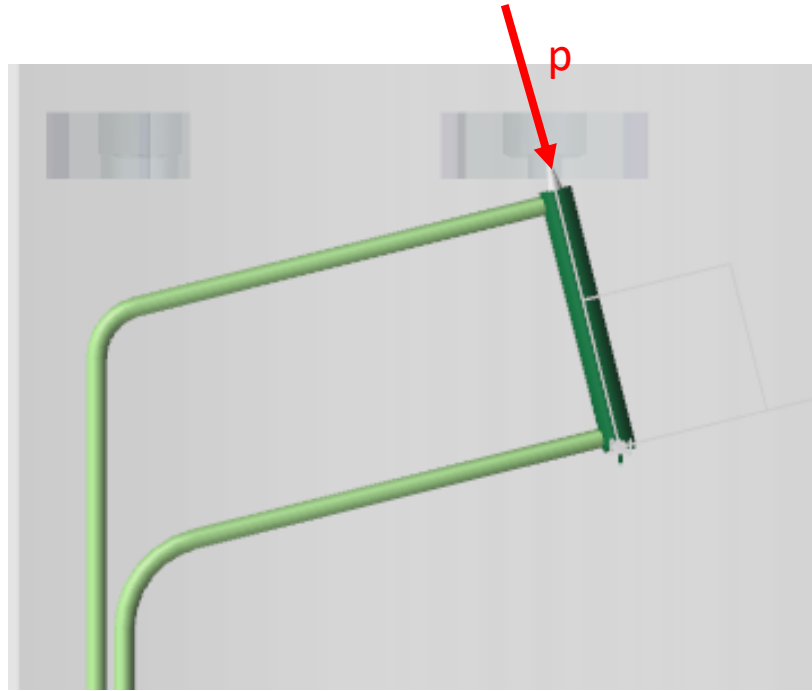


Fixed Granular Target

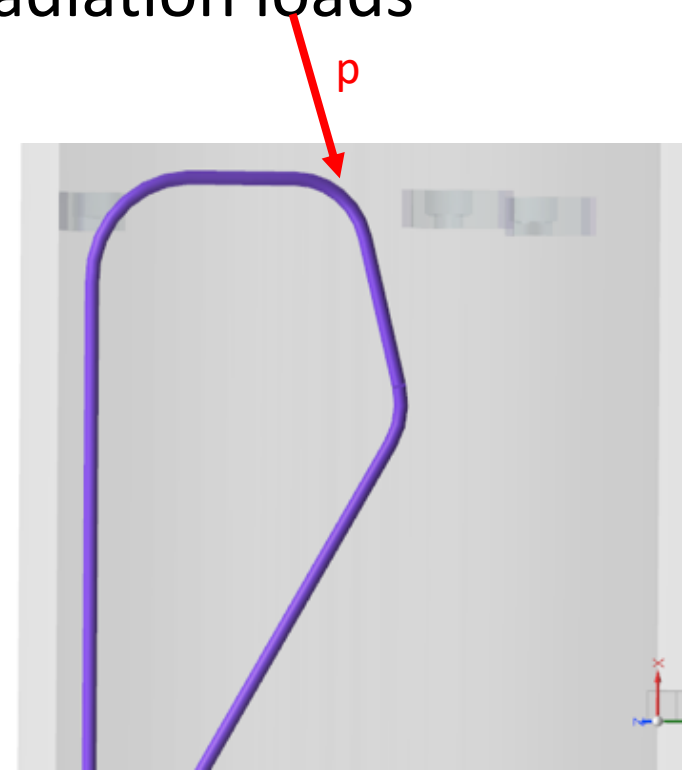


Conveyor

Prioritizing designs


- Constraint: compatibility with the current HRS design (inner bore=20 (25) cm)

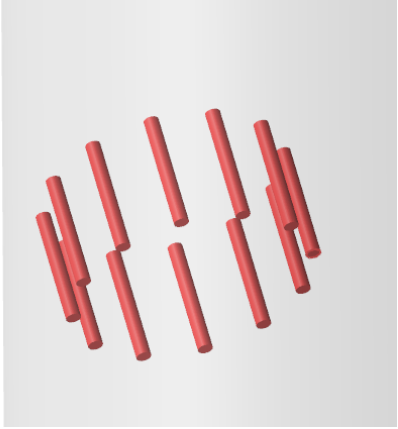

Pros: radiation damage can be distributed over many rods
Cons: its hardware would require a significant space inside the bore (complicates cooling and muon flow)

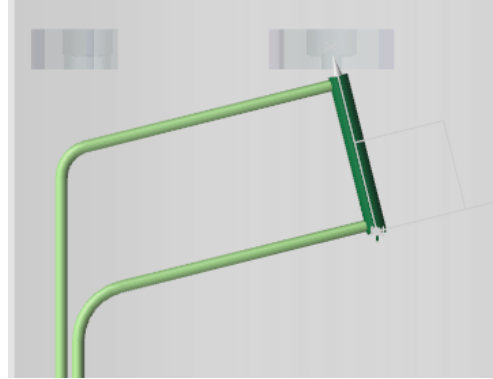


Pros: small space required
Cons: peak DPA (MARS15) >300/yr; gas cooling cannot be performed efficiently

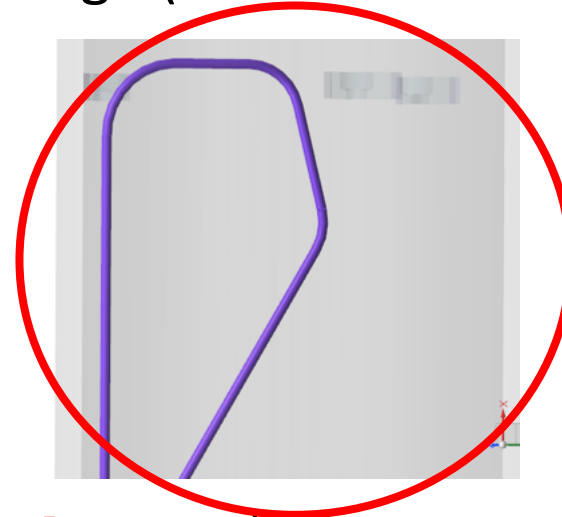

Pros: small space required; He gas could be used for both cooling and moving elements inside conveyor; radiation damage can be distributed; **Cons:** technical complexity (prototyping needed)




Conveyor target length optimization

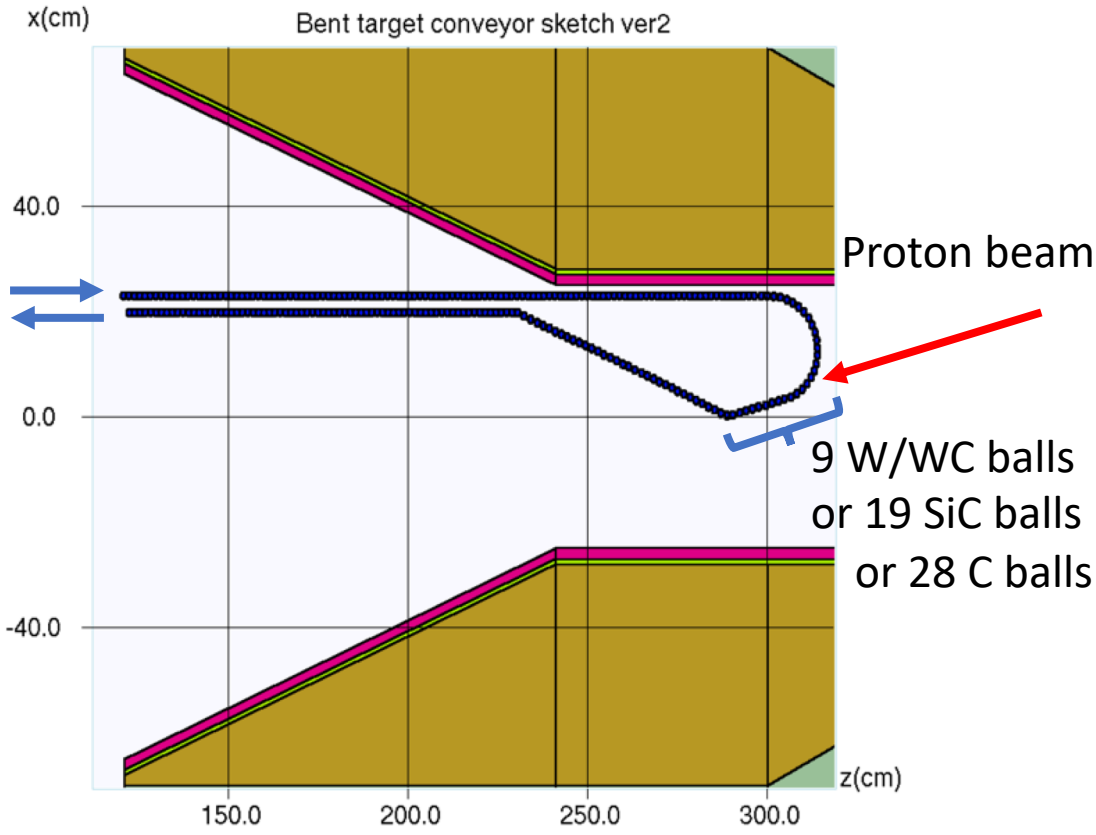

Aspect Ratio z/x = 1.4674; y0 = 0.0000 cm

Rball=0.75 cm; $\sigma=0.1$ cm


Carbon target length optimization by muon stops

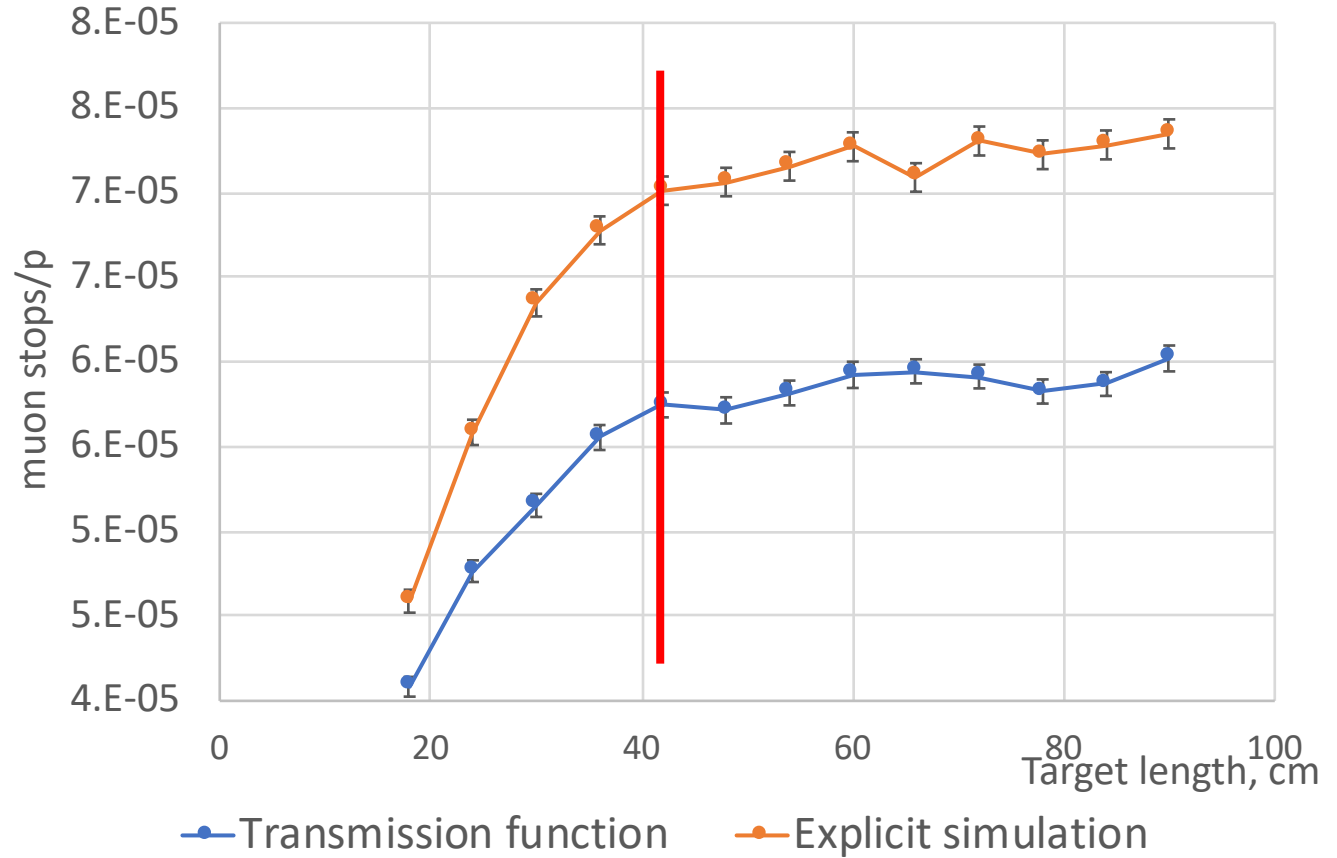


Based on muon stopping rate studies with MARS15 and G4beamline optimal target lengths were determined to be: 28 balls (C target), 9 balls (W and WC targets), 19 balls (SiC); MoGRCF was studied. Agreement between transmission and explicit allows saving computation time.

Edep and radiation damage for a W target

Energy deposition, W



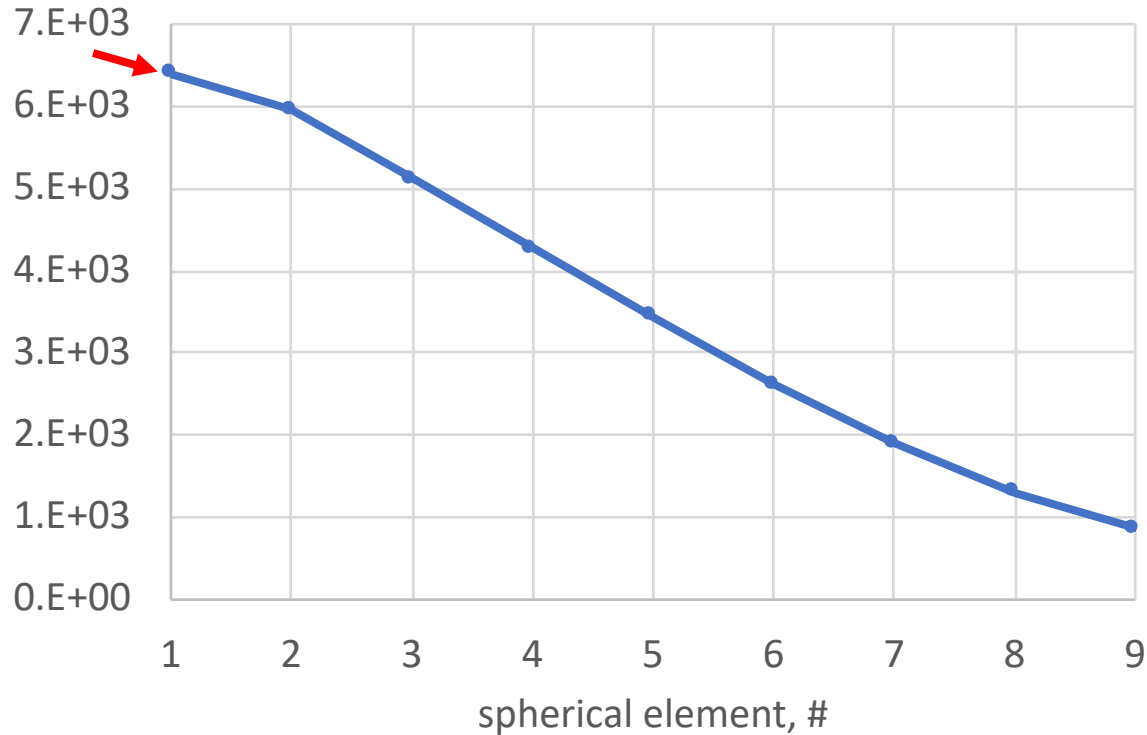


DPA in position/sec

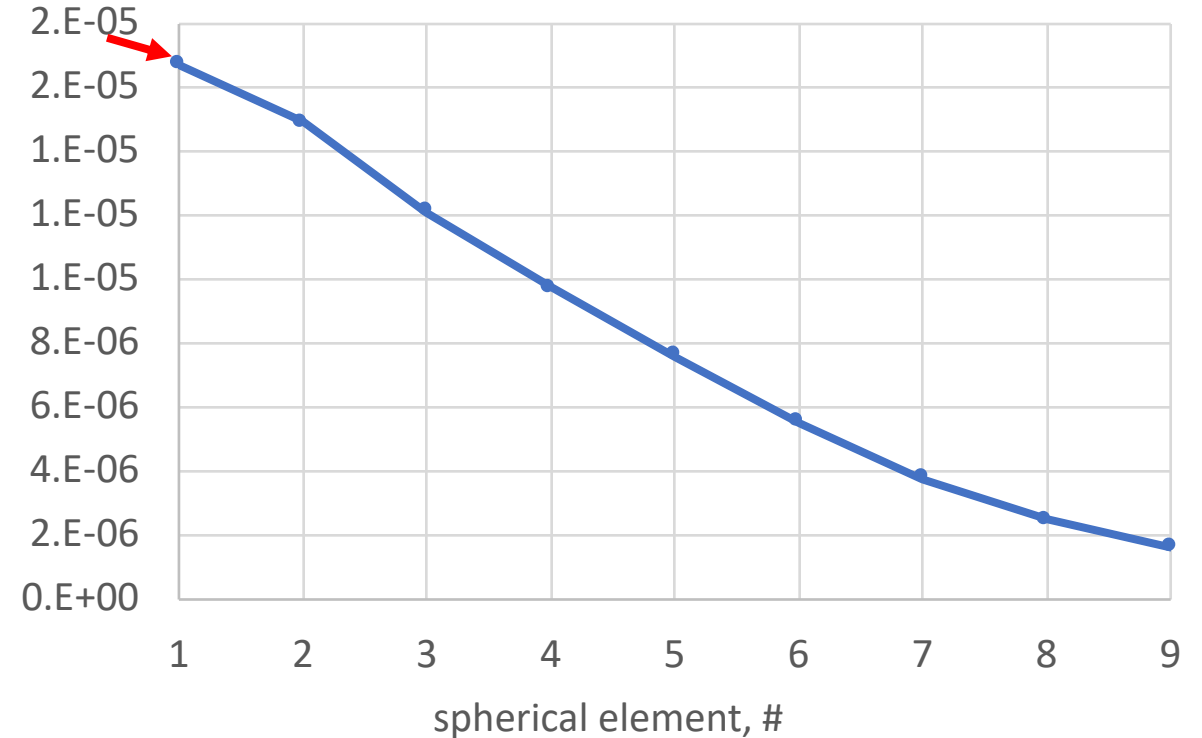

- Total Edep = 31.8 kW; peak DPA (Nordlund) = 330 DPA/yr; min balls required (DPA) = 150/yr
- Motion speed of spherical elements in conveyor is 10 cm/sec
- (1.35 sec for an element to pass the beam). **More balls are required by thermal analysis**

Thermal and mechanical analyses

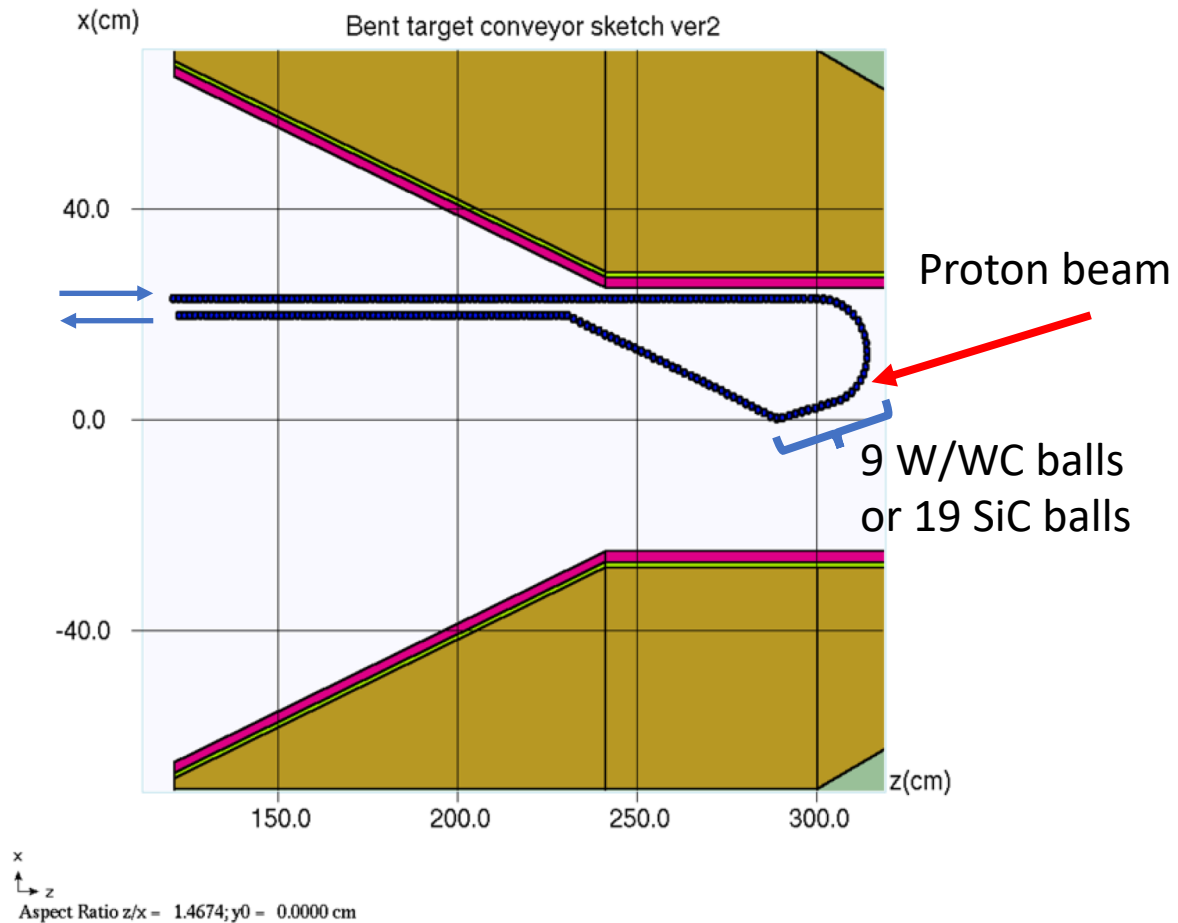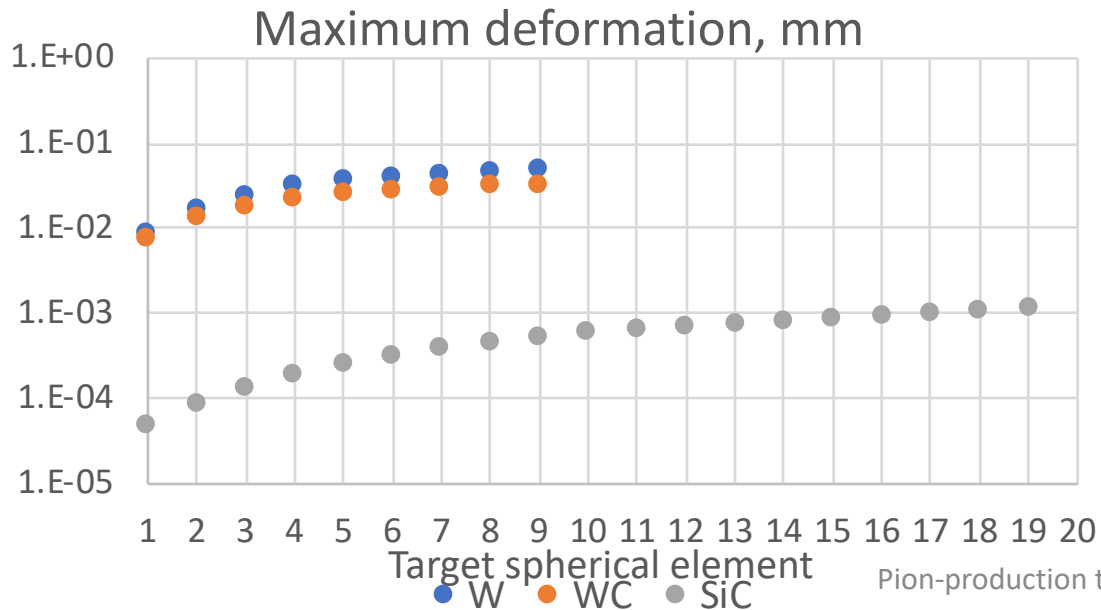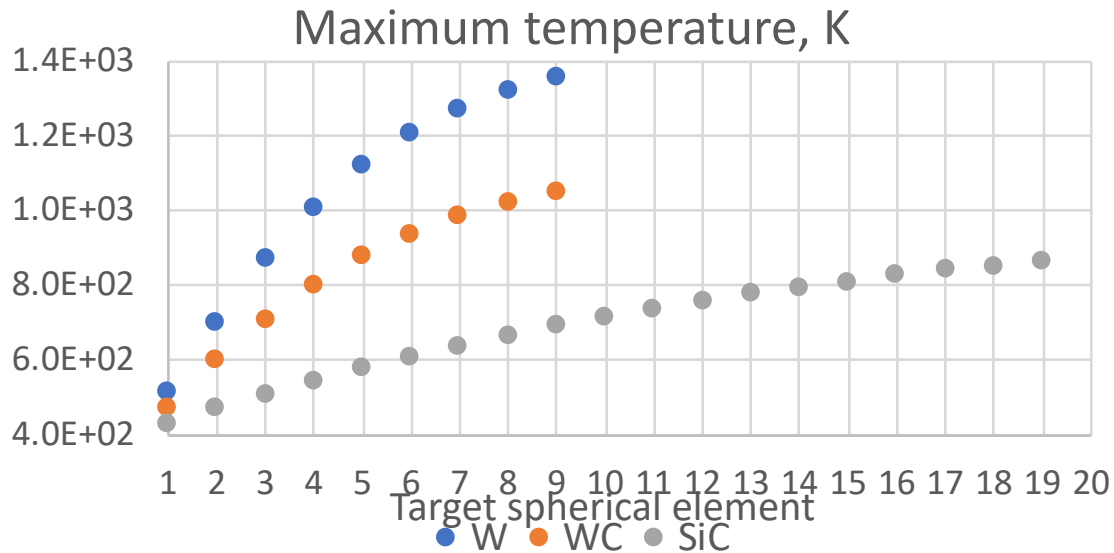

Summary and future plans

- The conveyor bent target (C or W) is the primary candidate for prototyping
- Lengths, shapes, angles, positions for the target elements have been optimized assuming Mu2e baseline parameters
- We found that energy deposition imposes more constraints on number of target elements in the system (requires more elements) than radiation damage (DPA)
- Target version models are being adopted for framework sensitivity analyses, simulations are ongoing
- Cross-comparisons of MARS15 with Fluka and G4bl are being carried out (angular distributions are the next step)
- Currently considering primarily a two-phase (ammonia) cooling

	Tungsten/WC	Lower-density bent (Carbon)
Rotated	Requires a large hardware in HRS	Too large to fit HRS
Fixed granular	DPA is too high	DPA is high; lower pion production
Conveyor	Thermal analysis is ongoing; currently looks feasible	Lower pion production; thermal analysis is ongoing; currently looks feasible

Thank you for your attention!