



Program of joint RP, MDI and HEC session

- Plans for a refined dose model (Claudia Ahdida)
- First considerations for a surface map (Youri Robert)



International
Muon Collider
Collaboration

Plans for a refined dose model

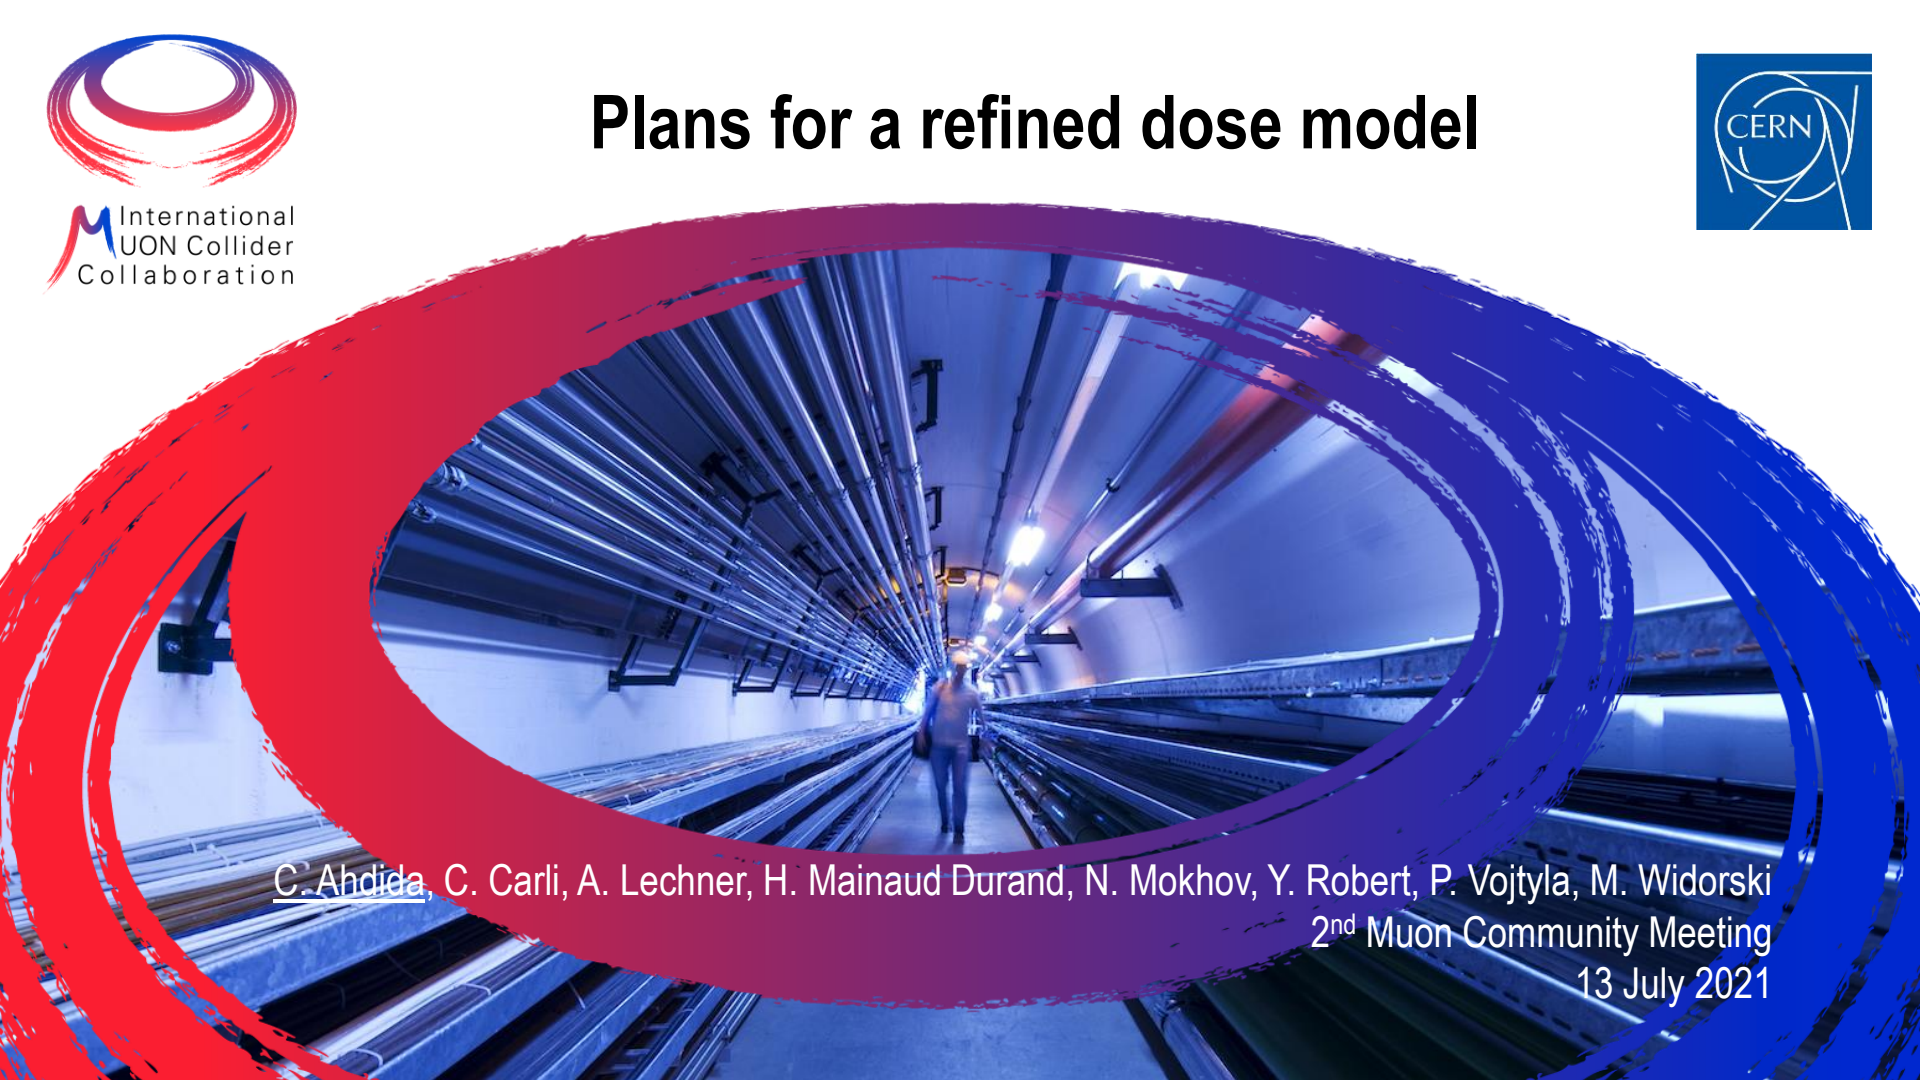

C. Ahdida, C. Carli, A. Lechner, H. Mainaud Durand, N. Mokhov, Y. Robert, P. Vojtyla, M. Widorski
2nd Muon Community Meeting
13 July 2021

List of challenges identified by RP WG

Draft – 07/06/2021

Radiation Protection Challenges

Neutrino Radiation

The main radiation protection challenge of a muon collider is the neutrino radiation emitted by the collider ring and its impact outside the complex. The neutrino radiation arises from the muon decays that produce a neutrino radiation disk emitted out tangentially from the collider ring with radiation hot spots created by straight sections of the collider. Neutrinos are so penetrating that even the earth between the facility and the very distant places where the neutrino radiation disk emerges on the surface is not sufficient to reduce the neutrino flux considerably, which makes the radiation hazard challenging. The exposure comes from secondary particles produced by deep inelastic scattering of the neutrinos in the upstream earth. Several past studies have generally addressed the potential neutrino doses showing a substantial neutrino-induced dose at far distances from the collider, particularly from straight sections. At the same time, the studies have proposed several possible mitigation methods and have shown the need for a more reliable dose estimation. An optimized and refined dose model is needed in particular for reducing individual effective doses to members of the public to about 10 μ Sv or less – a constraint below which the optimisation requirement is considered as fulfilled and public acceptance can be expected.

The following two main R&D items were identified to tackle the given neutrino radiation challenge.

1. Refined dose model

A refined dose model for a reliable and precise estimation of neutrino-induced doses outside the complex shall be developed and used for a collider ring optimization to minimise the doses impact on the public.

Such a dose model shall be based on the stipulated collider parameters. For the well-defined operational modes and scenarios, including accidents, the neutrino source term shall be defined and optimized. The optimization shall cover the optics design of the collider ring insertions, in particular the final focus, the RF section, as well as the injection and extraction. Further mitigation methods such as orbit oscillations could be investigated. Additional refinement and optimization shall also assess civil engineering challenges, for instance the choice of the site and layout including the depth and inclination of the collider ring layout. A surface map showing the regions impacted by the neutrino radiation shall be established.

The given dose model shall allow for a full path assessment between the source and the impact locations. In addition, it shall be used to evaluate the fluence spectra of the secondary particles produced by the neutrino interactions needed to design suitable monitoring instrumentation.

In addition, a sensitivity analysis for the model parameters, for example alignment, optics, material properties, etc., shall be performed. The underlying simulation models and codes shall be validated as well.

The representative person from the public shall be finally identified for which the final dose assessments in planned as well as potential exposure situations will be carried out to demonstrate the facility compliance with the radiation protection regulations in force.

cal wobbling magnets”)

ward from a muon collider would be to move the beam line by defocusing the beamline in the vertical plane to a very low frequency movements of components (on a 1 cm, considering an opening angle of 1 mrad, 14 TeV, C case.

high resolution movers to perform “safe” remote ment solution to monitor and control the position of amplitude displacements

ity needed to develop a solution to determine in a) imponents underground with respect to the surface.

of the art concerning remote alignment of synchrotron stion use remote alignment, on short ranges (maximum at CERN, the Full Remote Alignment System (FRAS) will its size more than 200 m on each side of the ATLAS and (adjustment of the components within 2.5 mm over a om the 15 cm of amplitude requested. First, a more lab should be performed, while establishing in parallel olutions to be developed. Second, a study of different ping specific solutions and their prototypes. Third, the- this, specific points should be tackled like the impact of stem, vacuum, and other tunnel systems.

calorator components will have to be known w.r.t. the entore, an important number of geodetic studies and olometer like the LHC, the absolute position of the heir initial alignment; each component is aligned with , determined w.r.t. surface geodetic reference network, ine, it is only the relative alignment of components over matters: the machine and its shape can drift w.r.t. their the case of the muon collider and solutions to transfer rface geodetic network to the underground geodetic rate definition of the areas where the neutrinos beams it: to store all these underground positions and the to be developed under a GIS platform.

RP

also conventional radiation protection challenges need to be addressed at an early stage of the project as they strongly determine the design of the facility.

According to the radiation protection principles, the exposure of persons to radiation and the radiological impact on the environment must be optimized. To allow for such optimization, numerous radiation protection guidelines should be followed from the design phase onwards. Due to the high

ngt and residual dose rates require considerable shielding to interventions in the radiologically critical areas of the ed air and fire as well as the impact of its release into the ext to that, the release of potentially activated water and and groundwater surrounding the facility needs to be the minimisation, processing and storage of radioactive

required detail for the initial design proposal of the test an collider complex.


with the radiation protection challenges mentioned above, potentially upgradable to the order of 4 MW beam power- s choices. For example, sufficient space for adding the (e.g. a morgue room) would need to be foreseen as well define the highly radioactive zone and avoid streaming of e depth of the facility should be chosen such to prevent put on a He vessel needed around the target, which is the vivigant.

4. Key areas of the complex

Similarly to the test facility, also for the key areas of the muon collider complex, the main radiation protection challenges should be taken up at an early stage. In particular, for the high-power target complex, the radiation protection requirements are expected to have an important impact on the design.

- Neutrino Radiation
 1. Refined dose model
 2. Mitigation by movers (“mechanical wobbling magnets”)
- Additional Radiation Protection challenges
 3. Test facility
 4. Key areas of the complex

Overview of work related to a refined dose model

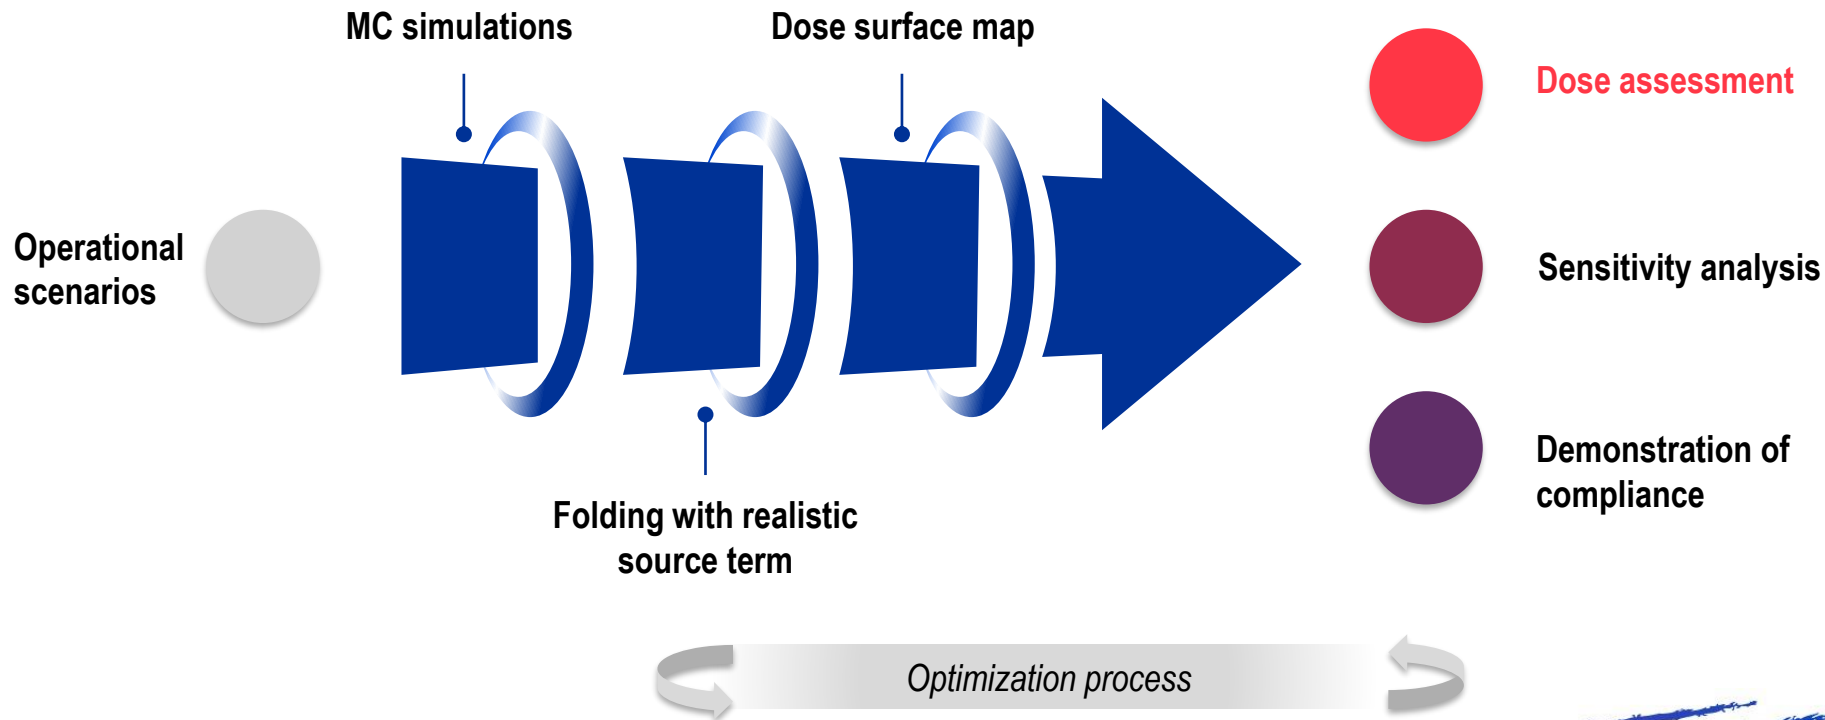

Operational scenarios

- Dose model shall be based on the stipulated collider parameters

Tentative target parameters

*Defined by the
Muon Beam Panel*

Target integrated luminosities		Tentative target parameters Scaled from MAP parameters			Comparison: CLIC at 3 TeV: 28 MW	
\sqrt{s}	$\int \mathcal{L} dt$	Parameter	Unit	3 TeV	10 TeV	14 TeV
3 TeV	1 ab ⁻¹	L	10 ³⁴ cm ⁻² s ⁻¹	1.8	20	40
10 TeV	10 ab ⁻¹	N	10 ¹²	2.2	1.8	1.8
14 TeV	20 ab ⁻¹	f _r	Hz	5	5	5
		P _{beam}	MW	5.3	14.4	20
		C	km	4.5	10	14
			T	7	10.5	10.5
		ε _L	MeV m	7.5	7.5	7.5
		σ _E / E	%	0.1	0.1	0.1
		σ _z	mm	5	1.5	1.07
		β	mm	5	1.5	1.07
		ε	μm	25	25	25
		σ _{x,y}	μm	3.0	0.9	0.63


Reasonably conservative

- each point in 5 years with tentative target parameters
- FCC-hh to operate for 25 years
- Aim to have two detectors
- But might need some operational margins

Note: focus on 3 and 10 TeV
Have to define staging strategy



- A dose model will be defined for each parameter set
- Prioritization (?):
 - 3 TeV
 - 10 TeV
 - 14 TeV




Past Monte Carlo simulations



Few examples


- **Comprehensive MARS15** simulations with a sophisticated neutrino interaction model crucial for evaluation of induced dose and secondary particle for monitoring
→ Mokhov and Ginneken, Neutrino Radiation at Muon Colliders and Storage Rings, 2000
- Studies for E_{com} 0.5, 1, 3, and 4 TeV muon colliders:
 - Effective dose for broad and pencil neutrino beams
 - Secondary particle equilibrium and non-equilibrium cases
 - Maximum and whole-body values for variety materials upstream the tissue-equivalent phantom
 - Contributions from both the collider ring and field free drifts
 - Standalone case of monoenergetic neutrino beams of energies from 100 MeV to 10 TeV
 - Idea of vertical wobbling of muon beams in the ring was introduced and calculated showing substantial effect of dose reduction
- Good agreement with **FLUKA** simulations
→ Bartosik et al., Preliminary Report on the Study of Beam-Induced Background Effects at a Muon Collider, 2019

MARS15 dose eq. vs. distance + E_ν for diff. materials

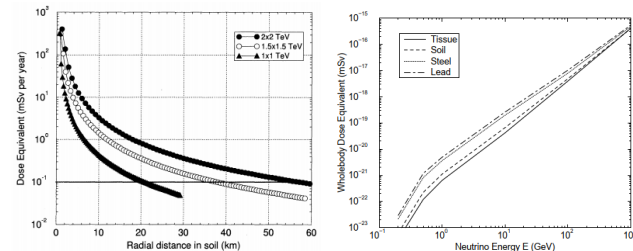

Mokhov and Ginneken, Neutrino Radiation at Muon Colliders and Storage Rings, 2000



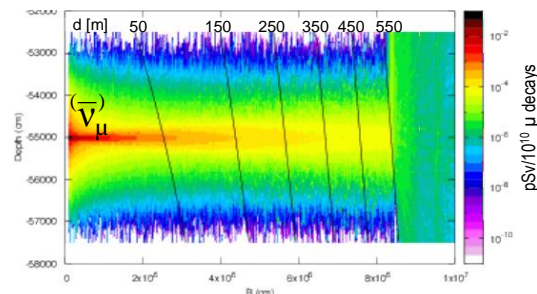

FLUKA $H^*(10)$ for 2 TeV vs. distance + depth



Bartosik et al., Preliminary Report on the Study of Beam-Induced Background Effects at a Muon Collider, 2019

→ To be built on for additional MC studies


Plans for Monte Carlo simulations

- Simplified FLUKA and MARS simulations with a **pencil neutrino beam** for the given operational scenarios (E_{com} 3, 10, 14 TeV (tbc)) to evaluate main parameters for the dose predictions, such as:
 - **Dose distribution** for different distances (collider depths) assuming secondary particle equilibrium (i.e. inside material)  Folding w realistic source term
 - **Sensitivity studies** for underlying assumptions (e.g. material properties, ν_e/μ and antineutrino)  Sensitivity analysis
 - **Differences** of possibly relevant **dosimetric quantities** (e.g. effective dose, ambient dose equivalent, eff. dose equivalent)  Demonstration of compliance
 - Difference to a more realistic **full path assessment**  Sensitivity analysis
 - **Secondary particle spectra** needed to design suitable monitoring instrumentation
- Benchmarking of **neutrino interaction models**

Folding with a realistic source term

- Evaluate **dose distributions** for a **realistic neutrino source term** taking into account:
 - The **real lattice** (collider, injection, accelerators)
 - The angular distribution from the **muon decay**
- Fold the information from MC simulations to estimate the dose distributions
 - more precise and less conservative dose estimation than analytical approach taking additional spread of secondary particle distribution into account
- **Identification of critical regions** (high dose areas)
- **Optimization** of the **source term** (e.g. lattice, wobbling) with respect to the dose
- **Sensitivity study** of underlying assumptions (e.g. closed orbit positions)

Example of using analytical approach for region around IP

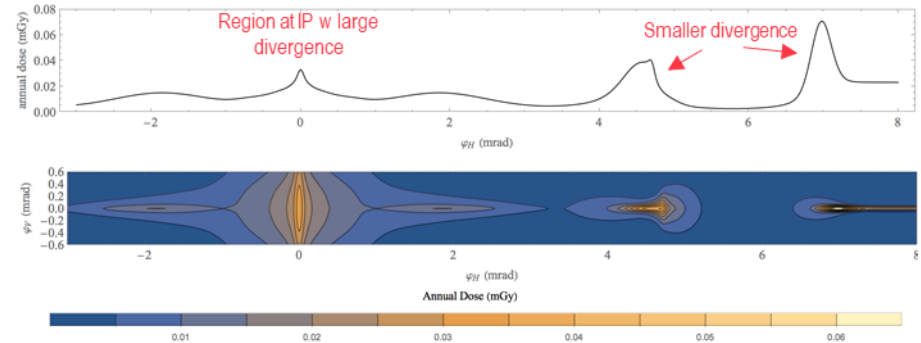


C. Carli, Considerations on Radiation, Muon Collider Design Meeting, 08.03.2021
(3 TeV, 100 m depth, analytical approach based on B. King)

➤ Dose surface map

➤ Sensitivity analysis


Dose surface map

- Establish **surface map of dose**
- **Optimization** w.r.t. depth, orientation and inclination
- Investigation of different **site options**
- Evaluation of **uncertainties** of methodology (e.g. accuracy of terrain model) ➤ Sensitivity analysis
- Preliminary study of where ν break ground for LHC/SPS straight sections (see presentation Y. Robert)
- Findings from simplified geometrical considerations (Earth as perfect sphere, no divergence, no collider inclination) for ν beam:
 - ν disk has a height (a) of ~ 1.1 - 2.5 m and traverses a region of width (b) of ~ 100 - 450 m
 - For dose additional spread of few m due to sec. particle shower
 - Exit angle of ν radiation is very small, wherefore **impacted area** can be of **several km** depending on height considered

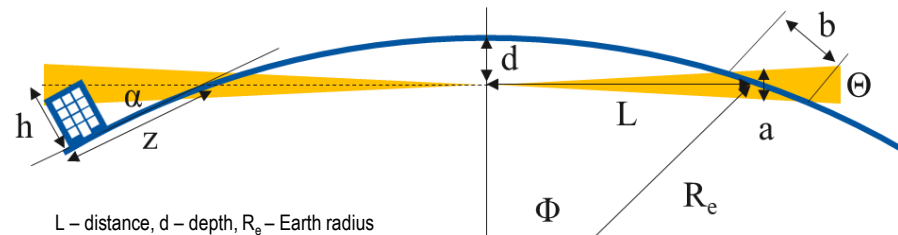


E_{com} [TeV]	3	10	10	14	14
d (m)	100	200	300	400	500
L (km)	36	51	62	71	80
a (m)	2.5	1.1	1.3	1.1	1.2
b (m)	449	135	135	96	96

100 m depth



500 m depth



$$L^2 = R_e^2 - (R_e - d)^2$$

$$\theta \sim 1/\gamma$$

$$a \approx 2\theta L$$

$$b \approx a/\phi, \sin \phi = L/R_e$$

Dose assessment

- Identify representative person from public for a final dose assessment
- As a general worst case scenario, one would have to assume maximum exposure and irradiation conditions (e.g. sick person lying in bed 24/7 at the location of the maximum dose)
 - Dose optimization to $O(10)$ $\mu\text{Sv}/\text{year}$
- Depending on the dose surface map, for certain regions of higher dose (e.g. for critical straight sections), possible exclusion of such a worst case scenario even for the far future
 - Dose higher than $O(10)$ $\mu\text{Sv}/\text{year}$ depending on possible exposure scenarios (e.g. lake, mountains, ocean, exclusion area)
 - Depends on acceptance by authorities and public
 - Uncertainty of the dose surface map




Sensitivity analysis

100 rem = 1Sv

ICRP and IAEA Safety standards –


Relationship between dose limit, generic and specific dose constraint, and optimization level

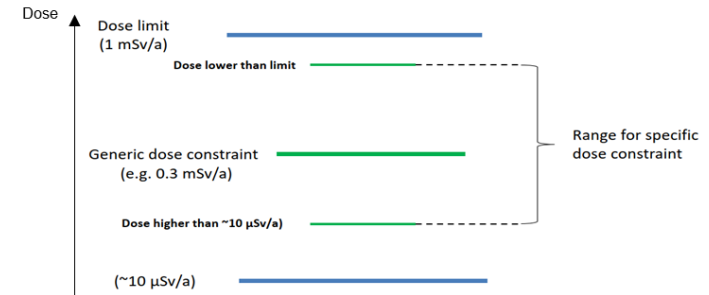

IAEA Safety Standards, General Safety Guide, No. GSG-9

Sensitivity analysis and demonstration of compliance

Sensitivity analysis

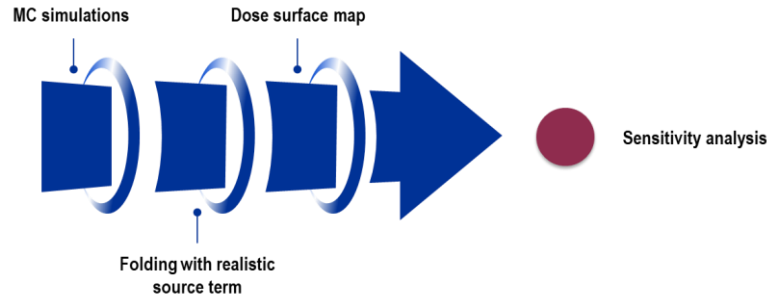

- Uncertainties of dose estimate to be defined based on the various underlying parameters and assumptions
- This includes uncertainties for the dose distribution as well as its projection on the surface

Demonstration of compliance

- Evaluate means to demonstrate compliance of the dose estimates, both at the source (emission) and impact side (immission)

Source side

- Measure muon beam parameters (e.g. divergence)

Impact side

- Design suitable monitoring instrumentation for measuring the dose from the secondary particles produced by the neutrino radiation

Proposed Workpackage Description

Neutrino radiation

1. Refined dose model

A refined dose model for a reliable and precise estimation of neutrino-induced doses outside the complex shall be developed and used for a collider ring optimization to minimise the dosimetric impact on the public

2. Mitigation by movers

Mitigation by movers, which move the beam line components to change the beam direction by deforming the beamline in the vertical plane

Additional RP challenges

3. Test facility

The test facility design will have to be optimised w.r.t. prompt and residual radiation, air/He/N activation, water and soil activation, and radioactive waste production, particularly when aiming at potentially upgrading to O(4) MW beam power

4. Key areas of the complex

Similarly to the test facility, also for the key areas of the muon collider complex, the main RP challenges should be investigated at an early design stage

Proposed Workpackage Tasks and Timeline – Refined Dose Model

Preliminary –
Timeline tbd

- **MC simulations**
 - MC simulations (FLUKA, MARS) to evaluate main parameters for the dose predictions and their uncertainties [202X-202X]
 - Benchmarking of neutrino production and interaction models [202X-202X]
- **Folding with realistic source term**
 - Evaluation of a realistic neutrino source term and folding with dose distributions from MC simulations [202X-202X]
 - Further optimization and sensitivity analysis [202X-202X]
- **Surface map**
 - Surface map of the dose for given site options [202X-202X]
 - Further optimization and sensitivity analysis [202X-202X]
- **Dose assessment + demonstration of compliance**
 - Perform final dose assessment and develop possible methods to demonstrate compliance [202X-202X]

Information Needed For Workpackage

- Specific collider parameters (E, circumference) are needed as input for the refined dose model [ASAP]
- *Other?*


Proposed Workpackage Tasks and Timeline – Mitigation Using Movers



Very preliminary work plan

- *K1: Development of large stroke/high resolution movers*
 - Study of SOTA / establishment of requirements (tech. Student) [ASAP]
 - Study of different options, concepts, up to the engineering (PhD student) [2022-2024]
 - Qualification of prototypes (tech student) [2025]
- *K2: Development of remote solutions to control the position of components*
 - Study of solutions + concepts of alignment sensors (PhD student) [2022-2024]
 - Development of first options / solutions / qualification of prototypes (fellow) [2024-2026]
- *K3: Accuracy of absolute position needed (underground vs surface)*
 - Some synergies with Geodetic studies undertaken for FCC
 - Adapt them to the specific case of muon collider: simulations (Post-doc) or development of specific methods (PhD student)

Timeline until next ESPPU

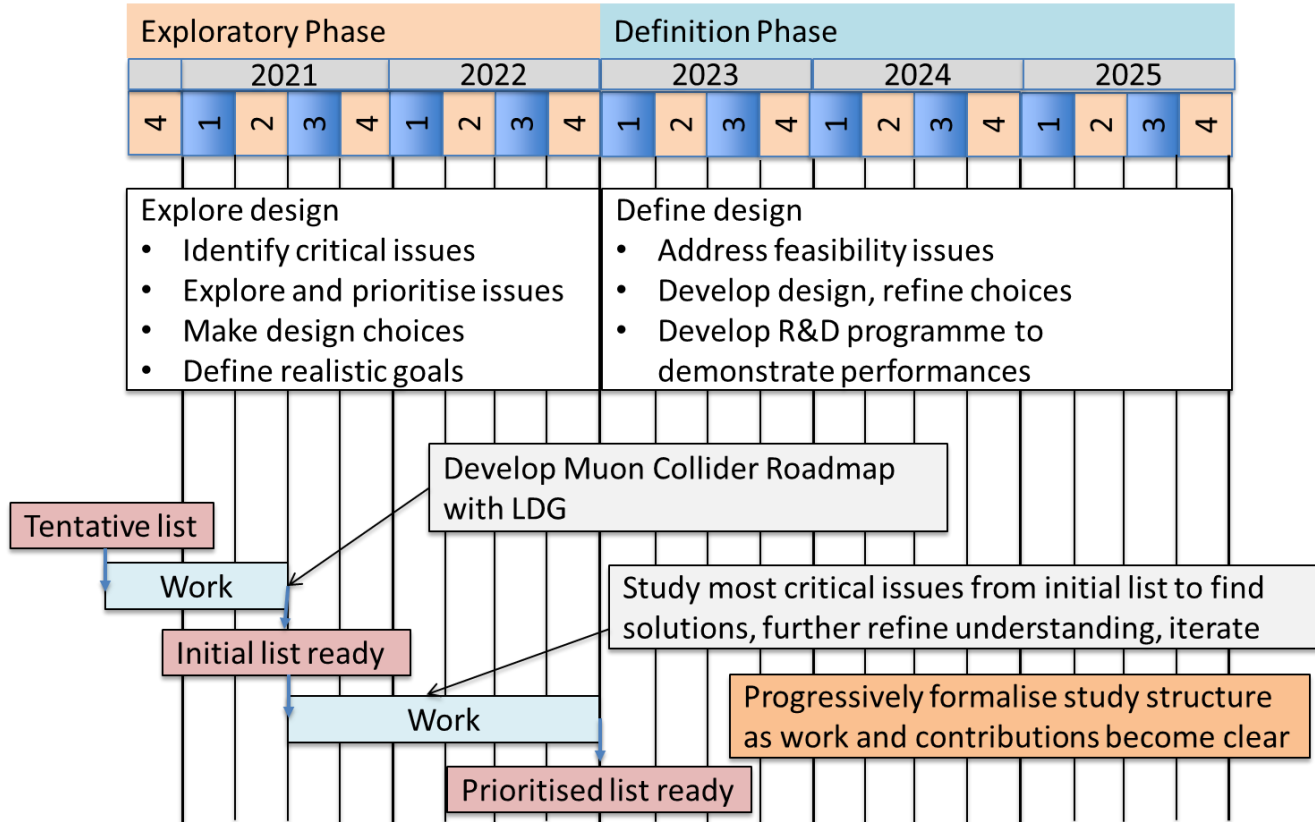


Proposed workpackage resources


Preliminary

Task	Staff [pm]	postdoc [pm]	student [pm]	Cash [kEUR]	Comment
MC simulations					SY-STI (CERN), Fermilab, HSE-RP (CERN)
Folding w realistic source term					BE-ABP (CERN)
Surface map					SCE-SAM (CERN)
Dose assessment	0.25 – 0.35 FTE/y				HSE-RP (CERN); includes also coordination+discussion for above tasks
Mitigation with movers					BE-GM (CERN)
Test facility	0.25 FTE/y + 0.1 FTE/y (tbd)	1-2 senior fellows – 2022-2025 (tbd)			HSE-RP (CERN); includes radiation protection and environmental assessment
Key areas of complex					

Additional people interested in participating to define and carry out the work are of course very welcome!

Technically Limited Long-Term Timeline

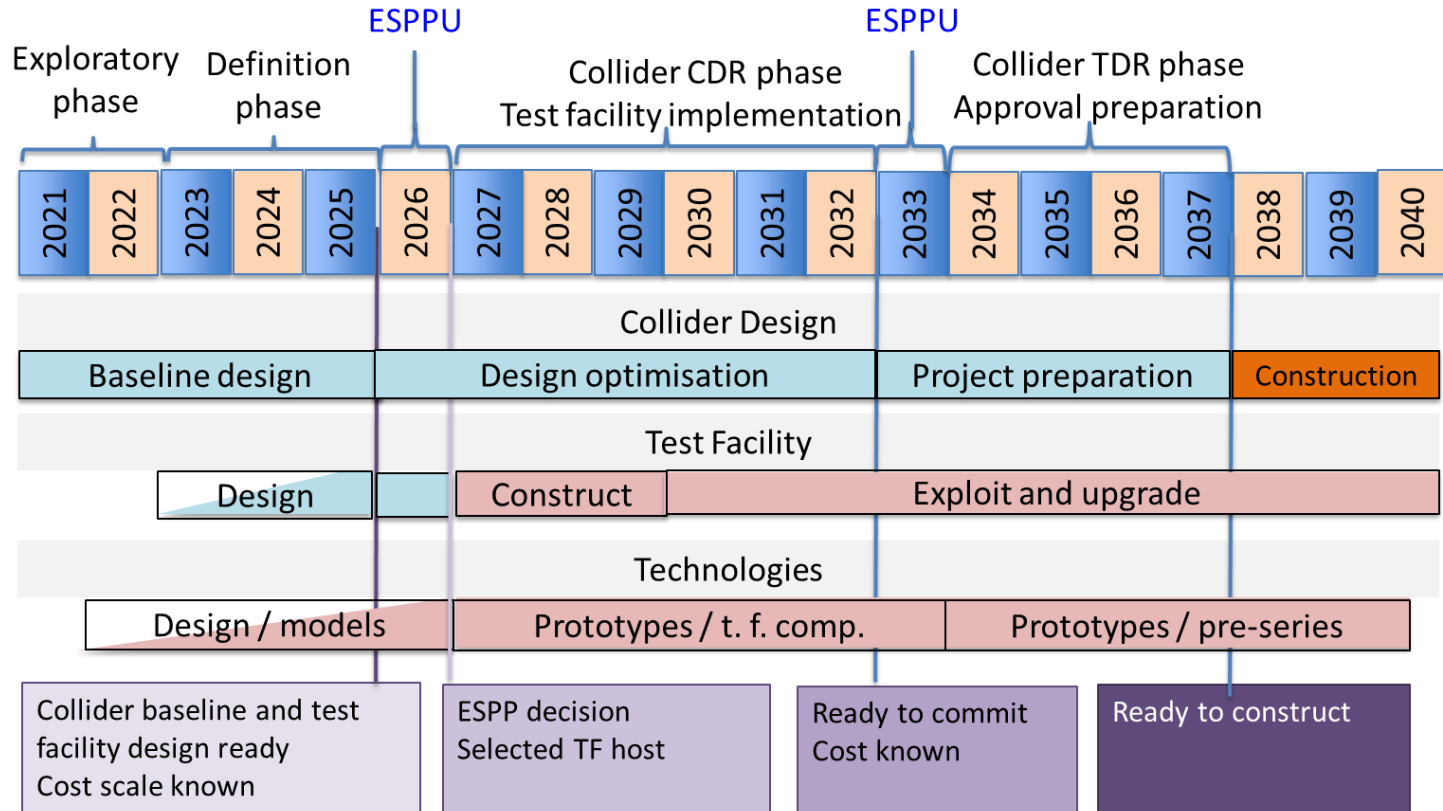

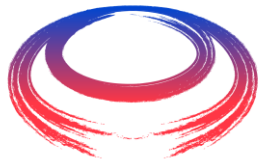


International
UON Collider
Collaboration




***Thank you
for your attention!***

Dose estimation with MAP lattice – C. Carli

Center of arc cell

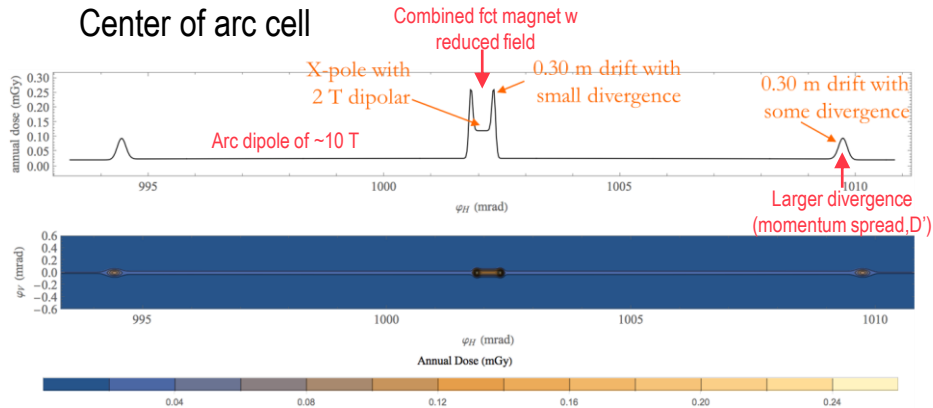

Region around IP

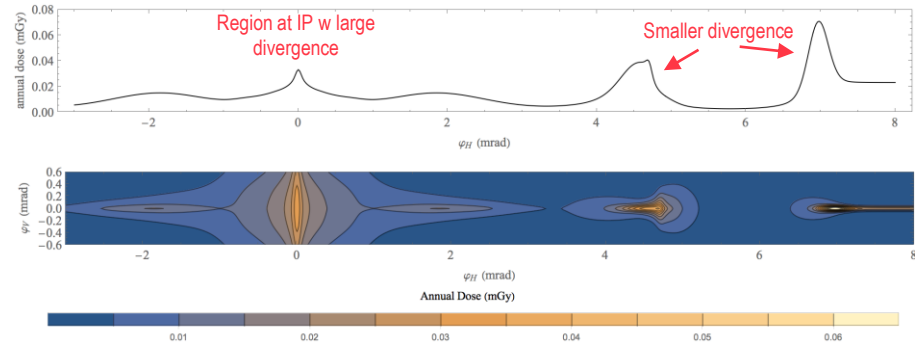


According to paper of B. King $Gy! = Sv$

- Based on analytical approach by B. King
- Application to 3 TeV c.o.m. lattice from MAP study ($9e20 \mu$ decays per year, depth = 100)
- Findings from the arcs: higher doses for reduced field sections and peak doses for small (30 cm) drift sections
- Findings close to IP: beam divergence relatively large at IP and higher dose from regions with smaller vertical/horizontal divergence

- Conclusions:
 - Beam divergence not always negligible (contributions from D' w large momentum spread), which mitigates radiation from straight sections
→ avoid combined function magnets w too low dipolar field components
- Outlook:
 - Improve lattice designs in arcs (e.g. avoid short straight sections w $D'=0$, increase dipolar component of combined function magnets)

Mitigation using movers – H. Mainaud Durand

- Mitigation studies on the so-called neutrino radiation:
 - One possibility would be to move the beam line components to change the beam direction (by deforming the beamline in the vertical plane).
 - Very low frequency movements of components within 15 cm.

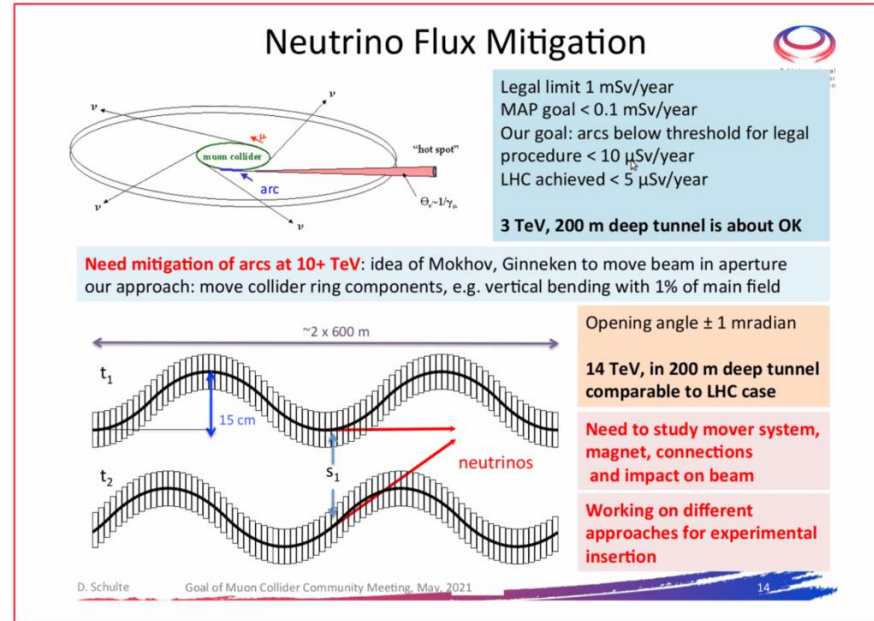

- Brief overview of state of the art including Full Remote Alignment System (FRAS): ± 5 mm

Mitigation using movers – H. Mainaud Durand

Studies to undertake / points to check (only subset given here)

- Study in further details the state of the art concerning adjustment solutions
- Have a better understanding of the requirements
 - Range of movers ? Resolution? Accuracy?
 - Long-term stability, impact of vibrations?
 - Frequency of adjustment?
 - Constraints from other equipment like cryo and vacuum (acting forces, flexibility)?
 - Weight, size and number of components?
- Study and develop alignment solutions and associated sensors for allowing to do such remote adjustment



Identified key issues

- K1. Development of large stroke/high resolution movers to perform safe remote displacements
- K2. Development of remote solutions to control the position of components (for circular collider), adapted to such ranges of displacements
- K3. Study of the accuracy needed / necessity to develop a solution to determine in a continuous way the absolute position of components underground vs. surface
 - + specific points to address (impact on other equipment, safe control system)