

Joint Universities Accelerator School

JUAS 2019

Archamps, France, 18 – 20th February 2019

Normal-conducting accelerator magnets

Lecture 1: Basic principles

Thomas Zickler

CERN



Scope of the lectures


Overview of electro-magnetic technology as used in particle accelerators considering *normal-conducting, iron-dominated* electro-magnets (generally restricted to direct current situations)

Main goal is to:

- create a fundamental understanding in accelerator magnet technology
- provide a guide book with practical instructions how to start with the design of a conventional accelerator magnet
- focus on applied and practical design aspects using 'real' examples
- introduce finite element codes for practical magnet design
- present an outlook into magnet manufacturing, testing and measurements

Not covered:

- permanent magnet technology
- superconducting technology

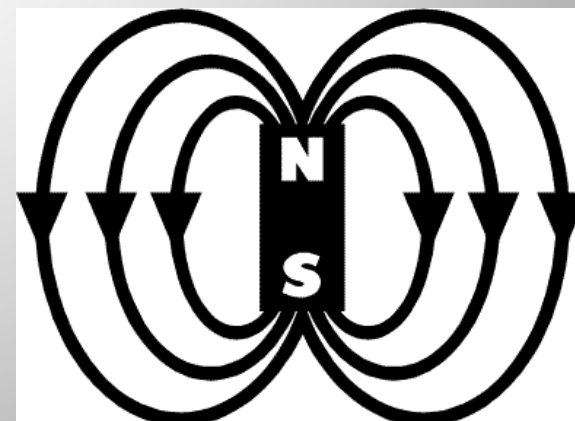



Literature

- [CAS proceedings](#), Fifth General Accelerator Physics Course, University of Jyväskylä, Finland, September 1992, CERN Yellow Report 94-01
- International Conference on Magnet Technology, Conference proceedings
- Iron Dominated Electromagnets, J. T. Tanabe, World Scientific Publishing, 2005
- Magnetic Field for Transporting Charged Beams, G. Parzen, BNL publication, 1976
- Magnete, G. Schnell, Thiemig Verlag, 1973 (German)
- Field Computation for Accelerator Magnets: Analytical and Numerical Methods for Electromagnetic Design and Optimization, S. Russenschuck, Wiley-VCH, 2010
- [Practical Definitions & Formulae for Normal Conducting Magnets](#), D. Tommasini, Sept. 2011
- [CAS proceedings](#), Magnetic measurements and alignment, Montreux, Switzerland, March 1992, CERN Yellow Report 92-05
- [CAS proceedings](#), Measurement and alignment of accelerator and detector magnets, Anacapri, Italy, April 1997, CERN Yellow Report 98-05
- The Physics of Particle Accelerators: An Introduction, K. Wille, Oxford University Press, 2000
- [CAS proceedings](#), Magnets, Bruges, Belgium, June 2009, CERN Yellow Report 2010-004

... and there will be a Special CAS on Normal-Conducting Magnets in autumn 2020
(see: <https://cas.web.cern.ch/>)



Acknowledgements

Many thanks ...

... to all my colleagues who contributed to this lecture, in particular L.Bottura, M.Buzio, B.Langenbeck, N.Marks, A.Milanese, S.Russenschuck, D.Schoerling, C.Siedler, S.Sgobba, D.Tommasini, A.Vorozhtsov



Program (1)



Lecture 1

Monday 18.2. (10:45 – 12:15)

Introduction & Basic principles

- Why do we need magnets?
- Basic principles and concepts
- Magnet types in accelerators

Lecture 2

Monday 18.2. (14:00 – 15:00)

Magnet production, tests and measurements

- Magnetic materials
- Manufacturing techniques
- Quality assurance & tests

Lecture 3

Monday 18.2. (15:00 – 16:00)

Analytical design

- What do we need to know before starting?
- Yoke design
- Coil dimensioning
- Cooling layout
- Cost estimation and optimization



Program (2)



Lecture 4

Tuesday 19.2. (15:00 – 16:00)

Applied numerical design

- Building a basic 2D finite-element model
- Interpretation of results
- Typical application examples

Tutorial

Tuesday 19.2. (16:15 – ???)

Case study (part 1)

- Students are invited to design and specify a ,real' magnet
- Analytical magnet design with pencil & paper

Mini-workshop

Wednesday, 20.2. (9:00 – 12:00)

Case study (part 2)

- Computer work
- Numerical magnet design

Exam

Thursday, 14.3. (9:00 – 10:30)



Lecture 1: Basic principles

- Why do we need magnets?
- Magnet technologies
- Basic principles and concepts
- Field description
- Magnet types and applications






Magnetic units


IEEE defines the following units:

- **Magnetic field:**
 - H (vector) [A/m]
 - the magnetizing force produced by electric currents
- **Electro-motive force:**
 - e.m.f. or U [V or $(\text{kg m}^2)/(\text{A s}^3)$]
 - here: voltage generated by a time varying magnetic field
- **Magnetic flux density or magnetic induction:**
 - B (vector) [T or $\text{kg}/(\text{A s}^2)$]
 - the density of magnetic flux driven through a medium by the magnetic field
 - Note: induction is frequently referred to as "Magnetic Field"
 - H , B and μ relates by: $B = \mu H$
- **Permeability:**
 - $\mu = \mu_0 \mu_r$
 - permeability of free space $\mu_0 = 4 \pi 10^{-7}$ [V s/A m]
 - relative permeability μ_r (dimensionless): $\mu_{\text{air}} = 1$; $\mu_{\text{iron}} > 1000$ (not saturated)
- **Magnetic flux:**
 - ϕ [Wb or $(\text{kg m}^2)/(\text{A s}^2)$]
 - surface integral of the flux density component perpendicular through a surface



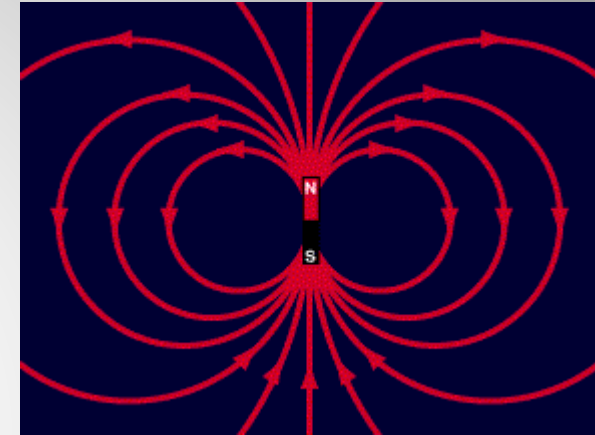




Magnets everywhere...


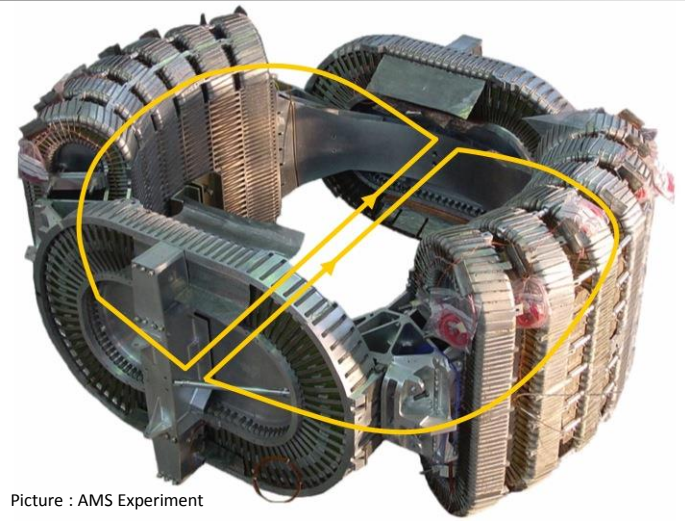


Picture : AMS Experiment

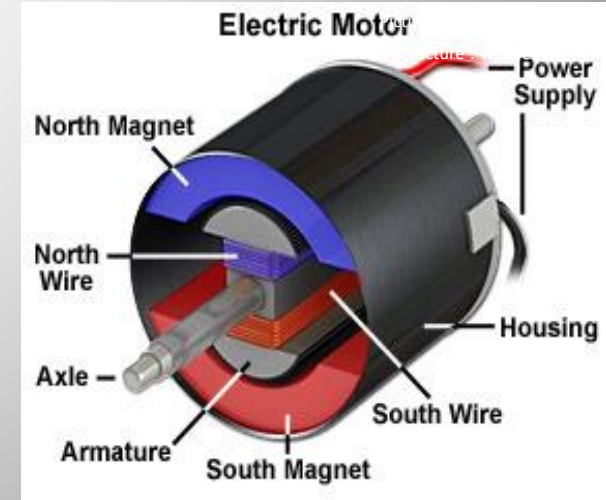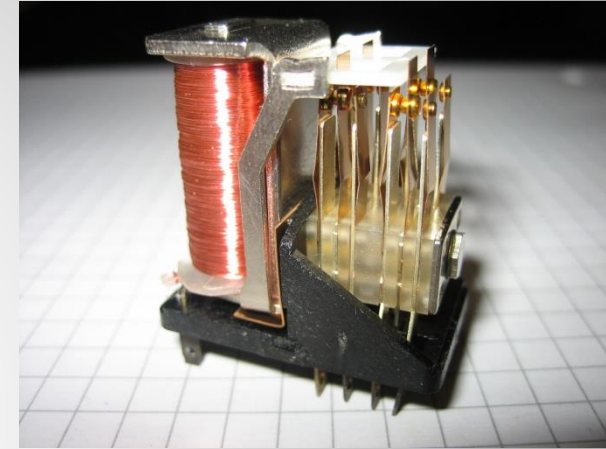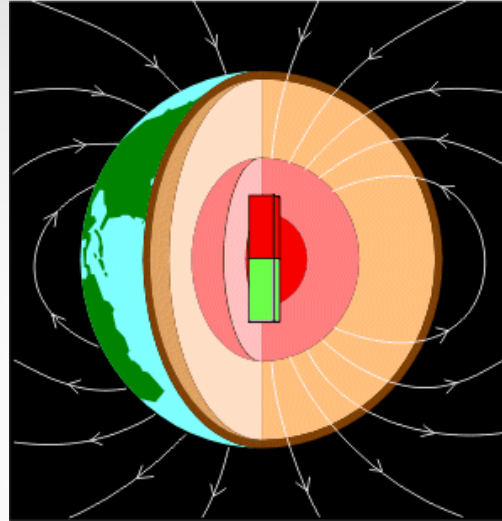



Magnets at CERN

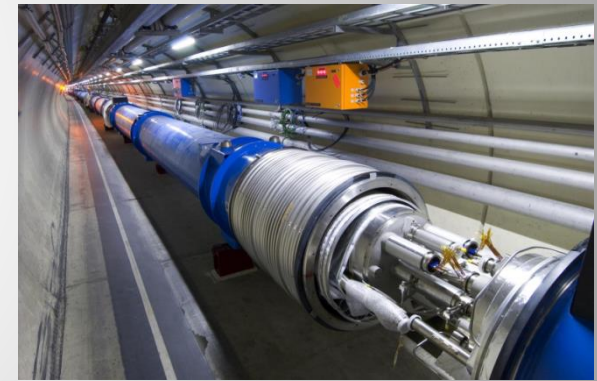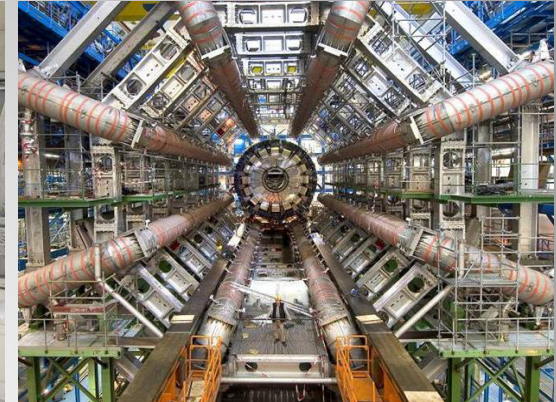

Normal-conducting magnets:

4800 magnets (50 000 tonnes) are installed in the CERN accelerator complex

Superconducting magnets:

10 000 magnets (50 000 tonnes) mainly in LHC




Permanent magnets:

150 magnets (4 tonnes) in Linacs & EA



Why do we need magnets?

- Interaction with the beam
 - guide the beam to keep it on the orbit
 - focus and shape the beam
- Lorentz's force: $\vec{F} = q(\vec{E} + \vec{v} \times \vec{B})$
 - for relativistic particles this effect is equivalent if $\vec{E} = c\vec{B}$
 - if $B = 1 \text{ T}$ then $E = 3 \cdot 10^8 \text{ V/m(!)}$

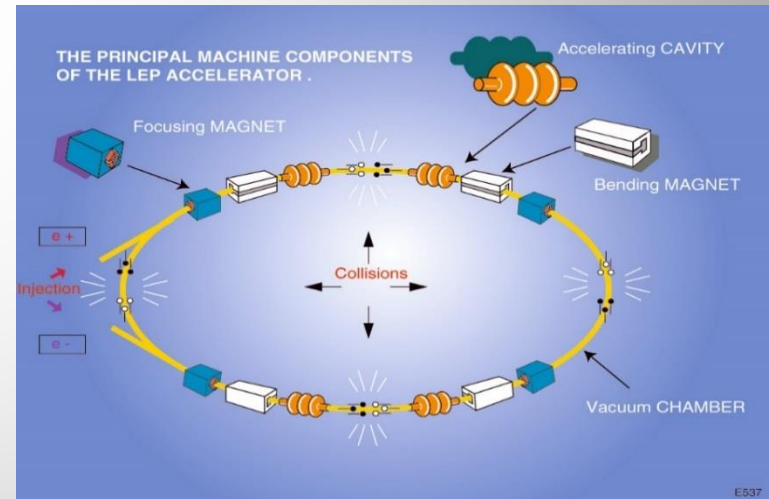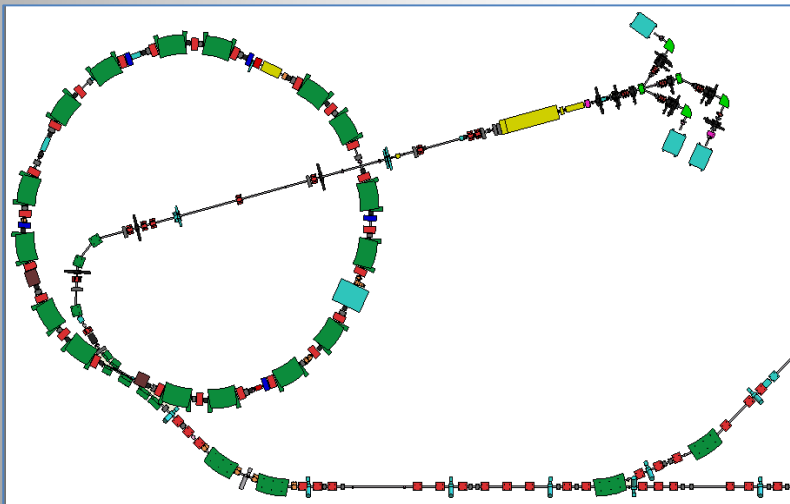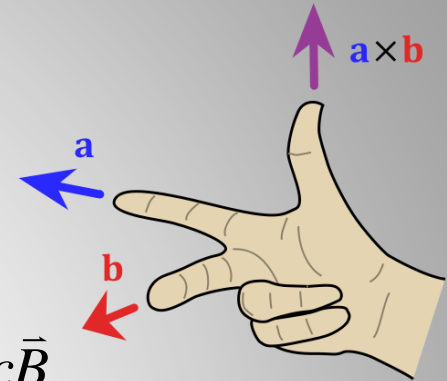

- Permanent magnets provide (in general) only constant magnetic fields
- **Electro-magnets** can provide adjustable magnetic fields



Maxwell's equations

In 1873, Maxwell published "Treatise on Electricity and Magnetism" in which he summarized the discoveries of Coulomb, Oersted, Ampere, Faraday, et. al. in four mathematical equations:

Gauss' law for electricity:


$$\nabla \cdot \vec{E} = \frac{\rho}{\epsilon_0}$$

$$\oint_{\partial V} \vec{E} \cdot d\vec{A} = \frac{q}{\epsilon_0}$$

Gauss' law of flux conservation:

$$\nabla \cdot \vec{B} = 0$$

$$\oint_{\partial V} \vec{B} \cdot d\vec{A} = 0$$

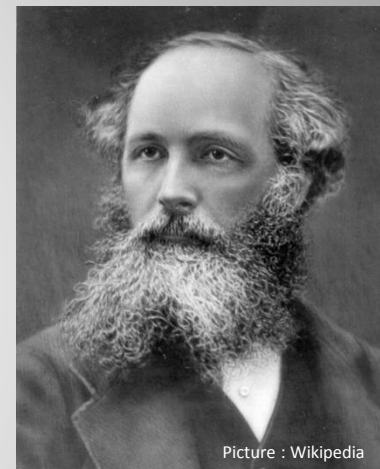

Picture : Wikipedia

Faraday's law of induction:

$$\nabla \times \vec{E} = -\frac{\partial \vec{B}}{\partial t}$$

$$\oint_{\partial A} \vec{E} \cdot d\vec{s} = -\frac{d\Phi}{dt} = -\frac{d}{dt} \int_A \vec{B} \cdot d\vec{A}$$

Ampere's circuital law:

$$\nabla \times \vec{B} = \mu_0 \vec{J} + \mu_0 \epsilon_0 \frac{\partial \vec{E}}{\partial t}$$

$$\oint_{\partial A} \vec{B} \cdot d\vec{s} = \int_A \mu_0 \vec{J} \cdot d\vec{A} + \frac{d}{dt} \int_A \mu_0 \epsilon_0 \vec{E} \cdot d\vec{A}$$



Maxwell's equations

Gauss' law for electricity:

$$\nabla \cdot \vec{E} = \frac{\rho}{\epsilon_0}$$

Gauss' law of flux conservation:





$$\nabla \cdot \vec{B} = 0$$

Faraday's law of induction:

$$\nabla \times \vec{E} = -\frac{\partial \vec{B}}{\partial t}$$


Ampere's law:

$$\nabla \times \vec{B} = \mu_0 \vec{J} + \mu_0 \epsilon_0 \frac{\partial \vec{E}}{\partial t}$$

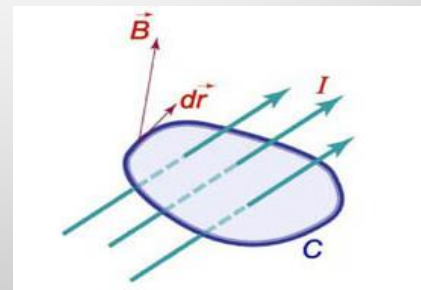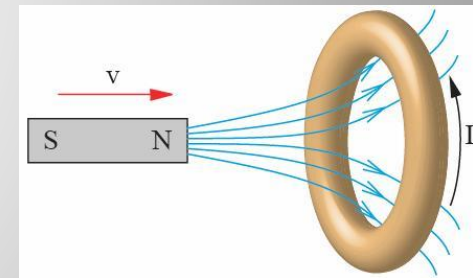





Producing the field

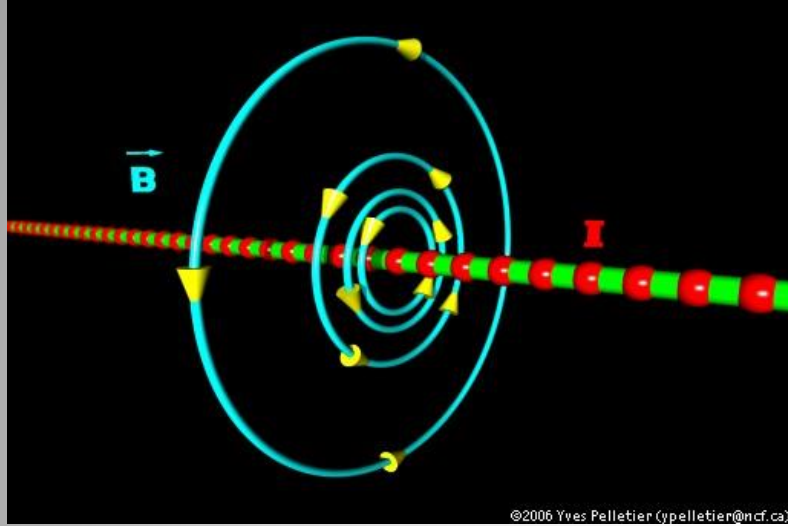

Maxwell & Ampere:



$$\nabla \times \vec{H} = \vec{J} + \frac{\partial \vec{D}}{\partial t}$$

„An electrical current is surrounded by a magnetic field“

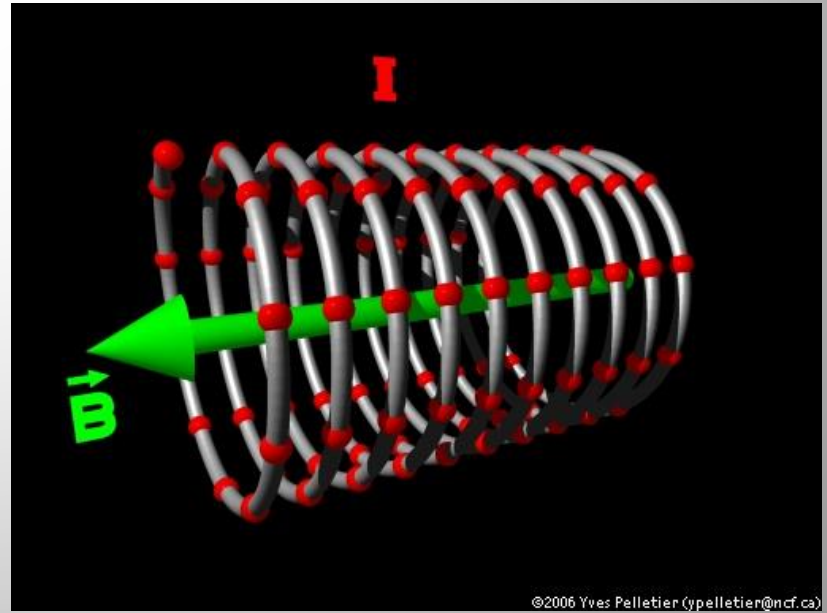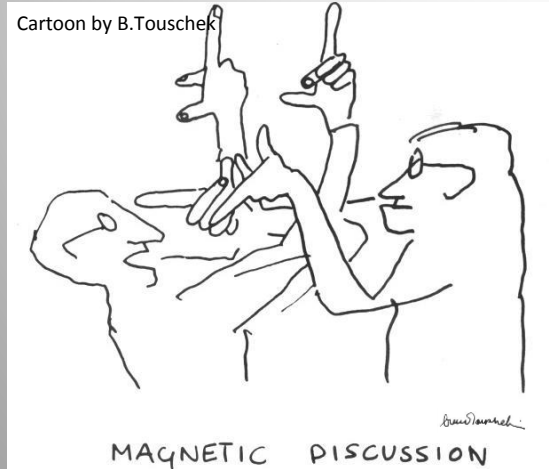





Magnetic circuit

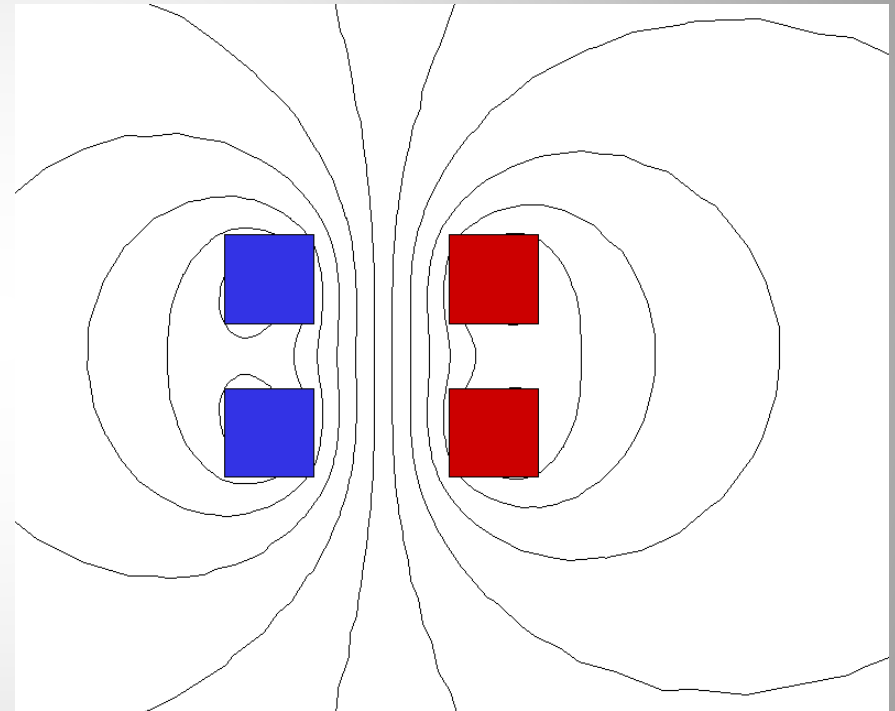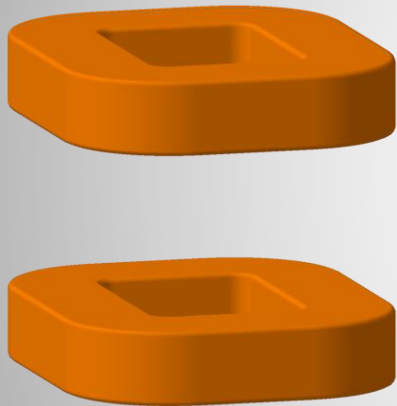

Flux lines represent the magnetic field
Coil colors indicate the current direction



Magnetic circuit



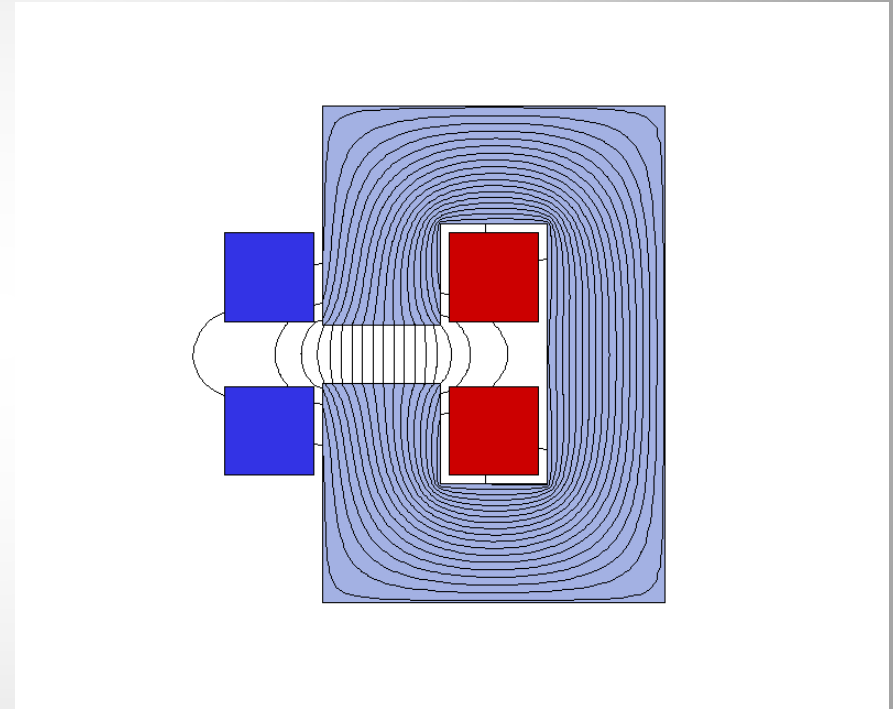
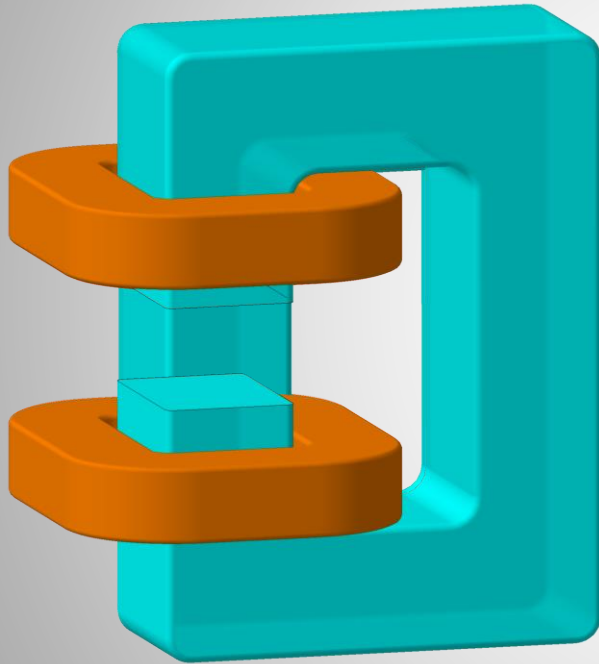


Coils hold the electrical current
Iron holds the magnetic flux

→ “iron-dominated magnet”




Magnet technologies

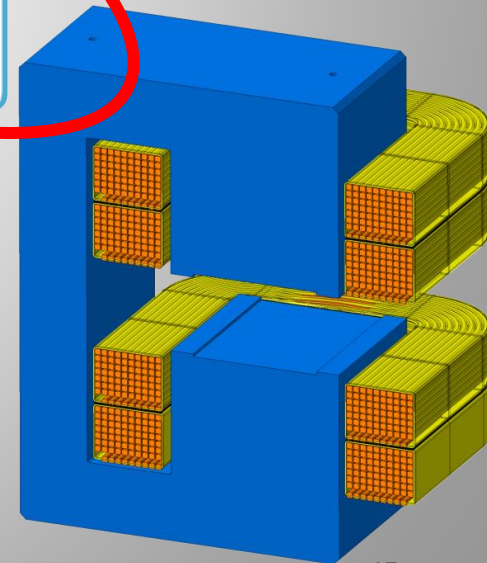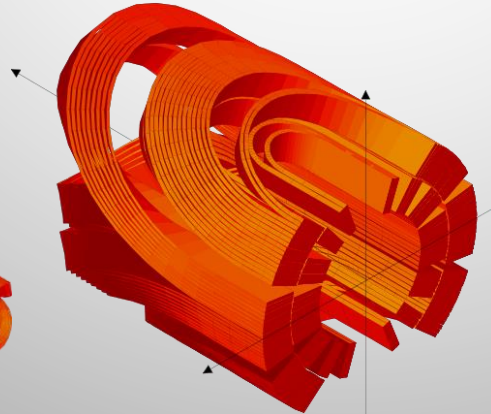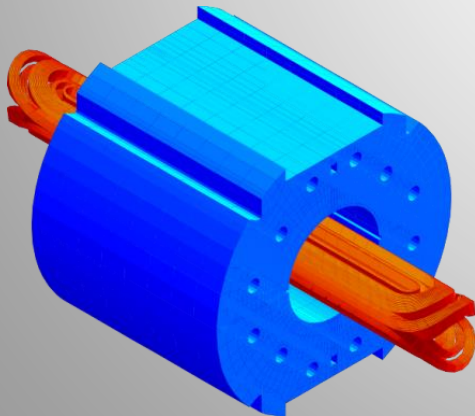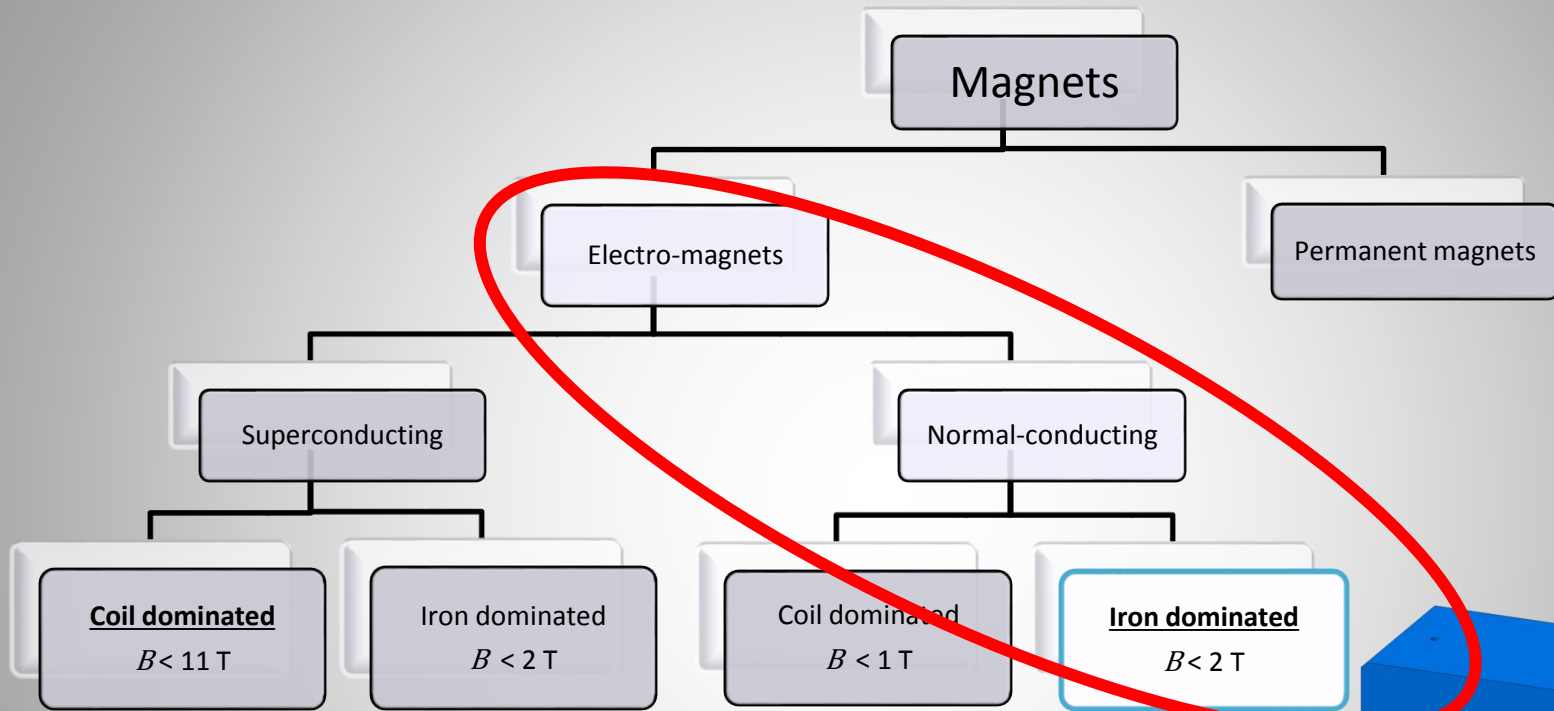




Magnetic circuit

$I = 32 \text{ kA}$
 $B_{\text{centre}} = 0.09 \text{ T}$

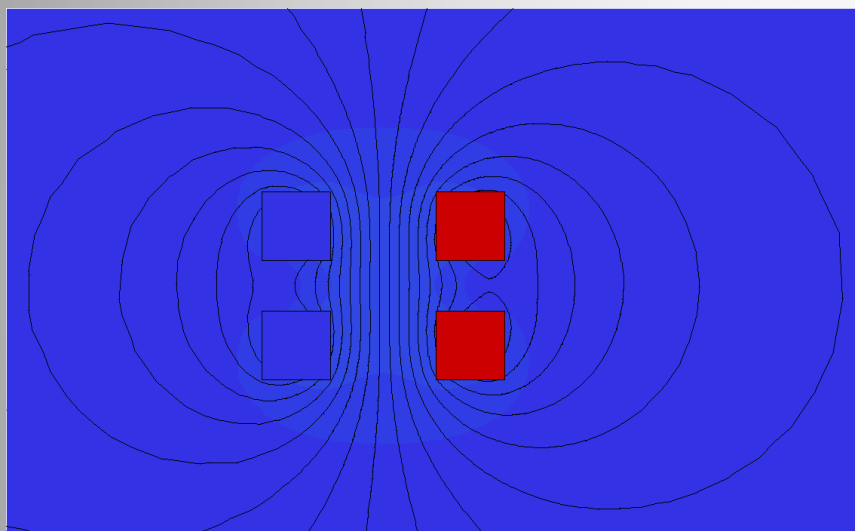

$I = 32 \text{ kA}$
 $B_{\text{centre}} = 0.80 \text{ T}$

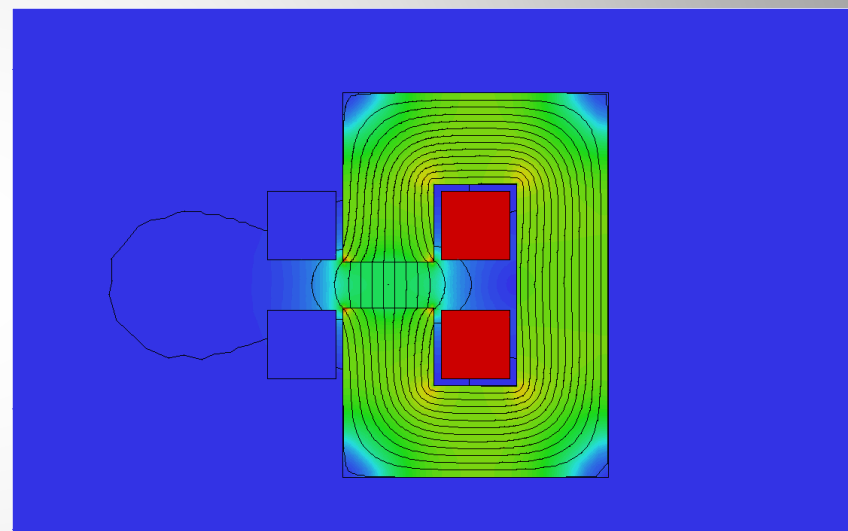

Component: BMOD
0.0

1.0

2.0



The presence of a magnetic circuit can increase the flux density in the magnet aperture by factors

Note: the asymmetric field distribution is an artifact from the FE-mesh





Permeability

$$\vec{B} = \mu \vec{H}$$

$$\mu = \mu_0 \mu_r$$

Permeability: correlation between magnetic field strength H and magnetic flux density B

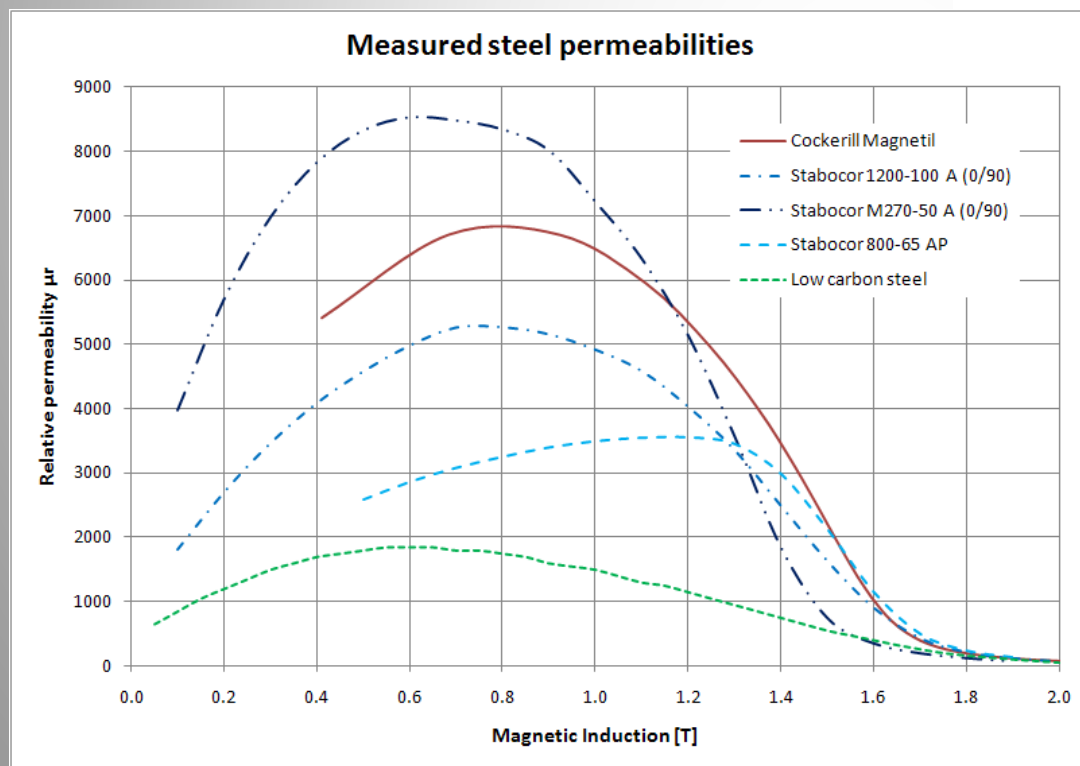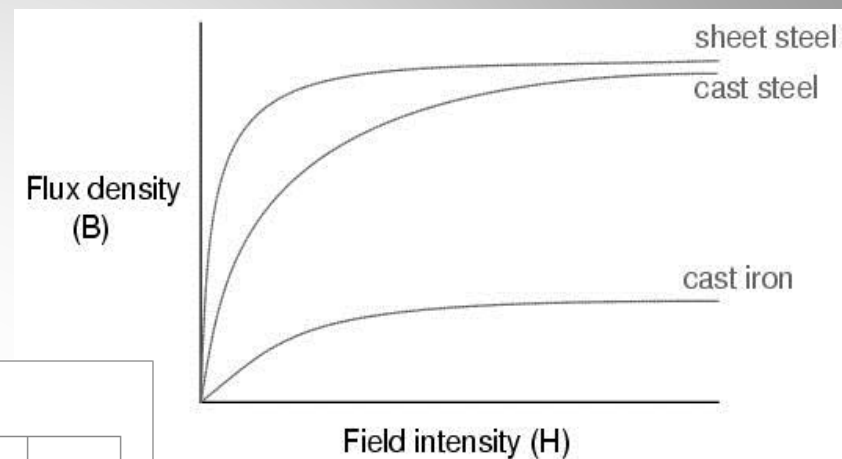

Ferro-magnetic materials:
high permeability ($\mu_r \gg 1$),
but not constant



Excitation current in a dipole


Ampere's law $\oint \vec{H} \cdot d\vec{l} = NI$ and $\vec{B} = \mu\vec{H}$

leads to
$$NI = \oint \frac{\vec{B}}{\mu} \cdot d\vec{l} = \int_{\text{gap}} \frac{\vec{B}}{\mu_{\text{air}}} \cdot d\vec{l} + \int_{\text{yoke}} \frac{\vec{B}}{\mu_{\text{iron}}} \cdot d\vec{l} = \frac{Bh}{\mu_{\text{air}}} + \frac{B\lambda}{\mu_{\text{iron}}}$$

assuming, that B is constant along the path.


If the iron is not saturated: $\frac{h}{\mu_{\text{air}}} \gg \frac{\lambda}{\mu_{\text{iron}}}$

then:
$$NI_{(\text{per pole})} \approx \frac{Bh}{2\mu_0}$$

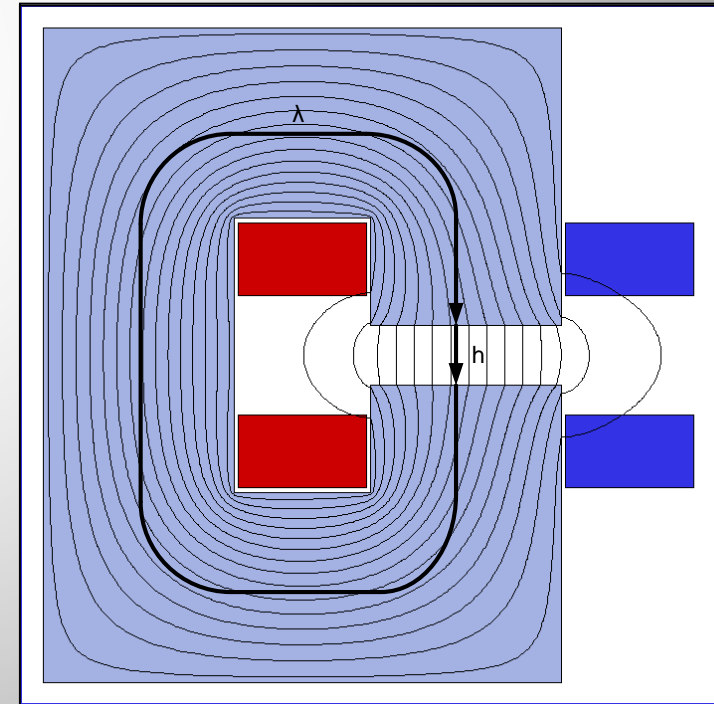



Transfer function

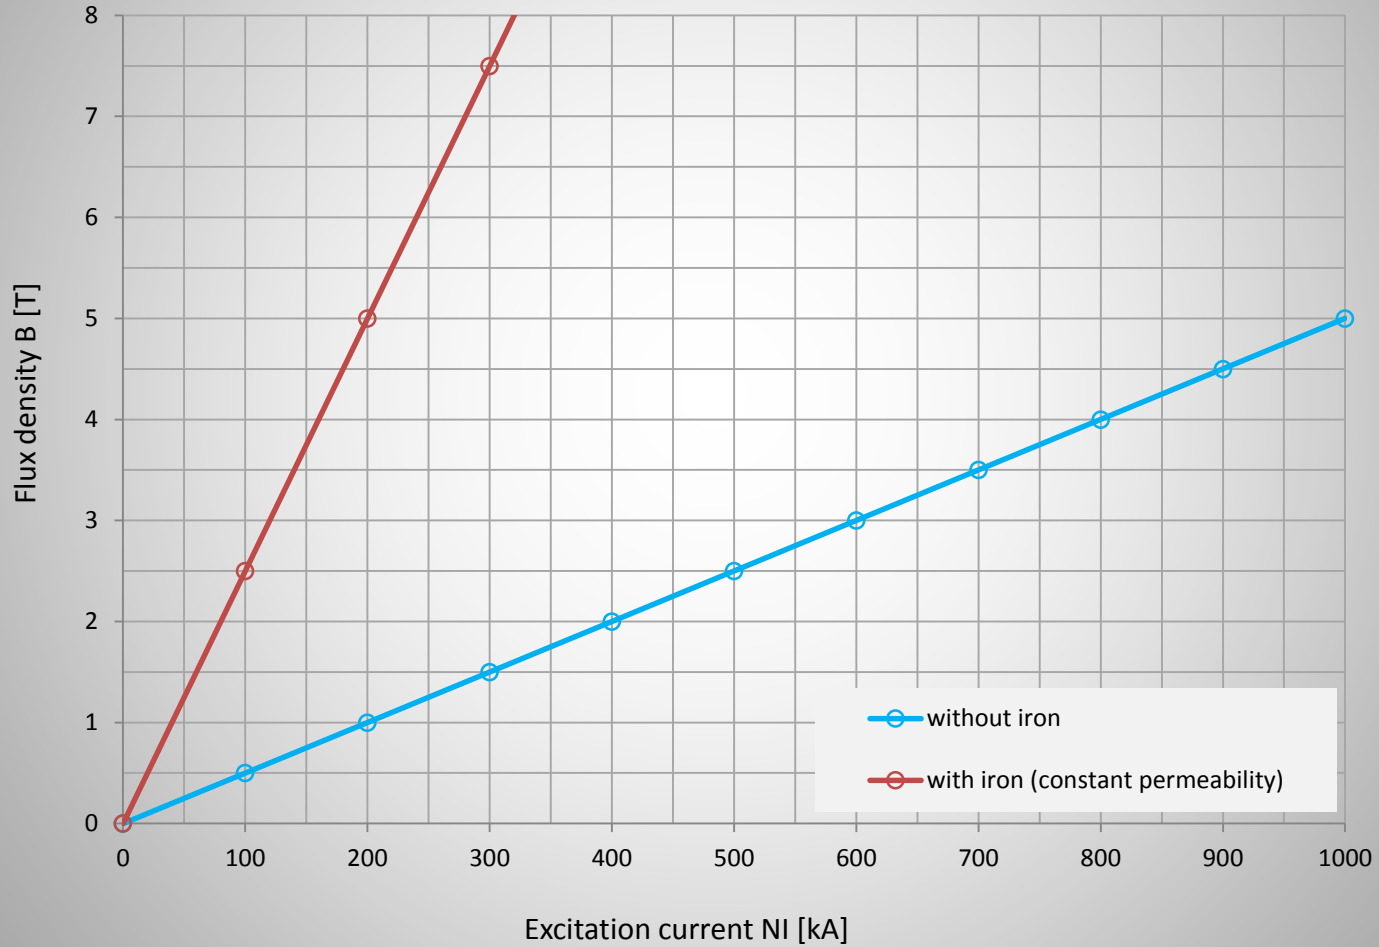




Reluctance and saturation

Similar to electrical circuits, one can define the ‘resistance’ of a magnetic circuit, called ‘reluctance’:

Ohm’s law:

$$R_E = \frac{U}{I} = \frac{l_E}{A_E \sigma}$$

- Voltage drop U [V]
- Resistance R_E [Ω]
- Current I [A]
- El. conductivity σ [S/m]
- Conductor length l_E [m]
- Conductor cross section A_E [m²]

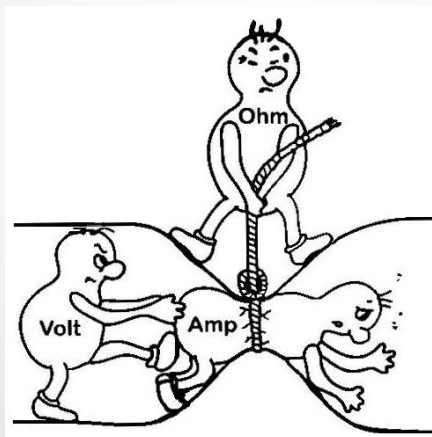

Hopkinson’s law:

$$R_M = \frac{NI}{\Phi} = \frac{l_M}{A_M \mu_r \mu_0}$$

- Magneto-motive force NI [A]
- Reluctance R_M [A/Vs]
- Magnetic flux Φ [Wb]
- Permeability μ [Vs/Am]
- Flux path length in iron l_M [m]
- Iron cross section A_M [m²]
(perpendicular to flux)

...but: μ_{iron} is in general not constant!



Reluctance and saturation

$I = 32 \text{ kA}$
 $B_{\text{centre}} = 0.09 \text{ T}$





$I = 64 \text{ kA}$
 $B_{\text{centre}} = 0.18 \text{ T}$

$I = 32 \text{ kA}$
 $B_{\text{centre}} = 0.80 \text{ T}$



$I = 64 \text{ kA}$
 $B_{\text{centre}} = 1.30 \text{ T}$

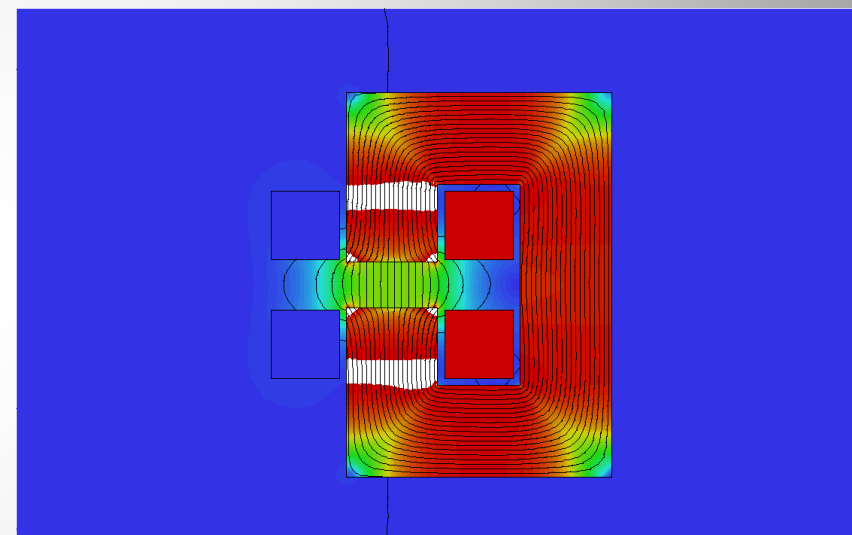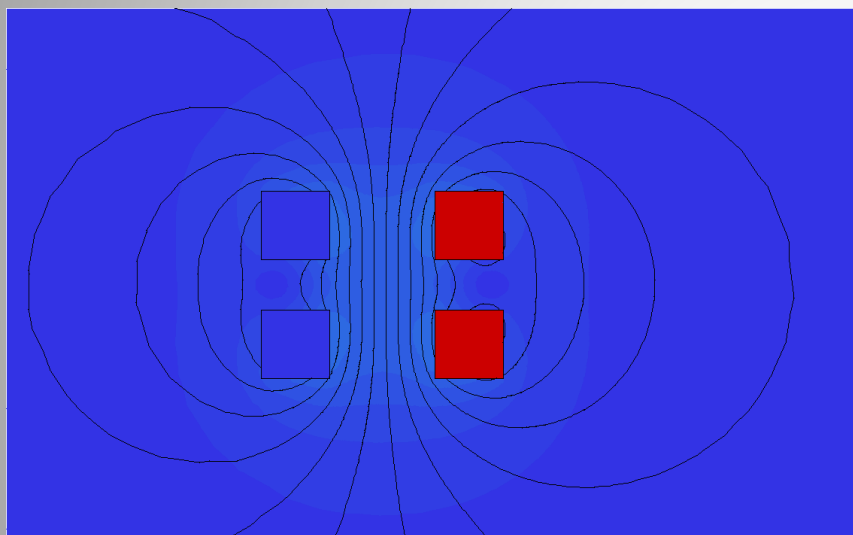



Component: BMOD
0.0

1.0

2.0

Increase of B above 1.5 T in iron requires non-proportional increase of H
Iron saturation (small μ_{iron}) leads to inefficiencies

Reluctance and saturation

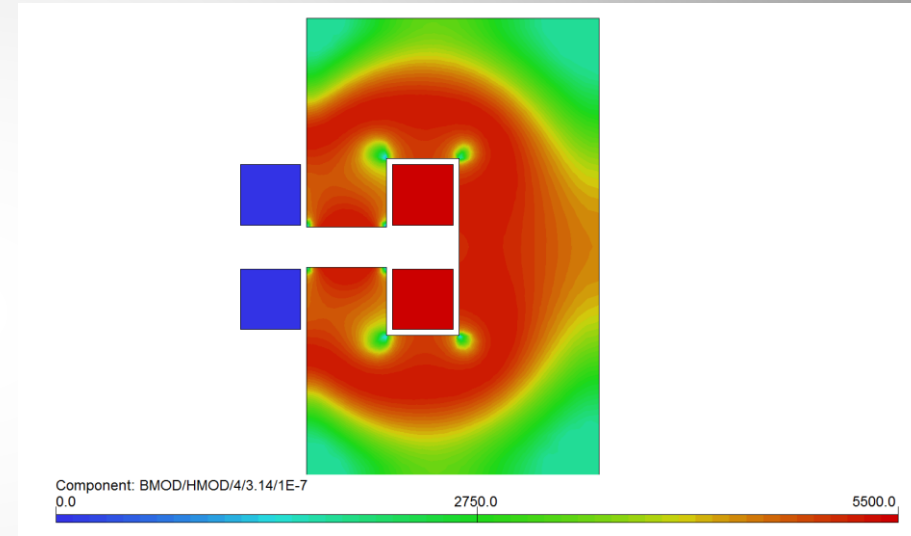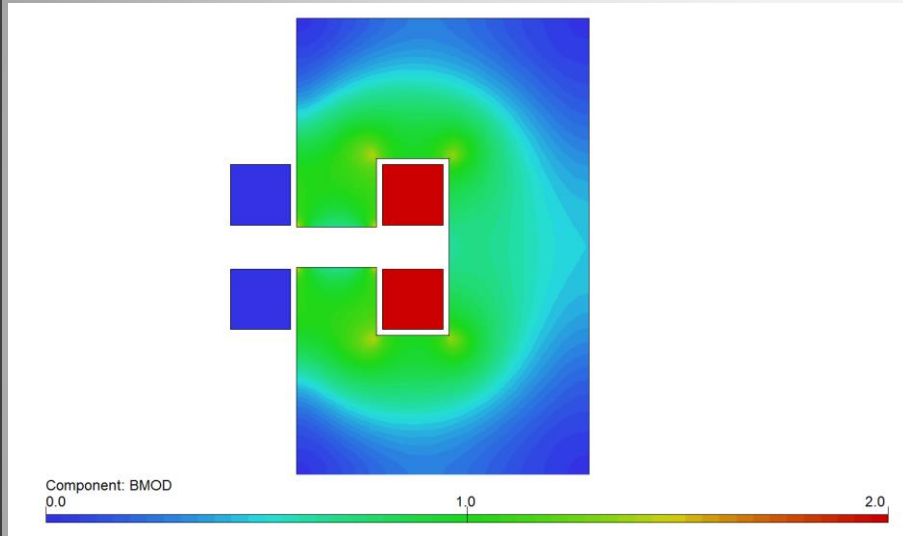


Keep yoke reluctance small by providing sufficient iron cross-section!



Reluctance and saturation


$$\vec{B} = \mu_0 \vec{H} + \vec{J} = \mu_0 \mu_r \vec{H}$$

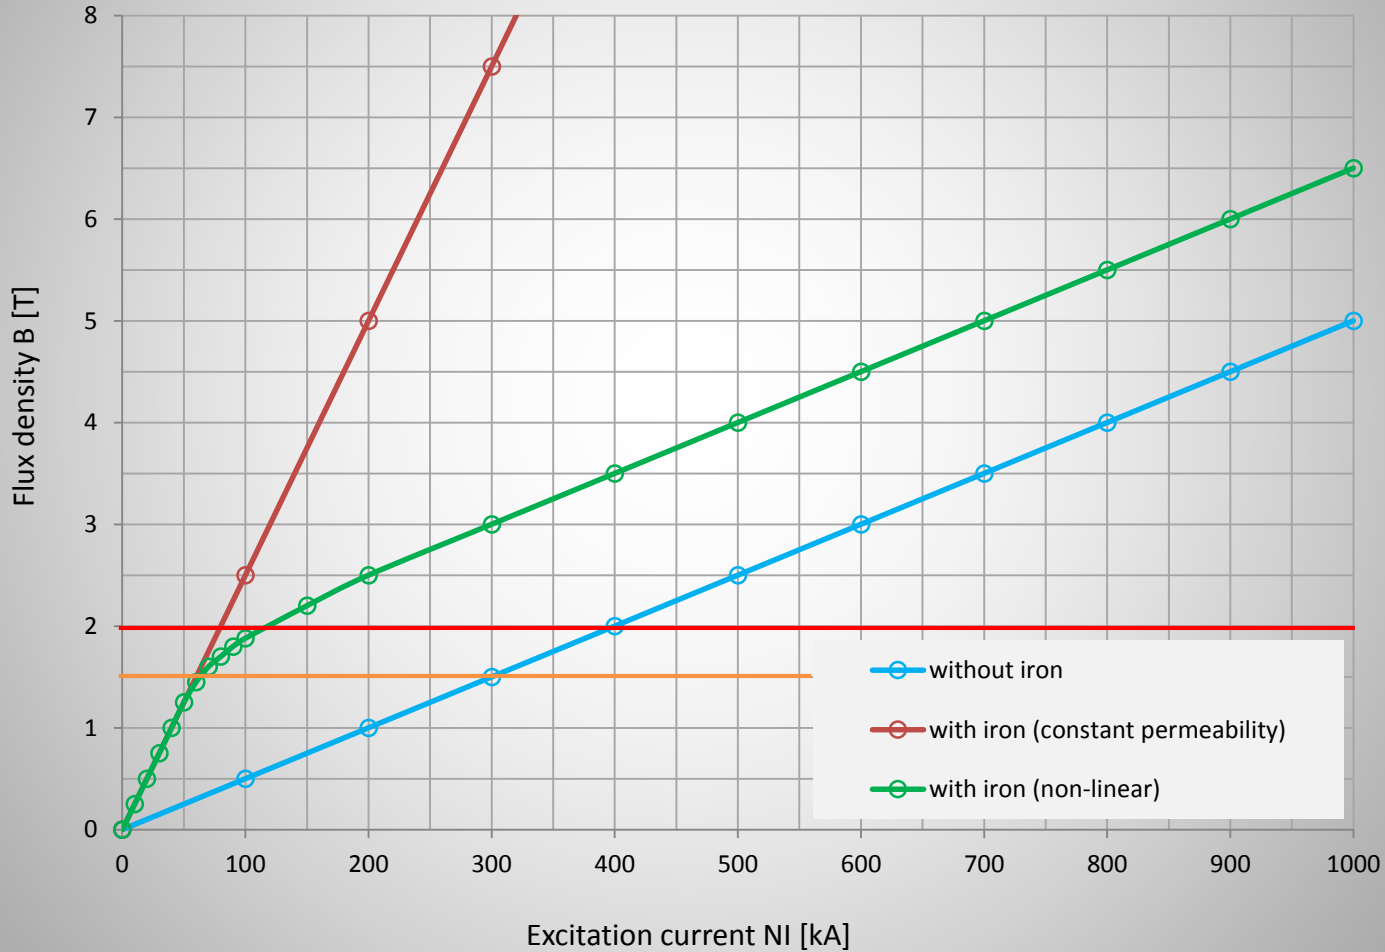



Steel hysteresis

Flux density $B(H)$ as a function of the field strength is different, when increasing and decreasing excitation

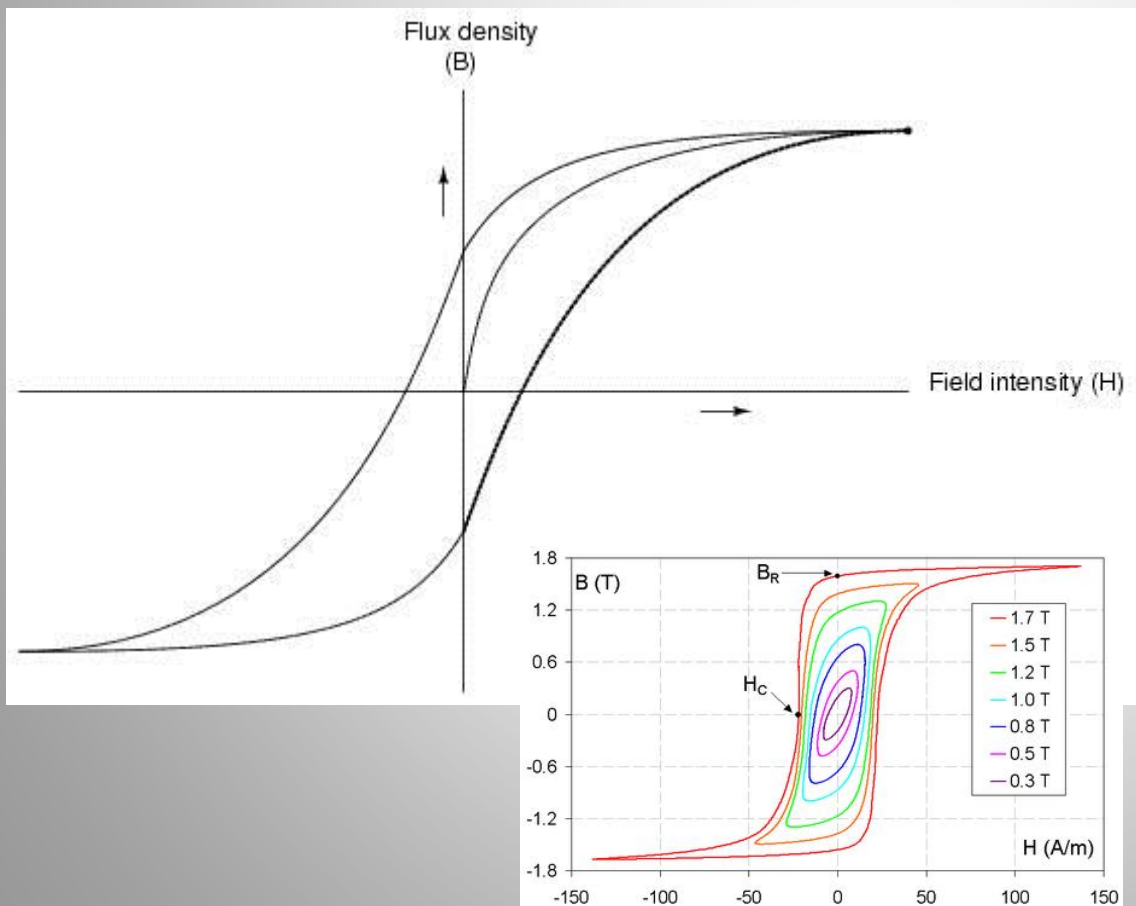


Remanent field (Retentivity):

$$H = 0 \rightarrow B = B_r > 0$$

Coercivity or coercive force:

$$B = 0 \rightarrow H = H_c < 0$$

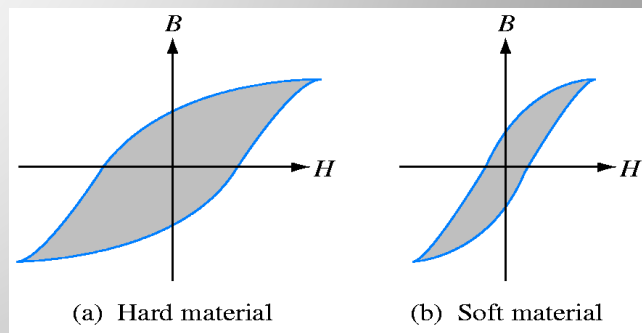



Residual field in a magnet



In a continuous ferro-magnetic core (transformer) the residual field is determined by the remanent field B_r

In a magnet core (gap), the residual field is determined by the coercivity H_c

Assuming the coil current $I=0$:

$$\oint \vec{H} \cdot d\vec{l} = \int_{gap} \vec{H}_{gap} \cdot d\vec{l} + \int_{yoke} \vec{H}_c \cdot d\vec{l} = 0$$

$$B_{residual} = -\mu_0 H_c \frac{l}{g}$$

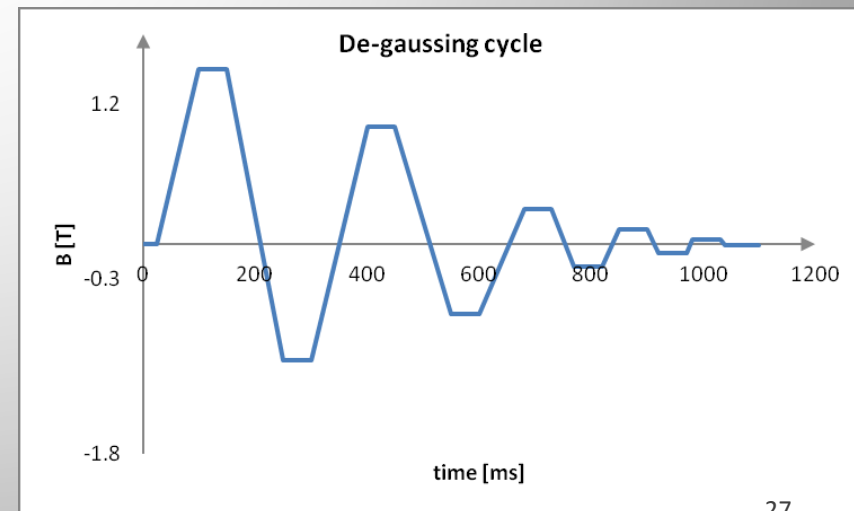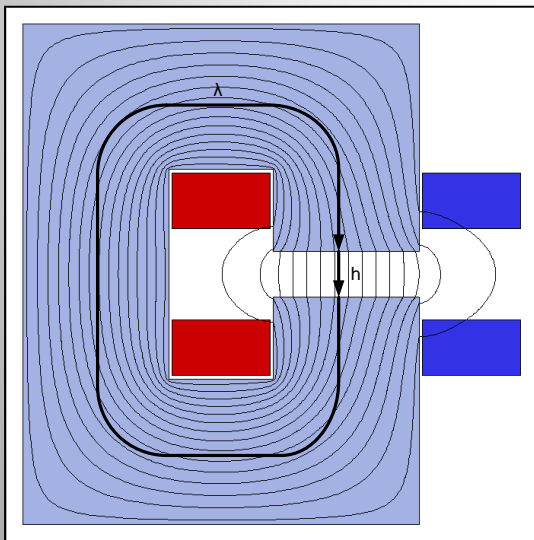




Demagnetization cycle!



Field description

How can we conveniently describe the field in the aperture?

- at any point (in 2D) $z = x + iy = re^{i\varphi}$
- for any field configuration
- regardless of the magnet technology

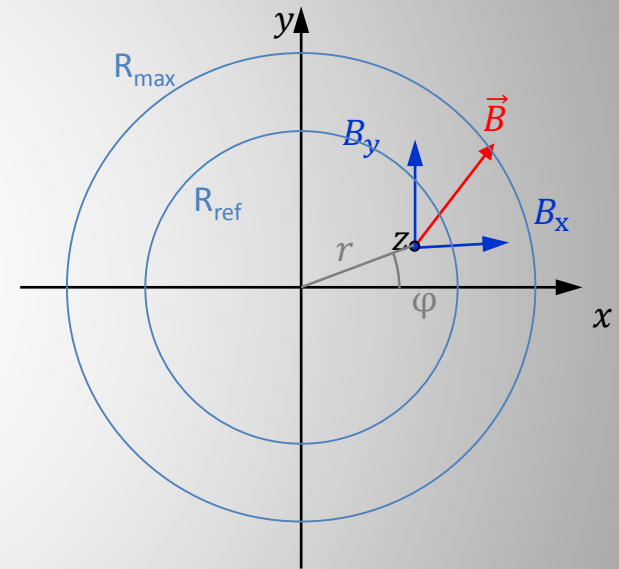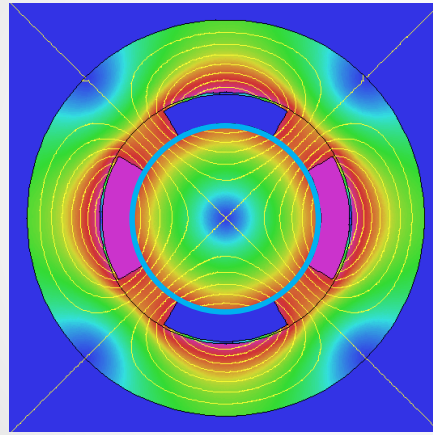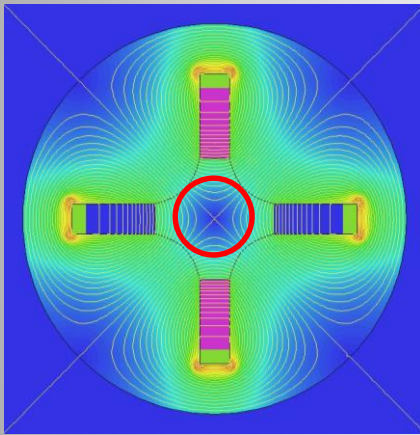

Solution: multipole expansion, describing the field within a circle of validity with scalar coefficients

$$B_y(z) + iB_x(z) = \sum_{n=1}^{\infty} (B_n + iA_n) \left(\frac{z}{R_{ref}} \right)^{n-1}$$




Field description

For radial and tangential components of the field the series contains sin and cos terms (Fourier decomposition):



$$B_r(r, \varphi) = \sum_{n=1}^{\infty} \left(\frac{r}{R_{ref}} \right)^{n-1} [B_n \sin(n\varphi) + A_n \cos(n\varphi)]$$

$$B_\varphi(r, \varphi) = \sum_{n=1}^{\infty} \left(\frac{r}{R_{ref}} \right)^{n-1} [B_n \cos(n\varphi) - A_n \sin(n\varphi)]$$

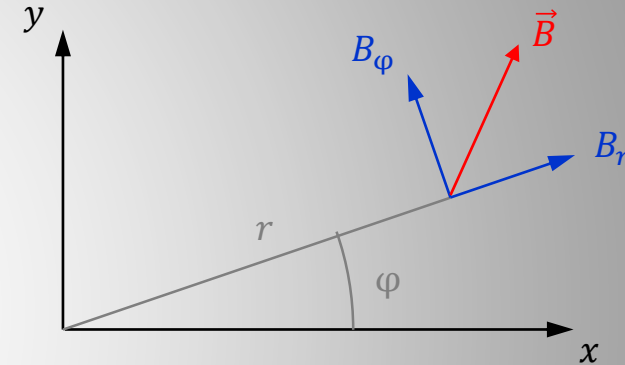

This 2D decomposition holds only in a region of space:

- without magnetic materials ($\mu_r = 1$)
- without currents
- when B_z is constant

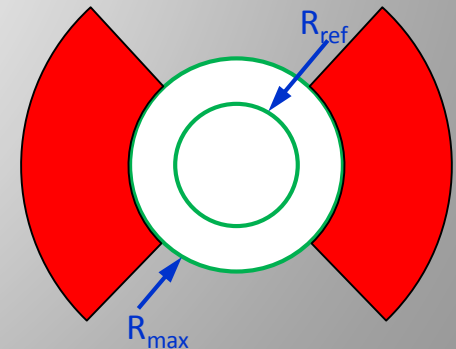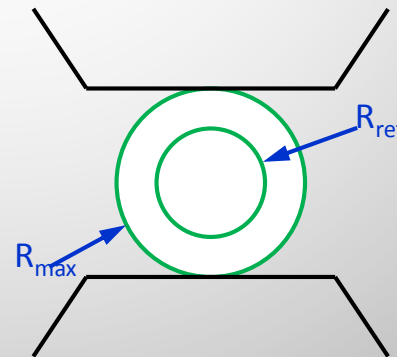





Field description

Each multipole term has a corresponding magnet type:


B_1 : normal dipole

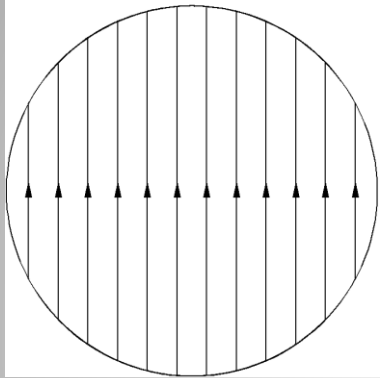


B_2 : normal quadrupole

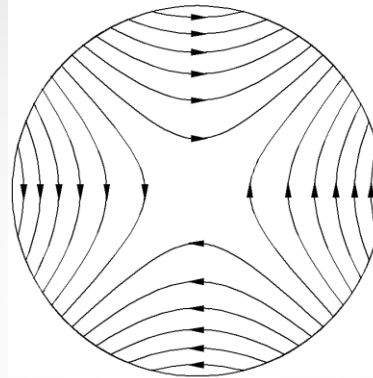


B_3 : normal sextupole

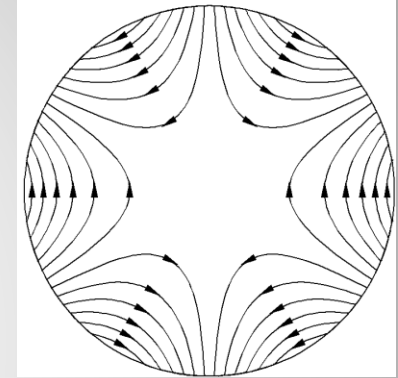


A_1 : skew dipole

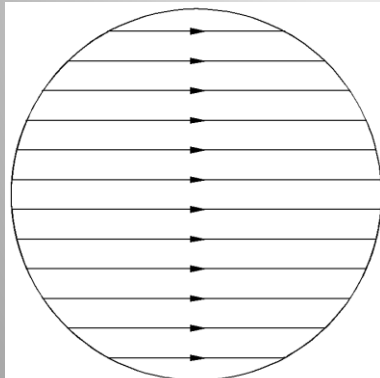

A_2 : skew quadrupole

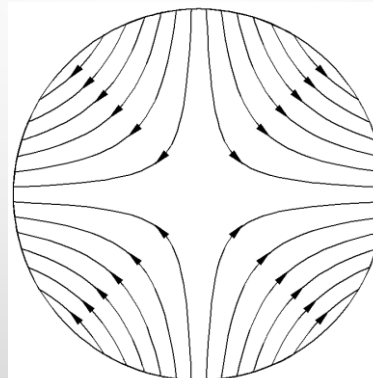

A_3 : skew sextupole

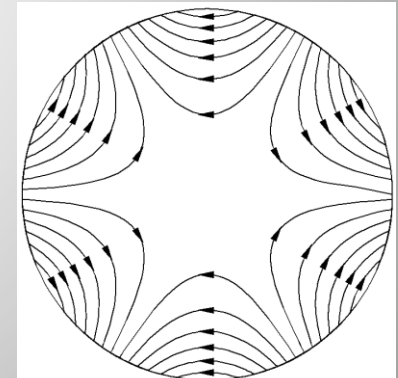


Vector equipotential lines are flux lines. \vec{B} is tangent point by point to the flux lines
 Scalar equipotential lines are orthogonal to the vector equipotential lines. They define the boundary conditions for shaping the field.




Field description


$$\text{Field expansion along } x: B_y(x) = \sum_{n=1}^{\infty} B_n \left(\frac{x}{r_0} \right)^{n-1} = B_1 + B_2 \frac{x}{r_0} + B_3 \frac{x^2}{r_0^2} + \dots$$

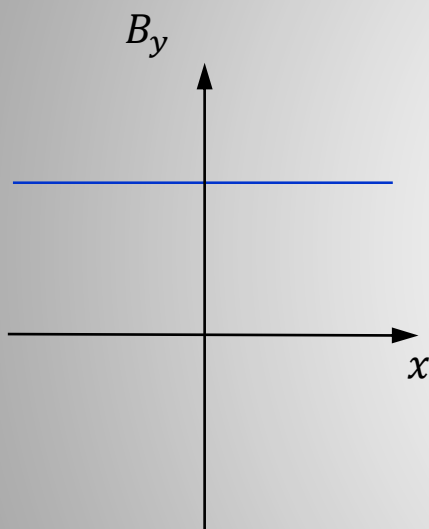

B_1 : dipole

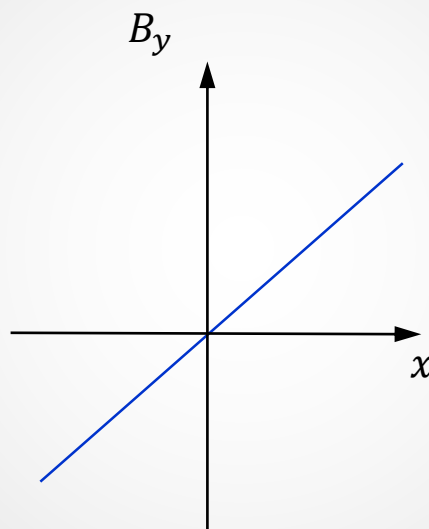

B_2 : quadrupole

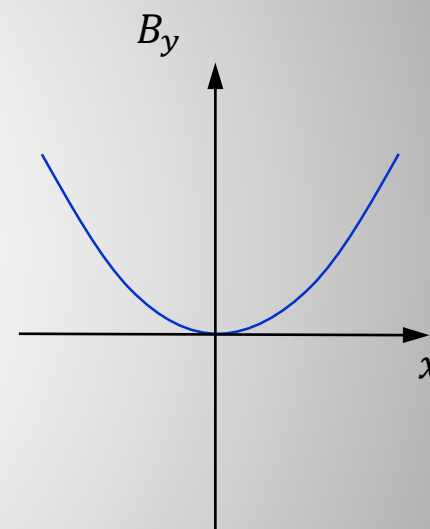




B_3 : sextupole

$$G = \frac{B_2}{r_0} = \frac{\partial B_y}{\partial x}$$

The field profile in the horizontal plane follows a polynomial expansion
The ideal poles for each magnet type are lines of constant scalar potential

Dipoles

Purpose: bend or steer the particle beam

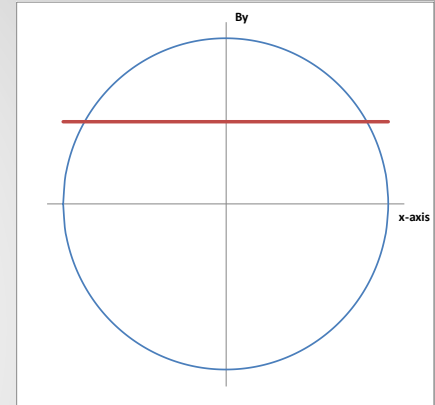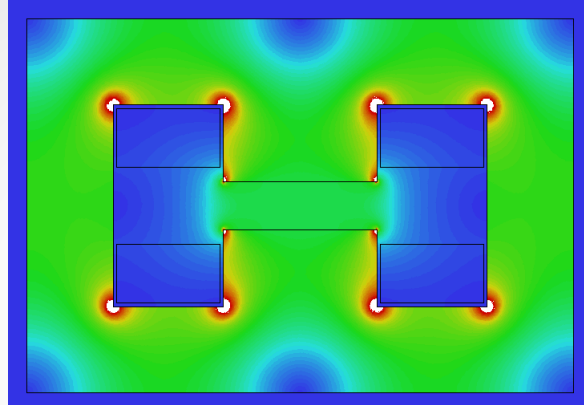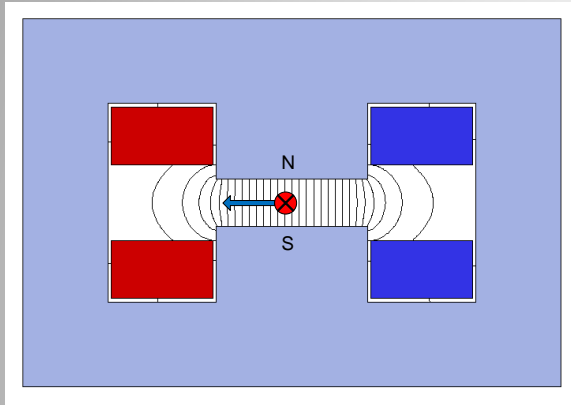

Equation for normal (non-skew) ideal (infinite) poles:

$$y = \pm h/2 \quad (\rightarrow \text{straight line with } h = \text{gap height})$$



Magnetic flux density: $B_x = 0$; $B_y = B_1 = \text{const.}$

Applications: synchrotrons, transfer lines, spectrometry, beam scanning






Dipole types



H-Shape

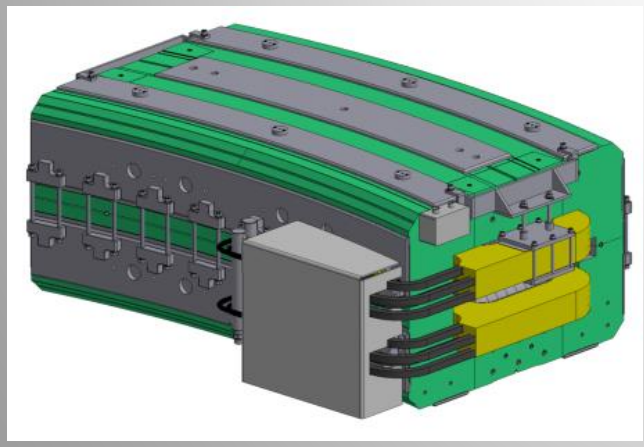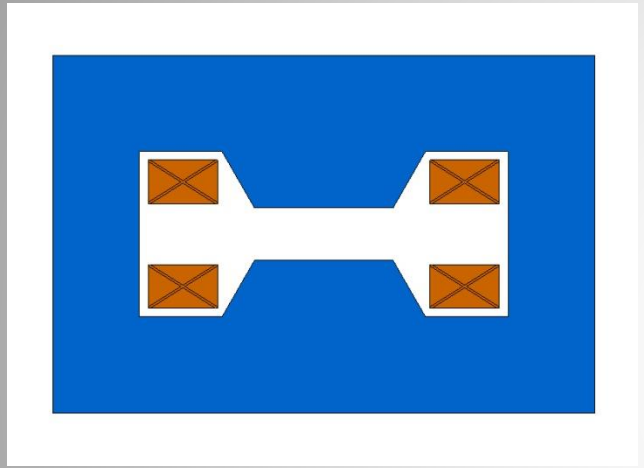

O-Shape

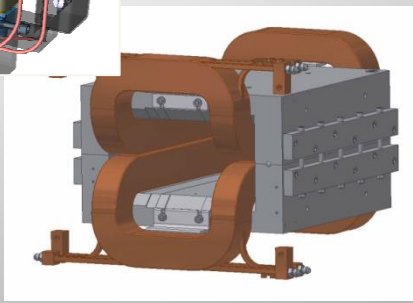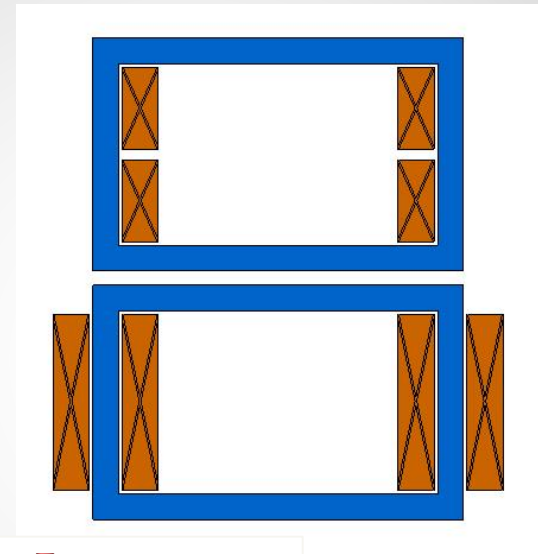




C-Shape

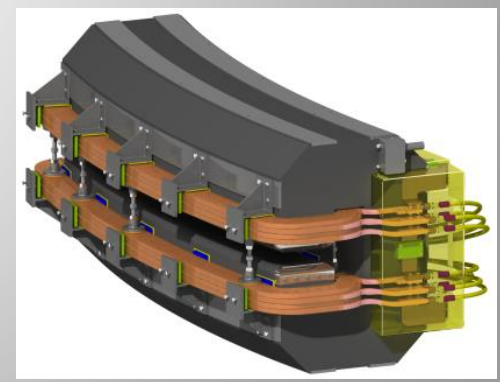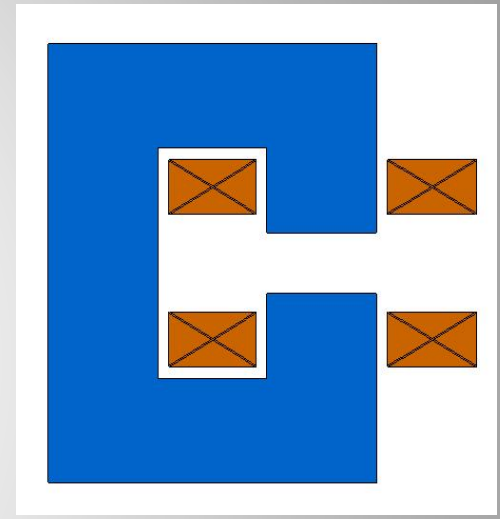



Quadrupoles

Purpose: focusing the beam (horizontally focused beam is vertically defocused)

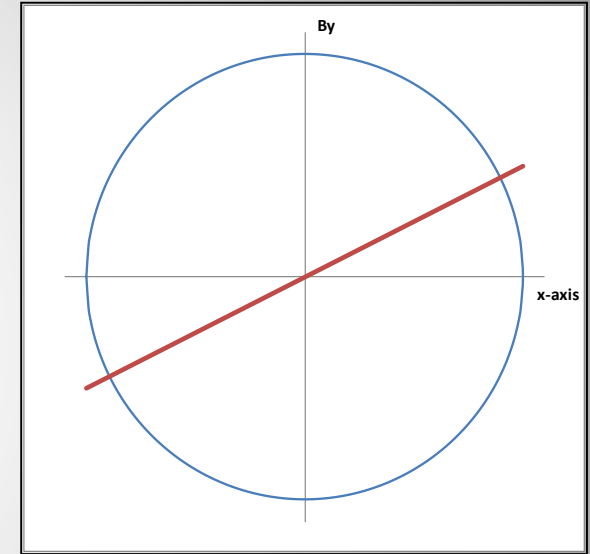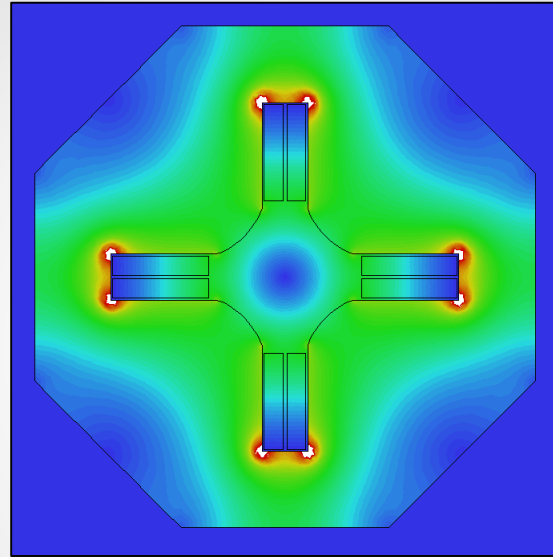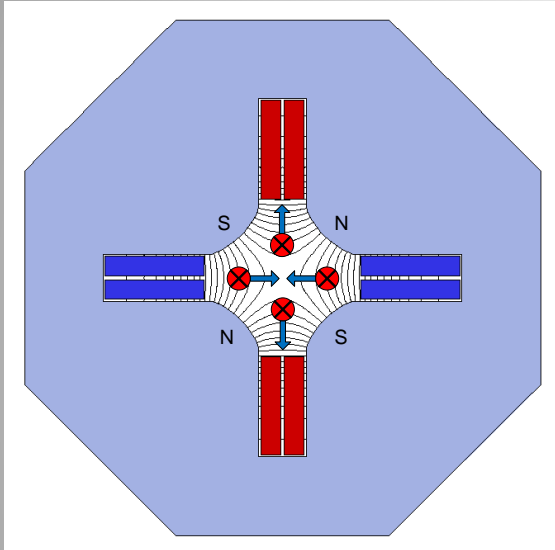

Equation for normal (non-skew) ideal (infinite) poles:


$$2xy = \pm r^2 \quad (\rightarrow \text{hyperbola with } r = \text{aperture radius})$$

Magnetic flux density: $B_x = \frac{B_2}{R_{ref}} y; \quad B_y = \frac{B_2}{R_{ref}} x$




Quadrupole types



Standard quadrupole I

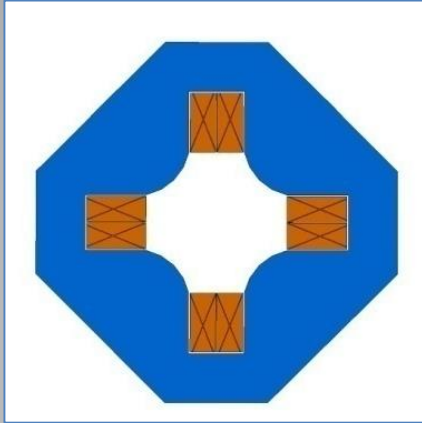

Standard quadrupole II

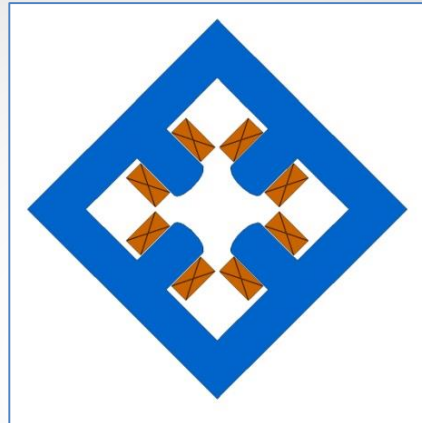




Collins or Figure-of-Eight

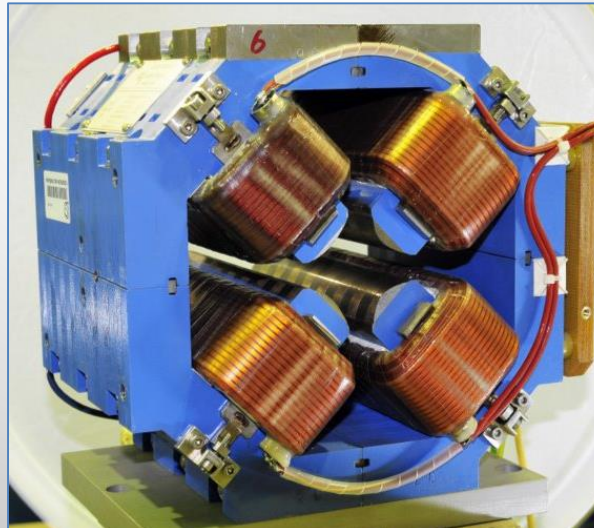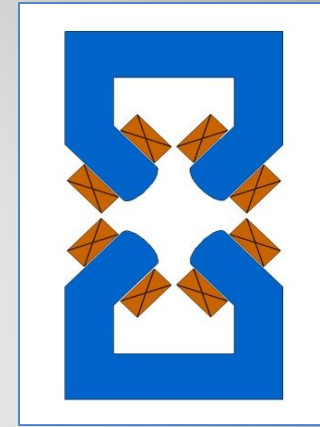



Sextupoles

Purpose: correct chromatic aberrations of 'off-momentum' particles

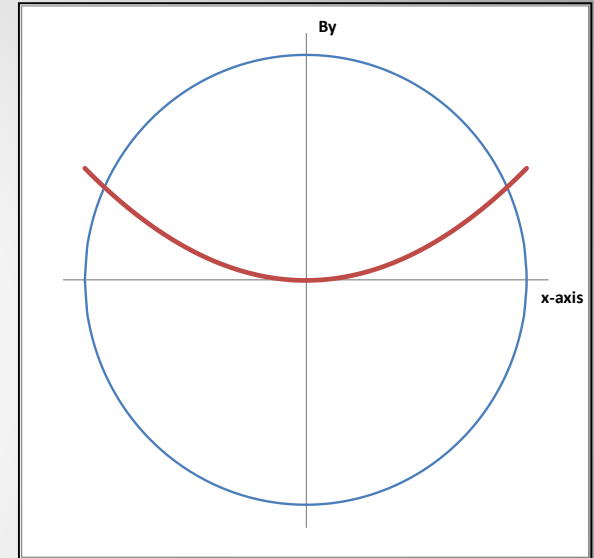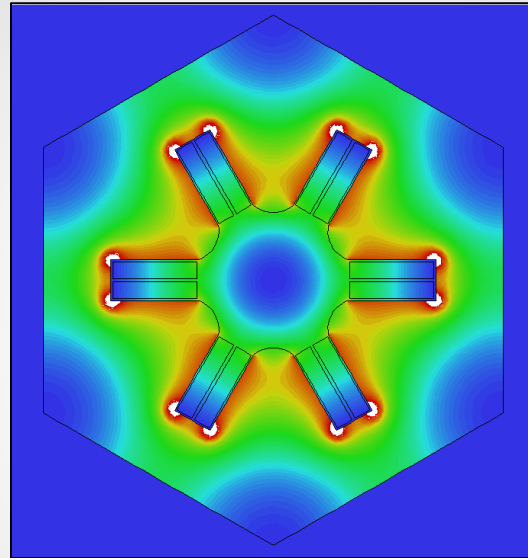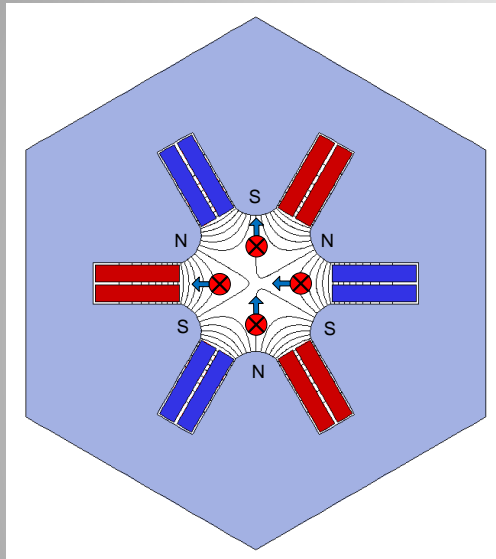

Equation for normal (non-skew) ideal (infinite) poles:

$$3x^2y - y^3 = \pm r^3 \quad (\text{with } r = \text{aperture radius})$$

Magnetic flux density: $B_x = \frac{B_3}{R_{ref}^2} xy; \quad B_y = \frac{B_3}{R_{ref}^2} (x^2 - y^2)$




Combined function magnets

Functions generated by pole shape (sum a scalar potentials):

Amplitudes cannot be varied independently

Dipole and quadrupole: PS main magnet (PFW, Fo8...)


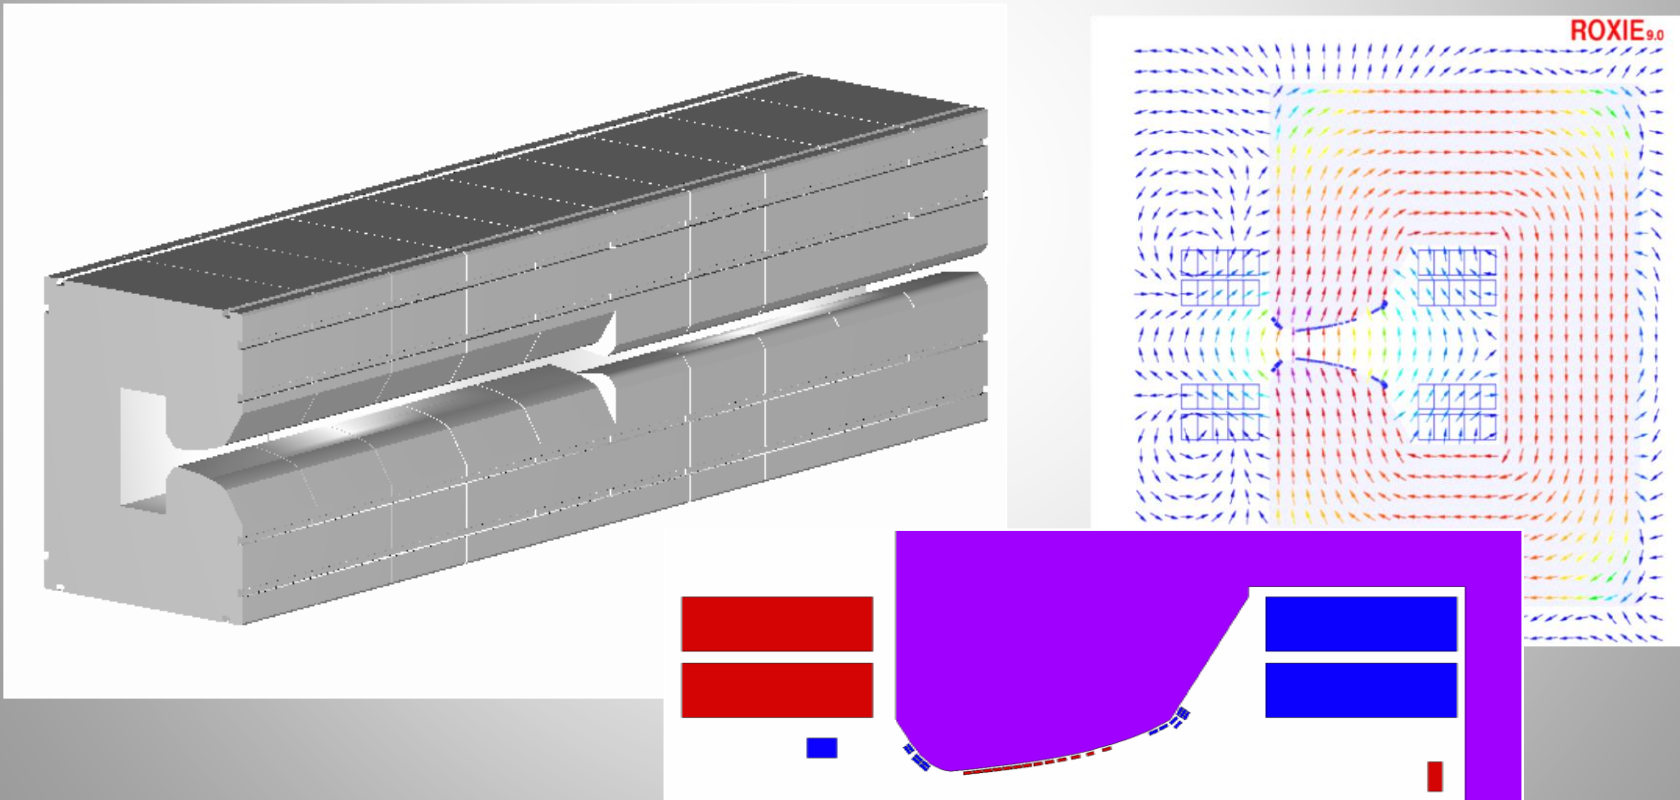




Combined function magnets

Functions generated by individual coils:






Amplitudes can be varied independently

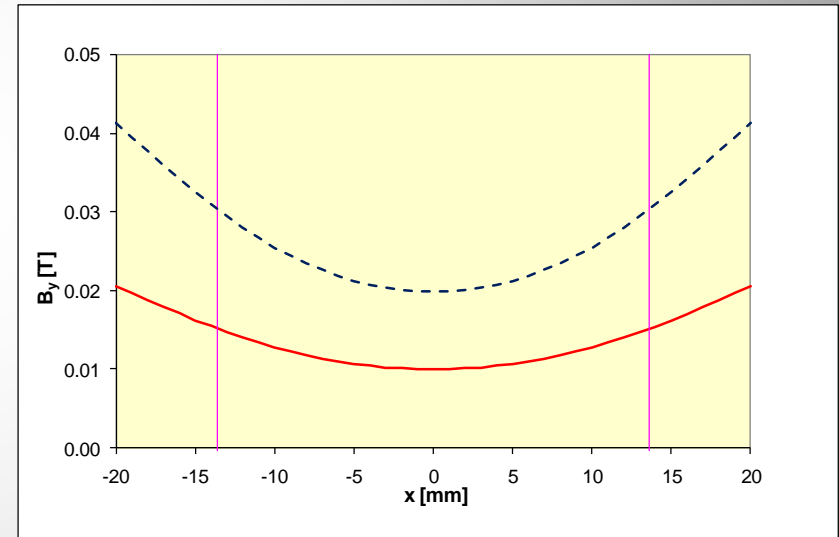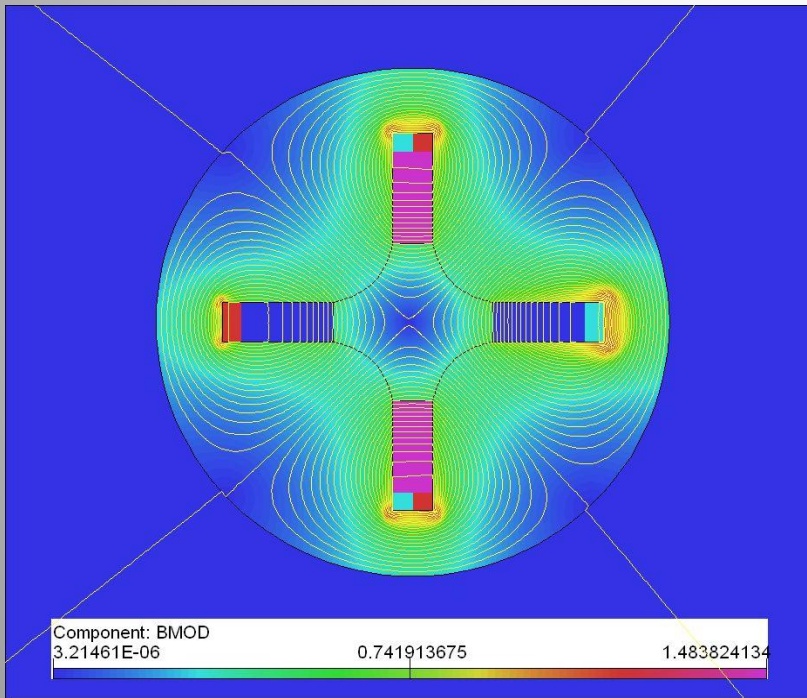

Quadrupole and corrector dipole
(strong sextupole component in dipole field)





Combined function magnets

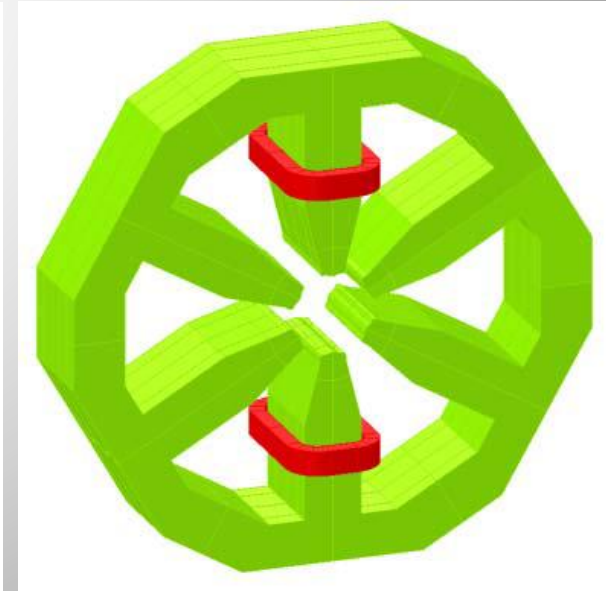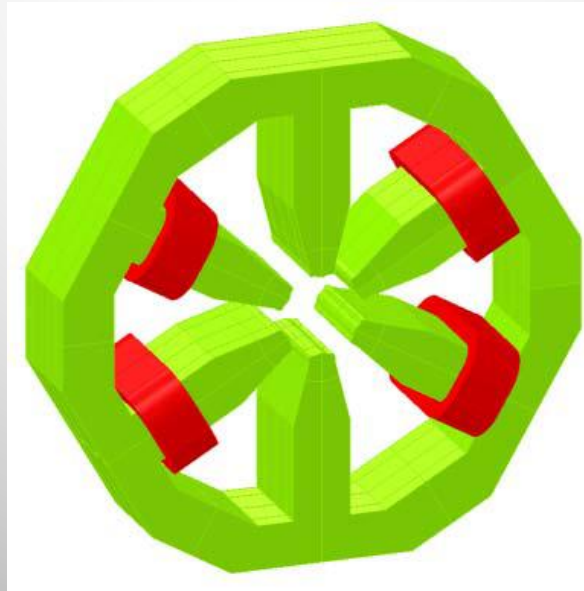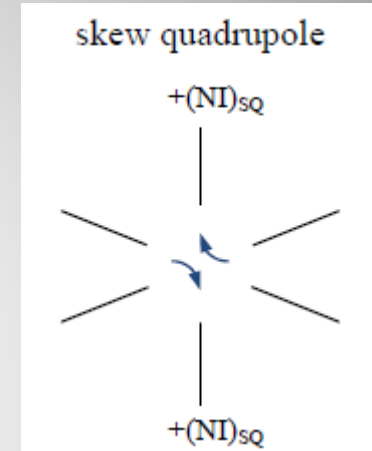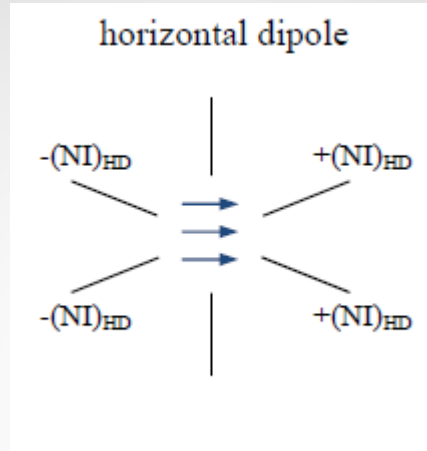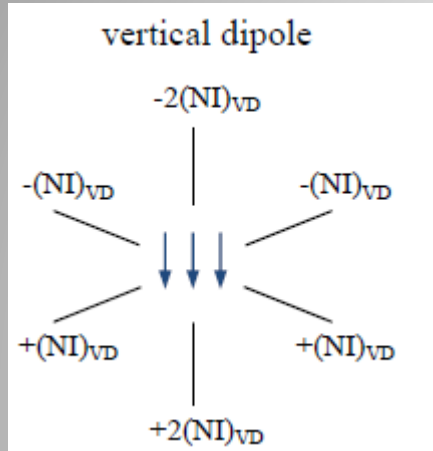



Coil dominated magnets

- Nested multi-pole corrector (moderate field levels)
- Iron for shielding only
- Field determined by current distribution

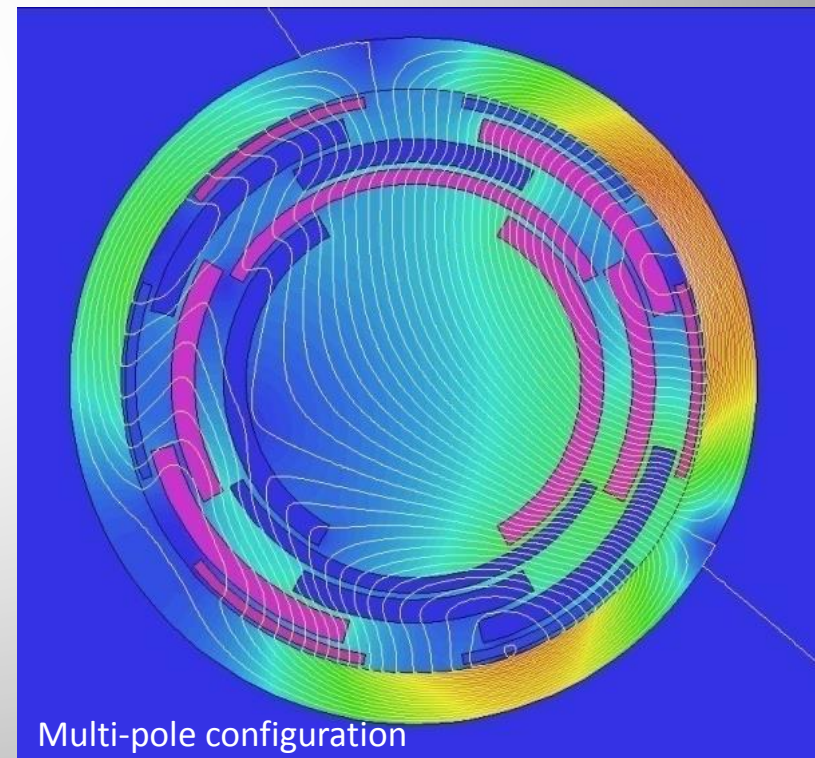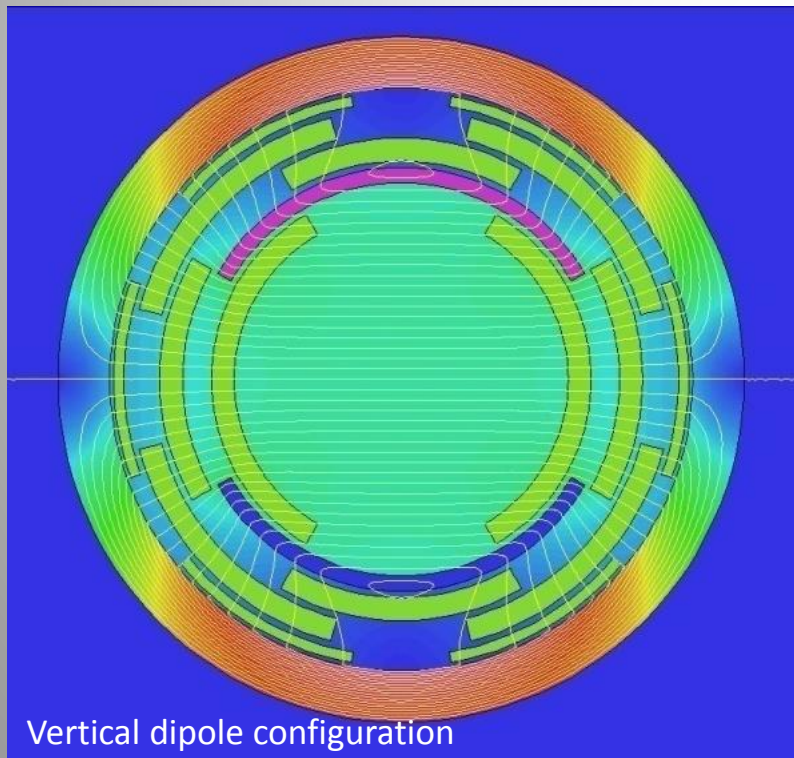



Magnet types

Pole shape	Field distribution	Pole equation	B_x, B_y
		$y = \pm r$	$B_x = 0$ $B_y = B_1 = \text{const.}$
		$2xy = \pm r^2$	$B_x = \frac{B_2}{R_{ref}} y$ $B_y = \frac{B_2}{R_{ref}} x$
		$3x^2y - y^3 = \pm r^3$	$B_x = \frac{B_3}{R_{ref}^2} xy$ $B_y = \frac{B_3}{R_{ref}^2} (x^2 - y^2)$
		$4(x^3y - xy^3) = \pm r^4$	$B_x = \frac{B_4}{R_{ref}^3} (3x^2y - y^3)$ $B_y = \frac{B_4}{6R_{ref}^3} (x^3 - 3xy^2)$

Summary

- Magnets are needed to **guide** and **shape** particle beams
- Coils carry the electrical current, the iron yoke carries the magnetic flux
- Magnetic steel is characterized by its relative **permeability** μ_r and its **coercivity** H_c
- Iron **saturation** influences the **efficiency** of the magnetic circuit and has to be taken into account in the design
- The 2D (magnetic) vector field can be expressed as a series of **multipole coefficients**
- Different magnet types for different functions

