




Steinar Stapnes  
on behalf of CLIC

# The Compact Linear Collider (CLIC)


## Outline

- A CLIC project overview
- CLIC at 380 GeV
- Multi-TeV studies
- Summary



IAS HK  
Jan 18th, 2022

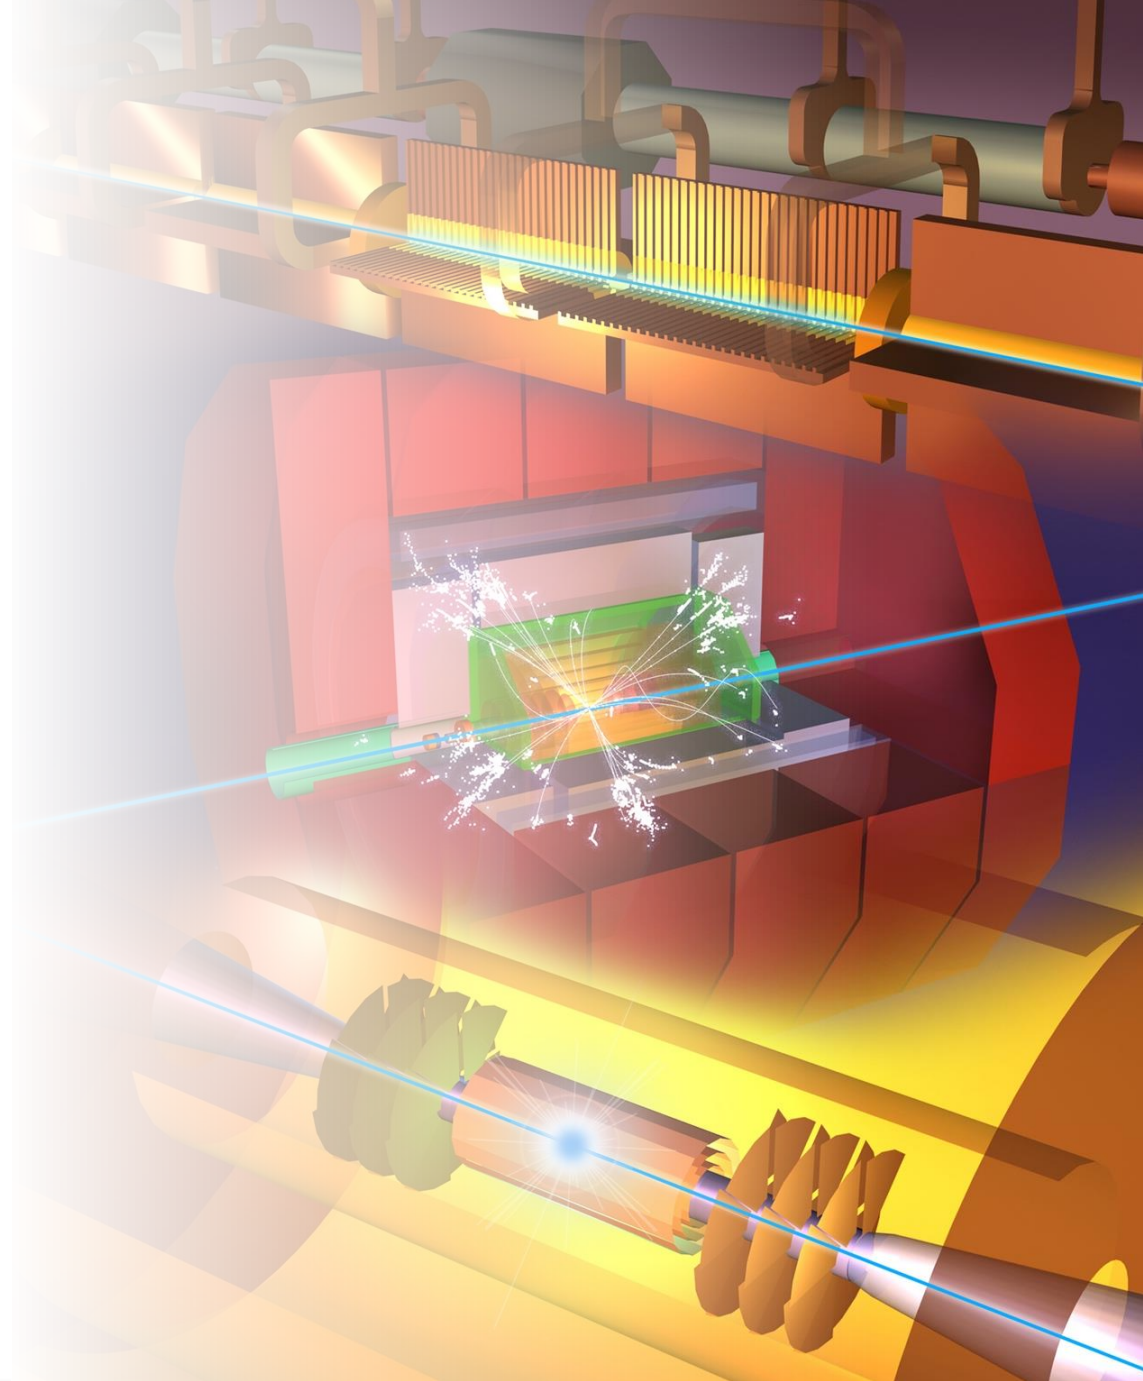

# The Compact Linear Collider (CLIC)

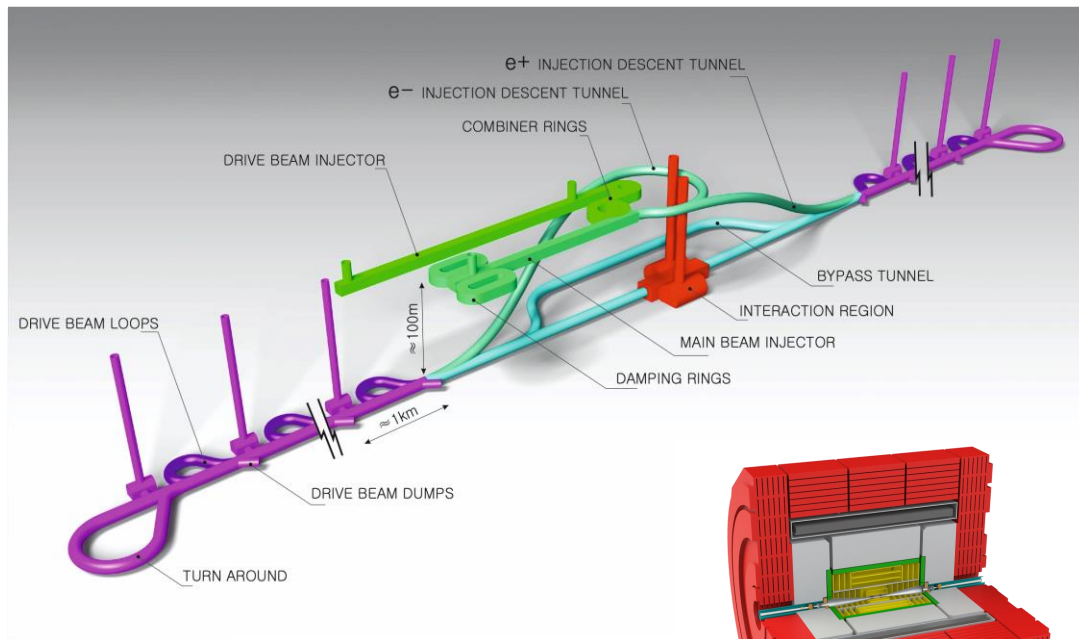

*Accelerating structure  
prototype for CLIC:  
12 GHz ( $L \sim 25$  cm)*

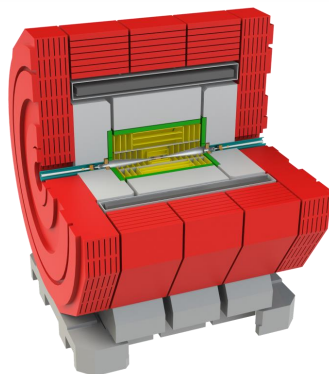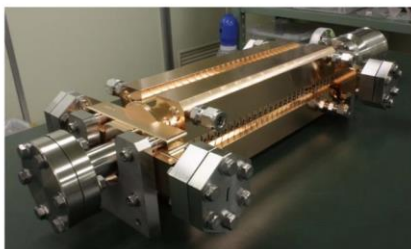

- **Timeline:** Electron-positron linear collider at CERN for the era beyond HL-LHC
- **Compact:** Novel and unique two-beam accelerating technique with high-gradient room temperature RF cavities ( $\sim 20'500$  structures at 380 GeV),  $\sim 11$  km in its initial phase
- **Expandable:** Staged programme with collision energies from 380 GeV (Higgs/top) up to 3 TeV (Energy Frontier)
- CDR in 2012 with focus on 3 TeV. Updated project overview documents in 2018 (Project Implementation Plan) with focus 380 GeV for Higgs and top.
- **Cost:** 5.9 BCHF for 380 GeV (stable wrt 2012)
- **Power:** 168 MW at 380 GeV (reduced wrt 2012), corresponding to 60% of CERN's energy consumption today
- Comprehensive **Detector and Physics** studies




# Collaborations



## CLIC accelerator

- ~50 institutes from 28 countries\*
- CLIC accelerator studies
- CLIC accelerator design and development
- Construction and operation of CLIC Test Facility, CTF3

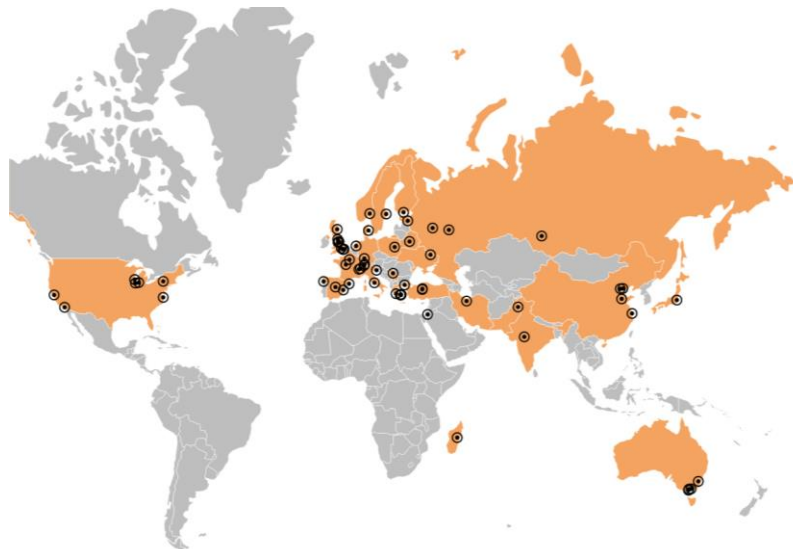

## CLIC detector and physics (CLICdp)

- 30 institutes from 18 countries
- Physics prospects & simulations studies
- Detector optimisation + R&D for CLIC



+ strong participation in the CALICE and FCAL Collaborations and in AIDA-2020/AIDAInnova

\*Canada missing on map



# CLIC parameters

Parameter	Symbol	Unit	Stage 1	Stage 2	Stage 3
Centre-of-mass energy	$\sqrt{s}$	GeV	380	1500	3000
Repetition frequency	$f_{\text{rep}}$	Hz	50	50	50
Number of bunches per train	$n_b$		352	312	312
Bunch separation	$\Delta t$	ns	0.5	0.5	0.5
Pulse length	$\tau_{\text{RF}}$	ns	244	244	244
Accelerating gradient	$G$	MV/m	72	72/100	72/100
Total luminosity	$\mathcal{L}$	$10^{34} \text{ cm}^{-2} \text{ s}^{-1}$	1.5	3.7	5.9
Luminosity above 99% of $\sqrt{s}$	$\mathcal{L}_{0.01}$	$10^{34} \text{ cm}^{-2} \text{ s}^{-1}$	0.9	1.4	2
Total integrated luminosity per year	$\mathcal{L}_{\text{int}}$	$\text{fb}^{-1}$	180	444	708
Main linac tunnel length		km	11.4	29.0	50.1
Number of particles per bunch	$N$	$10^9$	5.2	3.7	3.7
Bunch length	$\sigma_z$	$\mu\text{m}$	70	44	44
IP beam size	$\sigma_x/\sigma_y$	nm	149/2.9	$\sim 60/1.5$	$\sim 40/1$
Normalised emittance (end of linac)	$\varepsilon_x/\varepsilon_y$	nm	900/20	660/20	660/20
Final RMS energy spread		%	0.35	0.35	0.35
Crossing angle (at IP)		mrad	16.5	20	20

# CLIC is a mature design/study



The CLIC accelerator studies are mature:

Optimised design for cost and power

Many tests in CTF3, FELs, lightsources and test-stands

Technical developments of “all” key elements



# Resources

Available at:  
[clic.cern/european-strategy](http://clic.cern/european-strategy)

3-volume CDR 2012


Updated Staging Baseline 2016



Two formal submissions to the ESPPU 2018



4 CERN Yellow Reports 2018

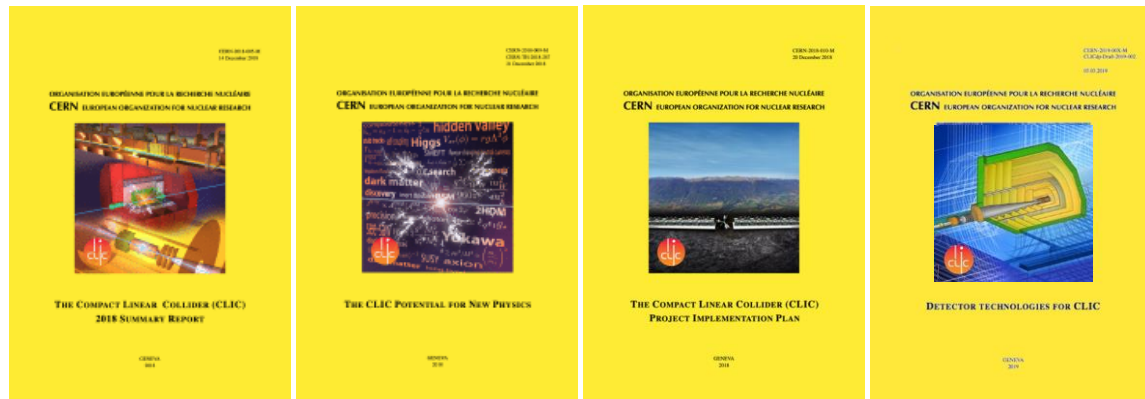

Several Lols have been submitted on behalf of CLIC and CLICdp to the Snowmass process:

The CLIC accelerator study: [Link](#)

Beam-dynamics focused on very high energies: [Link](#)

The physics potential: [Link](#)

The detector: [Link](#)

Details about the accelerator, detector R&D, physics studies for Higgs/top and BSM



# Updates since 2019



- After ESU
  - Immediate study of luminosity performance margins, gamma-gamma and Z-pole operation
  - Timeline for further studies changed (slower implementation)

## Accelerator



- Resources too limited to move into TDR “proper”
- External projects using X-band technology very important and much increased
- Prioritize R&D type of studies and development of core technologies (will show later)

## Physics and Detector:


- Less resources for dedicated CLIC studies, more “Higgs-factory” approach (i.e. CLIC, ILC, FCC-ee, CEPC) and continue linking to detector R&D collaborations



# CLIC timeline

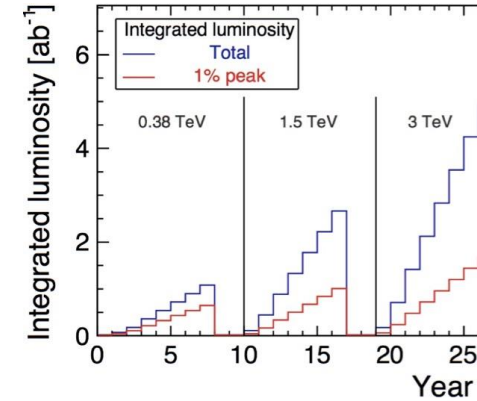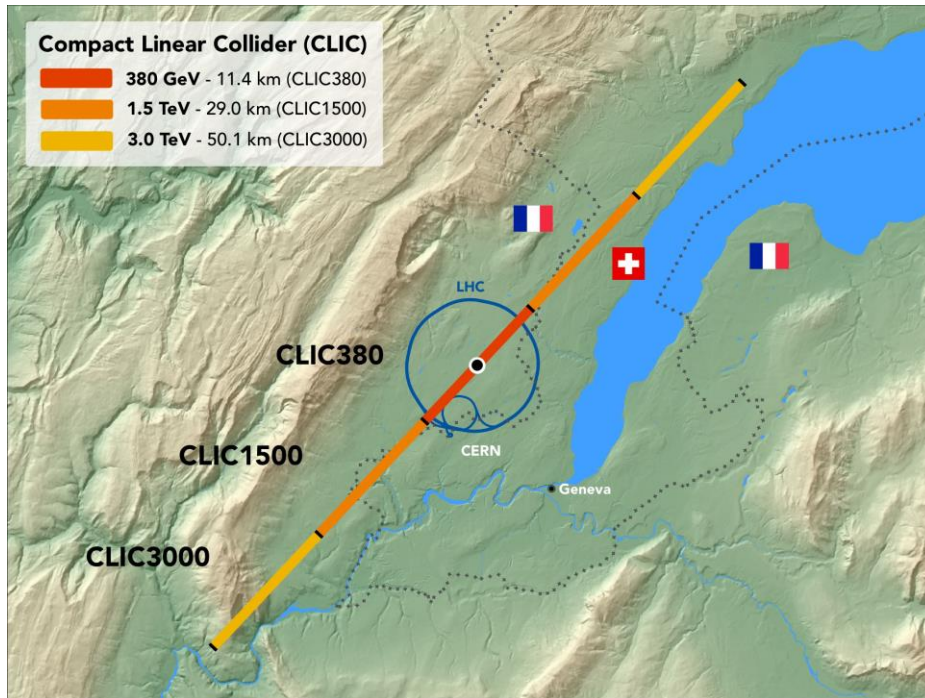

Ramp-up and up-time assumptions:  
arXiv:1810.13022, Bordry et al.

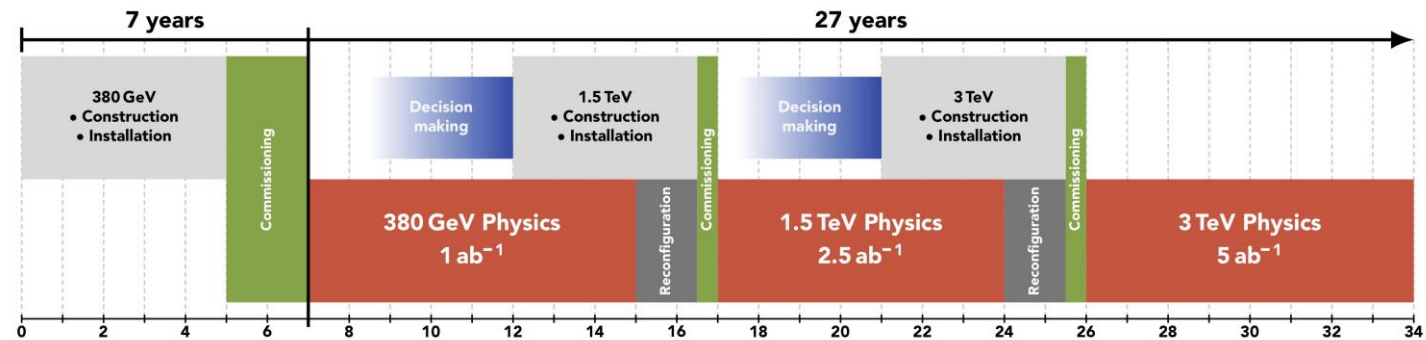

Technology Driven Schedule from start of construction shown above.

A preparation phase of  $\sim 5$  years is needed before (estimated resource need for this phase is  $\sim 4\%$  of overall project costs)




Project Readiness Report as a step toward a TDR – for next ESPP

Assuming ESPP in 2026, Project Approval ~ 2028, Project (tunnel) construction can start in ~ 2030.

Focusing on:


- The X-band technology readiness for the 380 GeV CLIC initial phase
- Optimizing the luminosity at 380 GeV
- Improving the power efficiency for both the initial phase and at high energies

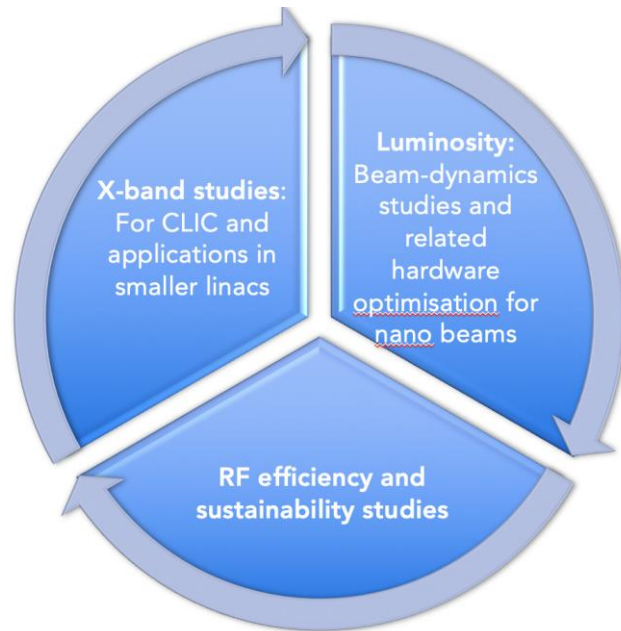

Goals for these studies by ~2025:

- Improved 380 GeV parameters/performance/project plan
- Push multi-TeV options/parameters

# X-band

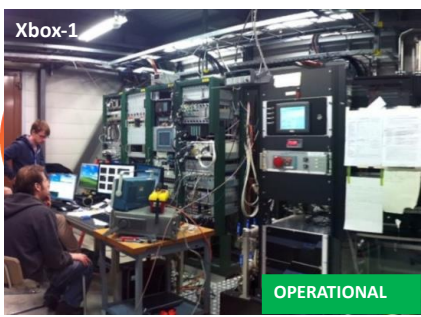

**CPI 50MW 1.5us klystron**  
**Scandinova Modulator**  
**Rep Rate 50Hz**  
**Beam test capabilities**

**CPI 50MW 1.5us klystron**  
**Scandinova Modulator**  
**Rep Rate 50Hz**

**2x Toshiba 6MW 5us klystron**  
**2x Scandinova Modulators**  
**Rep Rate 400Hz**

**Ongoing test:**  
*CPI2 repair validation and interferometry tests*





**Ongoing test:**  
*CLIC TD26 CLEX SuperStructure*

**Ongoing test:**  
*SARI X-band deflector*  
*High power window*

S-box (3GHz) also being set up again to test KT structure, PROBE and the new injector

## Industrial questionnaire:

Based on the companies feedback, the preparation phase to the mass production could take about five years. Capacity clearly available.

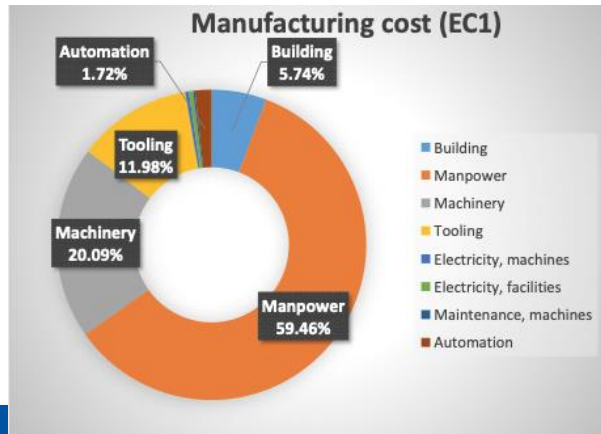

Structures and components production programme to study designs, operation/conditioning, manufacturing, industry qualification/experience

EU projects: ARIES, I-FAST, new TNA



# Use in smaller linacs (C and X-band)



## SwissFEL: C-band linac

- 104 x 2 m-long C-band (5.7 GHz) structures (beam up to 6 GeV at 100 Hz)
- Similar  $\mu\text{m}$ -level tolerance
- Length  $\sim$  800 CLIC structures
- Being commissioned
- X-band structures from PSI perform well

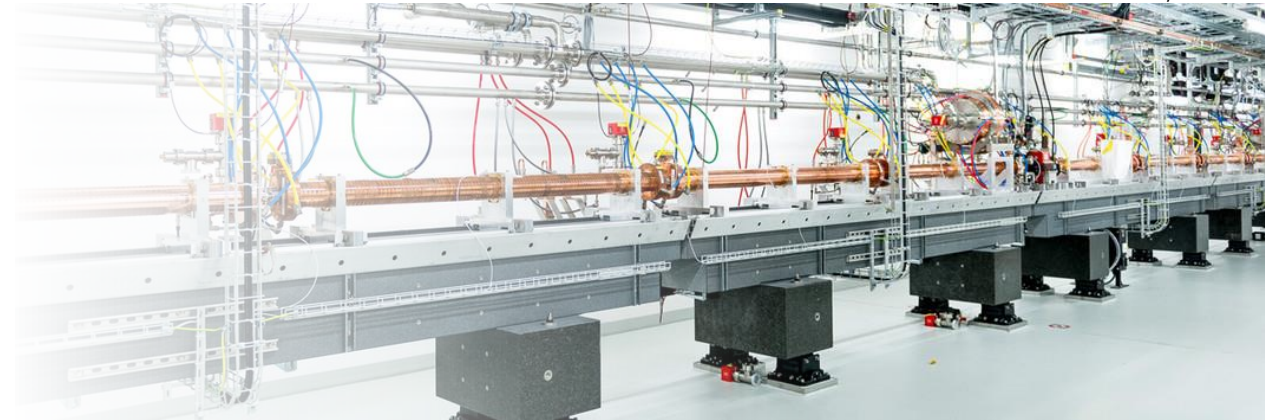



Photo: SwissFEL/PSI



26 academic and industrial partners:

<http://www.compactlight.eu/Main/HomePage>




CompactLight Design Studies 2018-21 ([link](#))  
Compact FEL based on X-band technologies

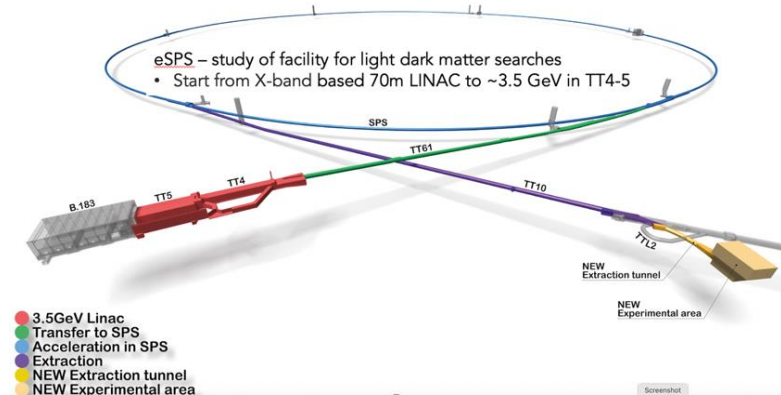

CERN: eSPS study (3.5 GeV X-band linac)

- CompactLight Design Studies 2018-21 (right)
- INFN 1 GeV linac
- Flash RT, at CHUV
- “Design Studies” for ICS
- AERES, IFAST and TNA project





Overview at [LINK](#)

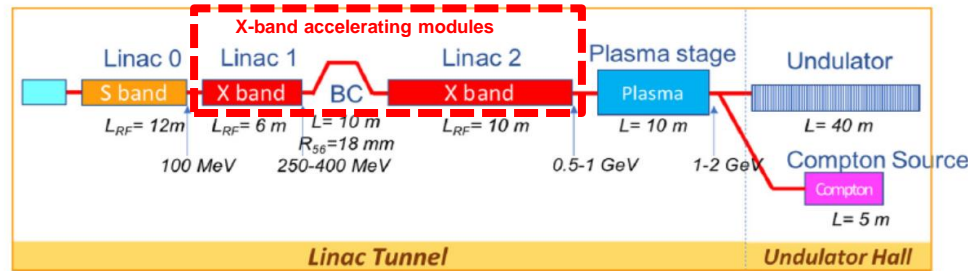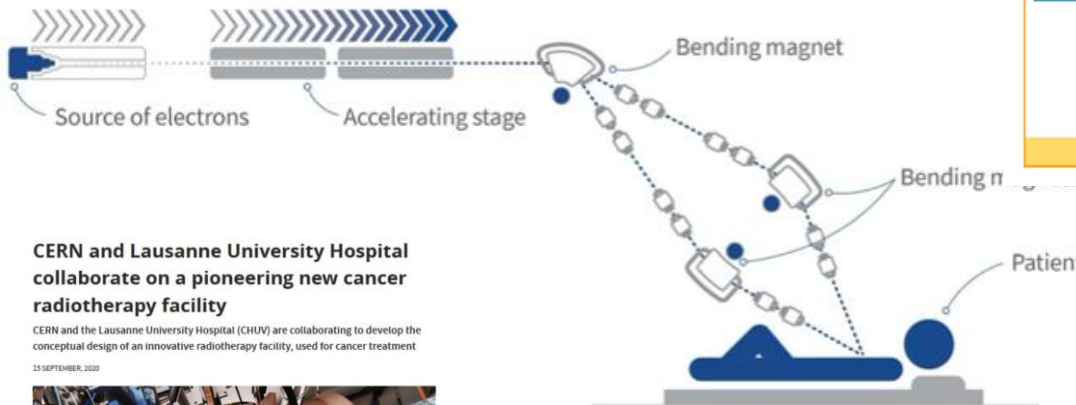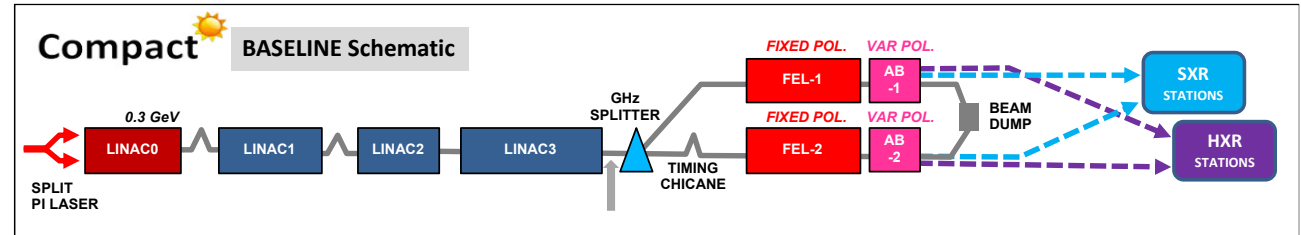

## CERN and Lausanne University Hospital collaborate on a pioneering new cancer radiotherapy facility

CERN and the Lausanne University Hospital (CHUV) are collaborating to develop the conceptual design of an innovative radiotherapy facility, used for cancer treatment

15 SEPTEMBER, 2020

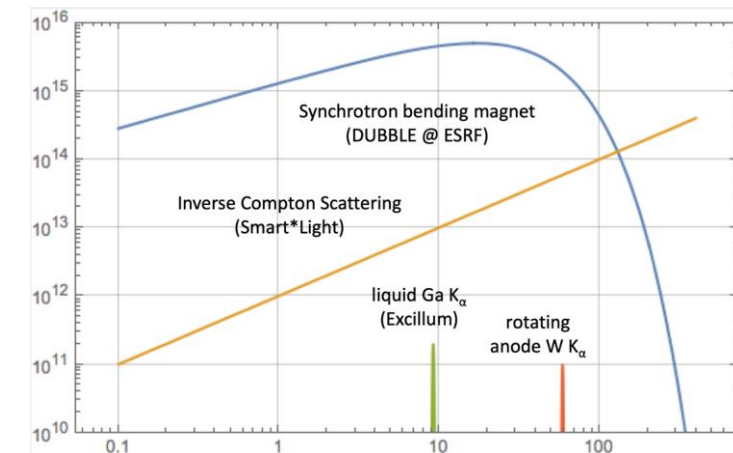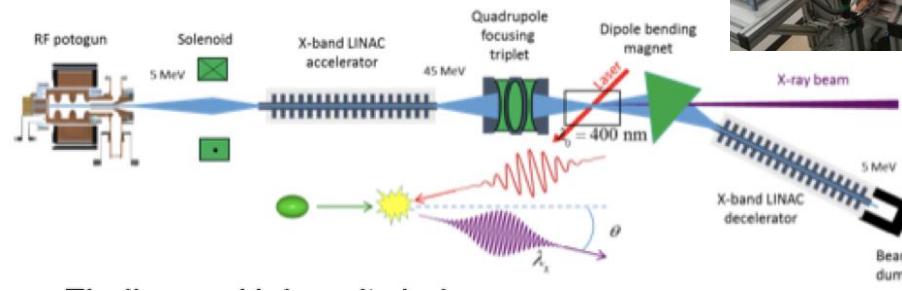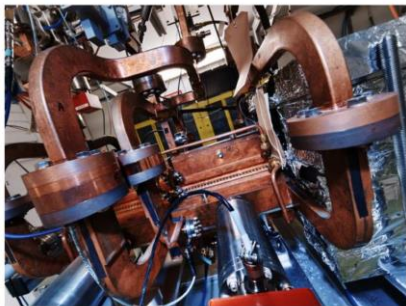




# CLIC acc. studies – luminosities



Further work on luminosity performance, possible improvements and margins, operation at the Z-pole and gamma-gamma

- Z pole performance,  $2.3 \times 10^{32} - 0.4 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ 
  - The latter number when accelerator configured for Z running (e.g. early or end of first stage)
- Gamma – Gamma spectrum (example)
- Luminosity margins and increases
  - Baseline includes estimates static and dynamic degradations from damping ring to IP:  $1.5 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ , a “perfect” machine will give :  $4.3 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ , so significant upside
  - In addition: doubling the frequency (50 Hz to 100 Hz) would double the luminosity, at a cost of +50 MW and ~5% cost increase
- [CLIC note](#) and [paper](#) about these studies

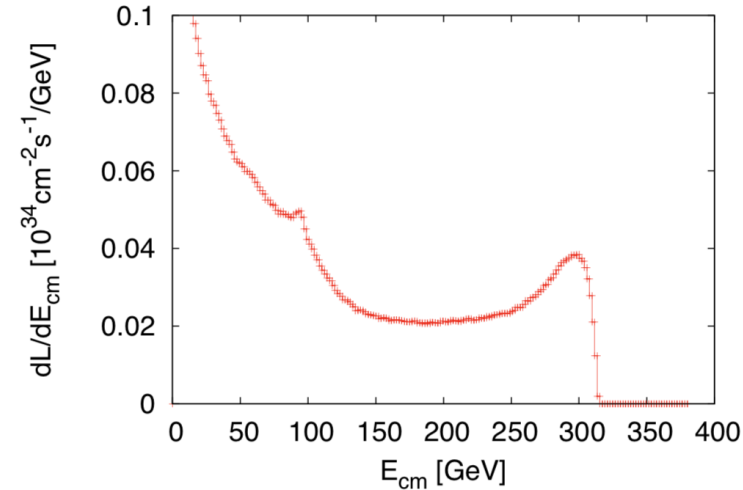


Program and organization team

- Nuria Catalan-Lasheras
- Angeles Faus-Golfe
- Thibaut Lefevre
- Helene Mainaud-Durand
- Yanniss Papaphilippou
- Nobuhiro Terunuma
- Alexia Augier
- Grace Fern Jackson

**Damping rings, radio-frequency, magnets, alignment, stabilization, Injection/extraction, vacuum and impedance, instrumentation**


Tuesday 2 February 2021		
RF Injection/Extraction (Chair: T. Lefevre)	RF design for High-frequency systems for rings (Including low rise) injection systems and methods for ultra-low emittance rise	Themis Mastoridis
	Power systems for low emittance rings	Erk Jensen
	Wake-field monitors and wakefield mitigation.	Kyrre Ness Siobaek
	Kicker design with tight kick tolerances and Pulsers with ultrashort	Mike Barnes
<b>Break</b>		
Instrumentation (Chair: H. Mainaud-Durand)	Overview on profile measurements of nano-beams.	Thibaut Lefevre
	Measuring nanometer beam size at final focus.	Toshiyuki Otsugi
	High resolution cavity BPMs. From prototype to larger production	Alexei Lyapun
	Non-invasive beam measurement using polarisation radiatio	Pavel Karateev
	X-band transverse deflection structure with variable polariza	Barbara Marchetti
	Measuring femtosecond bunches using Electro-optical techn	Serge Bielawski
Beam dynamics (Chair: A. Faus-Golfe)	Welcome and introduction	Steiner Stappes
	Beam dynamics tolerances for Rings.	Yanniss Papaphilippou
	Beam dynamics tolerances for FELs and Linear colliders.	Andrea Latina
	Jitter control and Feedback (IP, DR).	Phillippe Burrows
<b>Break</b>		
Magnets (Chair: A. Faus-Golfe)	Permanent adjustable Magnets	Ben Shepard
	SC Low-beta magnets	Brett Parker
	High-field undulators/wigglers HTS	Daniel Schoerling
	Special magnets (ATF octupoles, skew sextupoles)	M. Modena
	High-field longitudinal gradient dipoles.	Manuel Dominguez
	Crab cavities	S. Verdu
Alignment and stability (Chair: Y. Papaphilippou)	The PACMAN project results.	Helene Mainaud-Durand
	Structured laser beam for alignment.	Jean-Christoph Gayde
	Status MDI alignment.	Leonard Watrelot
	Development of low-cost alignment systems.	Mateusz Sosin
	Girder stability LAPP	Gael Balik
<b>Break</b>		
Vacuum and imp- (Chair: Y. Papaphilippou)	“Very thin” Non-Evaporable Getter coatings for particle acce	Pedro Costa Pinto
	Development of thin-walled copper electroformed vacuum	Lucia Lain Amador
	Measuring conductivity of coated surfaces at high frequency	Andrea Pasaneli
	Beam dynamics tolerances for next generation of accelerato	Daniel Schulte
	Workshop wrap-up	Nuria Catalan-Lasheras

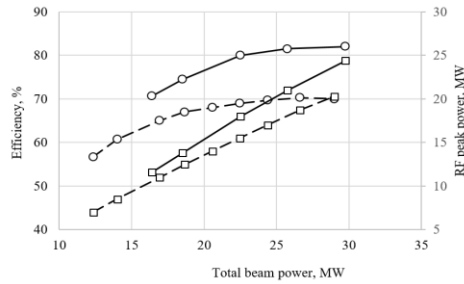

Location: CERN Bldg: 112


Drivebeam klystron: The klystron efficiency (circles) and the peak RF power (squares) simulated for the CLIC TS MBK (solid lines) and measured for the Canon MBK E37503 (dashed lines) vs total beam power. See more later.

Publication: <https://ieeexplore.ieee.org/document/9115885>

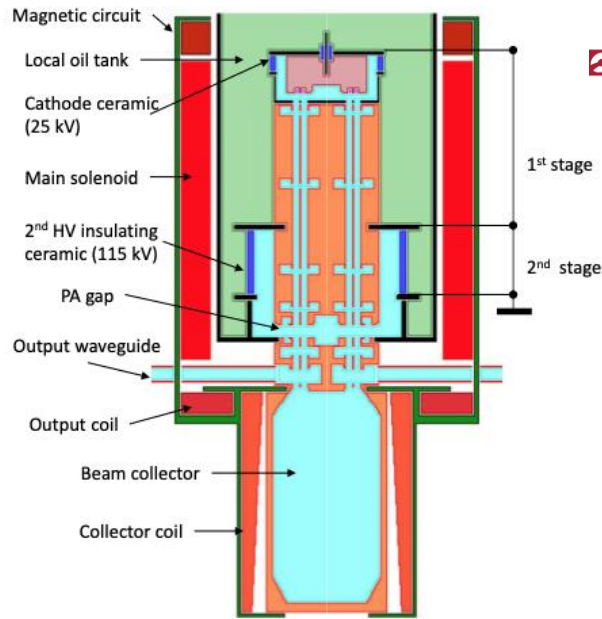

High Efficiency X-band klystrons retrofit upgrades (in collaboration with CPI and Canon).

50 MW	VKX-8311A	HEX COM_M (CERN/cpi)	8-10 MW	E37113 at factory	HEX COM_M (CERN/canon)
Voltage, kV	420	420	Voltage, kV	154	154
Current, A	322	204	Current, A	93	90
Frequency, GHz	11.994	11.994	Frequency, GHz	11.994	11.994
Peak power, MW	49	59	Peak power, MW	6.2	8.1
Sat. gain, dB	48	58	Sat. gain, dB	49	58
Efficiency, %	36.2	68 / 41C	Efficiency, %	42	57 / FCI
Life time, hours	30 000	85 000	Life time, hours	30 000	30 000
Solenoidal magnetic field, T	0.6	0.35/0.6	Solenoidal magnetic field, T	0.35	0.4
RF circuit length, m	0.32	0.32	RF circuit length, m	0.127	0.127




# High Eff. Klystrons

L-band, X-band (for applications/collaborators and test-stands)

High Efficiency implementations:





- New small X-band klystron, ordered
- Large with CPI, work with INFN
- L-band two stage, design done, prototyping for FCC

Also important, redesign of damping ring RF system (well underway) – no klystron development foreseen

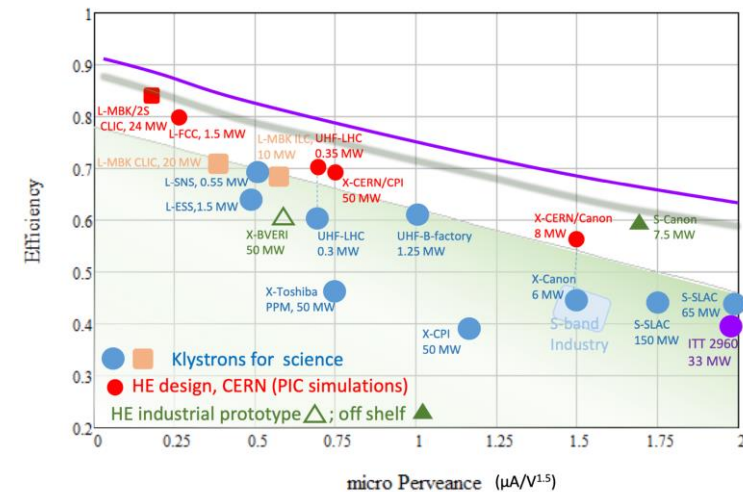

# CLIC Detector

- CLICdet:**
- ◆ High-performing detector optimized for CLIC beam environment
  - ◆ Full GEANT-based simulation, including beam-induced backgrounds, available for optimization and physics studies
  - ◆ Mature reconstruction chain allows detailed performance characterisation
    - e.g. for tracking: effect of busy environment; displaced track reconstruction

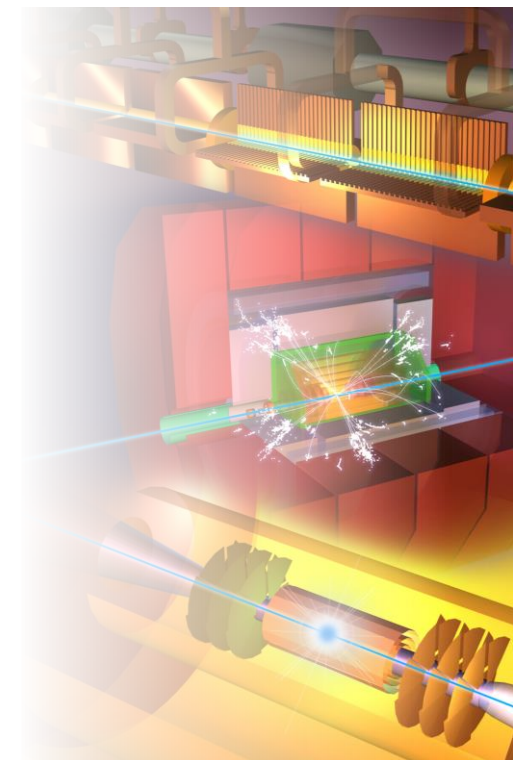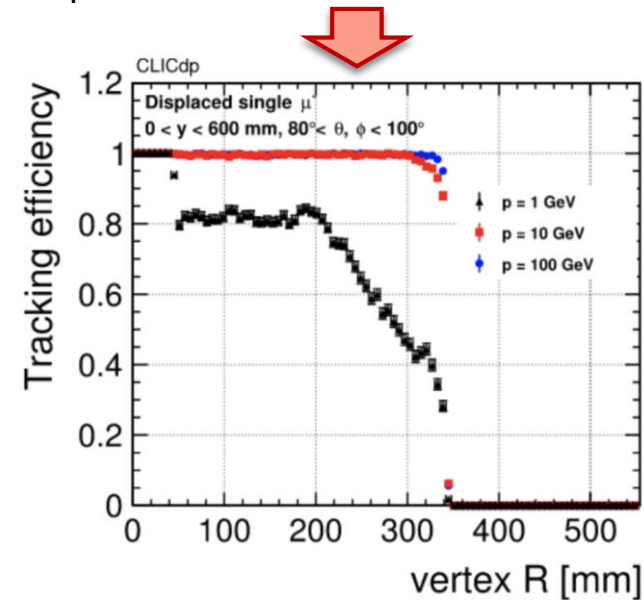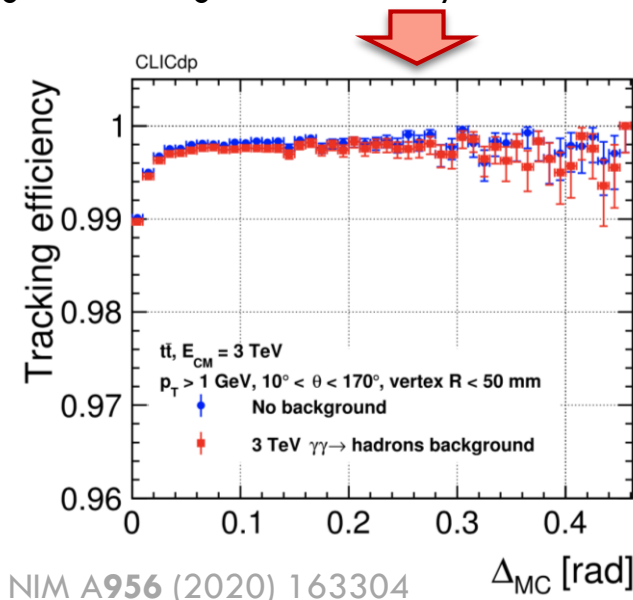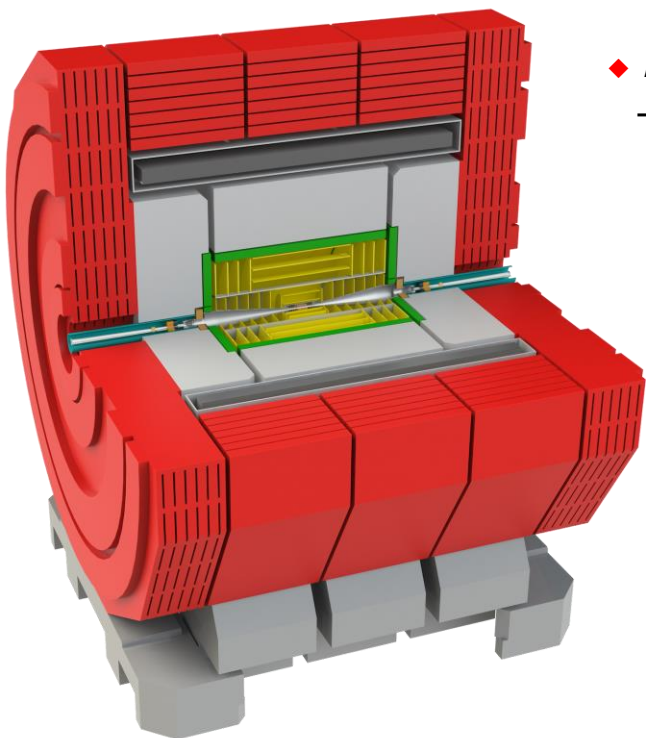


## Software framework:

- ◆ Originally in iLCSoft, the simulation/reconstruction is now fully embedded in the **Key4HEP** ecosystem → a common target for all future collider options
- existing reconstruction algorithms “wrapped” for the new framework



# Detector R&D for CLICdet

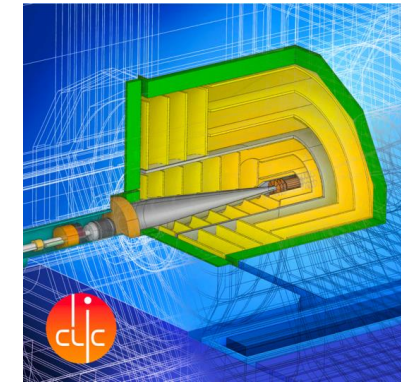

Calorimeter R&D => within CALICE and FCAL


## Silicon vertex/tracker R&D:

- [Working Group](#) within CLICdp and strong collaboration with DESY + AIDAinnova
- Now integrated in the [CERN EP detector R&D programme](#)

## A few examples:

### Hybrid assemblies:

- ◆ Development of **bump bonding** process for **CLICpix2** hybrid assemblies with 25  $\mu\text{m}$  pitch  
<https://cds.cern.ch/record/2766510>

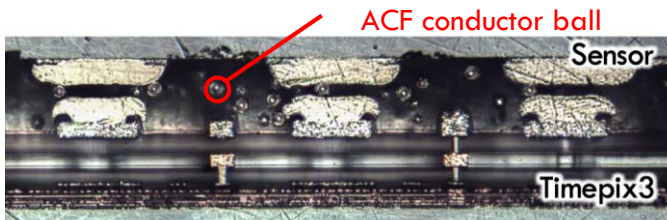


- ◆ Successful sensor+ASIC bonding using **Anisotropic Conductive Film (ACF)**, e.g. with CLICpix2, Timepix3 ASICs. ACF now also used for module integration with monolithic sensors.  
<https://agenda.linearcollider.org/event/9211/contributions/49469/>

### Monolithic sensors:

- ◆ Exploring sub-nanosecond pixel timing with **ATTRACT FASTPIX** demonstrator in 180 nm monolithic CMOS  
<https://agenda.linearcollider.org/event/9211/contributions/49445/>
- ◆ Now performing qualification of modified **65 nm CMOS** imaging process for further improved performance



### CLICTD monolithic tracking sensor:

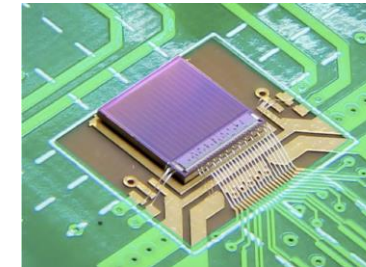

Detailed simulations, Allpix<sup>2</sup> transient Monte Carlo combined with electrostatic 3D TCAD.

Beam tests at DESY, e.g. 5.8 ns CLICTD time resolution achieved

<https://agenda.linearcollider.org/event/9211/contributions/49443/>

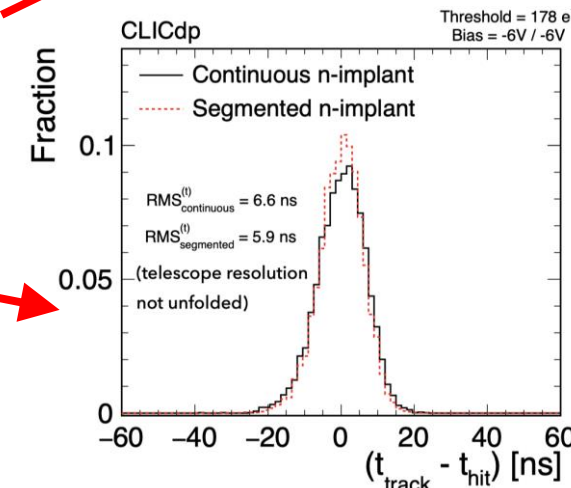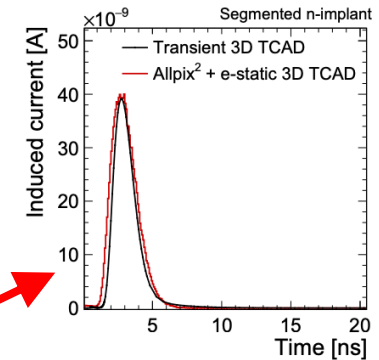





# Physics Potential recent highlights 1: Initial energy stage



## ◆ Ongoing studies on Higgs and top-quark precision physics potential

### Higgs coupling sensitivity:

- ◆ Sensitivities under different integrated luminosity scenarios to complement accelerator luminosity studies


Increased integrated luminosity at 380 GeV (4ab<sup>-1</sup>)

Baseline: 380 GeV (1ab<sup>-1</sup>) + 1.5 TeV

	Benchmark	HL-LHC	HL-LHC + CLIC		HL-LHC + FCC-ee	
			380 (4ab <sup>-1</sup> )	380 (1ab <sup>-1</sup> ) + 1500 (2.5ab <sup>-1</sup> )	240	365
$g_{HZZ}^{\text{eff}} [\%]$	SMEFT <sub>ND</sub>	3.6	0.3	0.2	0.5	0.3
$g_{HWW}^{\text{eff}} [\%]$	SMEFT <sub>ND</sub>	3.2	0.3	0.2	0.5	0.3
$g_{H\gamma\gamma}^{\text{eff}} [\%]$	SMEFT <sub>ND</sub>	3.6	1.3	1.3	1.3	1.2
$g_{HZ\gamma}^{\text{eff}} [\%]$	SMEFT <sub>ND</sub>	11.	9.3	4.6	9.8	9.3
$g_{Hgg}^{\text{eff}} [\%]$	SMEFT <sub>ND</sub>	2.3	0.9	1.0	1.0	0.8
$g_{Htt}^{\text{eff}} [\%]$	SMEFT <sub>ND</sub>	3.5	3.1	2.2	3.1	3.1
$g_{Hcc}^{\text{eff}} [\%]$	SMEFT <sub>ND</sub>	—	2.1	1.8	1.4	1.2
$g_{Hbb}^{\text{eff}} [\%]$	SMEFT <sub>ND</sub>	5.3	0.6	0.4	0.7	0.6
$g_{H\tau\tau}^{\text{eff}} [\%]$	SMEFT <sub>ND</sub>	3.4	1.0	0.9	0.7	0.6
$g_{H\mu\mu}^{\text{eff}} [\%]$	SMEFT <sub>ND</sub>	5.5	4.3	4.1	4.	3.8
$\delta g_{1Z} [\times 10^2]$	SMEFT <sub>ND</sub>	0.66	0.027	0.013	0.085	0.036
$\delta \kappa_\gamma [\times 10^2]$	SMEFT <sub>ND</sub>	3.2	0.032	0.044	0.086	0.049
$\lambda_Z [\times 10^2]$	SMEFT <sub>ND</sub>	3.2	0.022	0.005	0.1	0.051

<https://arxiv.org/abs/2001.05278>

other sensitivities from Briefing Book <https://arxiv.org/abs/1910.11775>

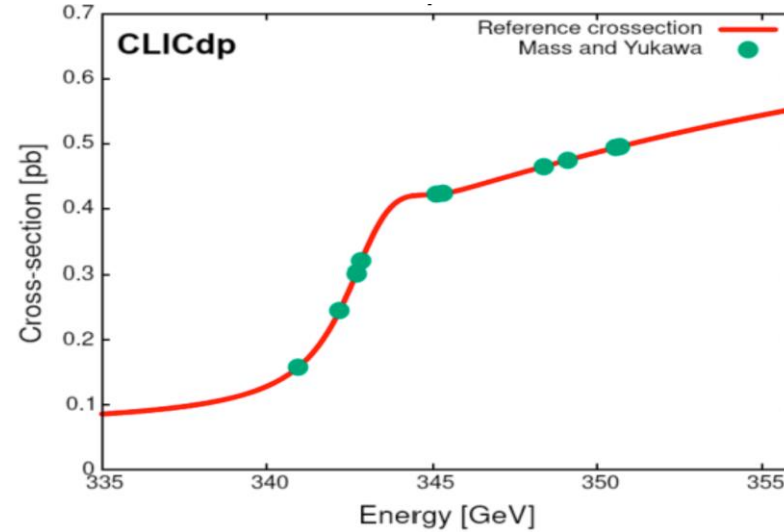

### Top-quark threshold scan


- ◆ Optimisation of scan points including beam spectrum; here optimising on mass and Yukawa coupling.

- ◆ Expected top-quark mass precision of 25MeV can be improved by 25% without losing precision on width or Yukawa.

<https://arxiv.org/abs/2103.00522>



# Power and Energy

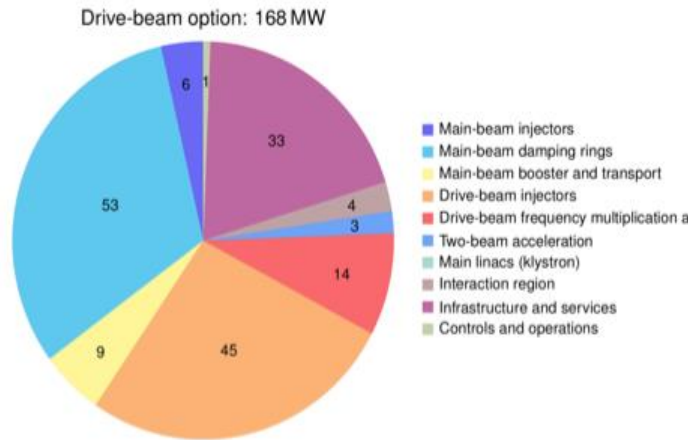

Power estimate bottom up (concentrating on 380 GeV systems)

- Very large reductions since CDR, better estimates of nominal settings, much more optimised drivebeam complex and more efficient klystrons, injectors more optimized, etc

Further savings possible, main target damping ring RF significantly reduced, L-band klystrons (target 110-130 MW)

Energy consumption ~0.8 TWh yearly (target 0.6)  
CERN is currently (when) running at 1.2 TWh (~90% in accelerators)

## Design Optimisation:

The designs of CLIC, including key performance parameters as accelerating gradients, pulse lengths, bunch-charges and luminosities, have been optimised for cost but also increasingly focussing on reducing power consumption.

## Technical Developments:

Technical developments targeting reduced power consumptions at system level high efficiency klystrons, and super conducting and permanent magnets for damping rings and linacs.

## Running when energy is cheap:



CLIC is normal conduction, single pass, can change off-on-off quickly, at low power when not pulsed. Specify state-change (off-standby-on) times and power uses for each – see if clever scheduling using low cost periods, can reduce the energy bill

## Renewable energy (carbon footprint):

Is it possible to fully supply the annual electricity demand of the CLIC-380 by installing local wind and PV generators (this could be e.g. achieved by 330 MW-peak PV and 220 MW-peak wind generators, at a cost of slightly more than 10% of the CLIC 380 GeV cost)



# CLIC can easily be extended

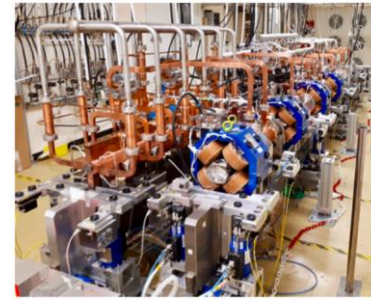
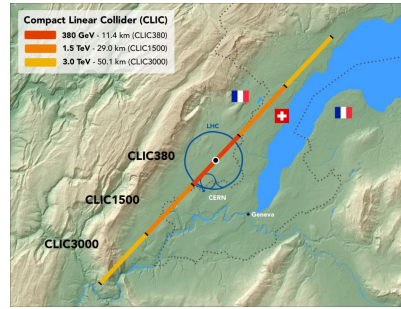


What are the critical elements:

- Physics
- Gradient and power efficiency
- Costs

1. Drive beam accelerated to  $\sim 2$  GeV using conventional klystrons
2. Intensity increased using a series of delay loops and combiner rings
3. Drive beam decelerated and produces high-RF
4. Feed high-RF to the less intense main beam using waveguides

Extend by extending main linacs, increase drivebeam pulse-length and power, and a second drivebeam to get to 3 TeV

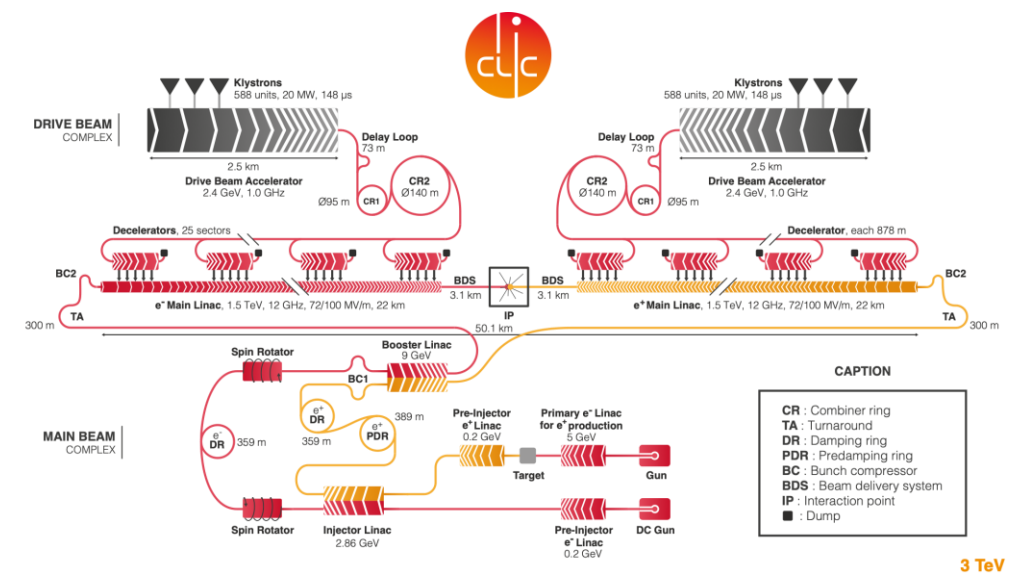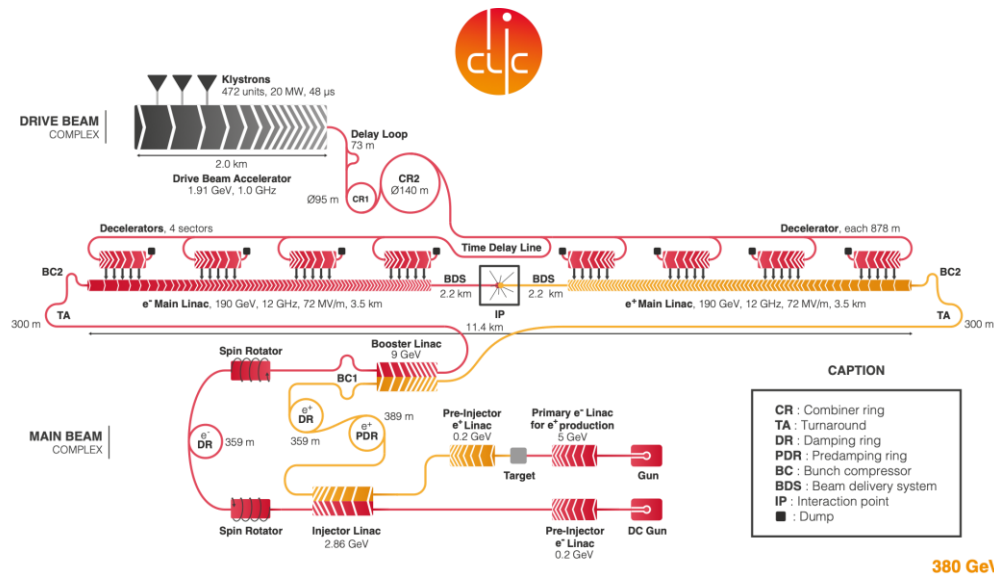

**380 GeV**

CR : Combiner ring  
 TA : Turnaround  
 DR : Damping ring  
 PDR : Predamping ring  
 BC : Bunch compressor  
 BDS : Beam delivery system  
 IP : Interaction point  
 ■ : Dump

**3 TeV**


CR : Combiner ring  
 TA : Turnaround  
 DR : Damping ring  
 PDR : Predamping ring  
 BC : Bunch compressor  
 BDS : Beam delivery system  
 IP : Interaction point  
 ■ : Dump

CLIC - Scheme of the Compact Linear Collider (CLIC)

## ◆ Ongoing studies on new physics searches

### Search for heavy neutrinos


- ◆  $e+e- \rightarrow N\nu \rightarrow qq\ell\nu$  signature allows full reconstruction of N
- ◆ BDT separates signal from SM; beam backgrounds included.
- ◆ cross-section limits converted to mass ( $m_N$ ) coupling ( $V_{IN}$ ) plane

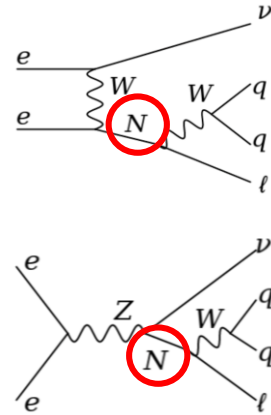


### Dark matter using mono-photon signature at 3TeV, $e+e- \rightarrow XX\gamma$

- ◆ New study using ratio of electron beam polarisations to reduce systematics
- ◆ Exclusions for simplified model with mediator Y and DM particle X
- ◆ For benchmark mediator of 3.5TeV, photon energy spectrum discriminates different DM mediators & allows 1TeV DM particle mass measurement to  $\sim 1\%$

<https://arxiv.org/abs/2103.06006>

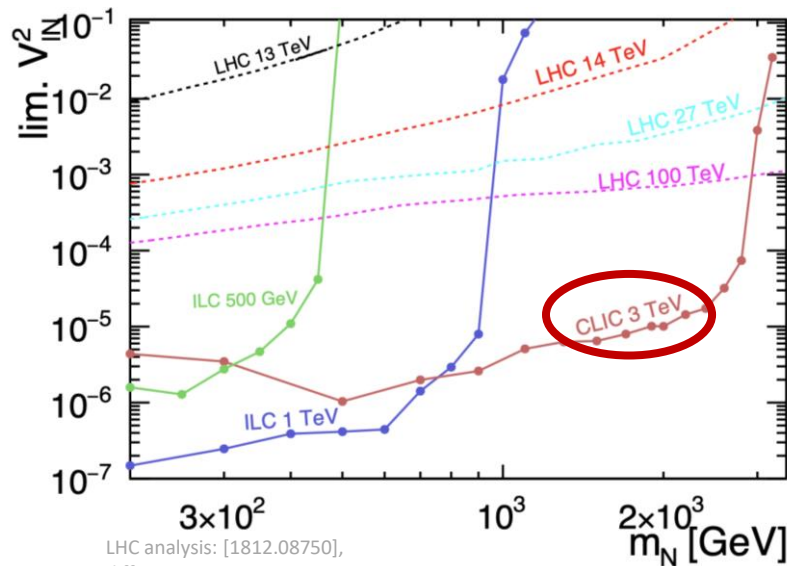

LHC analysis: [1812.08750],  
different assumption  $V_{eN} = V_{mN} \neq V_{\ell N} = 0$

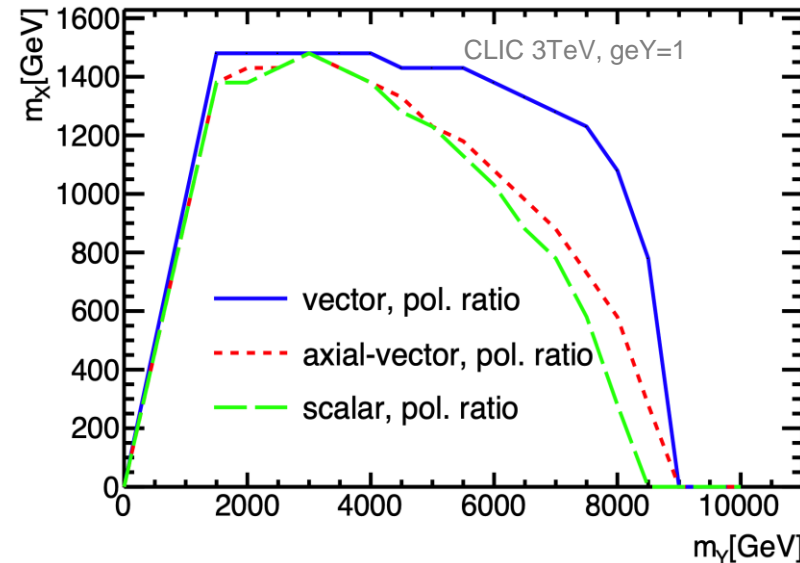

CLIC core studies:

Normal conducting accelerating structures are limited in gradient by three main effects (setting aside input power):

- Field emission
- Vacuum arcing (breakdown)
- Fatigue due to pulsed surface heating


Studying these processes gives important input into:

- RF design – Optimizing structures also coupled with beam dynamics
- Technology – Material choice, process optimization
- Operation – Conditioning and recovery from breakdown


Designs for CLIC steadily improving, but also RFQ, Muon collider, XFEL, ICS, etc  
Important experimental support

## Multi-TeV energies:


High gradient, high wall-plug to beam efficiency, nanobeam parameters increasingly demanding

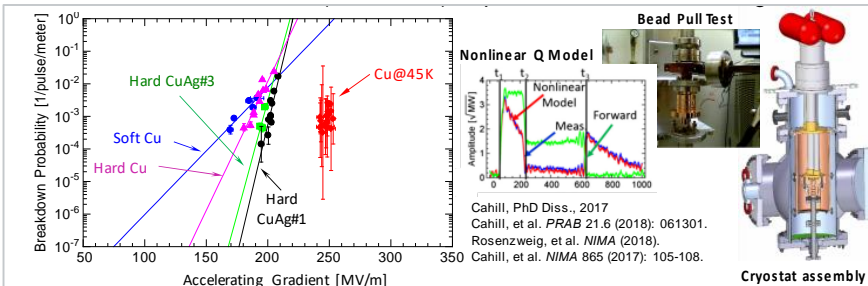

Cryo-cooled copper cavity, SLAC

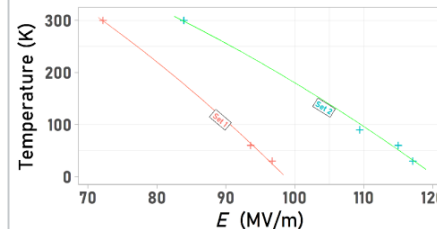

Cryo-cooled copper pulsed dc electrodes, Uppsala/CERN

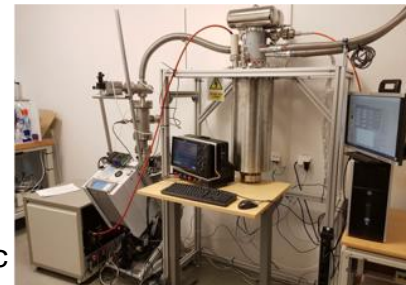

The diagram shows a cross-section of a CLIC cell structure with an end cell and regular cells. Implementation details include: Cell structure Manufactured by Milling, Iris aperture, Gap, Copper in high electric field region, and HTS in high magnetic field region. A key open question is highlighted: "A key open question is how the HTS will behave at high-power. Can it be even put in the high electric field region?"

3 or 12 GHz for high power test in CLIC test stands.

(a) Elliptical Rounding

Cryogenic systems extended: Combining high-gradients in cryo-copper and high-temperature superconductors for high-efficiency and reduced peak RF power requirements.




# Cost - I



Machine has been re-costed bottom-up in 2017-18

- Methods and costings validated at review on 7 November 2018 – similar to LHC, ILC, CLIC CDR
- Technical uncertainty and commercial uncertainty estimated

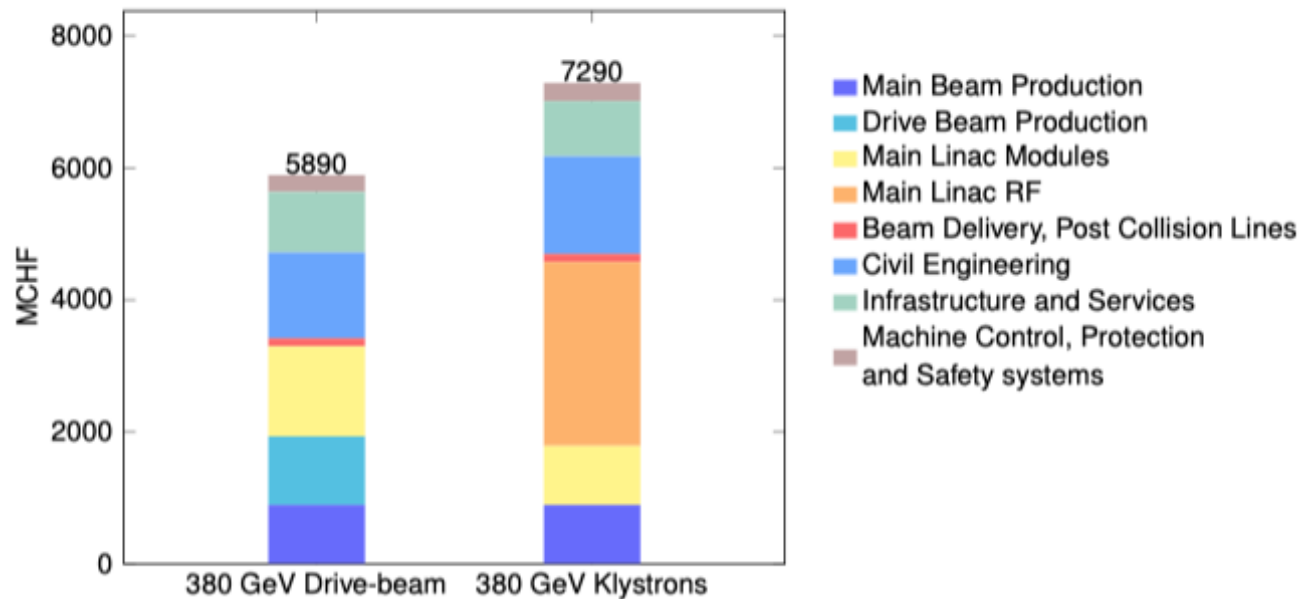

Domain	Sub-Domain	Cost [MCHF]	
		Drive-Beam	Klystron
Main Beam Production	Injectors	175	175
	Damping Rings	309	309
	Beam Transport	409	409
Drive Beam Production	Injectors	584	—
	Frequency Multiplication	379	—
	Beam Transport	76	—
Main Linac Modules	Main Linac Modules	1329	895
	Post decelerators	37	—
Main Linac RF	Main Linac Xband RF	—	2788
Beam Delivery and Post Collision Lines	Beam Delivery Systems	52	52
	Final focus, Exp. Area	22	22
	Post-collision lines/dumps	47	47
Civil Engineering	Civil Engineering	1300	1479
	Electrical distribution	243	243
	Survey and Alignment	194	147
Infrastructure and Services	Cooling and ventilation	443	410
	Transport / installation	38	36
	Safety system	72	114
Machine Control, Protection and Safety systems	Machine Control Infrastructure	146	131
	Machine Protection	14	8
	Access Safety & Control System	23	23
<b>Total (rounded)</b>		<b>5890</b>	<b>7290</b>

CLIC 380 GeV Drive-Beam based:  $5890^{+1470}_{-1270}$  MCHF;

CLIC 380 GeV Klystron based:  $7290^{+1800}_{-1540}$  MCHF.



# Cost - II



Other cost estimates:

Construction:

- From 380 GeV to 1.5 TeV, add 5.1 BCHF (drive-beam RF upgrade and lengthening of ML)
- From 1.5 TeV to 3 TeV, add 7.3 BCHF (second drive-beam complex and lengthening of ML)
- Labour estimate: ~11500 FTE for the 380 GeV construction

Operation:

- 116 MCHF (see assumptions in box below)
- Energy costs
  - 1% for accelerator hardware parts (e.g. modules).
  - 3% for the RF systems, taking the limited lifetime of these parts into account.
  - 5% for cooling, ventilation and electrical infrastructures etc. (includes contract labour and consumables)

These replacement/operation costs represent 116 MCHF per year.



# Summary and thanks

- CLIC studies focused on core technologies, X-band and nanobeam, for next ESU, well underway.
- Keep focus on both 380 GeV and multi-TeV performance and R&D
- Greatly helped by studies of smaller linacs and systems using X-band technology
- Detector and physics studies continue at lower pace, also in many areas integrated or connected with "Higgs-factory" studies, and wider Detector R&D efforts
- Thanks to many CLIC accelerator colleagues for slides and input, and the CLICdp slides in particular compiled by Aidan Robson