

# Test plan for SPL short cryomodule

O. Brunner, W. Weingarten

# Objective of test

---

- ▶ **Validation of RF power test setup** with 1 MW klystron/modulator on sc cavity in pulsed mode
- ▶ **Validation of cavities inside cryo-module and of assembling procedure:** conditioning with 1 klystron of pair of cavities up to 25 MV/m
  - ▶ main coupler conditioning
  - ▶ calorimetric Q-measurement
  - ▶ X-ray generation of cryo-module
  - ▶ long run test @ max field
  - ▶ crosstalk between cavities by RF or dark currents, ...
- ▶ **Validation of LLRF system**
- ▶ **Validation of cryo-module design**
  - ▶ static losses
  - ▶ critical heat flow in super-fluid helium
  - ▶ microphonics, ...

# Test object <sup>1</sup>

---

- ▶ The cryomodule is equipped with
  - ▶ 4  $\beta=1$  5-cell Nb bulk cavities at 704 MHz joined with 1He tank
  - ▶ 4 power couplers (2 per klystron) with ancillaries (gHe feeder lines with heater) and interlock equipment (e-current, temperature, vacuum gauge)
  - ▶ 1 pickup antenna (50  $\Omega$ )
  - ▶ 4 tuners (slow and piezo)
  - ▶ thermal shield with magnetic shield (Cryoperm) thermally anchored to it (need of 2<sup>nd</sup> shield to be discussed)
  - ▶ 2 gate valves at extremities (plus protection flanges)
  - ▶ slow control & interlock system
  - ▶ ...

## Test object <sup>2</sup>

---


- ▶ ... the cryomodule is equipped with
  - ▶ He pressure gauge
  - ▶ 2 lHe level sensors (redundancy)
  - ▶ Temperature-sensors at strategic points (bellows, magnetic shield, HOM couplers, power coupler)
  - ▶ 8 HOM couplers with (broadband) feedthrus and RF cables to room temperature loads (rated 100 W) sufficiently thermally anchored
  - ▶ Pressure gauges for cavity and insulation vacuum
  - ▶ Heater inside He tank (among others used for measurement of Q-value)
  - ▶ RF-DC filters for e<sup>-</sup>-current measurement (outside cryo-module)
- ▶ Radiation monitor available inside bunker
- ▶ All sensor signals remotely logged

# Test object <sup>1</sup>

RF power tests with 1/2/4 cavities per 1 MW klystron

---

RF test in pulsed operation without beam

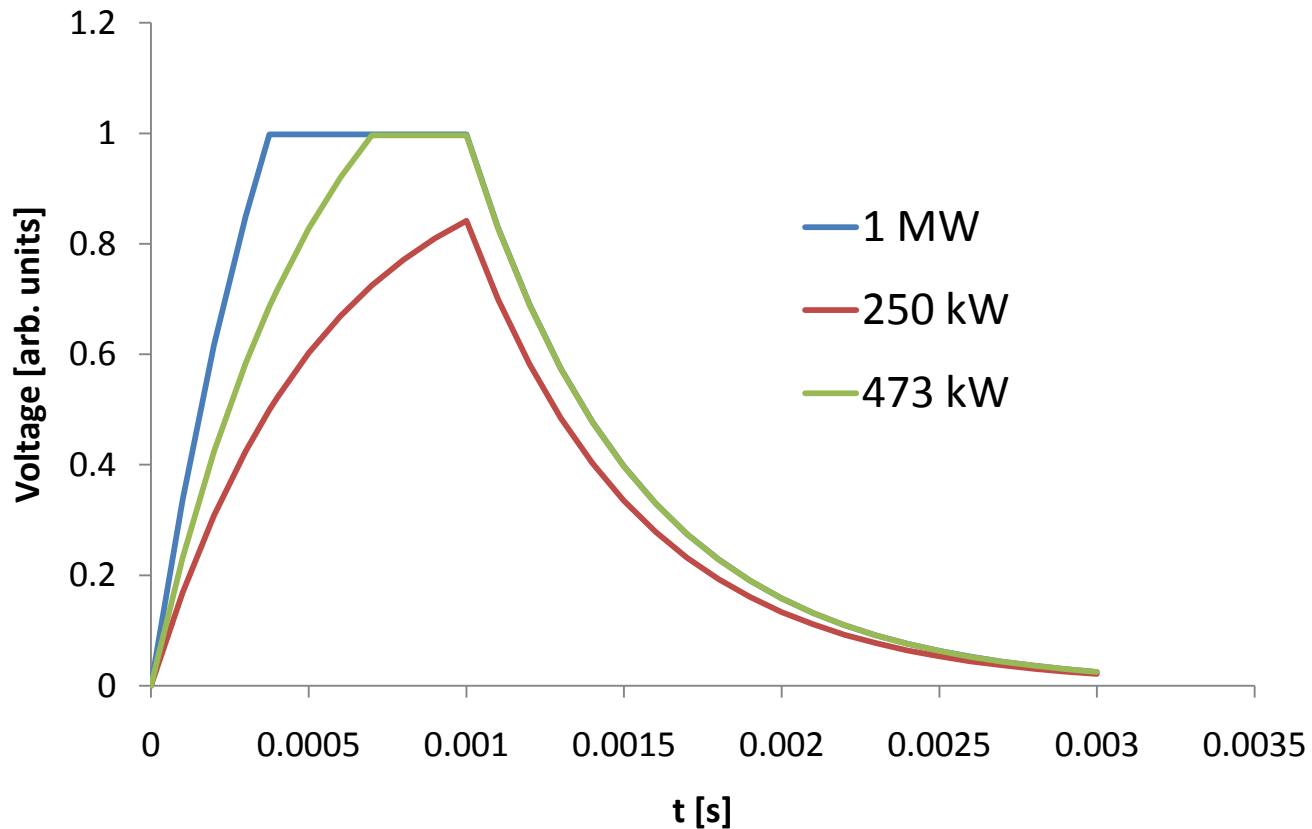

# Cryogenic design parameters

Updated values in red

Cf. also

<https://twiki.cern.ch/twiki/bin/view/SPL/SPLparameterList>

<u>Parameter</u>	<u>Unit</u>	<u>low-beta</u>	<u>high-beta</u>
		nominal/ultimate	
Cavity bath temperature	[K]	2.0	2.0
Beam loss	[W/m]	1.0	1.0
Static loss along cryo-modules at 2 K	[W/m]	?	?
Static loss at 5-280 K	[W/m]	?	?
Accelerating gradient/ <b>Voltage</b>	[MV/m]/[MV]	19.3/ <b>13.3</b>	25/ <b>26.5</b>
Quality factor Q	[10 <sup>9</sup> ]	6/3	10/5
R/Q value	[Ω]	290	570
Cryogenic duty cycle	[%]	4.09/8.17	4.11/8.22
Coupler loss at 2.0 K	[W]	<0.2/0.2	<0.2/0.2
HOM loss at 2.0 K in cavity	[W]	<1/<3	<1/<3
HOM coupler loss at 2.0 K (per coupler)	[W]	<0.2 /0.2	<0.2/0.2
HOM & Coupler loss 5-280 K	[g/s]	0.05	0.05
Tunnel slope	[%]	1.7	1.7
Cavities per cryostat		3	4/8
<b>Dynamic heat load p. Cavity</b>	<b>[W]</b>	<b>4.2/16.8</b>	<b>5.1/20.4</b>
<b>Intercavity bellows hom loss (ss/copper) for 2.112 GHz</b>	<b>[W]</b>	<b>?</b>	<b>&lt;3/&lt;0.1</b>

# Test sequence <sup>1</sup>

---

## ▶ Room temperature

- ▶ The cryo-module is installed and connected to the cryo-line but not yet to the RF power waveguide system (2 cavities per klystron)
- ▶ Check vital components such as tuners (range), temperature sensors, low level RF system
- ▶ Measurement of fundamental mode (704 MHz) resonant frequencies of cavities and  $Q_{\text{ext}}$  for 704 MHz of power couplers, pickup probes and HOM couplers
- ▶ Calibrate directional couplers on waveguides for forward and reflected wave
- ▶ interlock tests
- ▶ If vacuum OK ( $p < 10^{-6}$  mbar) start cool down
  - ▶ Sequence of cool down: thermal/magnetic shield – cavity end group (beam tubes) – cavity proper

# Test sequence <sup>2</sup>

---

- ▶ During cool down
  - ▶ Logging of temperature sensors/lHe level/vacuum



# Test sequence<sup>3</sup>

---

## ▶ At 4.5 K

- ▶ Measurement of fundamental mode resonant frequencies of cavities and  $Q_{\text{ext}}$  of power couplers, pickup probes and HOM couplers (optional)
- ▶ Connection with RF power waveguide system and adjustments of  $Q_{\text{ext}}$  of power coupler to nominal, if needed
- ▶ Switch on moderate RF power and check for RF leaks in waveguide system
- ▶ Activate LLRF system for tuning cavities on master frequency
- ▶ Have all interlocks and all diagnostics equipment active and actuators on REMOTE, close door of bunker

# Test sequence<sup>4</sup>

---

## ▶ At 1.8 K

- ▶ Increase RF power slowly to nominal value under pulsed conditions and careful observation of
  - ▶ Power coupler diagnostics signals (to be specified)
  - ▶ Cavity signals (forward, reflected, transmitted power, vacuum)
  - ▶ HOM power at 704 MHz
  - ▶ X-radiation
  - ▶ e<sup>-</sup>-current
- ▶ Check for pressure oscillations without RF
- ▶ Measure static heat load
- ▶ Increase acc. Gradient to nominal; when at design gradient,
  - ▶ measure Lorentz-force detuning in pulsed mode
  - ▶ measure dynamic cavity heat dissipation by adjusting the He gas pressure with the heater power inside the He tank

# Wish-list for accessibility for in-situ intervention

---

## ▶ **Inside cryo-module**

- ▶ Tuner
  - ▶ Motor and mechanical parts
- ▶ HOM coupler
  - ▶ re-tuning of notch-filter or in situ tuning from outside, if possible
- ▶ RF vacuum transitions
  - ▶ all type N (or similar)

## ▶ **Outside cryo-module**

- ▶ 3-stub tuner
  - ▶ for RF coupler re-adjustment
- ▶ gHe pipes
  - ▶ mass flow in power coupler heat exchanger