



Enhancements of the Fast Interlock System for Wendelstein 7-X operational phase OP2.1



J. Schacht¹, R. Vilbrandt¹, S. Degenkolbe¹, O. Grulke¹,
A. Winter¹, U. Herbst¹, A. Wölk¹, S. Pingel¹, H.-S.
Bosch¹ and the W7-X Team

¹ Max-Planck-Institut for Plasma Physics, Greifswald, Germany



This work has been carried out within the framework of the EUROfusion Consortium, funded by the European Union via the Euratom Research and Training Programme (Grant Agreement No 101052200 — EUROfusion). Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union or the European Commission. Neither the European Union nor the European Commission can be held responsible for them.

Stellarator Wendelstein 7-X: Ready for Operation Phase 2.1

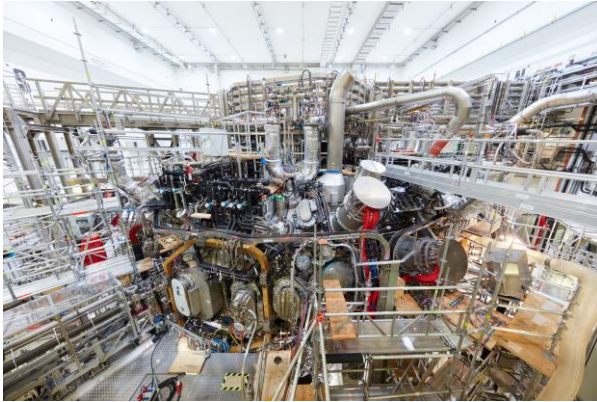


Fig. 1: Stellarator Wendelstein W7-X

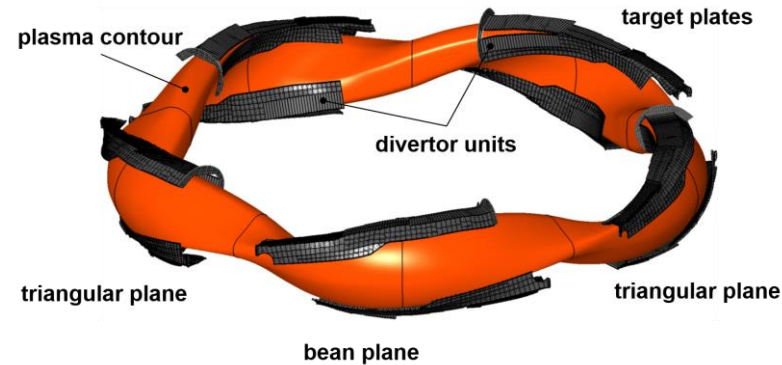


Fig. 2: Actively cooled divertor units

High heat flux operation OP2: September 2022+

- Full water cooling of all PFC to provide max. heat load 10MW/m^2 ,
- Considerable enhancement of heating, fueling and diagnostics systems,
- Consecutive increase of energy turnaround 1GJ (OP2.1 \rightarrow 18GJ),

New requirements for Fast Interlock System (FIS) for actively cooled divertor operation in OP2 led to an extensive revision of technical implementation and the software of FIS!

Highlights of W7-X Fast Interlock System

- Enhancement of the Fast Interlock System for operational Phase 2.1 of W7-X,
- Using fast PLC CPU Siemens 1573 for processing of cFIS Interlock Functions,
- Input/Output of interlock signals via decentral periphery devices ET200SP,
- Using Profinet bus for connection the CPU 1500 with all ET200SP devices,
- Integration of new FIS diagnostic signals for divertor protection, for ICRH heating and Continuous Pellet Filling System (CPFS),
- Integration of new FIS actuator signals: NBI20, ICRH, Continuous Pellet Injection (CPFS),
- Extension and modification of Interlock Functions for Op2.1,
- Implementation of a new Unlock_Request / Heating_Release cycle for all heating systems,

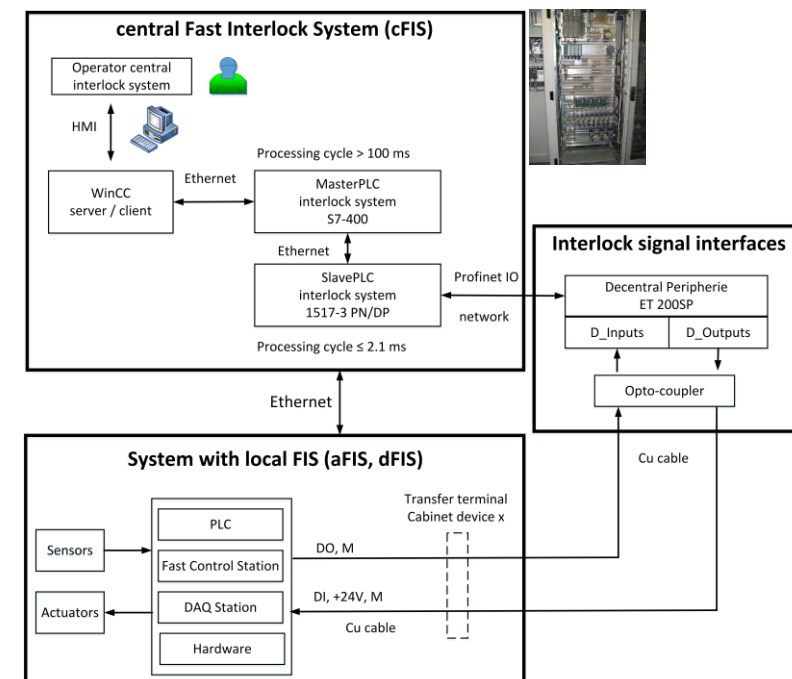


Fig. 3: Structure of FIS

Thanks for attention!

Please contact me during the poster session!
Poster session , Poster ID # 56

Preview of Poster #56



Enhancements of the Fast Interlock System for Wendelstein 7-X operational phase OP2.1



MAX-PLANCK-INSTITUT FÜR PLASMAPHYSIK

J. Schacht¹, A. Wölk¹, S. Pingel¹, U. Herbst¹, R. Vilbrandt¹, S. Degenkolbe¹, O. Grulke, A. Winter¹, H.-S. Bosch¹ and the W7-X Team
¹Max-Planck-Institut für Plasmaphysik.

ABSTRACT

The Fast Interlock System (FIS) is an independent subsystem of the safety control system of W7-X. The main task of the FIS is to protect the inner plasma vessel components from thermal overload from both plasma heating systems (e.g. neutral beam injection) and the plasma itself. There are strict limits for reaction times, which have to be observed in order to prevent overload situations of the first wall.

The requirements for the FIS were substantially modified and extended in order to address the challenges due to the actively cooled divertor. This led to extensive revision of the technical implementation and the software of the FIS.

This paper gives an overview about the requirements of FIS for the operational phase OP2.1, followed by a description of the technical aspects of the FIS and the implementation of the interlock functions. Finally, the actual status of the project 'FIS for OP2.1' is discussed.

STELLARATOR WENDELSTEIN 7-X: READY FOR OPERATION PHASE 2.1



Fig. 1: Stellarator Wendelstein 7-X

Fig. 2: Actively cooled divertor units

High heat flux operation OP2: September 2022+

- Full water cooling of all PFC to provide max. heat load 10MW/m².
- Considerable enhancement of heating, fueling and diagnostics systems,
- Consecutive increase of energy turnaround 1GJ (OP2.1 → 18GJ),

PROJECT FIS FOR OP2.1

Central Interlock System (cFIS)

Design phase:

- Specification of functional requirements for FIS-OP2.1
- Specification of non functional requirements for FIS-OP2.1
- ET-Specification for modification of the electrical cabinets
- Software specification for the cFIS

Implementation phase:

- Modification of all cFIS cabinets
- Cabling between IFIS cabinets and cFIS cabinets
- Network cabling a network configuration
- PLC software and visualization

Test phase:

- FIS signal transmission test
- Unit and integration tests
- Validation cFIS
- Validation whole Fast Interlock system with plasma operation

Local Interlock System (lFIS)

Design and implementation for the local Interlock Systems are part of the CoDaC projects of the diagnostics and heating systems with lFIS tasks.

The working packages and the technical realization of lFIS projects are strongly coordinated with the cFIS project.

- ✓
- ✓
- ✓
- ✓
- ✓
- ✓
- ✓
- ✓
- ✓
- ✓
- ✓
- ongoing
- August 2022
- September 2022

HIGHLIGHTS OF W7-X FAST INTERLOCK SYSTEM

- Enhancement of the Fast Interlock System for operational Phase 2.1 of W7-X,
- Using fast PLC CPU Siemens 1500 for processing of Interlock Functions,
- Input/Output of interlock signals via decentral periphery devices ET200SP,
- Using Profinet bus for connection the CPU 1500 with all ET200SP devices,
- Implementation of a new Unlock Request / Heating Release cycle for all heating systems,
- Integration of new FIS diagnostic signals for divertor protection, for ICRH heating and Continuous Pellet Filling System (CPFS),
- Extension and modification of Interlock Functions for Op2.1,

REALIZATION OF FIS

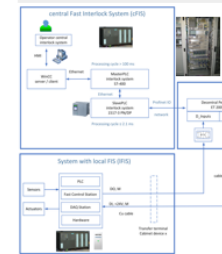


Fig. 4: Structure of Fast Interlock System

Central Interlock System (cFIS):

- cFIS Logic: Fast PLC Siemens 1500,
- Configuration, HMI: PLC S7-400,
- Signal Interfaces: Et200SP with I/O devices,
- HMI: WinCC Server,

Signal Interface:

- Located in the near of the IFIS components,
- Signal information will be transmitted via Profibus connection between Et200SP and PLC 1200,

Local Fast Interlock Systems:

- Individually designed for every IFIS system,

FIS Type	SCADA System	FIS Tasks
cFIS	PLC based	Parameter sets for Interlock-Functions and for IFIS diagnostics. Send and receive interlock signals. Processing of interlock functions. HMI for FIS. Archiving data into W7-X archive. Cycle time < 10ms.
Diagnostic FIS	Interferometry Magnetics Divertor Observation Machine Instrumentation	Generation of events for the FIS-functions (e.g. plasma density for heating xy is not o.k., temperature overload divertor). Cycle time < 100ms.
Actuator FIS	Plasma Heating ECRH Plasma Heating NBI20/21 Plasma Heating ICRH Plasma Fueling Pellet Injector	Control of Heating_Request signal according experiment program requirements. Immediately switch off heating, if the signal Heating_xy_Release==inactive. Switch Off time < 5µs

Table 2: Overview about local diagnostic and actuator Fast Interlock Systems (lFIS).

SAFETY LEVEL CONCEPT FOR W7-X MACHINE PROTECTION

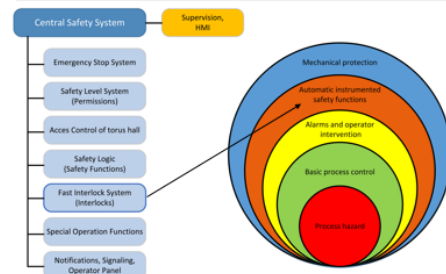


Fig. 3: Fast Interlock System as a part of the safety system for W7-X machine protection

Protection Layer	Responsible protection system	Action by
P _{rl} 0	SCADA System	Basic process control (BPC), Process safety control functions (PSCF)
P _{rl} 1	Safety Instrumented System (SIS), Fast Interlock System (FIS)	Safety Instrumented Functions (SIF) Fast Interlock Functions (FIF)
P _{rl} 2	Active protection	Active safety parts (e.g. rupture disks)
P _{rl} 3	Passive protection	Passive safety parts (e.g. Torus hall)

Table 1: Layer of protection for the W7-X device

Poster No. 52
23rd. IEEE Real Time Conference 2022

Corresponding author:
joerg.schacht@ipp.mpg.de



This work has been created as part of the framework of the EUROfusion Consortium, funded by the European Union through the Marie Skłodé Curie Grant, the European Union's Horizon 2020 research and innovation programme under grant agreement No 101019715 and by funding from the Member States of the EUROfusion Consortium, and by national research programs. The views and opinions expressed herein do not necessarily reflect those of the European Union or the EUROfusion Consortium, nor those of the Member States or the national research programs.

