




# Laboratory Session on Emittance Measurements

Accelerator Beam Diagnostics

Uli Raich (CERN)

ASP-2014 Dakar, Senegal

# The ultimate emittance measurement

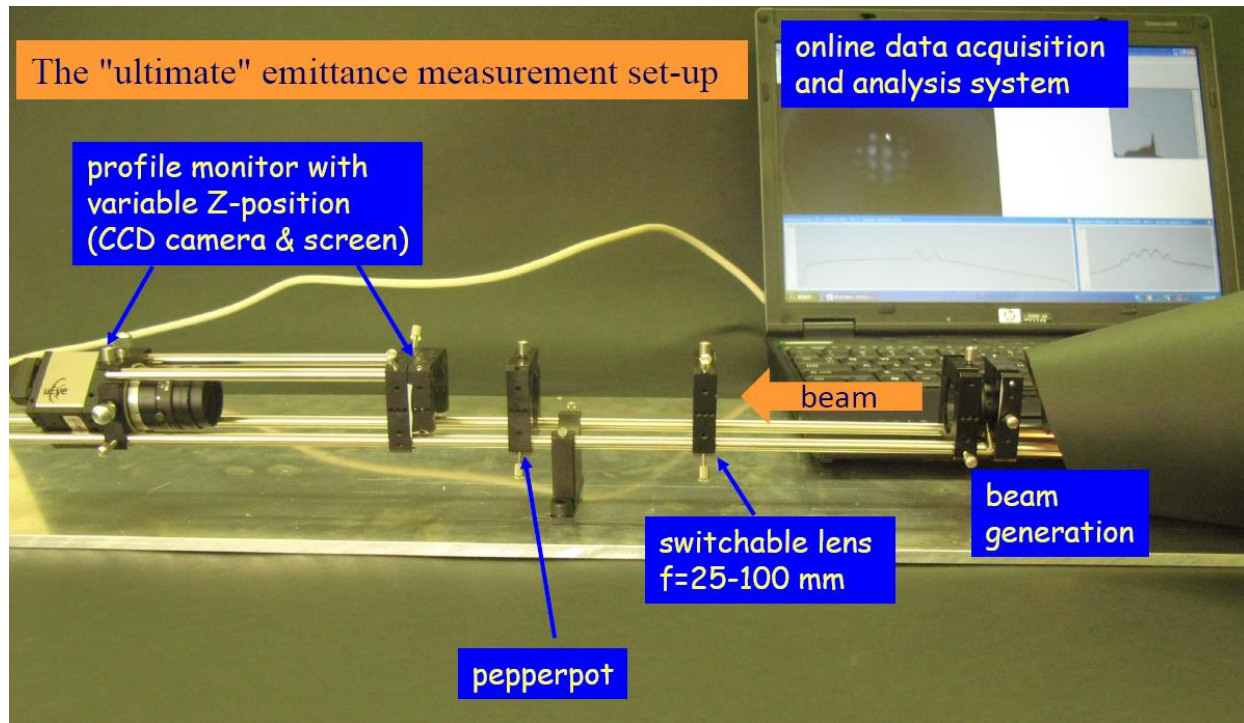

Optical bench with:

- Point light source
- Pepperpot plate
- Screen
- Lenses
- Data acquisition
- Evaluation programs

# Possible measurements

---

These measurements can be simulated:

- Pepperpot
- 3 (or more) profiles measurement
- Quadrupole Scan

# Pepperpot Measurement


---

Only the evaluation of the horizontal phase plane is implemented but... on an optical system horizontal and vertical phase space is symmetric.

Steps to be performed:

- We will use a series of vertical holes like a slit calculating the projection of the image to the horizontal axis. Therefore ...
- Make sure the holes are perfectly aligned and are on an exactly vertical line
- Measure the distance between the holes (in pixels) and calculate the scaling factor  $s$  [pixels/mm]
- To do this: Replace the screen with the pepperpot plate. After this measurement keep the distance screen-camera constant.
- Save the image as an 640x480 .bmp file
- Take the pepperpot image on the screen (make sure the camera focuses on the screen) and save it.

# Pepperpot Evaluation Program

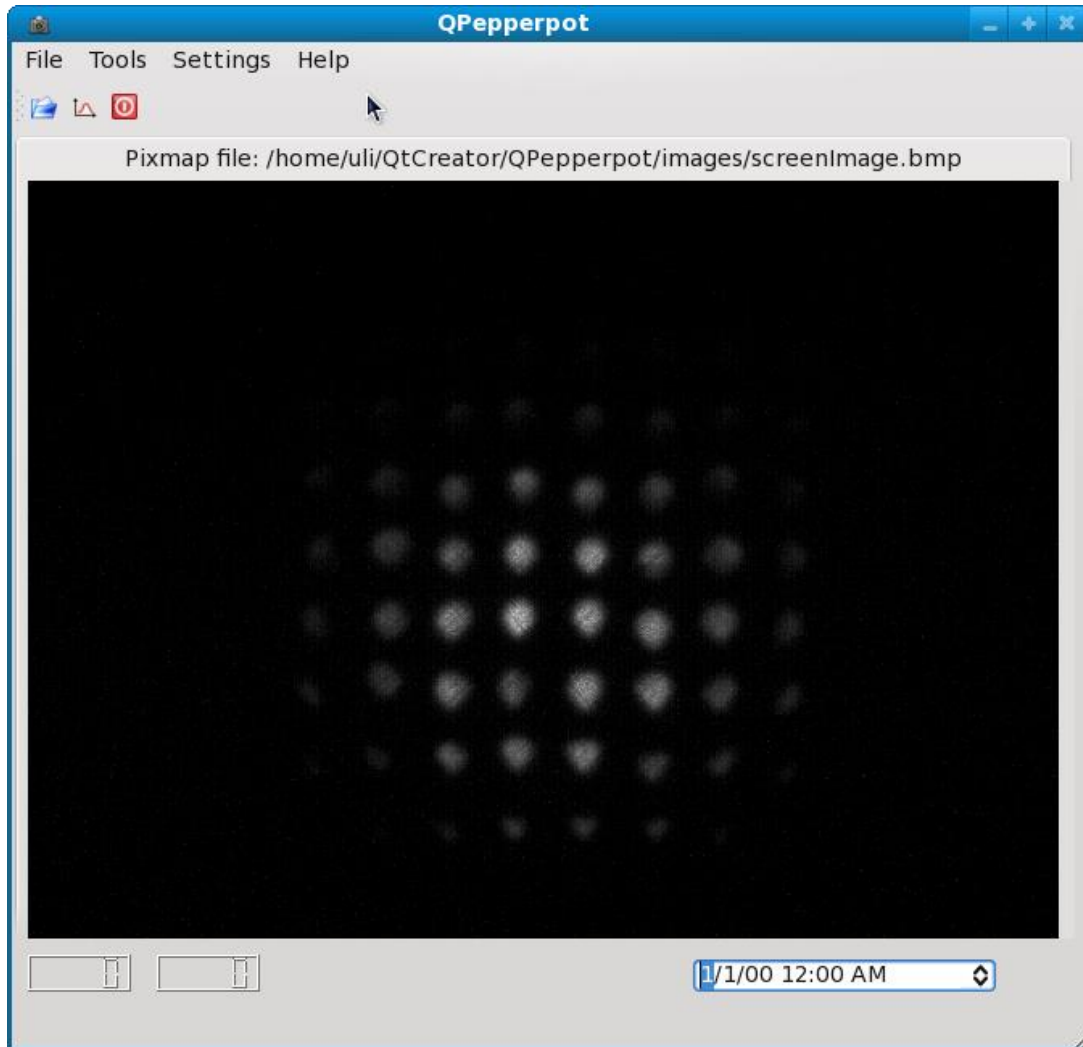

Clicking the left mouse button on the image creates a hor/ver cursor which allows to check the alignment.


The cursor position is displayed on the LCD displays (left: x pos, right y pos)

File menu contains entries to save intermediate results




Tools menu controls projections and calculates emittance plot

Settings allows entering scaling Factors or manually defined peaks


# Calibration

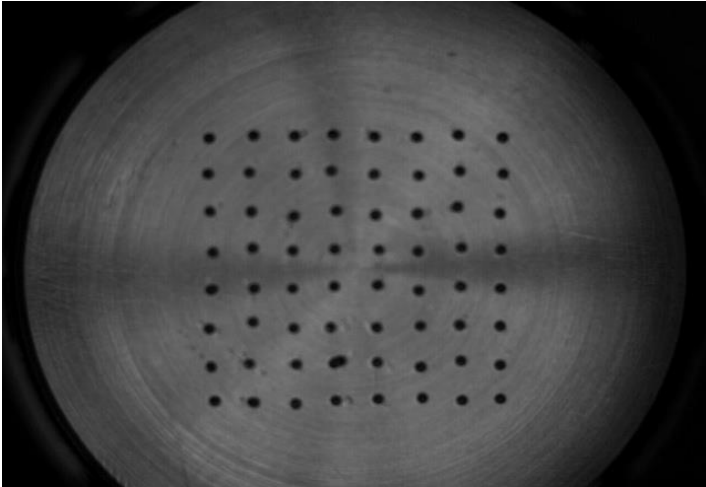

Settings menu brings up the settings box  
Enter the scaling factor (pixels/mm)  
and center position (mm())

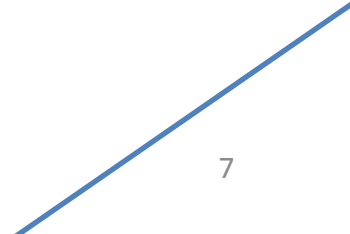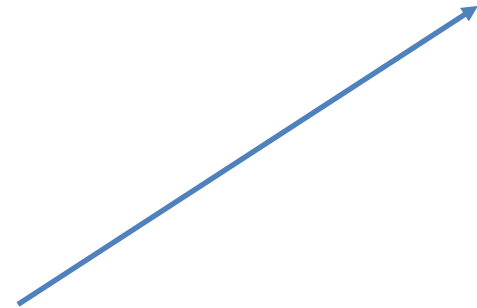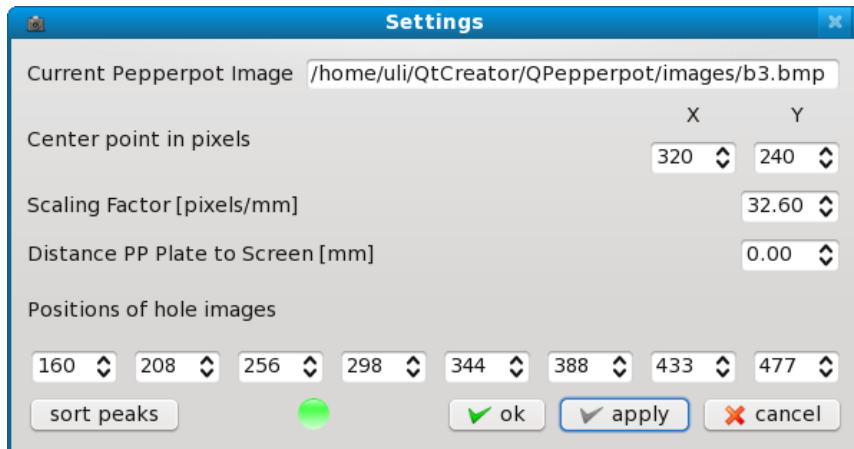



# Projections

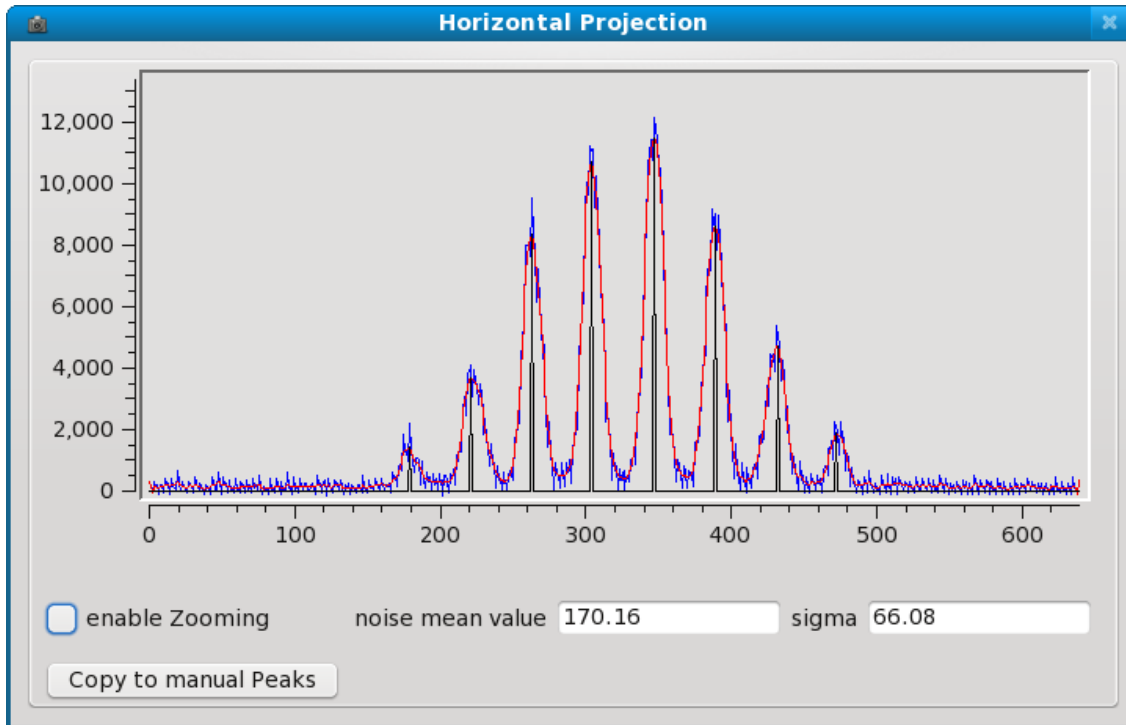

Projection box comes up  
Through “Tools” menu or  
histogram button on the tool  
bar.  
Blue curve: raw data  
Red curve: low pass filtered  
data  
Black curve: peaks (hole image)  
Each histogram may be switched  
on or off from the Tools menu

Left mouse button on plot shows cursor + cursor position  
Useful to manually find peaks  
When zoom is active, use the mouse to define zoom area


# Emittance Plot

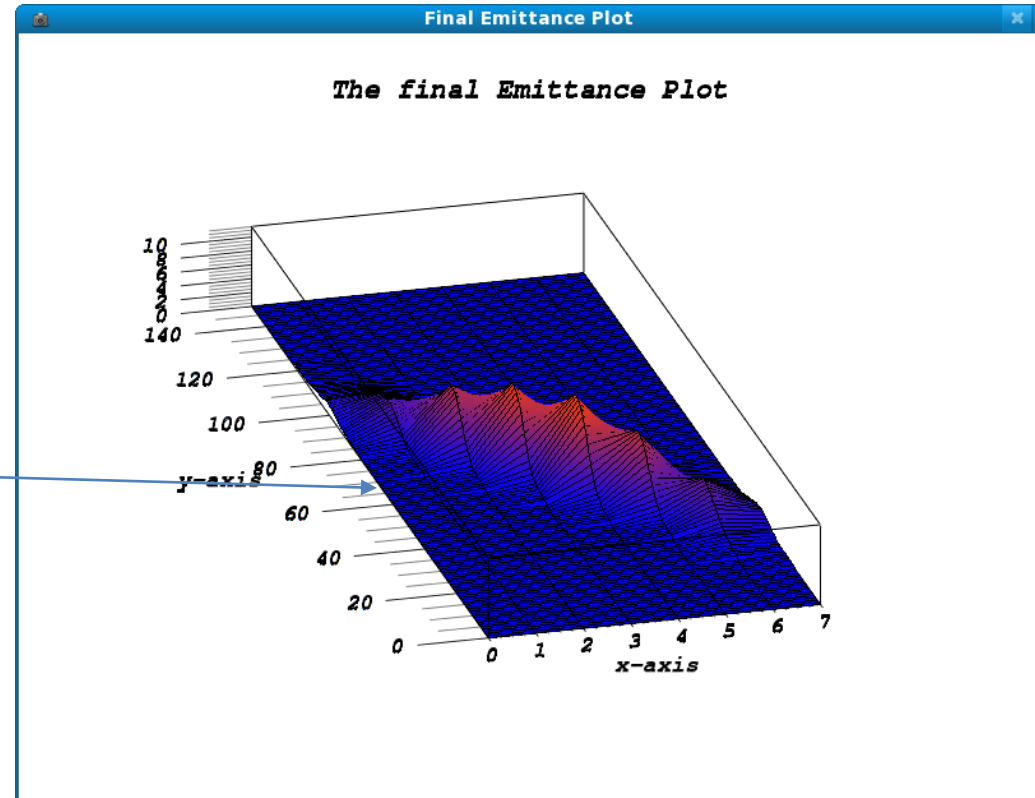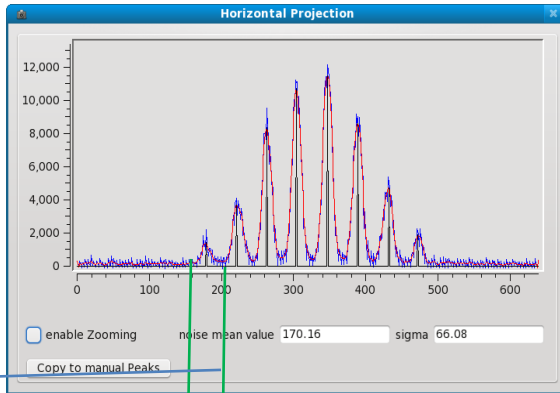

The projection is split into slices  
Length of 1 slice = distance between peaks  
8 such slices (eight pepperpot plate holes)  
make up the emittance plot



# Noisy projections

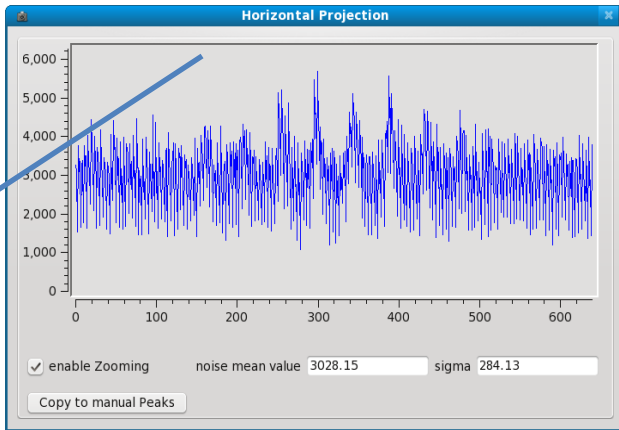

Settings

Current Pepperpot Image /home/uli/QtCreator/QPepperpot/images/b3.bmp

Center point in pixels    X    Y  
320    240


Scaling Factor [pixels/mm] 32.60

Distance PP Plate to Screen [mm] 0.00

Positions of hole images

160    208    256    298    344    388    433    477

sort peaks     ok     apply     cancel

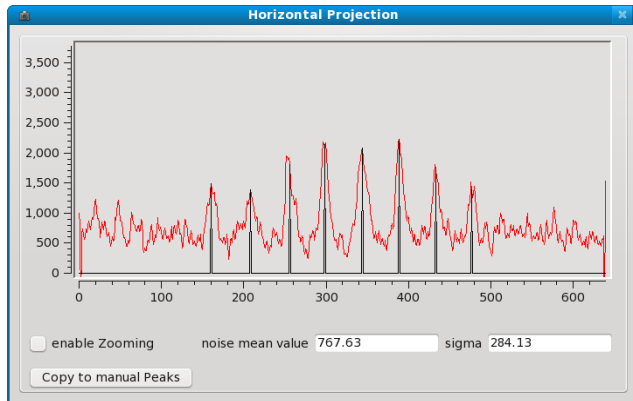

- Filter the projection
- Try to find peaks automatically (will probably fail to find all peaks)
- *Copy to manual peaks* copies the automatically found peaks to the settings box.
- Switch off automatic peak finding
- Correct peaks and add the missing ones, press “apply”
- (will be shown in the projection box)
- Displays in red in changes without “apply”
- Calculate emittance from manually defined peaks

# 3 Profile Measurements

---


## Principle

- Measure the beam profile and find the beam size at 3 (or more) different locations around a beam waist (around the focal point of the lens).
- Beam size corresponds to 2 vertical lines in phase space
- Transform these lines through transfer matrix calculations to
- the position of the first profile

For a drift space:



L: length of drift space

# Determination of Beam Width

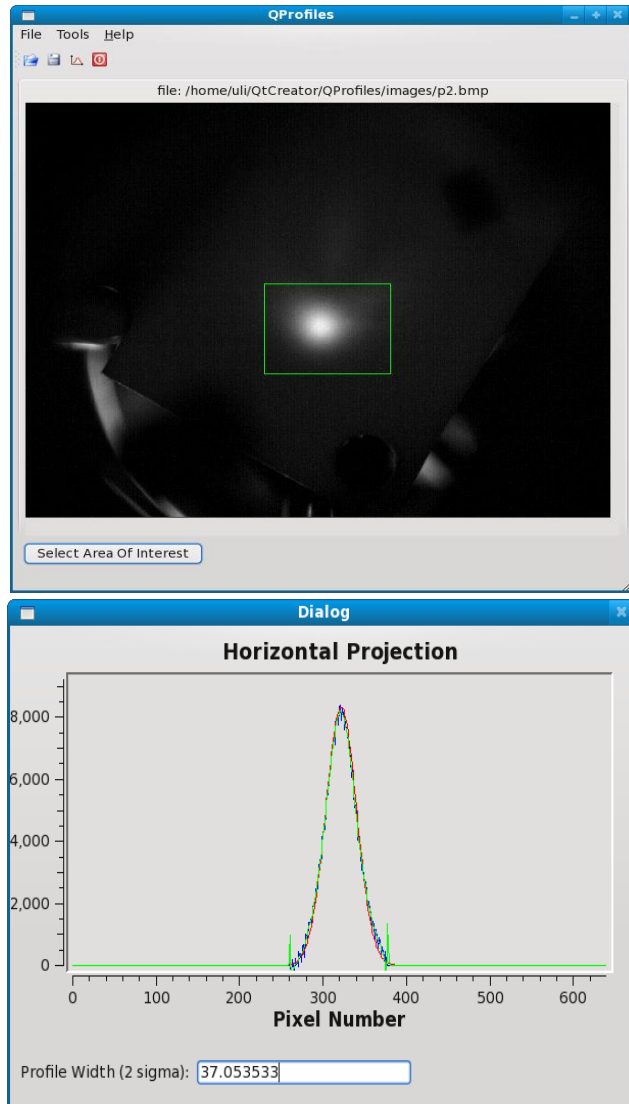

- Check that the image is not saturated at
  - any of the 3 or more locations
  - Take images of the light (beam) spot
  - Read the images with the QProfiles program
  - If you have background light,
  - the area of interest function allows
  - to get rid of it
  - (first mouse button drag)
  - Click 3rd mouse button to restore the
  - original image
  - You may low-pass filter the projection
  - Offset can also be suppressed
  -
- QProfiles calculates the first and second moment of the distribution and shows a Gaussian curve with the same Center position and  $\sigma$ . The profile width is displayed.

# Optics calculations

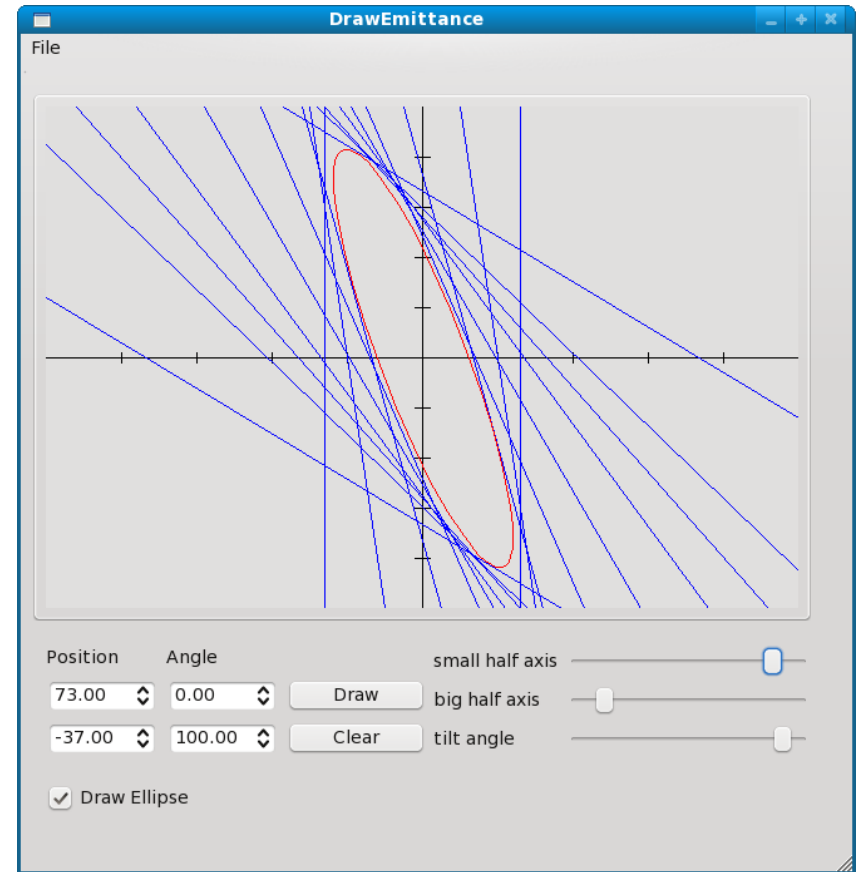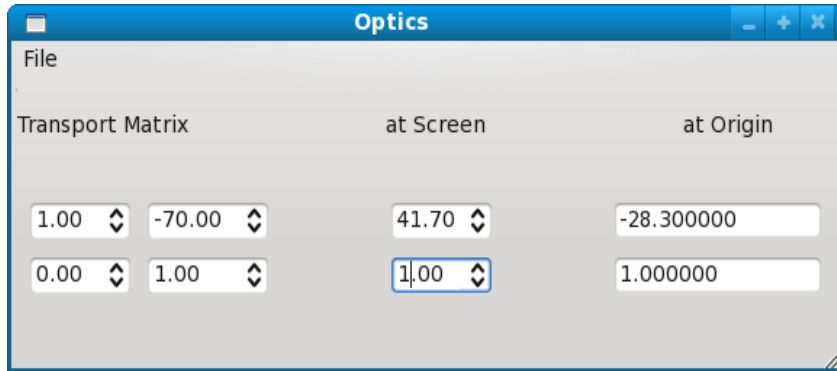

Enter the inverse Transfer matrix into the optics program (simple multiplication of the transport matrix with a phase space vector) and calculate the line at the position of the first profile (vertical lines)

The emittance ellipse can be fitted by hand using the control sliders for the half axis and the tilt angle