

Simulations using NCrystal & Geant4 for innovative solid-state neutron detectors

George O'Neill^{1,*}, Marco Povoli², Angela Kok², Ozhan Koybasi², Michael Getz², Dieter Roehrich¹, Eduard Monakhov³, Henrik Pedersen⁴, Jens Birch⁴, Arun Choolakkal⁴, Kalliopi Kanaki⁵, Chung-Chuan Lai⁵, Richard Hall-Wilton⁵, Tomas Slavicek⁶, Isabel Jansa Llamas⁷.

- ¹. University of Bergen, Department of Physics and Technology, Bergen, Norway.
- ². SINTEF AS, Smart Sensors and Microsystems, MiNaLab, Oslo, Norway.
- ³. University of Oslo, Centre for Materials Science and Nanotechnology, Oslo, Norway.
- ⁴. Linköping University, Department of Physics, Chemistry and Biology, Linköping, Sweden.
- ⁵. European Spallation Source, Detector System Design, Lund, Sweden.
- ⁶. Czech Technical University, Institute for Experimental and applied Physics, Prague, Czech Republic.
- ⁷. Institute for Energy Technology (IFE), Kjeller, Norway.

* Corresponding author, george.oneill@uib.no

Due to their lack of charge, low-energy neutrons are not detectable in typical semi-conductors often applied to radiation detection, and instead detectors use expensive or dangerous gases (e.g., ^3He , BF_3) in bulky, immobile devices. An INDet (Improved Neutron DETection) detector aims to fix these issues using pulse plasma etching (described in more detail in [1]) to generate a 3-D silicon diode consisting of a series of sub-structures each with an enriched boron carbide (B_xC) coating. By making use of the $^{10}\text{B}(n, ^{11}\text{B}^*)$ capture reaction, the spontaneous fission of the excited ^{11}B nucleus into two charged decay products (α and ^7Li) can be used as a signature for a neutron event by detecting either product in the silicon.

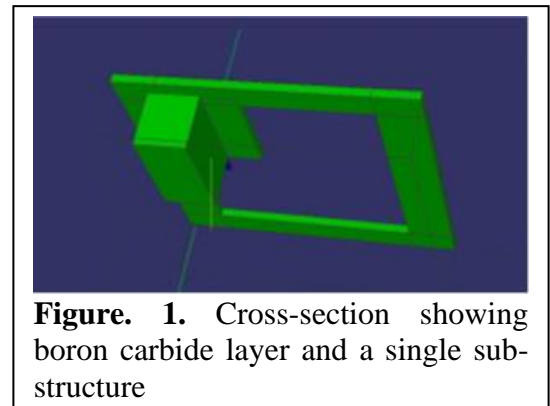



Figure. 1. Cross-section showing boron carbide layer and a single sub-structure

Using 3-D sensors allows for an increase in the thickness of the deposited B_xC layer, and thus an increase in conversion efficiency. However, the optimal coverage of boron does not necessarily correspond to the best detection geometry, nor what is manufacturable reliably.

A simple mathematical treatment can determine the expected number of converted events for regular geometries, but Monte Carlo methods are required in order to determine the performance of the entire detector; to this end, a series of simulations were created using the NCrystal library [2], developed by the detector group at the European Spallation Source, which allows for more accurate simulation of sub-keV neutrons within Geant4. These simulations have been compared to existing work and geometries, such as pyramids on top of a planar surface [3], and improved via comparison to ‘real-world’ scenarios.

Simulations of trenches have shown a detection efficiency of over 30% when using a converter thickness of 1 μm . Other geometries consisting of a series of holes, squares, and pyramids have also been generated with lower efficiency, but allowing for better comparison with experimental datasets.

This presentation will discuss the capabilities and advantages of NCrystal, the setup and technique used to simulate many small sub-structures atop the main diode, and the comparison with existing physical devices

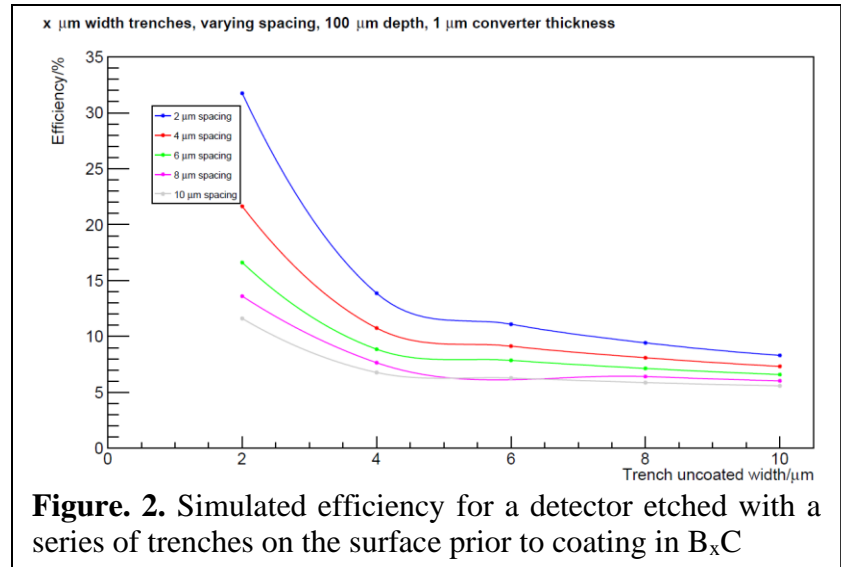

- [1] L. Souqui et al., "Surface-Inhibiting Effect in Chemical Vapor Deposition of Boron–Carbon Thin Films from Trimethylboron," *Chemistry of Materials*, vol. 31, no. 15, p. 5408, 2019.
- [2] X.-X. Cai and T. Kittelmann, "NCrystal: A library for thermal neutron transport," *Computer Physics Communications*, vol. 246, p. 106851, 2020.
- [3] S. V. Mehendale et al., "Characterization of boron-coated silicon sensors for thermal neutron detection," *Nucl. Inst. & Methods A*, vol. 972, p. 164124, 2020.

The authors acknowledge funding from the Norwegian Research Council (Research Project #289437 – NANO2021 program).