


# An idea for SuperKEKB photon detector

Aurélien MARTENS

# Introduction

SuperKEKB upgrade polarimeter :

- 250MHz rep-rate laser  $\rightarrow$  4ns spacing of scattered particles
- Ideally involves both diagnostics on scattered photons and electrons)
- Assume only measure longitudinal polarization

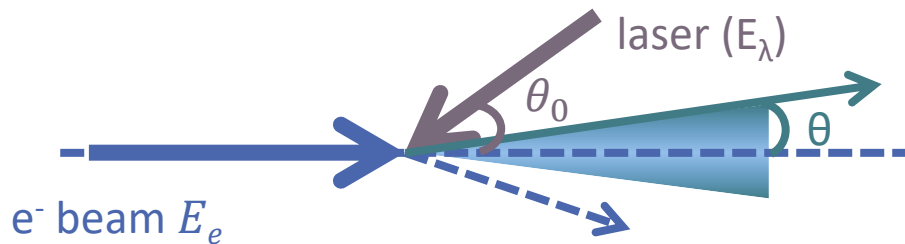


- Initial electron energy (7 GeV)
- Initial photon energy (1.2eV at 1030nm)
- Crossing angle of beams
- Emitted photon energy

Narrow cone of photons

• Low scattering rate: ( $\sim 1/\text{bunch}$ )

- ☺ Data-driven, online calibration and linearity control can be considered (edges of 1, 2, 3 photons)
- ☺ Signal only radiation dose in detector **O(1MGy/year)** (1GeV@250MHz)
- ☹ Very good knowledge (spectrum shape) of backgrounds is necessary (data driven)



energy vs emission angle correlation

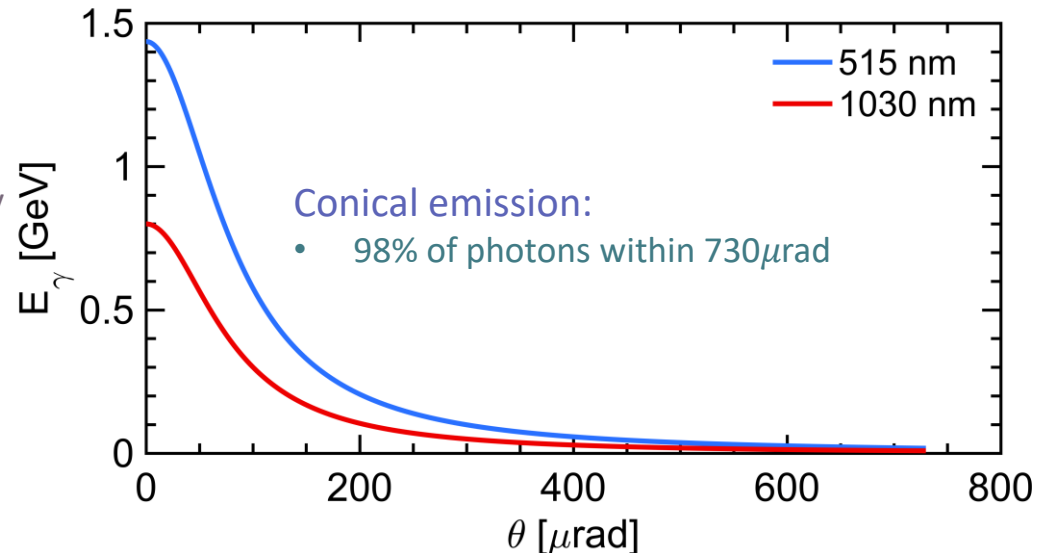

# Basic idea of detector

## Basic elements

- a VERY FAST radhard scintillating crystal → BaF<sub>2</sub>
  - Need to filter out the slow component → UV optical filters
  - Interesting: Y doping reduces the slow component, but R&D stage
- a PMT with low transit time dispersion → commercially available (hamamatsu for instance)
- Associated electronics
- Next step: validate detection scheme

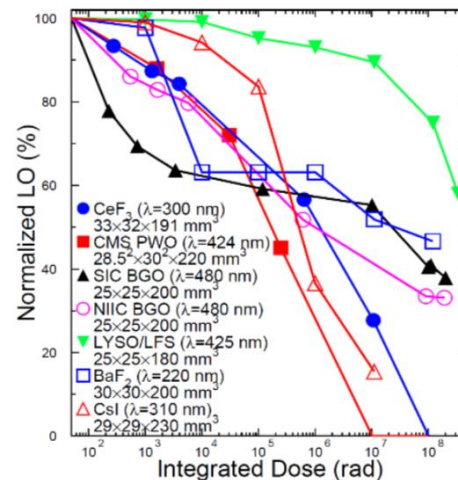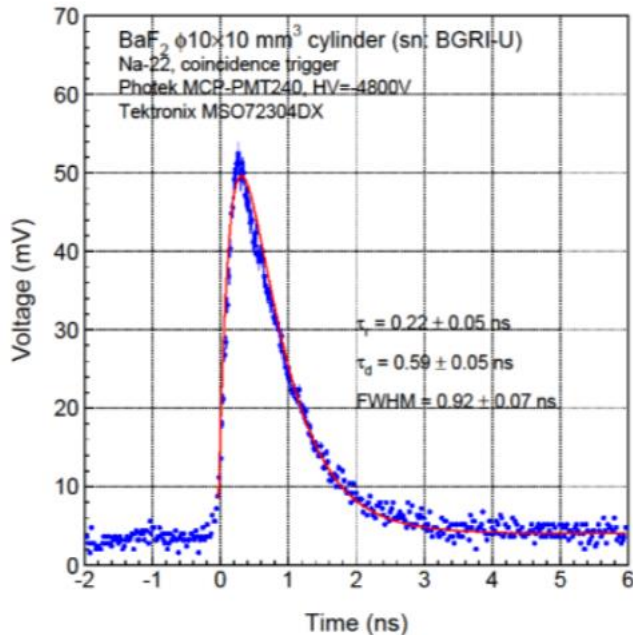

## Ultrafast and Radiation Hard Inorganic Scintillators for Future HEP Experiments

Ren-Yuan Zhu  
California Institute of Technology, Pasadena, CA 91125, USA  
E-mail: zhu@hep.caltech.edu

**Abstract.** Future HEP experiments at the energy and intensity frontiers require fast and ultrafast inorganic scintillators with excellent radiation hardness to face the challenges of unprecedented event rate and severe radiation environment. This paper reports recent progresses in fast and ultrafast inorganic scintillators, such as LYSO:Ce crystals and LAAG:Ce ceramics for an inorganic scintillator based shashlik sampling calorimeter and yttrium doped BaF<sub>2</sub> crystals for the proposed Mu2e-II experiment. Applications of ultrafast inorganic scintillators in Gigahertz hard X-ray imaging will also be discussed.

### 1. Introduction

Inorganic scintillators have been used widely in high energy and nuclear physics experiments, medical instruments and homeland security applications. In high energy physics (HEP) and nuclear physics experiments, total absorption electromagnetic calorimeters made of inorganic crystals are known for their superb energy resolution and detection efficiency for photon and electron measurements [1]. An inorganic crystal calorimeter is thus the choice for those experiments where precision measurements of photons and electrons are crucial for their physics missions.

Among all existing crystal calorimeters, the CMS lead tungstate (PbWO<sub>4</sub> or PWO) crystal calorimeter, consisting of 75,848 crystals of 11 m<sup>3</sup>, is the largest. Because of its superb energy resolution and detection efficiency, the CMS PWO calorimeter has played an important role for the discovery of the Higgs boson by the CMS experiment [2]. Crystal calorimeters currently under construction are: an undoped CsI calorimeter for the Mu2e experiment at Fermilab, a PWO calorimeter for PANDA at FAIR, a LYSO calorimeter for COMET at JPARC and a PbF<sub>2</sub> calorimeter for the g-2 experiment at Fermilab.

Future HEP calorimeters will be operated under unprecedented luminosity. An important issue is thus the decay time of scintillation light. Table 1 lists the optical and scintillation properties for fast inorganic crystal scintillators with a scintillation decay time ranged from sub-nanosecond to a few tens nanosecond, and compared to plastic scintillator [1]. Among the fast crystals listed in Table 1 the mass-production cost of barium fluoride (BaF<sub>2</sub>) and undoped CsI crystals is significantly lower than others because of their low raw material cost and low melting point.

Crystal calorimeters for future HEP experiments at the energy frontier face a challenge of severe radiation environment. Significant losses of light output have been observed in the CMS PWO crystals at large rapidity *in situ* at the LHC caused by both ionization dose and hadrons [3]. Controlling oxygen contamination in halide crystals, e.g. CsI:TL or oxygen vacancies in oxide crystals, e.g. PWO, was found effective [4]. Co-doping with yttrium and lanthanum was also found effective for CMS PWO crystals [5]. For experiments to be operated at the HL-LHC with 3,000 fb<sup>-1</sup>, crystals should survive an environment with an absorbed dose of 100 Mrad, charged hadron fluence of 6 × 10<sup>15</sup> p cm<sup>-2</sup> and fast


# Basic idea of detector

## Basic elements

- a VERY FAST radhard scintillating crystal  $\rightarrow$  BaF<sub>2</sub>, the only solution ?
  - ☹ Need to filter out the slow component  $\rightarrow$  UV optical filters
  - ☺ Interesting: Y doping reduces the slow component, but R&D stage
- a PMT with low transit time dispersion  $\rightarrow$  commercially available (hamamatsu for instance)
- Associated electronics
- Next step: validate detection scheme

2500 bunches  $\rightarrow$  2500 histograms  
About 1000 bins each (or less ?)  
12 bits dynamics ?

30Mb (3.75MB) to transfer every minute

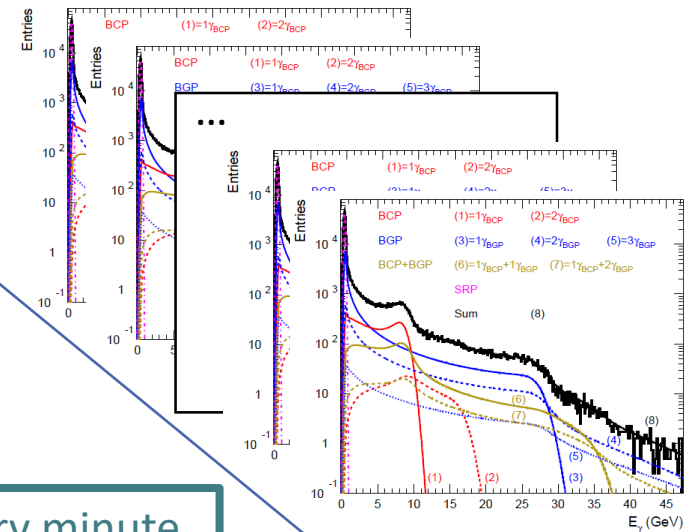



## Two options

- Embarked ADC and data processing in the accelerator bay w/transfer link to storage, requires clock (laser also needs it) and bunch identification
- Deported electronics 'à la' lumi with diamonds sensors ? (expensive high BW cables)

# Polarization extraction

Offline: fitter

- Not immediate but can be very precise
- Account for every detail of the experiment → I start by implementing this step by step

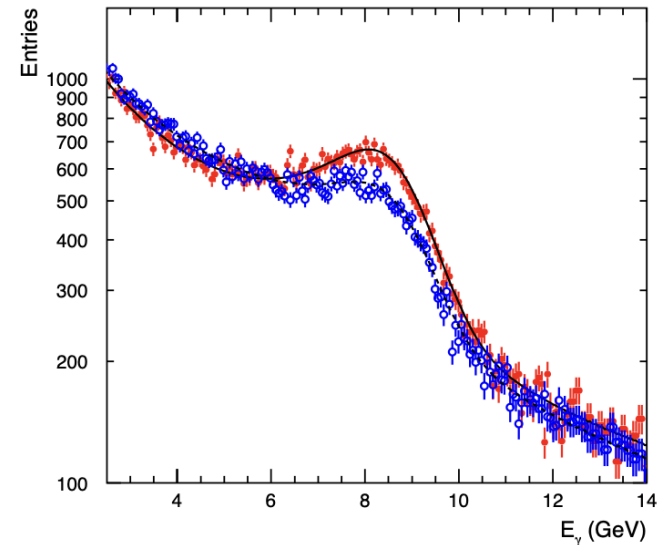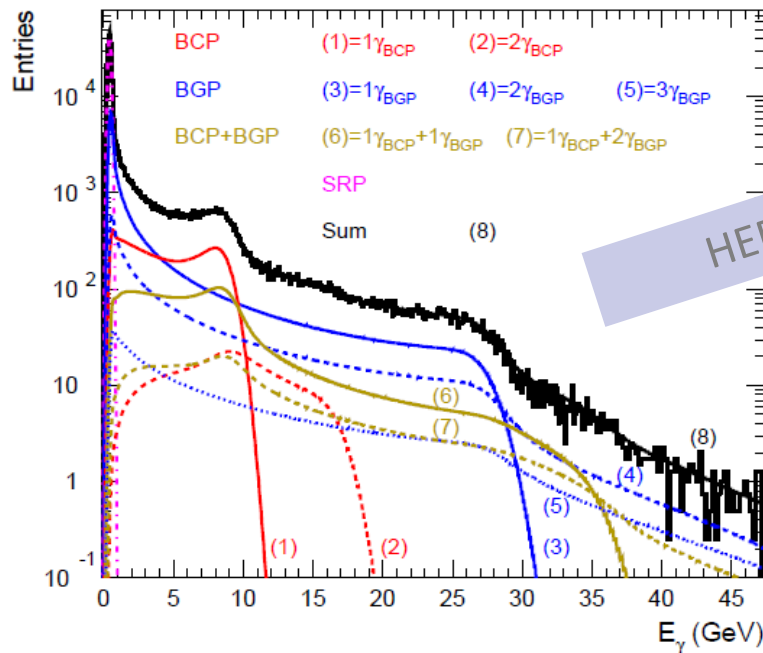

Online: fast approximate/biased extraction

- To be investigated based on HERA work by C. Pascaud et al. (Orsay group)

# Conclusion


---

---

- A high rep-rate (250MHz) bunch/bunch polarization extraction may be feasible for SuperKEKB
- Requires some experimental validation
- A nearly perfect knowledge of backgrounds is needed
- Some info about Transverse polarization could similarly be retrieved 'a la TPOL of HERA'

# Compton cross-section

$$x = \frac{2E_0\omega_0}{m^2} (1 + \cos \theta_0) \quad y = \frac{E_\gamma}{E_0}$$

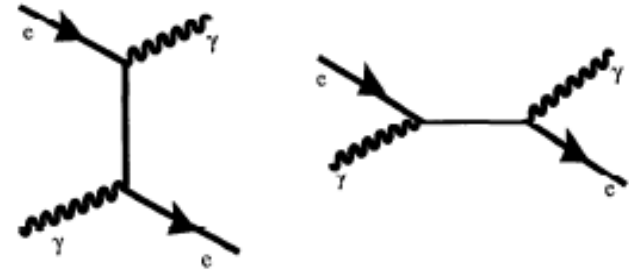

The Compton cross-section averaged over scattered particles spins:

Differential cross-section

Transverse laser polarisation: nuisance parameter to minimize and keep under control

Transverse electron beam polarisation: intervenes as an asymmetry in the transverse plane

$$\frac{d\sigma}{dyd\varphi_{obs}}(x, y) = \frac{d\sigma_0}{dy}(x, y) + \frac{d\sigma_{\perp}}{dy}(x, y) \cos(2(\varphi_{obs} - \varphi_{las})) \mathcal{P}_{\perp}^{las} + \frac{d\sigma_{\parallel}}{dy}(x, y) \mathcal{P}_C^{las} (P_T f_T(x, y) \cos(\varphi_{obs} - \varphi_{elec}) + P_L f_L(x, y))$$

*Electron beam polarization independent*
*Electron beam polarization dependent*

⚠ Assume in the following:

- purely circular laser polarization  $\mathcal{P}_C^{las}$  : transverse polarization of laser will be a systematic uncertainty or a constrained parameter in the fit
- I also assume for the sensitivities studies performed here that  $\mathcal{P}_C^{las}=1$  (or -1)
- I postpone quantitative studies related to imperfect laser polarization to a later stage

# Offline fitter: ingredients

Ideally (time consuming, can be part of a PhD project):

- One should probably use a dedicated generator (CAIN most probably)
- Account for every detail of the detection system with a Geant4 reconstruction

However the most important aspects of the simulation are relatively simple to implement in a quick Monte Carlo :

- Compton cross-section (polarization effects included)
- Detector energy resolution
- Finite detector size
- Smearing from the finite electron beam emittance and dispersion (depends on baseline location)
- Data filled in histograms

All these effects can also be fit in a simple binned  $\chi^2$  (or ML) with ROOT6 and MINUIT2 library

- To start with: I only fit a scale factor and  $P_z$ .
- I numerically integrate the Compton cross-section over the detector size and bin width accounting for
  - detector energy resolution
  - horizontal point spread due to finite e-beam sizes
  - Miscalibration (if any)
- I assume that the detector has nominally a square cross-section (despite it may be simpler to implement a cylindrical detector in the end)

I first go through a sanity check that everything goes fine when I assume one and only photon is scattered per bunch crossing.

This is obviously work in progress !



# Detector/e-beam parameters

Detector energy resolution  $\frac{\sigma_E}{E} = \sqrt{\frac{A^2}{E[\text{GeV}]} + B^2 + \frac{C^2}{E^2[\text{GeV}^2]}}$

A=10% (conservative ?); B=1% (optimistic ?); C=pile-up, electronics, 0 for now on

## Finite detector size

- Detector assumed to be placed at L=30m from Compton IP
- Square section of 25x25 mm<sup>2</sup>

## Electron beam parameters

- Taken at LTL076 (numbers to consolidate)
- Relative energy spread 6.3e-4

$$x_1 = \sqrt{2\epsilon_x u_1 \beta_{x1}} \cos \varphi_1 + \eta_x \varepsilon_1$$

$$x'_1 = \sqrt{2\epsilon_x u_1 / \beta_{x1}} (-\alpha_{x1} \cos \varphi_1 - \sin \varphi_1) + \eta'_x \varepsilon_1$$

$$y_1 = \sqrt{2\epsilon_y u_2 \beta_{y1}} \cos \varphi_2 + \eta_y \varepsilon_1$$

$$y'_1 = \sqrt{2\epsilon_y u_2 / \beta_{y1}} (-\alpha_{y1} \cos \varphi_2 - \sin \varphi_2) + \eta'_y \varepsilon_1$$

Induces a (gaussian) point spread function at the detector plane:

$$\sigma_D^2 = \sigma_x^2 + L^2 \sigma_{x'}^2$$

- Similarly in y


```
// at LTL076
double alphaX_ = -2.0120; //homogenous to 1
double betaX_ = 5.10797; //m
double emitX_ = 4.49E-9; //mrad
double etaX_ = .13030; //m
double etapX_ = .04644;
double alphaY_ = 17.5537;
double betaY_ = 120.656;
double emitY_ = 2.8E-13; //mrad
double etaY_ = 8.3E-10; //unit m
double etapY_ = -1.E-10;
```

$$\sigma_x = 170\mu\text{m}, \sigma_{x'} = 73\mu\text{rad}$$

$$\sigma_y = 5\mu\text{m}, \sigma_{y'} = 1\mu\text{rad}$$


# Result

Perfectly aligned, calibrated, known average beam energy, known e-beam phase-space parameters

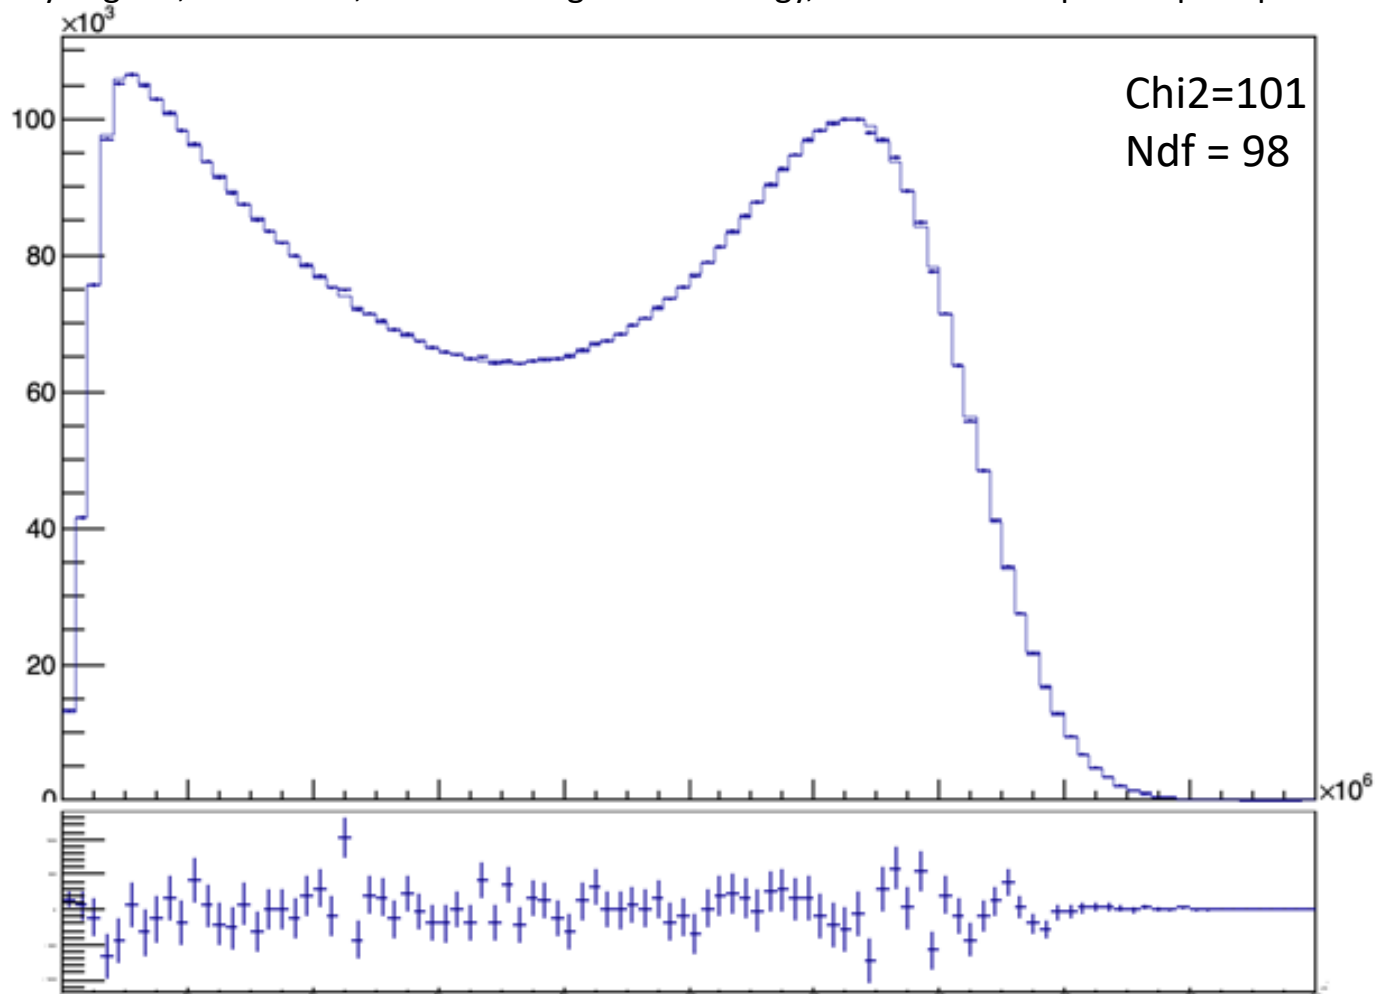

# But...

The fit is time consuming but actually too accurate for the situation we may face in data:

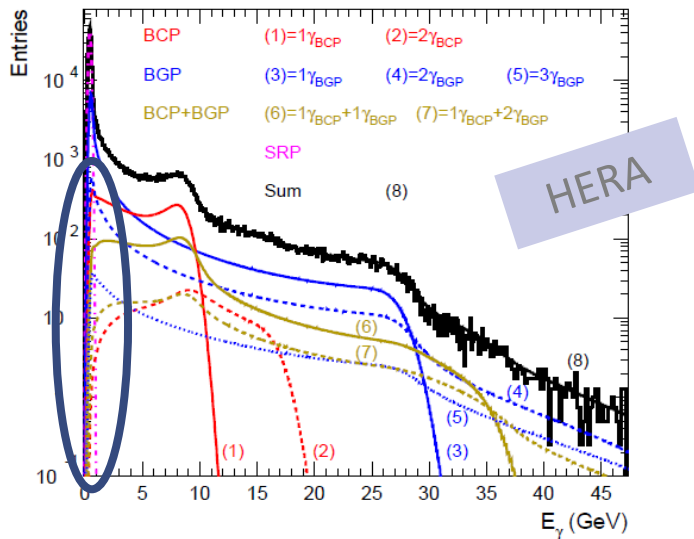



Beam gas + synchrotron radiation peak may be the dominant contributions at low energies



Maybe not so important to accurately fit the low energy part


I will now try to look at 'degraded' fitters to investigate several effects, keeping in mind that we are able to revert to an accurate fit of MC data (and that maybe a cylindrical geometry is maybe more appropriate)

# Lower energy part of spectrum

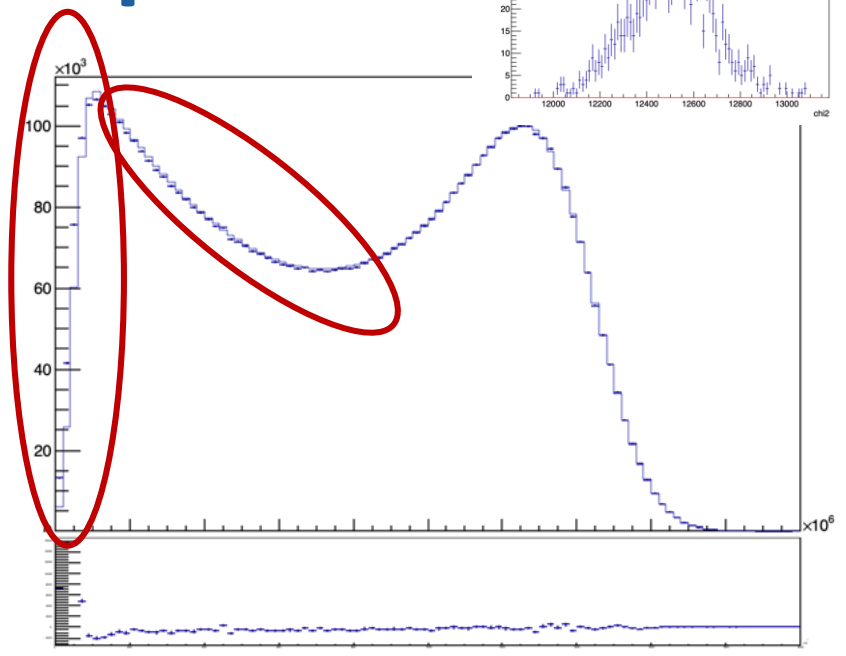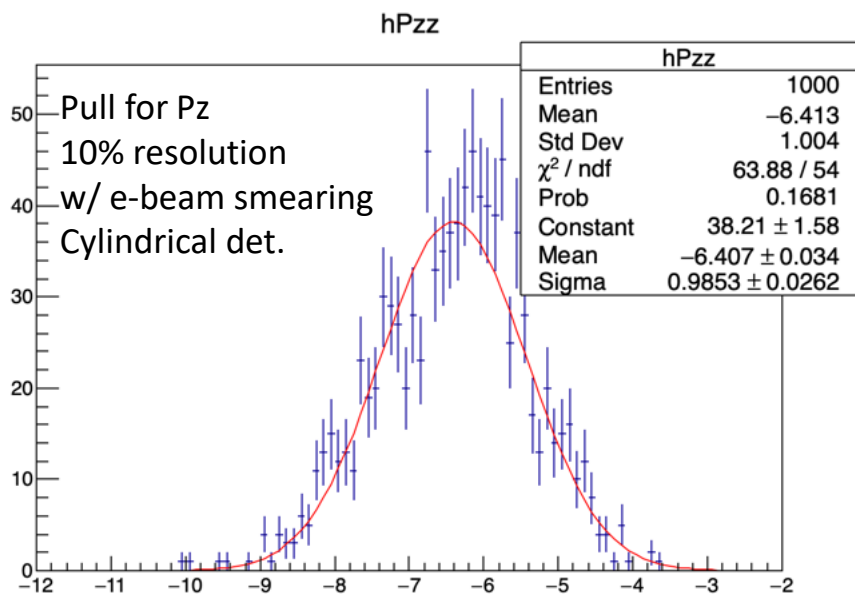


The (deliberately) wrong assumption about detector geometry mainly biases low energy contribution that is likely to be dominated by backgrounds and will not provide sensitivity.




→ Need a full model with realistic backgrounds



# Removing the first 10 bins from fit


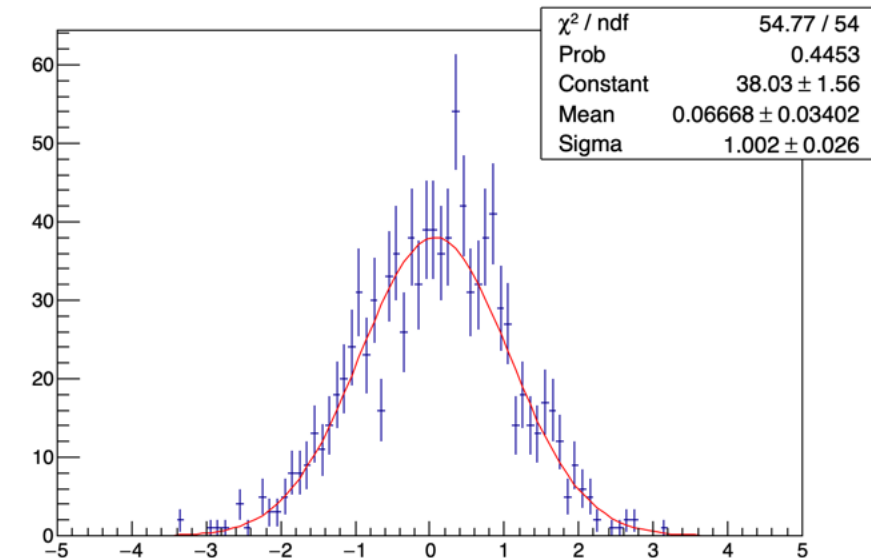


Chi2 good (10 removed bins)

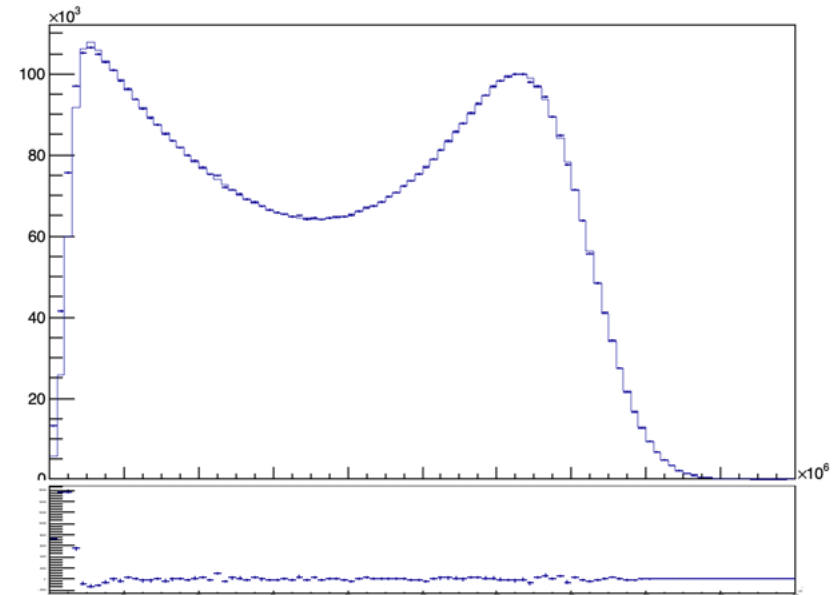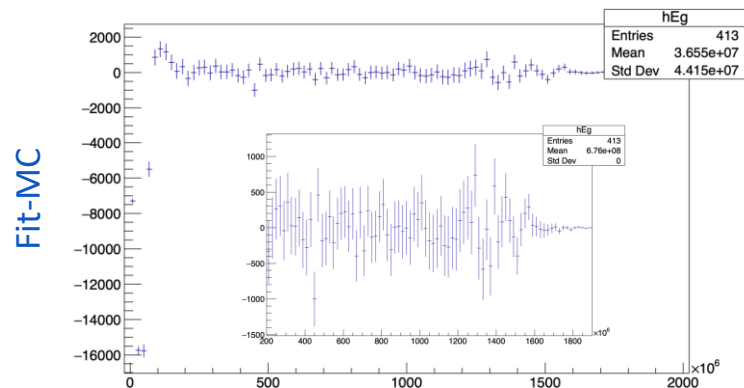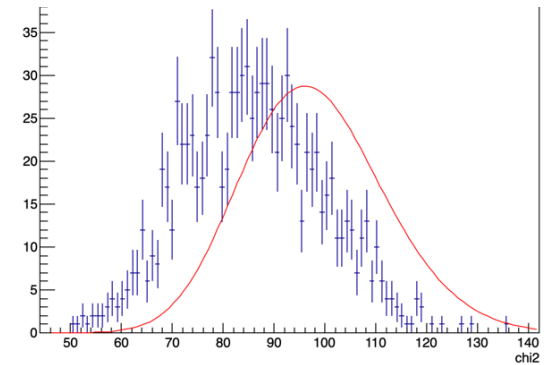





Confirms that the detector geometry and beam spreads do not impact longitudinal polarization extraction on the largest (and most sensitive part) of the spectrum

# Effect of detector energy resolution

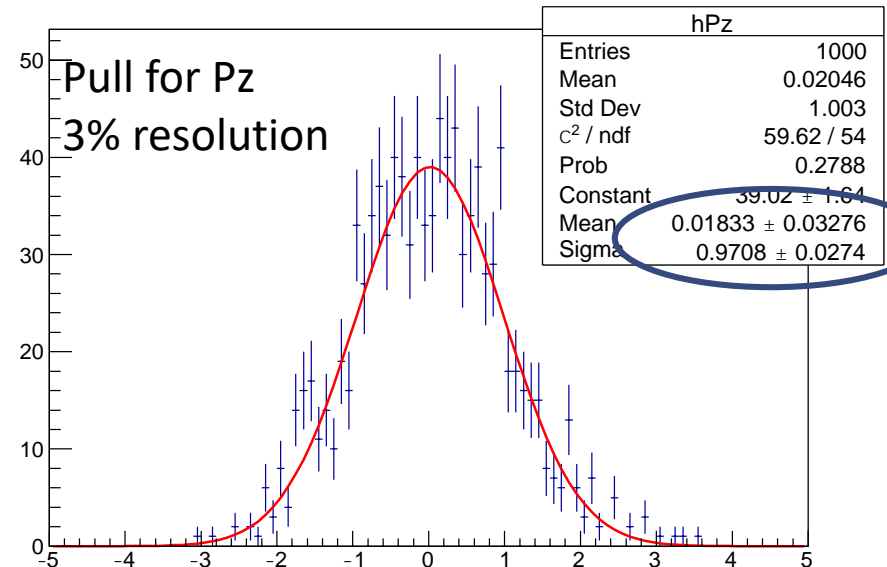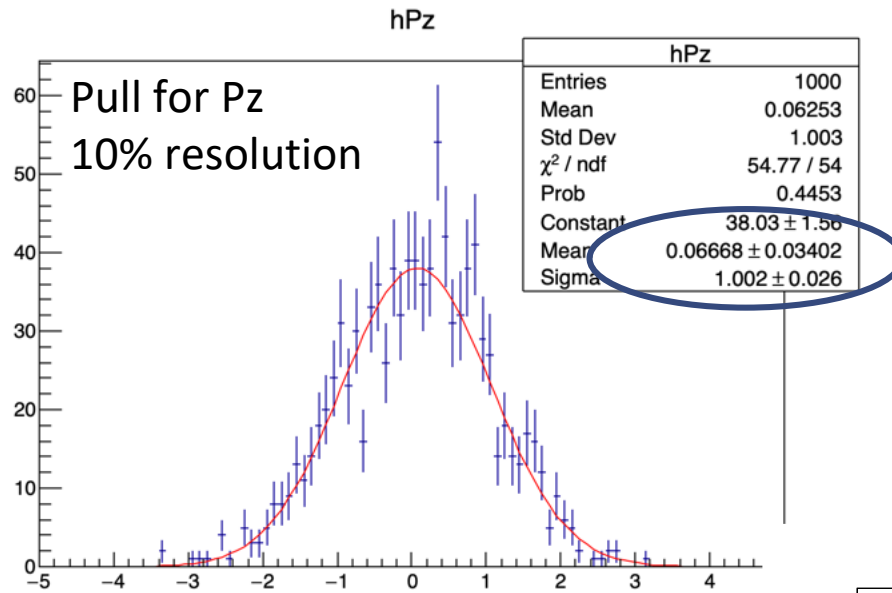



# Misalignments

Repeat the previous fit but with various misalignments, or angular pointing biases

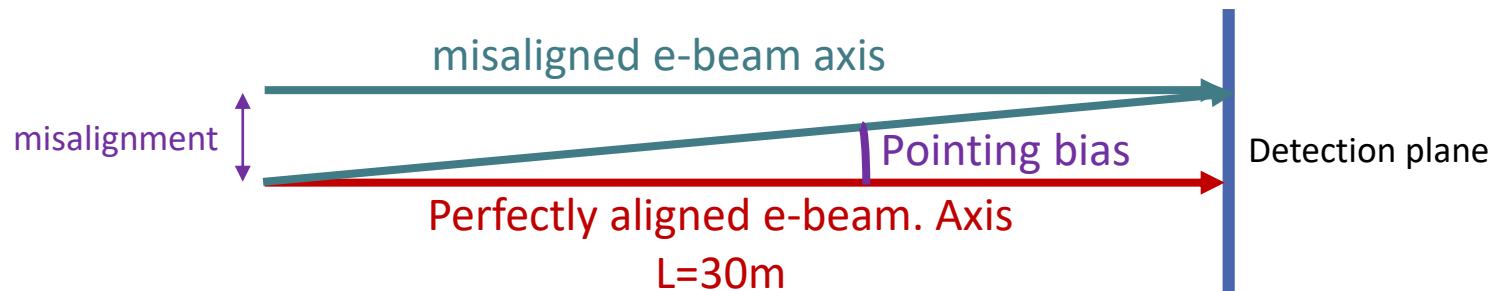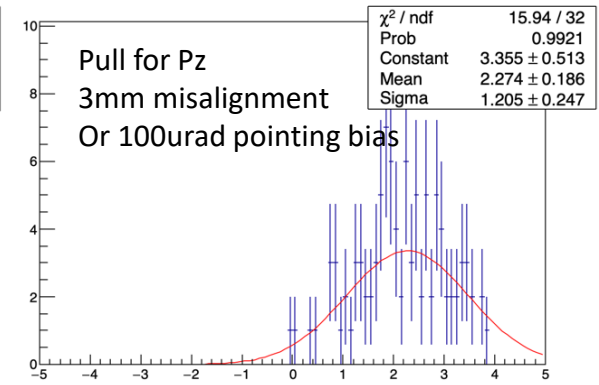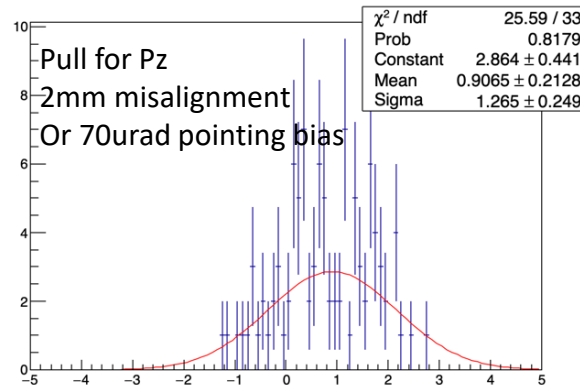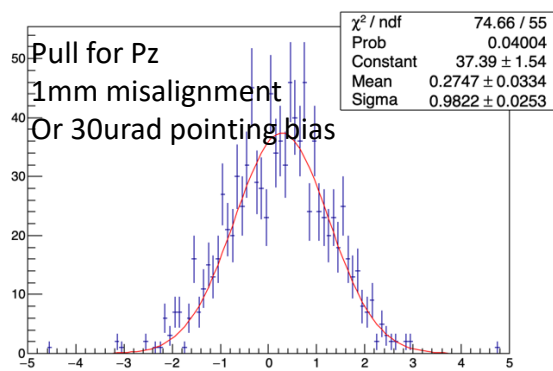

Need to ensure the beam points towards the center of the detector within 1mm to avoid biasing the polarization more than 0.001

# Miscalibration (10% on scale)

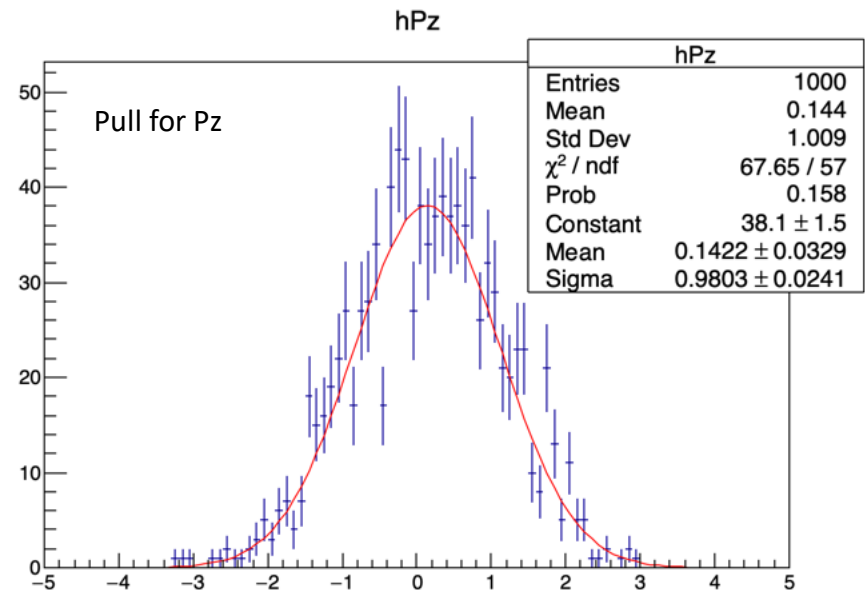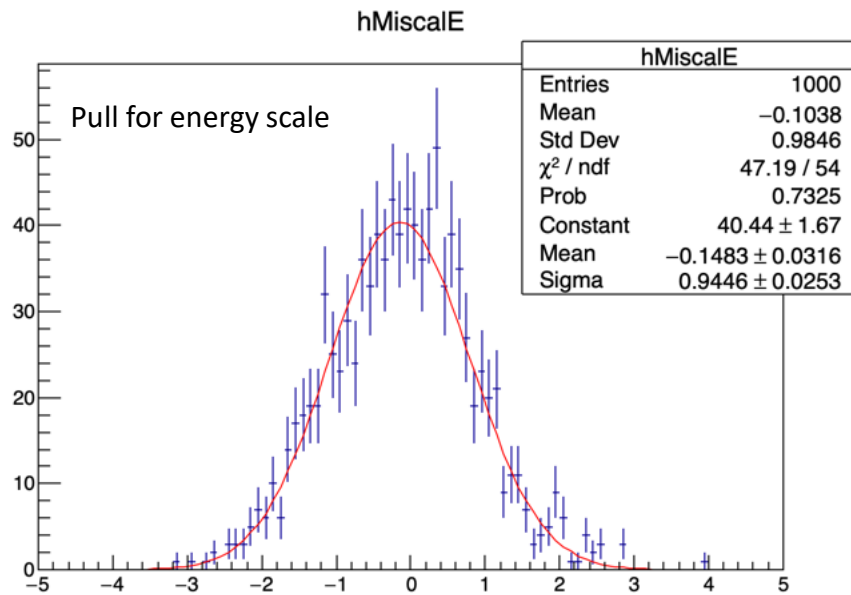




# Ongoing improvements

## Extraction of polarization:

- Upgraded the fit to perform with LUT filled on demand 6s  $\rightarrow$  0.15s/fit
  - Performs well
  - O(2500) estimates in a minute may be done that way on a relatively powerful PC
- Multi-photon contributions included (so far only 2 photon)
- **Statistical precision in a minute with a 5W 515nm laser  $\rightarrow$  0.9% for every bunch.**
- Next steps
  - Re-estimate systematic uncertainties
  - alignment procedure
  - Backgrounds
  - E-beam jitters ?

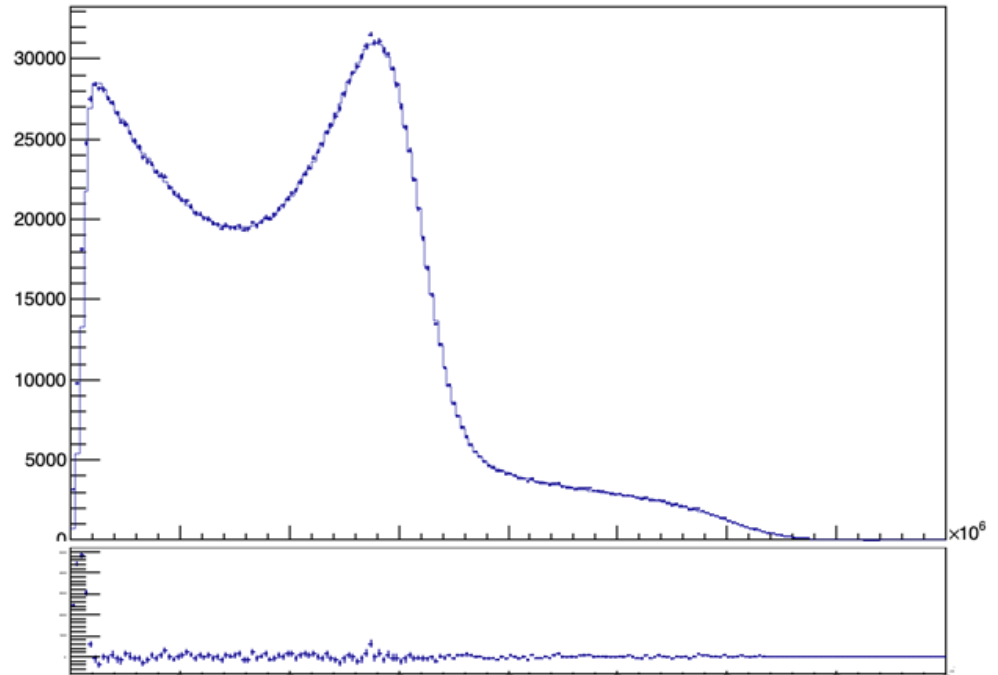

# Next steps

---

Waiting for comments on White Report

Continue progressing on extraction of polarization:



R&D:

- Test the concept of a BaF2 detector
- Costing exercise for the laser system



# A slightly more detailed look

$$\frac{d\sigma}{dy}(x, y) \cong \frac{d\sigma_0}{dy} (1 + P_L A_{LR})$$

*Polarization dependent term generates a left-right asymmetry function of  $E_\gamma$*

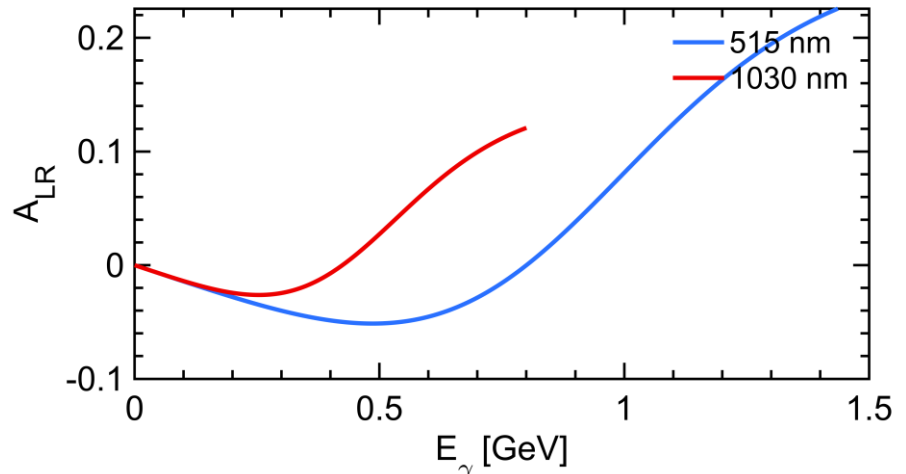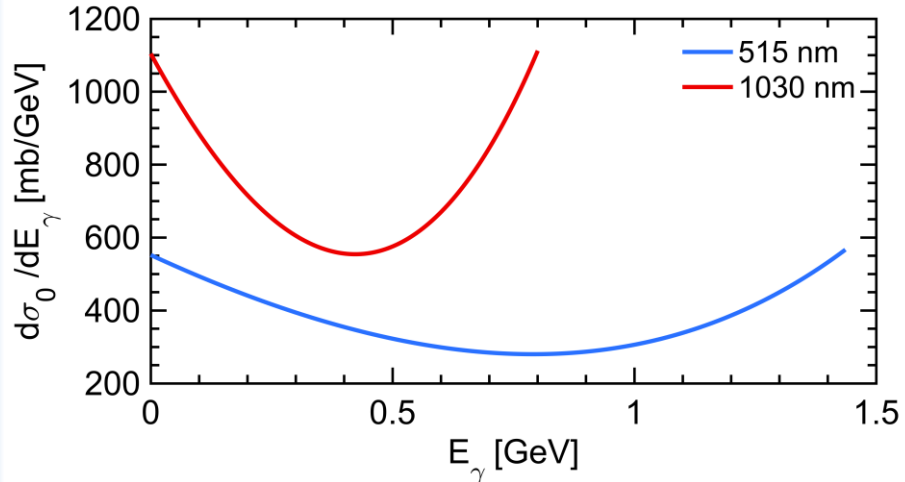

*that reflects also as a function of the energy of the emitted electron*

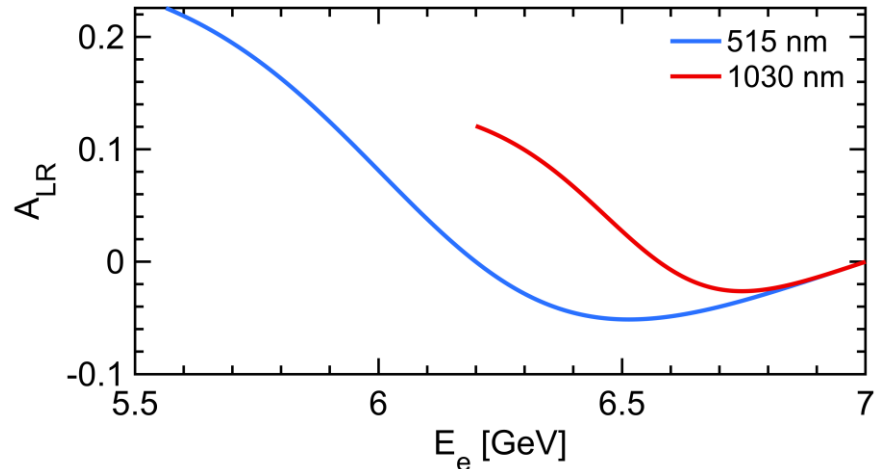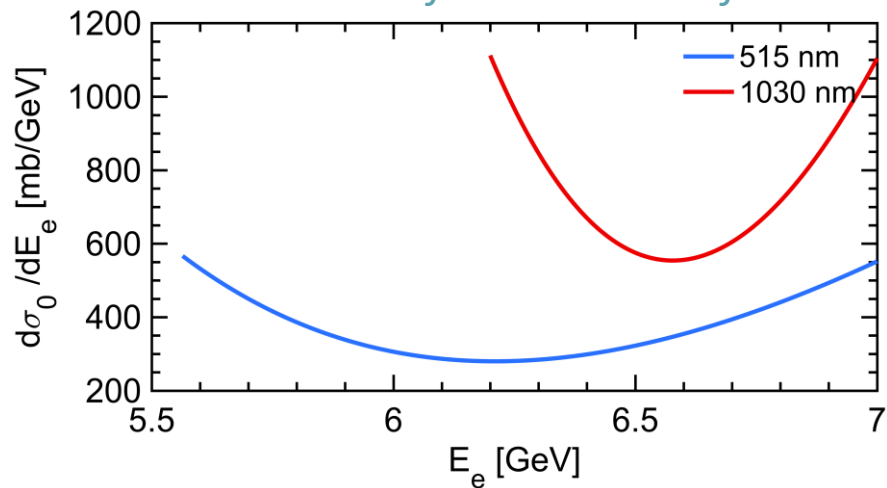

*Green light provides higher sensitivity*