

Measuring the Charge of the Neutron using a Time-Of-Flight Neutron Grating Interferometer

Philipp Heil

Laboratory for High Energy Physics
Albert Einstein Center for Fundamental Physics
University of Bern

philipp.heil@unibe.ch

4.7.2023

u^b

^b
**UNIVERSITÄT
BERN**

AEC
ALBERT EINSTEIN CENTER
FOR FUNDAMENTAL PHYSICS

Table of Content

1 Introduction, Motivation

2 Principle

3 Setup


4 Alignment

5 Measurements

6 Summary/Outlook

Motivation - Charge of the Neutron

Current value : $Q_n = (-0,4 \pm 1,1) \cdot 10^{-21} e^1$.




Important consequences for precise tests of fundamental physical laws:

- Even though Q_n is small, charge quantization and neutrality of atoms is under debate.
- Has Q_n the same value for bound and free neutrons?
- Charge conservation prohibits neutron - antineutron oscillation if $Q_n \neq 0$.

Here: Application of a cold neutron beam deflection measurement.

¹Baumann et al., Phys. Rev. D37,3017(1988)



Introduction - Measuring the Charge of the Neutron

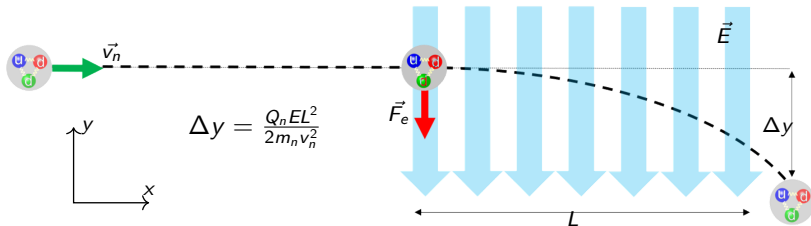


- Goal: Improvement by two orders of magnitude.
- Task: Deflection measurement on the picometer scale!²

²Piegsa, Phys. Rev. C 98, 045503 (2018)

Introduction - Production of Neutrons

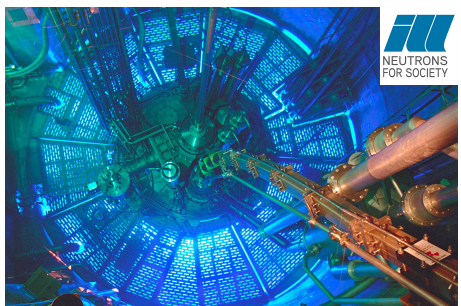

spallation



fission

Introduction - Energy Range of the Neutrons


	produced neutrons	cold neutrons	ultra cold neutrons
temperature [K]	1000	10	10^{-8}
energy [eV]	> 1	10^{-3}	10^{-7}
velocity [m s^{-1}]	2200	800	5
wavelength [\AA]	2	5	800

- Cooling the neutrons to the desired energy.
- Very Low energy for storage experiments (UCN).
- Low energy for **interference experiments** (CN).

Introduction - Energy Range of the Neutrons

	produced neutrons	cold neutrons	ultra cold neutrons
temperature [K]	1000	10	10^{-8}
energy [eV]	> 1	10^{-3}	10^{-7}
velocity [m s^{-1}]	2200	800	5
wavelength [\AA]	2	5	800

- Cooling the neutrons to the desired energy.
- Very Low energy for storage experiments (UCN).
- Low energy for **interference experiments** (CN).

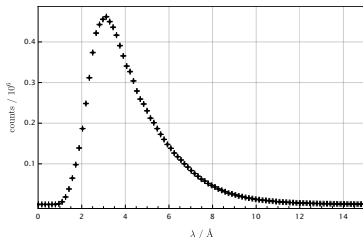

Spectrum of the cold neutron beam
at *SINQ, PSI*.

Table of Content

1 Introduction, Motivation

2 Principle


3 Setup

4 Alignment


5 Measurements

6 Summary/Outlook


Principle - Geometric Case

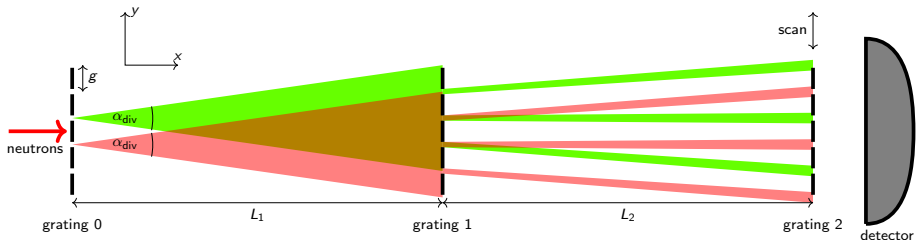


- G_0 and G_1 are acting as collimator.
- Spatial resolution of the detector is too low.
- G_2 needed as analyzer grating.

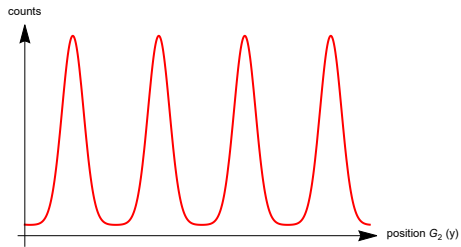


Principle - Diffraction Case

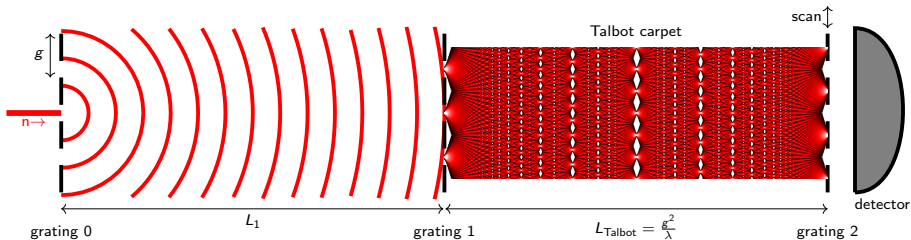

- Diffraction has to be considered.
- G_0 produce coherent line source.
- G_1 as diffraction grating.
- G_2 needed as analyzer grating.

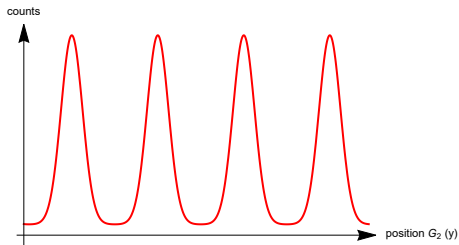


Principle - Charge Measurement

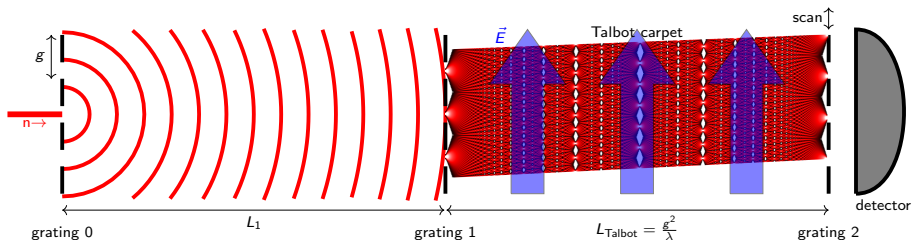


- Apply an electric field \vec{E} .
- If $Q_n \neq 0$ this induces a shift Δy of the pattern.

$$Q_n = \frac{2m_n v_n^2 \Delta y}{EL^2}$$

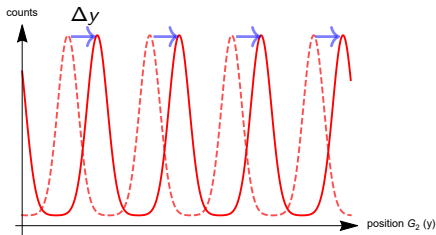

Principle - Two Beam Method

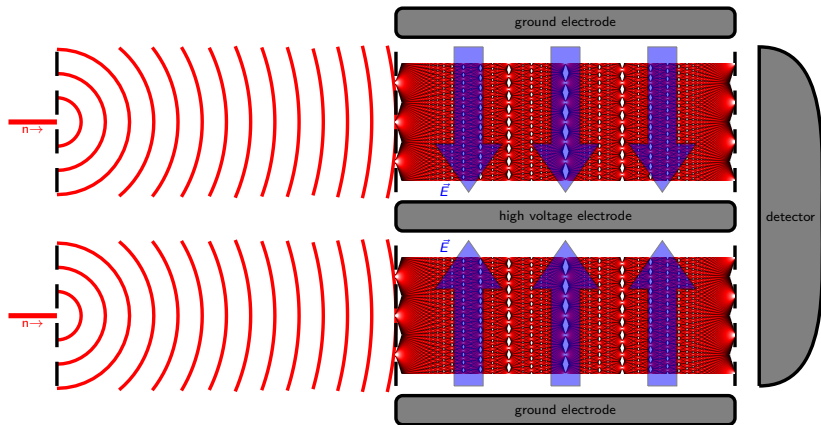


- Separate the neutron beam into two parts.
- Applying an electric field with inverted polarity using a central high voltage electrode.
- Taking the difference between left and right spot in order to compensate for global drifts.

Table of Content


- 1 Introduction, Motivation
- 2 Principle
- 3 Setup**
- 4 Alignment
- 5 Measurements
- 6 Summary/Outlook

Setup - Overview




Scheme of the interferometer setup as it was used at the *Paul Scherrer Institute* (August 2022)

Setup - Overview





Scheme of the interferometer setup as it was used at the *Paul Scherrer Institute* (August 2022)


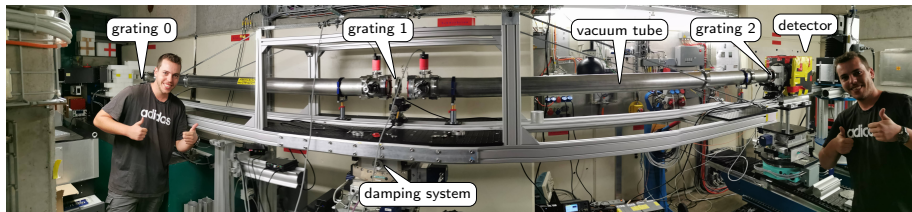


Setup - Stages

Adjusting rotation, tilt angle, and translation remotely.

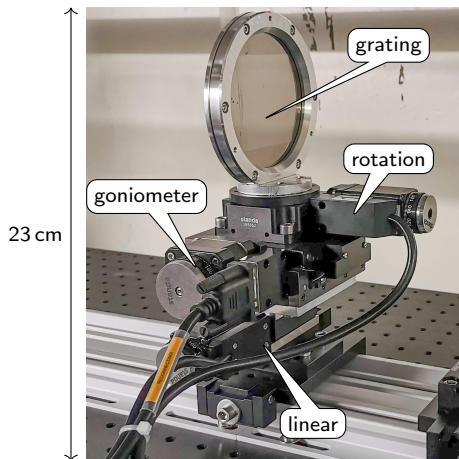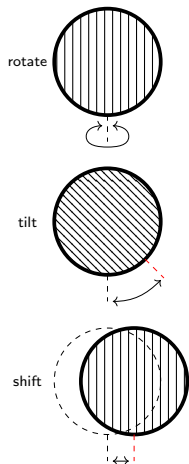


Setup - Gratings

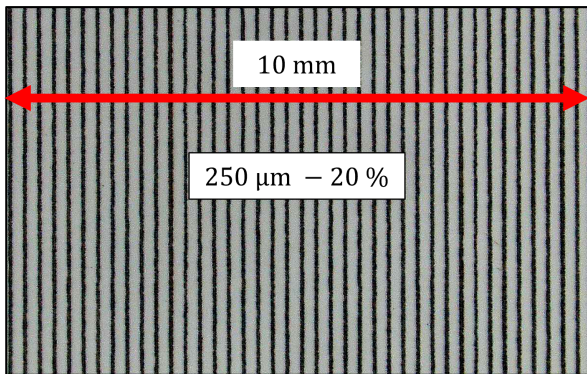

- Gd coated sapphire wafers (20 μm and 30 μm layer thickness).
- Engraved with a laser.
- Grating constant from $g = 25 \mu\text{m}$ to $g = 250 \mu\text{m}$.

Setup - Detectors

High statistics



High resolution





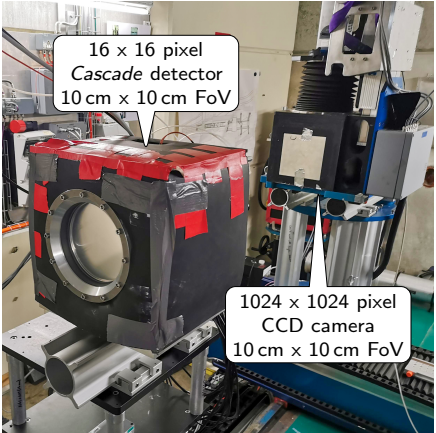


Table of Content

- 1 Introduction, Motivation
- 2 Principle
- 3 Setup
- 4 Alignment**
- 5 Measurements
- 6 Summary/Outlook


Alignment - Optical

Alignment with laser

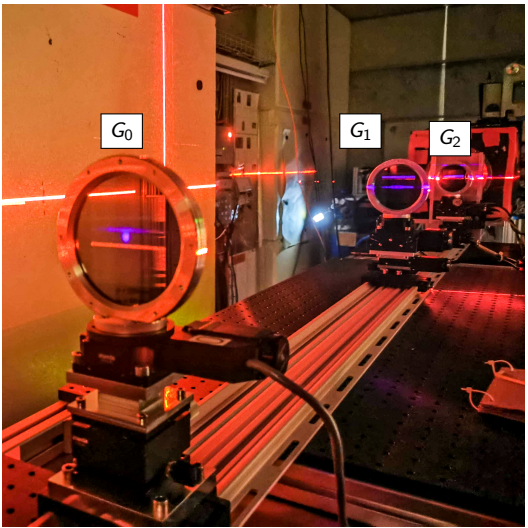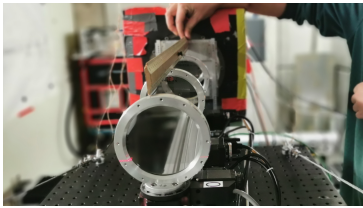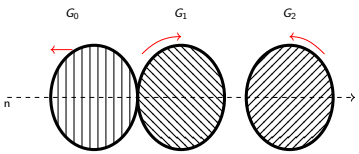


Alignment - Neutron

Alignment with Neutrons

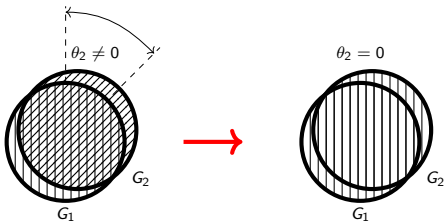

Pictures taken with CCD camera.

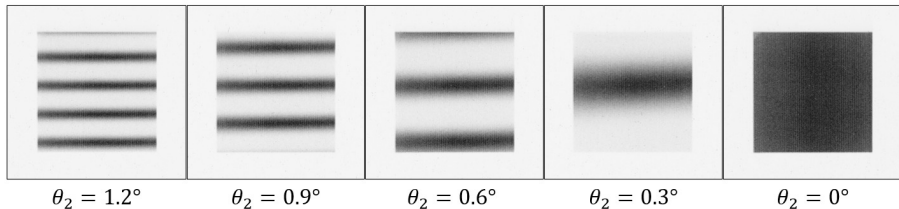


Scanning the tilt angle θ_2 between Grating 1 and Grating 2.

Table of Content

- 1 Introduction, Motivation
- 2 Principle
- 3 Setup
- 4 Alignment
- 5 Measurements**
- 6 Summary/Outlook


Measurements - Visibility - Ballistic Case

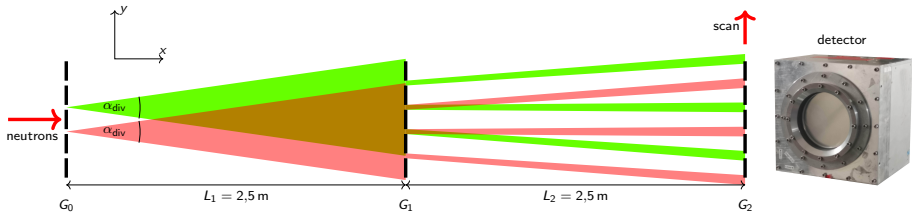


$$G_0 = G_1 = G_2 = 250 \mu\text{m}, 20\% \text{ dc}, 30 \mu\text{m} \text{ Gd}$$

Visibility of modulation:

$$\eta = \frac{N_{\max} - N_{\min}}{N_{\max} + N_{\min}} = 89,9\%$$

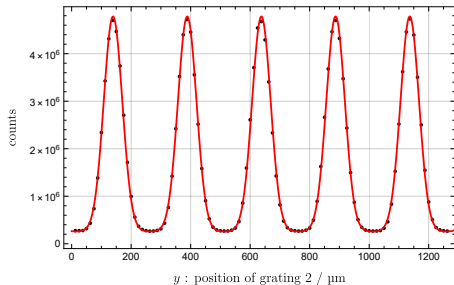


Measurements - Visibility - Diffraction Case

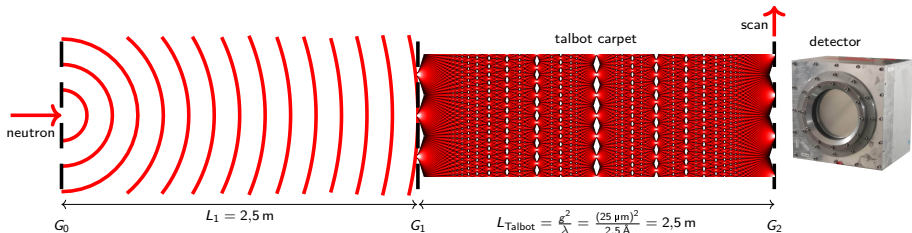


$$G_0 = G_1 = G_2 = 25 \mu\text{m}, 20 \% \text{ dc}, 30 \mu\text{m Gd}$$

Visibility of modulation:


$$\eta = \frac{N_{\text{max}} - N_{\text{min}}}{N_{\text{max}} + N_{\text{min}}} = 16,5 \%$$

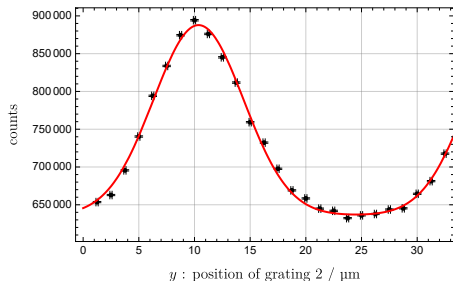



Measurements - Probing Beam Deflections

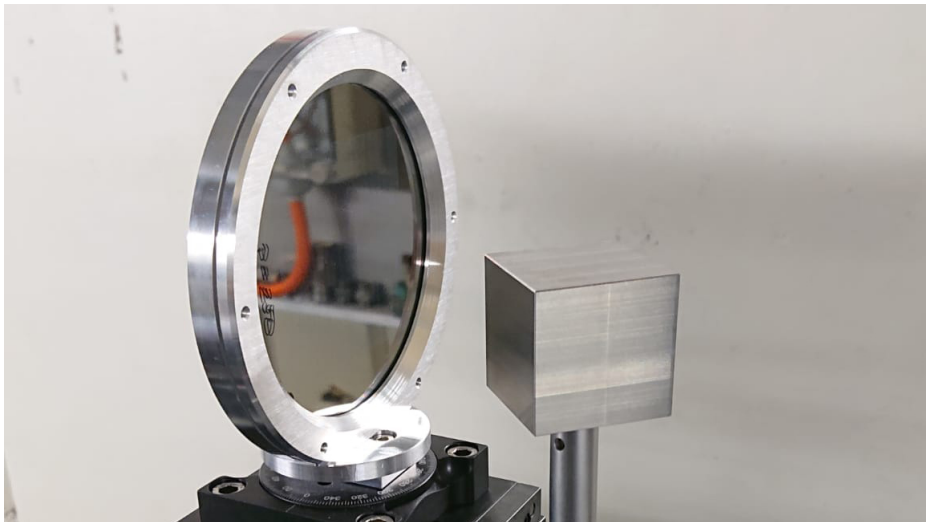


Measurements - Probing Beam Deflections

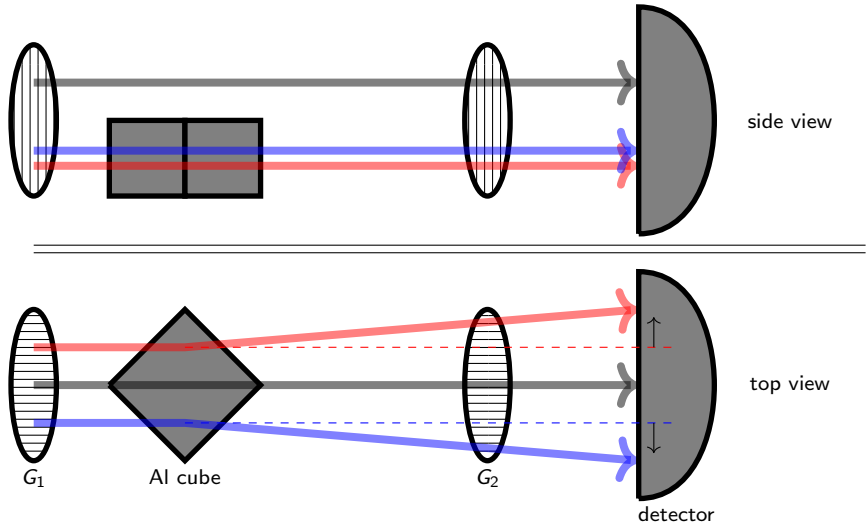


Measurements - Probing Beam Deflections

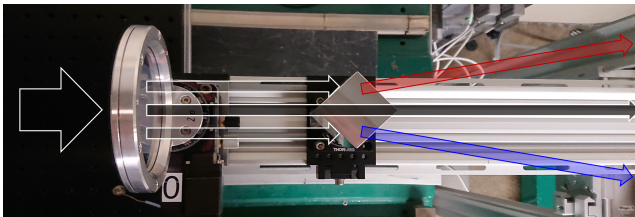


- Performing a scan with G_2 .
- Left zone shifted by $\delta_L \approx -10 \mu\text{m}$.
- Right zone shifted by $\delta_R \approx 10 \mu\text{m}$.

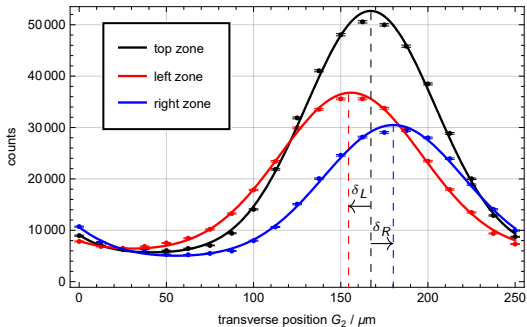

Measurements - Probing Beam Deflections


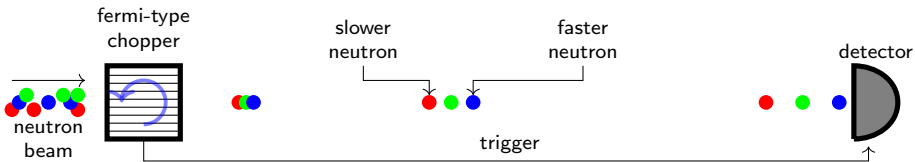


- Time-of-Flight measurement
- Wavelength dependent deflections δ_L , δ_R

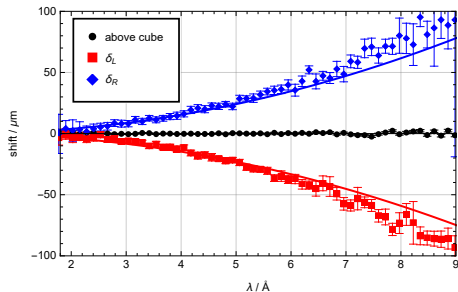

Measurements - Stability


How stable is the setup?

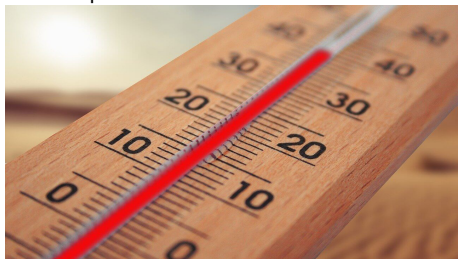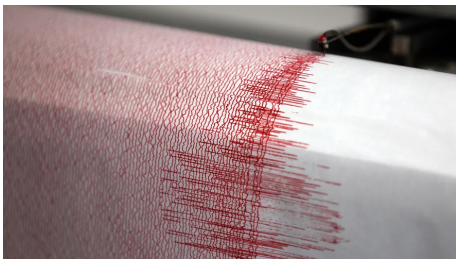

Measurements - Stability




Long time measurement at the most sensitive point (working point).

- Drive G_2 to the working point.
- Calibration count rate \leftrightarrow position.


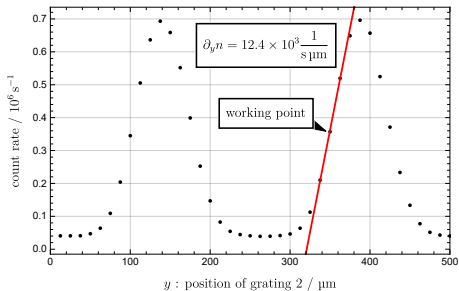


Measurements - Stability

Two beam method

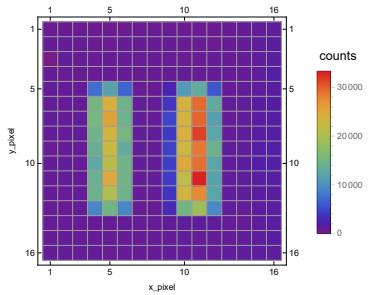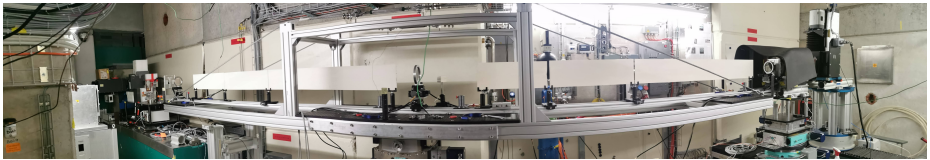


Measurements - Stability

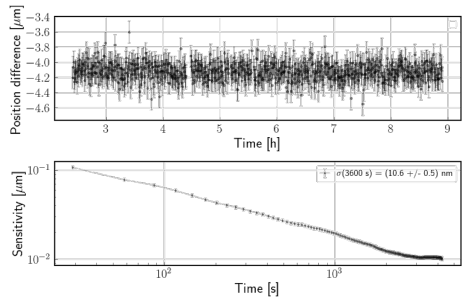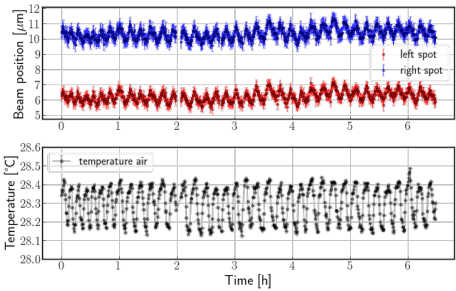

- Periodical temperature fluctuations observed at the beamline.
- Changes in temperature observable in neutron data.
- Taking the difference of the left and right spot in order to get rid of this systematic effect.

Measurements - Sensitivity

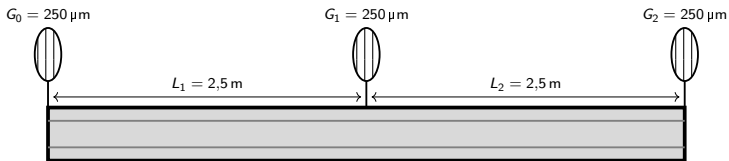


Sensitivity of charge measurement:

$$\sigma(Q_n) = \frac{4\pi\hbar^2 G_2}{\eta m_n E L_2^2 \lambda^2 \sqrt{N}}$$

- η : visibility
- N : number of neutron counts
- m_n : mass of the neutron
- E : electric field
- λ : wavelength

Measurements - Sensitivity

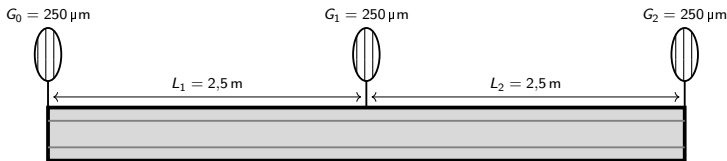

Sensitivity of charge measurement:

$$\sigma(Q_n) = \frac{4\pi\hbar^2 G_2}{\eta m_n E L_2^2 \lambda^2 \sqrt{N}}$$

- η : visibility
- N : number of neutron counts
- m_n : mass of the neutron
- E : electric field
- λ : wavelength

$\eta = 89,9\%$, $\lambda = 4,2 \text{ \AA}$, neutron rate = 317 kHz

If an electric field of $E = 100 \text{ kV cm}^{-1}$ **would** be applied (Electrodes under construction):





$$\sigma(Q_n) = 8,1 \cdot 10^{-20} \text{ e}/\sqrt{\text{day}}$$

Table of Content

- 1 Introduction, Motivation
- 2 Principle
- 3 Setup
- 4 Alignment
- 5 Measurements
- 6 Summary/Outlook

Summary

- Several setups characterized so far ✓
- Developed efficient alignment technique ✓
- Two beam method tested ✓
- Effect of external temperature fluctuations analyzed ✓
- Beam deflections observed (Proof of principle with Al prism) ✓



Outlook

- Next beam time in November at the *ILL* in Grenoble.
- Electrodes will be installed for the first time.
- First measurement of the charge of the neutron (not competitive).



Outlook

- Next beam time in November at the *ILL* in Grenoble.
- Electrodes will be installed for the first time.
- First measurement of the charge of the neutron (not competitive).



Ultimate goal: Measuring at the *ESS* in Lund, Sweden.
Estimation:

- Chopped, high intensity neutron beam.
- Measurement time of 100 days.
- Length of the setup of 10 m.
- Electric field of 100 kV cm^{-1}

$$\sigma(Q_n) \approx 10^{-23} e$$

u^b

LABORATORIUM FÜR HOCHENERGIEPHYSIK
LHEP
UNIVERSITÄT BERN

UNIVERSITÄT
BERN

AEC
ALBERT EINSTEIN CENTER
FOR FUNDAMENTAL PHYSICS




European Research Council

Established by the European Commission




Appendix

Principle - Time of Flight


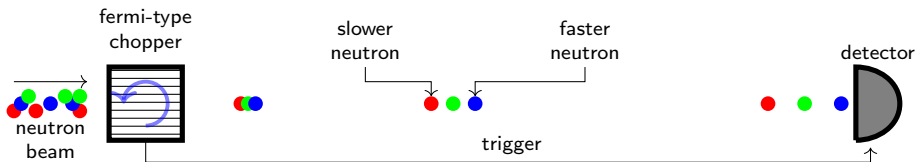


- Spectrum of the neutron beam in general non monochromatic.
- Using a fermi-type chopper to get time (wavelength) information.
- Maxwell distributed energy of the neutrons.

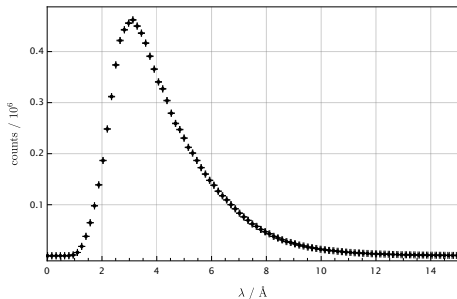

Time-of-flight spectrum of the cold neutron beam at *SINQ, PSI*.


Absorption Gratings - Properties

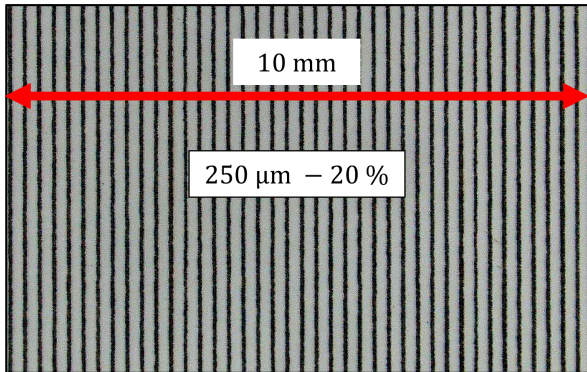

- Gd coated sapphire wafers (25 μm and 30 μm layer thickness).
- Engraved with a laser.
- Grating constant from $g = 25 \mu\text{m}$ to $g = 250 \mu\text{m}$.

Absorption Gratings - Transmission Measurement



- Time-of-flight transmission measurements.
- Thicker layers are favorable
- Quality of engraving has to be considered.

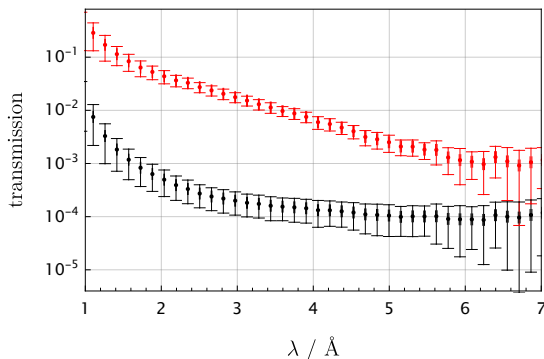

Time-of-flight transmission measurement for 20 μm and 30 μm Gd layer coating.


Absorption Gratings - Transmission Measurement

- Time-of-flight transmission measurements.
- Thicker layers are favorable
- Quality of engraving has to be considered.

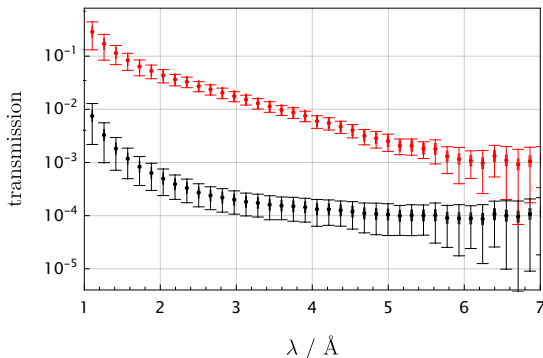



Time-of-flight transmission measurement for 20 μm and 30 μm Gd layer coating.

Absorption Gratings - Comparison Layer Thickness

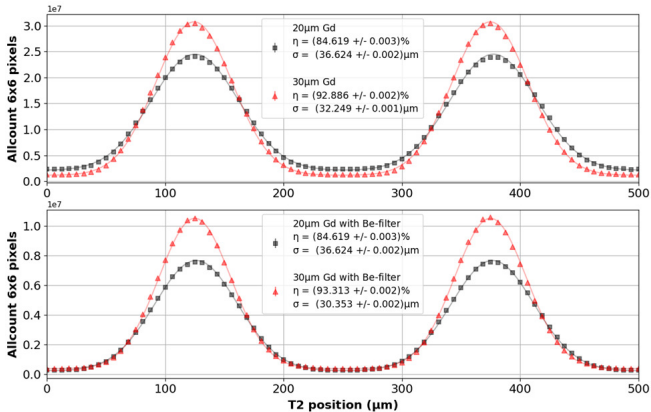

- Transversal scan of G_2 with $g = 250 \mu\text{m}$ grating period and a duty cycle of 20%.



Setup - Two Beam Method

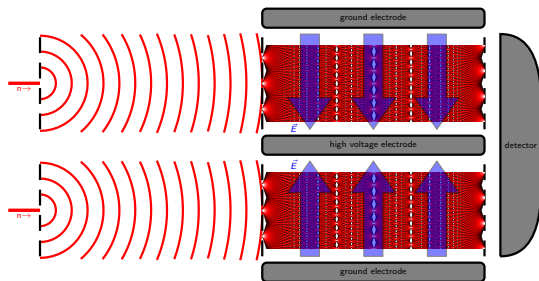

Measured neutrons with the 16x16 pixel detector.


- Separate the neutron beam into two parts.
- Applying an electric field with inverted polarity using a central high voltage electrode.
- Taking the difference between left and right spot compensates for global drifts.

Setup - Two Beam Method

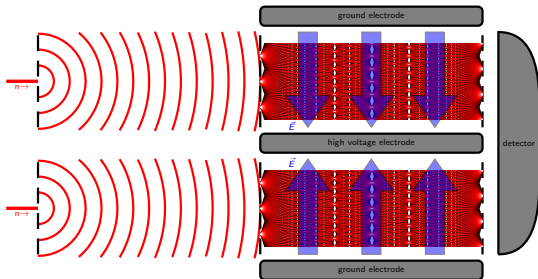

Measured neutrons with the 16x16 pixel detector.


- Separate the neutron beam into two parts.
- Applying an electric field with inverted polarity using a central high voltage electrode.
- Taking the difference between left and right spot compensates for global drifts.



Characterization - Stability

Further investigations in our labs.


Testing different directions of flow:



Characterization - Stability

Further investigations in our labs.

Testing different directions of flow:



Optical setup with polarizer foils to sense deformations:

