Laser driven proton acceleration using resonant nanoantennas

István Papp, Larissa Bravina, Mária Csete, Igor N. Mishustin, Anton Motornenko, Leonid M. Satarov, Horst Stöcker, András Szenes, Dávid Vass, Tamás S. Biró, László P. Csernai, Norbert Kroó (part of NAPLIFE Collaboration) ICNFP 2023, July 18, 2023, Kolymbari, Crete



Inertial Confinement Fusion

Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Nanoplasmonic Laser Fusion Research Laboratory



Kőszeg, September 14, 2019 - Int. Workshop on Collectivity First meeting on the NAPLIFE project (12 people)

Inertial Confinement Fusion

Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Nanoplasmonic Laser Fusion Research Laboratory



Project scientific leader: Bíró Tamás Sándor (Wigner)

Project Governing Body: <u>Szabó Gábor</u> (ELI-ALPS), chair Varga Dezső (WFK), secretary Czitrovszky Aladár (WFK), Nagy Attila (WFK), Pohánka Zsuzsa (NKFIH) Book-keeping: Dömötör Antónia (Wigner)

Project manager: Szeledi Anett (Wigner)

Science advisors: Kroó Norbert, prof. em. (Wigner) Csernai László, prof. em. (Uni.Bergen) Johann Rafelski, prof (U. Arizona)

Theory Group: <u>Csete Mária</u> (SZTE) Papp István (Wigner FK) Tóth Emese (SZTE) Vass Dávid (SZTE) Szenes András (SZTE) Bánhelyi Balázz (SZTE) Czirják András (SZTE) Földi Péter (SZTE) Konstantin Zhukovsky (W) Nanotechnology Group: <u>Bonyár Attila (</u>BME ETT) Borók Alexandra (BME ETT) Szalóki Melinda (DE FOK) Petrik Péter (EK) Schereen Zangana (BME) Janovák László (SZTE) Tarpataki Nóra (BME) Kovács Rebeka (BME) Laser Group: Kedves Miklós (Wigner) <u>Aladi Márk</u> (Wigner) Kumari Archana (Wigner) Nor Jalal Abdulameer (WFK/DE) Ráczkevi Béla (Wigner) Inger Ádádm (Wigner) Jean-Pierre Svantner (WFK/L) Spectroscopy Group: <u>Veres Miklós</u> (Wigner FK) Rigó István (Wigner FK) Nagyné Szokol Ágnes (Wigner FK) Holomb Román (Wigner FK) Kámán Judit (Wigner FK) Galbács Gábor (SZTE) Palásti Ádám (SZTE) Bélteki Dávid (SZTE)

Inertial Confinement Fusion

Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Thermo-nuclear Fusion

• ηE_f is the usable energy

• The loss is
$$(1 - \eta)(E_0 + E_b)$$

- $E_0 = 3nkT$, $E_b = bn^2 \tau \sqrt{T}$ (thermal bremsstralung)
- Giving the gain factor: $Q = \frac{\eta \epsilon n \tau v \sigma}{4(1-\eta)(3kT+bn\tau\sqrt{T})}$
- Q must be Q > 1 for energy production

• This also means
$$n au > rac{3kT(1-\eta)}{rac{1}{4}\epsilon\eta\langle v\sigma
angle - b(1-\eta)\sqrt{T}}
ightarrow \mathsf{LC}$$

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Lawson criterion

Fulfilling the Lawson criterion

- Magnetically confined plasmas: increase confinement time
- Inertial confinement fusion: increase density of fusion plasma

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

News on fusion

Home / News / Lawrence Livermore National Laboratory achieves fusion ignition



Lawrence Livermore National Laboratory achieves fusion ignition



The of <u>U.S. Department of Energy</u> (DOE) and DOE's of <u>National Nuclear Security</u> <u>Administration</u> (NNSA) today (Dec. 13) announced the achievement of fusion ignition



Dec. 14, 2022

News on fusion

Article

https://doi.org/10.1038/s41467-023-36655-1

Inertial Confinement Fusion

Radiation Dominated Implosion

Absorptivity by nano-technology

Two ways

First measurements of p¹¹B fusion in a magnetically confined plasma

| Received: 4 November 2022 | R. M. Magee® ¹ ⊠, K. Ogawa® ² , T. Tajima ^{1,3} , I. Allfrey® ¹ , H. Gota® ¹ , P. McCarroll ¹ , S. Ohdachi® ² , M. Isobe ² , S. Kamio® ^{1,3} , V. Klumper ^{1,3} , H. Nuga ² , M. Shoj ² , S. Ziael ¹ , M. Binderbaue ² & M. Osakabe® ² |
|------------------------------------|--|
| Accepted: 10 February 2023 | |
| Published online: 21 February 2023 | |
| Check for updates | Proton-boron (p ¹ B) fusion is an attractive potential energy source but tech- nically challenging to implement. Developing techniques to realize its poten- tial requires first developing the experimental capability to produce p ¹ B fusion in the magnetically-confined, thermonuclear plasma environment. Here we report clear experimental measurements supported by simulation of p ¹ B fusion with high-energy neutral beams and boron powder injection in a high- temperature fusion plasma (the Large Helical Device) that have resulted in diagnostically significant levels of alpha particle emission. The injection of boron powder into the plasma edge results in boron accumulation in the core. Three 2 MW, 160 K1 Mydrogen neutral beam injectors create a large population of well-confined, high -energy protons to react with the boron plasma. The fusion products, MeV alpha particles, are measured with a custom designed particle detector which gives a fusion rate in verg good relative agreement with calculations of the global rate. This is the first such realization of p ¹ B fusion in a magnetically confined plasma. |

While the challenges of producing the fusion core are greater for


Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

News on fusion



Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology


Direct vs Indirect drive

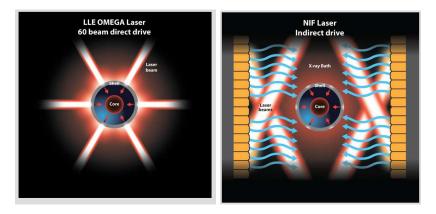




Hohlraum

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

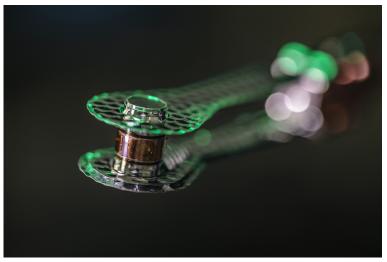

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Hohlraum 2014

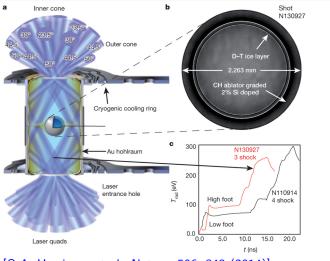

[O.A. Hurricane et al., Nature, 506, 343 (2014)]

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Hohlraum 2022

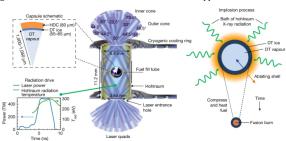


Fig. 1: Schematic of the indirect-drive inertial confinement approach to fusion.

Centre, A typical indirect-drive target configuration with key engineering elements labelled. Laser beams (blue) enter the hohlraum through laser entrance holes at various angles. Top left, A Schematic pie diagram showing the radial distribution and dimensions of materials in diamond (high-density carbon, HDC) ablator implosions. Bottom left, The temporal laser power pulse-shape (blue) and associated hohlraum radiation temperature (green). Right, At the centre of the hohlraum, the capsule

[A.B, Zylstra, O.A. Hurricane et al., Nature, 601, 542-548 (2022)]


Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Rayleigh-Taylor instabilities



Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology


Rayleigh-Taylor instabilities



Energy must be delivered as sysmmetric as possible!

Different levels of corrugation of the shell surfaces :

Stiking similarities exist between hydrodynamic instabilities in (a) inertial confinement fusion capsule implosions and (b) core-collapse supernova, explosions, [Image (a) is from Sakagami and Nishihara, Physics of Fluids 82, 2715 (1909); image (b) is from Hachisu et al., Astrophysical Journal 368, L27 (1901)]



Left: same roughness of inner and outer surface as specified for the NIF target Center: outer surface roughness is twice the NIF level

Right: DT inner surface roughness three times larger than NIF specifications


[S. Atzeni et al., Nucl. Fusion 54, 054008 (2014).]

25

Latest (January 2023) news 3.15MJ kinetic energy at NIF with burning time of 89-137 ps(?)

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

RFD

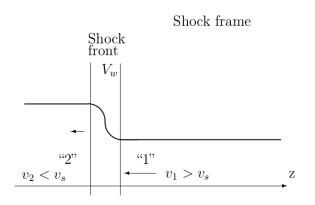

[Csernai, L.P. (1987). Detonation on a time-like front for relativistic systems. Zh. Eksp. Teor. Fiz. 92, 379-386.]

・ロ ・ ・ 一部 ・ く 言 ト ・ 言 ・ つ へ ペ
15/48

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

RFD

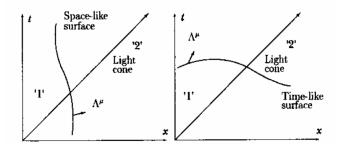


Figure 5.9: Space-like (a) and time-like (b) surfaces of discontinuity [Csernai, L.P. (1987). Detonation on a time-like front for relativistic systems. Zh. Eksp. Teor. Fiz. 92, 379-386.]

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

RFD





Figure 5.10: Smooth change from spacelike to timelike detonation [Csernai, L.P. (1987). Detonation on a time-like front for relativistic systems. Zh. Eksp. Teor. Fiz. 92, 379-386.]

17 / 48

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Constant absorptivity

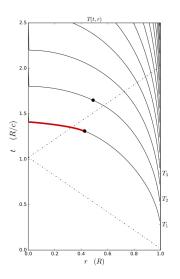


[L.P. Csernai & D.D. Strottman, Laser and Particle Beams 33, 279 (2015)]

 $\alpha_{k_{middle}} = \alpha_{k_{edge}}$

Simultaneous volume ignition is only up to 12%

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Changing absorptivity

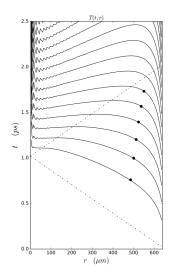


[Csernai, L.P., Kroo, N. and Papp, I. (2017). Procedure to improve the stability and efficiency of laser-fusion by nano-plasmonics method. Patent P1700278/3 of the Hungarian Intellectual Property Office.]

 $\alpha_{k_{middle}} \approx 4 \times \alpha_{k_{edge}}$

Simultaneous volume ignition is up to 73%

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Flat target

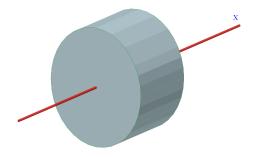


Schematic view of the cylindrical, flat target of radius, R, and thickness, h. $V = 2\pi R^3$, $R = \sqrt[3]{V/(2\pi)}$, $h = \sqrt[3]{4V/\pi}$.

[L.P. Csernai, M. Csete, I.N. Mishustin, A. Motornenko, I. Papp, L.M. Satarov, H. Stöcker & N. Kroó, Radiation- Dominated Implosion with Flat Target, *Physics and Wave Phenomena*, **28** (3) 187-199 (2020)]

Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Varying absorptivity

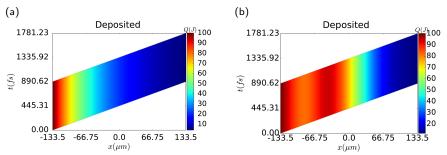

Deposited energy per unit time in the space-time plane across the depth, h, of the flat target. (a) without nano-shells (b) with nano-shells To increase central absorption we used the following distribution:

$$\alpha_{ns}(s) = \alpha_{ns}^{C} + \alpha_{ns}(0) \cdot \exp\left[4 \times \frac{\left(\frac{s}{100}\right)^2}{\left(\frac{s}{100} - 1\right)\left(\frac{s}{100} + 1\right)}\right]$$

Inertial Confinement Fusion Two ways **Radiation Dominated Implosion** Absorptivity by nano-technology

Similar Configuration with success


R

Nuclear probes of an out-of-equilibrium plasma at the highest compression Phys. Lett. A 383 (2019) 2285-2289. G. Zhang^{a,b,*}, M. Huang^c, A. Bonasera^{d,e,*}, Y.G. Ma^{f,b,i,*}, B.F. Shen^{g,h,*}, H.W. Wang^{a,b} W.P. Wang^g, J.C. Xu^g, G.T. Fan^{a,b}, H.J. Fu^b, H. Xue^b, H. Zheng^j, L.X. Liu^{a,b}, S. Zhang^c, W.I. Li^b, X.G. Cao^{a,b}, X.G. Deng^b, X.Y. Li^b, Y.C. Liu^b, Y. Yu^g, Y. Zhang^b, C.B. Fu^k,


4 (up) + 4(down) lasers Target thickness, h (3.6µm-1mm) & radius, R, (150-400µm) were varied.

X.P. Zhang^k

Total pulse energy 1.2kJ (2ns) for 8 beams. Shortest (250ps) pulses -> 100s MeV ions > non-thermal distr. = directed ion acceleration




Typical fusion neutron energies were measured & used to extract the target density.



Inertial Confinement Fusion Two ways Radiation Dominated Implosion Absorptivity by nano-technology

Nanoplasmonic Laser Fusion Research Laboratory

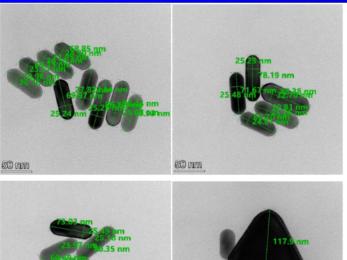

Transmission Electronmicroscopy photos of 75x25 nm gold nano-rod antennas [Judit Kámán, A. Bonyár et al. (NAPLIFE Collab.)., Gold nanorods 10th ICNFP 2021, Kolymbari]

FEM approach PIC approach

Nanorod


Field solver: $\epsilon(\omega) = 1 - \frac{\omega_p^2}{(\omega^2 + i\gamma\omega)}$ where ω_p is the plasma frequency: $\sqrt{\frac{n_e e^2}{m'\epsilon_0}}$ γ is the damping factor or collision frequency: $\gamma = \frac{1}{\tau}$ and τ is the average time between collisions Particle simulation:

$$\frac{\partial \boldsymbol{E}}{\partial t} = \frac{1}{\mu_0 \epsilon_0} \nabla \times \boldsymbol{B} - \frac{\boldsymbol{J}}{\epsilon_0}, \ \frac{\partial \boldsymbol{B}}{\partial t} = -\nabla \times \boldsymbol{E}$$

 $\gamma_i m_i \boldsymbol{v}_i = q_i (\boldsymbol{E}_i + \boldsymbol{v}_i \times \boldsymbol{B}_i), \ \gamma_i$ is the relativistic factor

FEM approach PIC approach

Nanorod

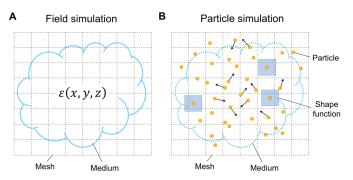

[W. J. Ding, et al., Particle simulation of plasmons Nanophotonics, vol. 9, no. 10, pp. 3303-3313 (2020)]

FEM approach PIC approach

Particle shape




Figure 3: Second order particle shape function

First order approximations are considered

$$F_{part} = \frac{1}{2}F_{i-1}\left(\frac{1}{2} + \frac{x_i - X}{\Delta x}\right)^2 + \frac{1}{2}F_i\left(\frac{3}{4} - \frac{(x_i - X)^2}{\Delta x^2}\right)^2 + \frac{1}{2}F_{i+1}\left(\frac{1}{2} + \frac{x_i - X}{\Delta x}\right)^2$$

[EPOCH 4.0 dev manual]

FEM approach PIC approach

Particle In Cell methods




Figure 2: The Yee grid in 2D

[F.H. Harlow (1955). A Machine Calculation Method for Hydrodynamic Problems. Los Alamos Scientific Laboratory report LAMS-1956]

[T.D. Arber et al 2015 Plasma Phys. Control. Fusion 57 113001]


A **super-particle** (marker-particle) is a computational particle that represents many real particles.

Particle **mover** or **pusher** algorithm as (typically Boris algorithm).

Finite-difference time-domain method for solving the time evolution of Maxwell's equations.

FEM approach PIC approach

General layout of the EPOCH code

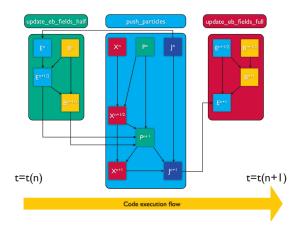



- (input) <u>deck</u>
- housekeeping
- o io
- parser
- physics_packages
- user_interaction

FEM approach PIC approach

FDTD in EPOCH

•
$$\boldsymbol{E}_{n+\frac{1}{2}} = \boldsymbol{E}_n + \frac{\Delta t}{2} \left(c^2 \nabla \times \boldsymbol{B}_n - \frac{\boldsymbol{j}_n}{\epsilon_0} \right)$$

• $\boldsymbol{B}_{n+\frac{1}{2}} = \boldsymbol{B}_n - \frac{\Delta t}{2} \left(\nabla \times \boldsymbol{E}_{n+\frac{1}{2}} \right)$
• Call particle pusher which calculates \boldsymbol{j}_{n+1}
• $\boldsymbol{B}_{n+1} = \boldsymbol{B}_{n+\frac{1}{2}} - \frac{\Delta t}{2} \left(\nabla \times \boldsymbol{E}_{n+\frac{1}{2}} \right)$
• $\boldsymbol{E}_{n+1} = \boldsymbol{E}_{n+\frac{1}{2}} + \frac{\Delta t}{2} \left(c^2 \nabla \times \boldsymbol{B}_{n+1} - \frac{\boldsymbol{j}_{n+1}}{\epsilon_0} \right)$

FEM approach PIC approach

Particle pusher

 Solves the relativistic equation of motion under the Lorentz force for each marker-particle

$$\boldsymbol{p}_{n+1} = \boldsymbol{p}_n + q\Delta t \left[\boldsymbol{E}_{n+\frac{1}{2}} \left(\boldsymbol{x}_{n+\frac{1}{2}} \right) + \boldsymbol{v}_{n+\frac{1}{2}} \times \boldsymbol{B}_{n+\frac{1}{2}} \left(\boldsymbol{x}_{n+\frac{1}{2}} \right) \right]$$

p is the particle momentum **q** is the particle's charge **v** is the velocity. **p** = $\gamma m \mathbf{v}$, where **m** is the rest mass $\gamma = [(\mathbf{p}/mc)^2 + 1]^{1/2}$

 Villasenor and Buneman current deposition scheme [Villasenor J & Buneman O 1992 Comput. Phys. Commun. 69 306], always satisfied: ∇ · *E* = ρ/ε₀, where ρ is the charge density.

FEM approach PIC approach

Metal Nanoparticles as Plasmas in Vacuum

The conduction band electrons in metals behave as strongly coupled plasmas.

For golden nanorods of 25nm diameter in vacuum this gives an effective wavelength of $\lambda_{\rm eff}=266\rm{nm}$

$$rac{\lambda_{eff}}{2R\pi}=13.74-0.12[arepsilon_{\infty}+141.04]-rac{2}{\pi}+rac{\lambda}{\lambda_{
ho}}0.12\sqrt{arepsilon_{\infty}+141.04}$$

[Lukas Novotny, Effective Wavelength Scaling for Optical Antennas, Phys. Rev. Lett. **98**, 266802 (2007).]

Metal Nanoparticles as Plasmas in UDMA-Tegdma

For golden nanorods of 25nm diameter in vacuum this gives an effective wavelength of $\lambda_{\rm eff}/2=85{\rm nm}$

The **propagation** velocity of light **inside** the **medium** is reduced to $c_s = c/\sqrt{\varepsilon_s}$, where $\varepsilon_s = n^2$.


$$\begin{aligned} \frac{\lambda_{\text{eff}}}{2R\pi} &= 13.74 - 0.12[\varepsilon_{\infty} + \varepsilon_{s} 141.04]/\varepsilon_{s} \\ &- \frac{2}{\pi} + \frac{\lambda}{\lambda_{p}} 0.12\sqrt{\varepsilon_{\infty} + \varepsilon_{s} 141.04}/\varepsilon_{s} \end{aligned}$$

[Lukas Novotny, Effective Wavelength Scaling for Optical Antennas, Phys. Rev. Lett. **98**, 266802 (2007).]


FEM approach PIC approach

Kinetic Modelling of the Nanorod

Nanorod inside a PIC simulation box

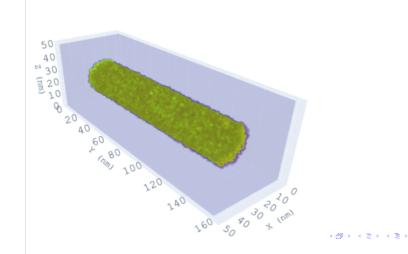


≣ ્ર 33 / 48

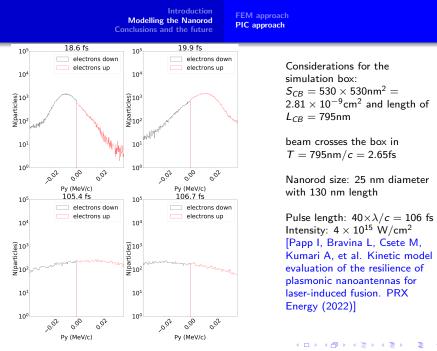

FEM approach PIC approach

Kinetic Modelling of the Nanorod


Evolution of the nanoantenna

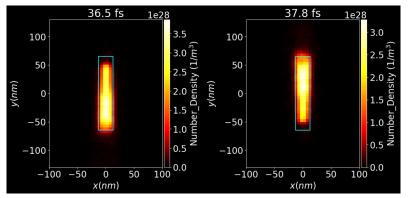

Number density of electrons in the middle of a nanorod of size 25×130 nm at different times. The nanorod is orthogonal to the beam direction, *x*.

FEM approach PIC approach

Kinetic Modelling of the Nanorod in Vacuum

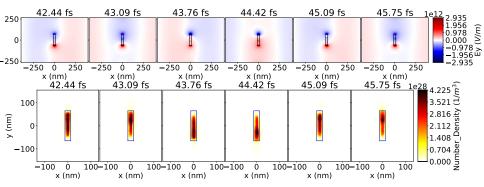


- Evolution of the E field's y component from 42.4 till 45.7 fs, around a nanorod of 25x130 nm.

- The direction of the E field at the two ends of the nanorod does not change.

FEM approach PIC approach

In Vacuum

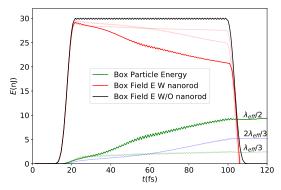


energy in the box without nanorod antenna 3×10^{-8} J (black line) nanorod absorbs EM energy reducing it to 2.3×10^{-8} J (red line) deposited energy in the nanorod (green line) results in light absorption cross section highest

-

FEM approach PIC approach

In UDMA-TEGDMA copolymer comparison

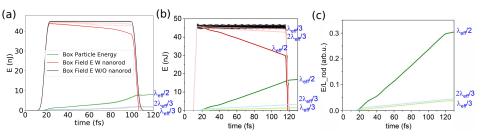


Optical response of the gold nanorod with different numerical methods and lengths, $L = \lambda_{eff}/2$, $\lambda_{eff}/3$ and $2\lambda_{eff}$ eff/3. (a) PIC, (b) FEM and (c) FEM with normalized values to unit antenna length.

[I. Papp, L. Bravina, M. Csete, et al.(NAPLIFE Collaboration), Kinetic model of resonant nanoantennas in polymer for laser induced fusion, Frontiers in Physics, **11**, 1116023 (2023).]


FEM approach PIC approach

In UDMA-TEGDMA copolymer comparison

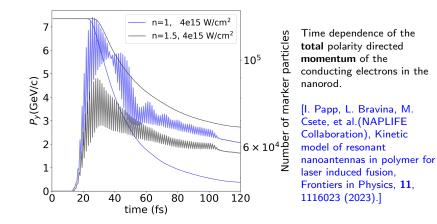

FEM approach PIC approach

In UDMA-TEGDMA copolymer comparison

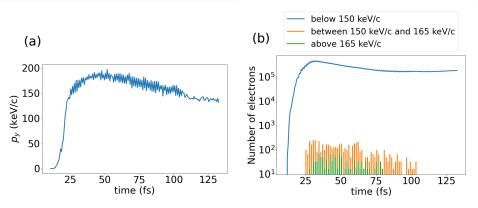


Electrons leaving the nanorod. Figure (a) indicates the **maximum momentum** in time, Figure (b) shows the distribution of electrons at different momentum values.

[I. Papp, L. Bravina, et al. Frontiers in Physics, **11**, 1116023 (2023).]

FEM approach PIC approach

Capping in the experiment

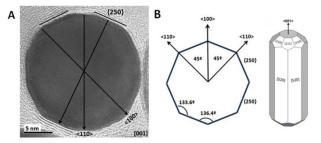


The gold nanorods in the polymer matrix are coated with dodecanethiol (DDT) capping. $CH_3(CH_2)_{11}SH$ [Bonyár A, et al. The Effect of Fem- tosecond Laser Irradiation and Plasmon Field on the Degree of Conversion of a UDMA-TEGDMA Copoly- mer

Nanocomposite Doped with Gold Nanorods. Inter- national Journal of Molecular Sciences 23(21), 13575 (2022).]

Introduction Modelling the Nanorod

FEM approach PIC approach

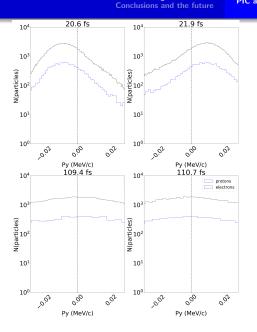

Considerations for the simulation box: $S_{CB} = 530 \times 530 \text{ m}^2 = 2.81 \times 10^{-9} \text{ cm}^2$ and length of $L_{CB} = 795 \text{ nm}$

beam crosses the box in T = 795 nm/c = 2.65 fs

Nanorod size: 25 nm diameter with 85 nm length

Pulse length: $40 \times \lambda/c = 106$ fs Intensity: 4×10^{15} W/cm²


(a)

э

42 / 48

FEM approach PIC approach


Ionisable surrounding

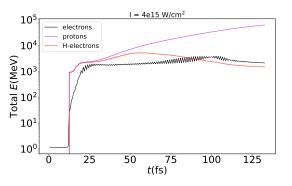

We consider a laser pulse of intensity $I = 4 \cdot 10^{15} \text{W/cm}^2$ and $I = 4 \cdot 10^{17} \text{W/cm}^2$ and duration of 106fs.

FEM approach PIC approach


Ionisable surrounding

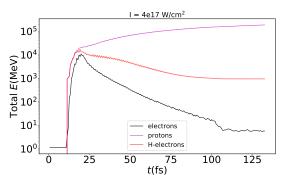

We consider a laser pulse of intensity $I = 4 \cdot 10^{15} W/cm^2$ and $I = 4 \cdot 10^{17} W/cm^2$ and duration of 106fs.

FEM approach PIC approach


Ionisable surrounding

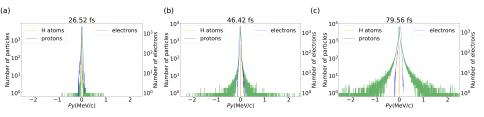

The number of electrons and protons when they leave the nano antennas or their surrounding at intensity $I = 4 \times 10^{15} \text{ W/cm}^2$.

FEM approach PIC approach

Ionisable surrounding

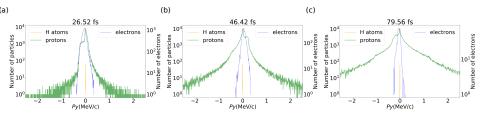

The number of electrons and protons when they leave the nano antennas or their surrounding at intensity $I = 4 \times 10^{17} \text{ W/cm}^2$.

Conclusions Acknoledgements

Conclusions, Looking forward

- The model is in good agreement with currently available widely accepted methods
- Quantitative differences mainly come at different resonant lengths
- The model is less idealized than before
- Ionization in the medium is now included, nuclear reactions are on the way
- Target pre-compression in the next step can be estimated

Conclusions Acknoledgements

Acknoledgements

Enlightening discussions with Johann Rafelski are gratefully acknowledged. Horst Stöcker acknowledges the Judah M. Eisenberg Professor Laureatus chair at Fachbereich Physik of Goethe Universität Frankfurt. We would like to thank the Wigner GPU Laboratory at the Wigner Research Center for Physics for providing support in computational resources. This work is supported in part by the Frankfurt Institute for Advanced Studies, Germany, the Eötvös Loránd Research Network of Hungary, the Research Council of Norway, grant no. 255253, and the National Research, Development and Innovation Office of Hungary, via the projects: Nanoplasmonic Laser Inertial Fusion Research Laboratory (NKFIH-468-3/2021), Optimized nanoplasmonics (K116362), and Ultrafast physical processes in atoms, molecules, nanostructures and biological systems (EFOP-3.6.2-16-2017-00005). LP acknowledges support from Wigner RCP, Budapest (2022-2.2.1-NL-2022-00002).

We also greatly acknowledge your attention!