



# EIC Accelerator New Technologies and Challenges

Todd Satogata, Jefferson Lab  
For the EIC Project and EIC Collaboration



JUAS Lecture  
24 January 2023

EIC: Electron-Ion Collider



# Outline


- The EIC accelerator
  - Requirements and present design
- Accelerator technology challenges
- Some project technology R&D
- Luminosity limiting factors
- Collider luminosity experience

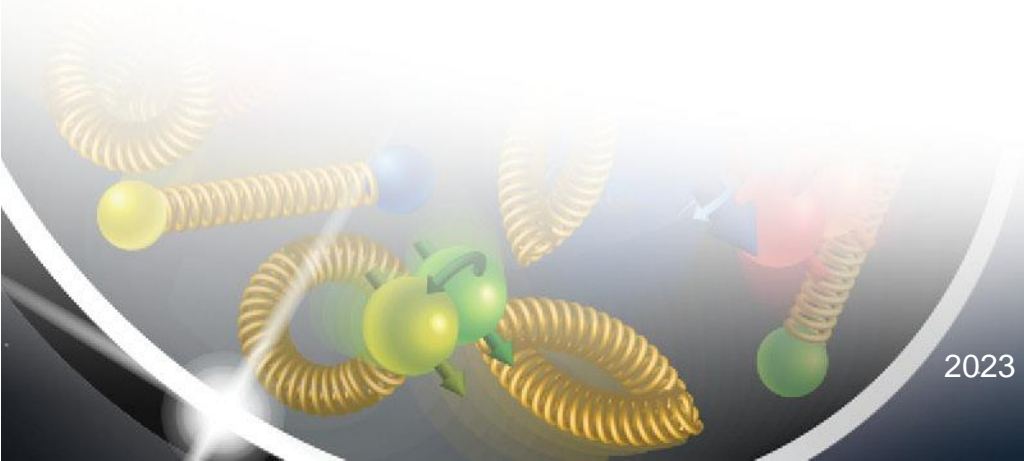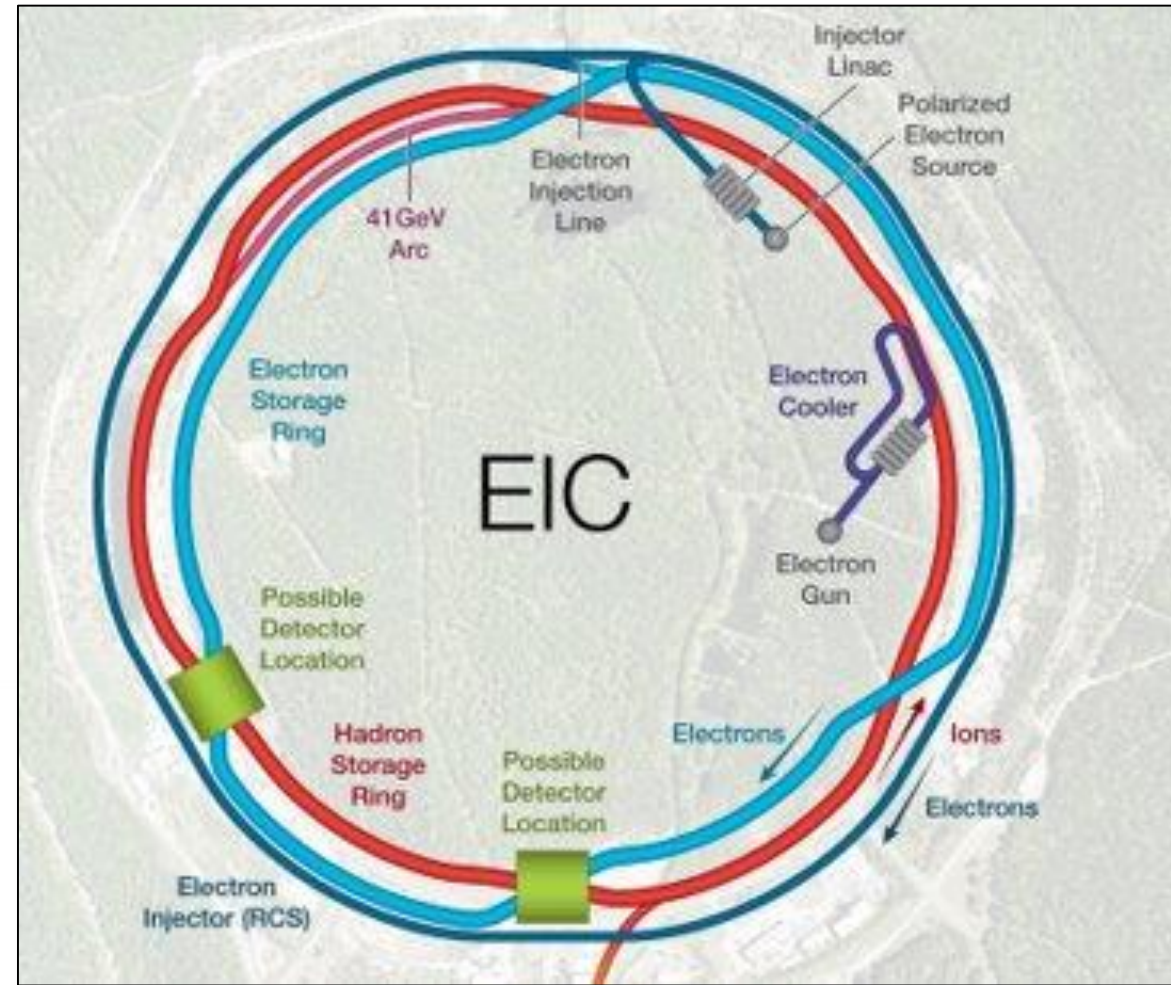



# “Not Like The Others” (LHC, FCC...)

- The **electron-ion collider (EIC)** is:
  - a **nuclear physics (NP)** collider
    - nuclear physics scattering experiments
    - includes “deep inelastic” scattering, or EM-intermediated scattering of electrons and partons
    - collective and single-particle effects in the strong interaction sector
  - NOT a high-energy physics collider
- Addresses **three fundamental nuclear physics questions**:
  - How does nuclear mass arise?
  - How does nuclear spin arise?
  - What are emergent properties of dense gluon systems?



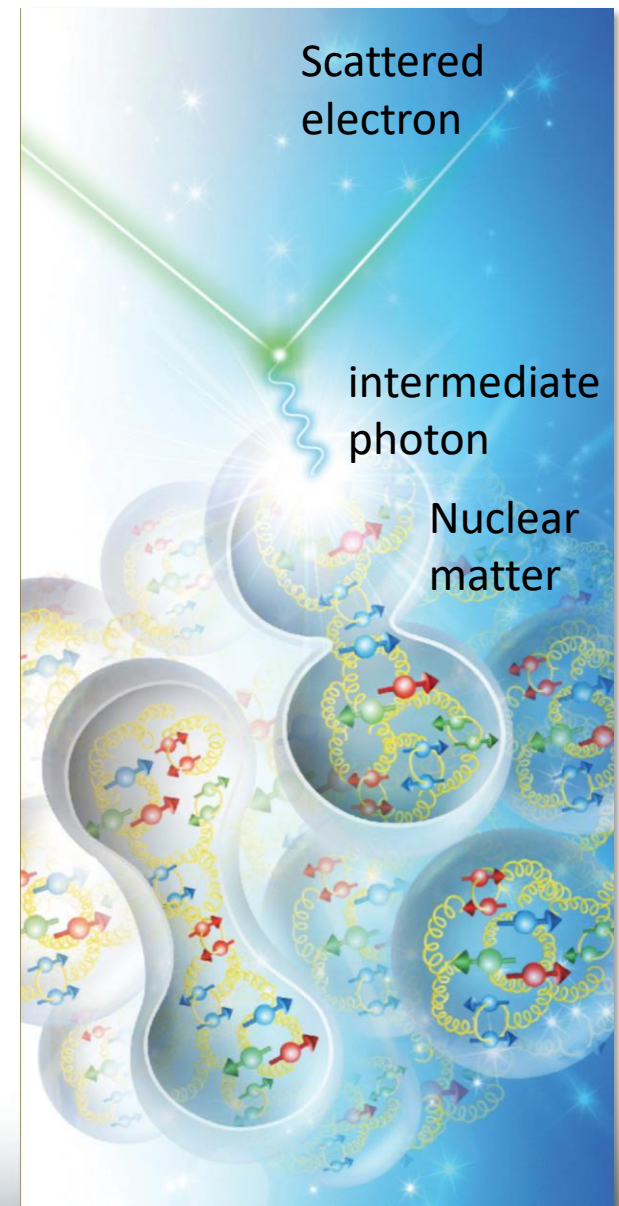


Ultimately, nuclear tomography

# EIC Requirements

- **EIC design goals**

- High luminosity:  $L = (0.1-1) \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ 
  - $\rightarrow 10-100 \text{ fb}^{-1}$
- Collisions of highly **polarized (>70%)** e and p (and light ion) beams
  - with flexible bunch by bunch spin patterns
- Large range of CM energies:
  - $E_{\text{cm}} = 20-140 \text{ GeV}$
- Large range of ion species:
  - Protons – Uranium
- Ensure accommodation of a second IR
- Large detector acceptances; good background
  - Hadron particle loss
  - IR synchrotron radiation backgrounds

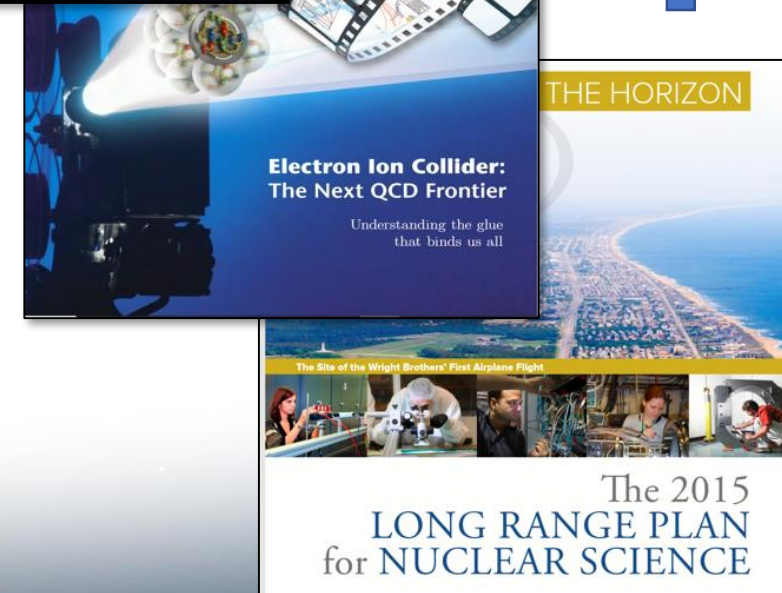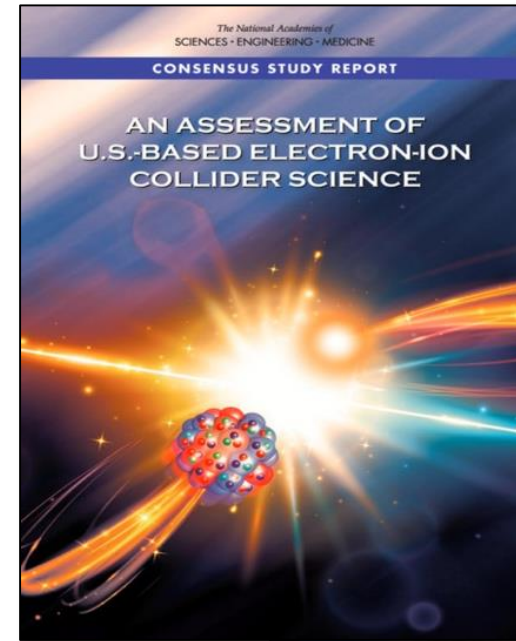






# EIC Requirements

## • EIC design goals

- High luminosity:  $L = (0.1-1) \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ 
  - $\rightarrow 10-100 \text{ fb}^{-1}$  **“High”**
- Collisions of highly **polarized (>70%)** e and p (and light ion) beams **Unique**
  - with flexible bunch by bunch spin patterns
- Large range of CM energies:
  - $E_{\text{cm}} = 20-140 \text{ GeV}$  **“Low”**
- Large range of ion species:
  - Protons – Uranium **Diverse**
- Ensure accommodation of a second IR
- Large detector acceptances; good background
  - Hadron particle loss
  - IR synchrotron radiation backgrounds



**uniquely  
challenging**

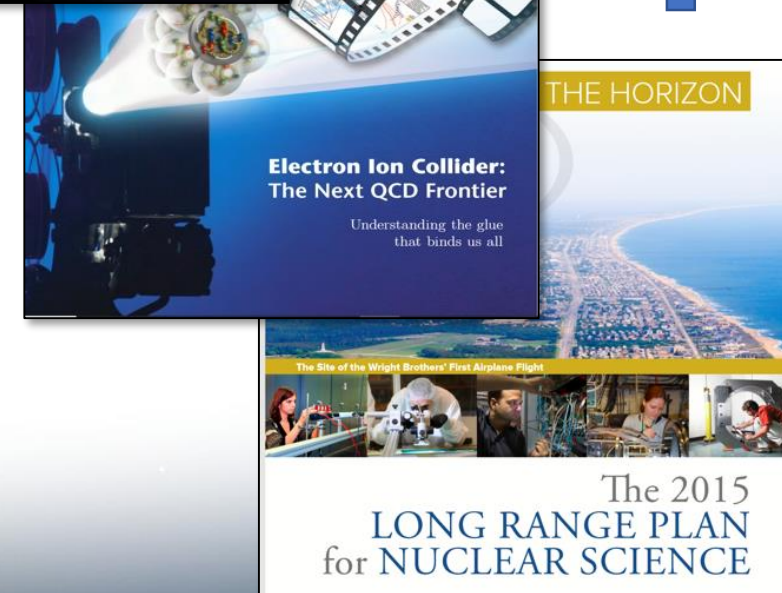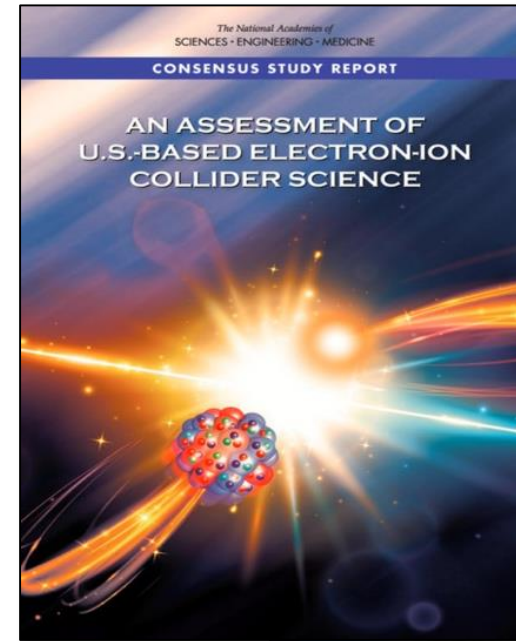

# EIC Accelerator Design Overview

- **Hadron storage ring (HSR): 40-275 GeV (existing)**
  - up to 1160 bunches, 1A beam current (3x RHIC)
  - bright vertical beam emittance (1.5 nm); new vac sleeves
  - strong cooling (coherent electron cooling, ERL)
- **Electron storage ring (ESR): 2.5–18 GeV (new)**
  - up to 1160 polarized bunches
    - high polarization by continual reinjection from RCS
  - large beam current (2.5 A) → 9 MW SR power
  - superconducting RF cavities
- **Rapid cycling synchrotron (RCS): 0.4-18 GeV (new)**
  - 2 bunches at 1 Hz; spin transparent due to high periodicity
- **High luminosity interaction region(s) (new)**
  - $L = 10^{34} \text{ cm}^{-2}\text{s}^{-1} = 10 \text{ kHz-uba}$ , superconducting magnets
  - 25 mrad crossing angle with crab cavities
  - spin rotators (produce longitudinal spin at IP)

Comparable to new mature B-factory, e.g. SuperKEKB

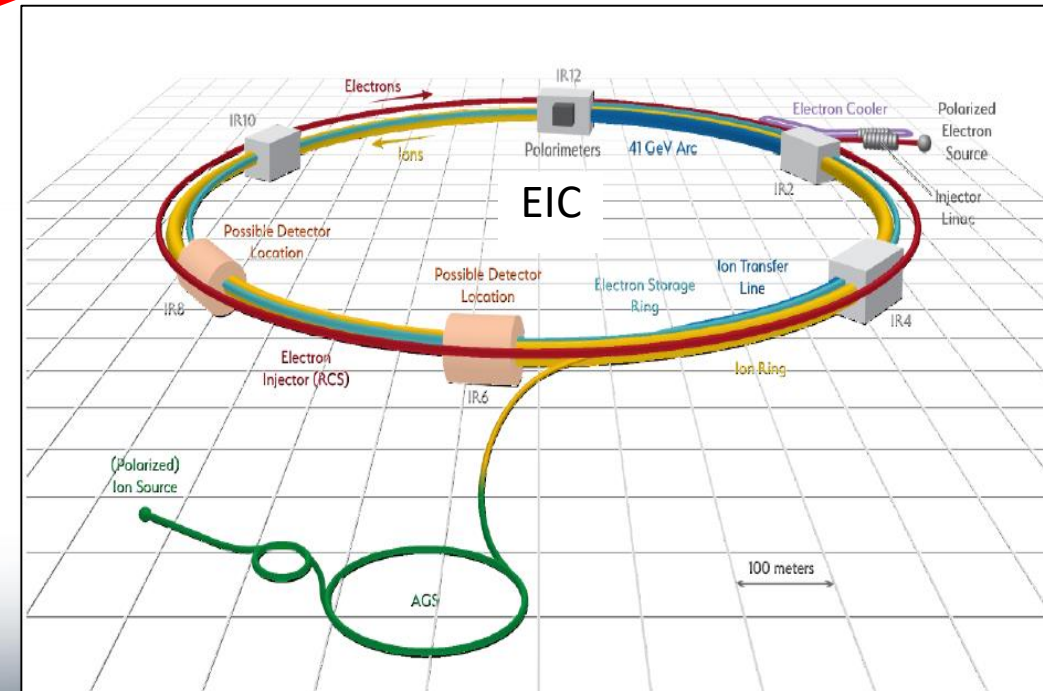



# Luminosity (Lumi) Limits In One Slide™

$$L \propto f_{\text{coll}} N_1 N_2 / \sigma_x^* \sigma_y^*$$

$f_{\text{coll}}$  : collision frequency

$N_{1,2}$  : particles per bunch


$\sigma_{x,y}^*$  : (equal) beam sizes at IP

Every parameter optimized separately and collectively in the EIC design

Try multiplying out the given numbers – should be very close to  $10^{34} \text{ cm}^{-2}\text{s}^{-1}$


- **Maximize collision frequency (~90 MHz)**
  - Limited by kicker rise times
  - Limited by parasitic collisions (crabbing)
- **Maximize particles per bunch (~ $10^{11}$ )**
  - Limited by sources, space charge
  - Limited by collective effects
    - Interaction of beam with impedances
    - Also total currents:  $I_{1,2} = q_{1,2} N_{1,2} f_{\text{coll}} \sim 1\text{-}3\text{A}$
- **Minimize beam sizes at IP (~250/25  $\mu\text{m}$ )**
  - Limited by IR focusing, magnets
  - Limited by chromatic dynamic aperture
  - Limited by emittance growth (IBS)

# EIC Accelerator Technology Challenges, R&D

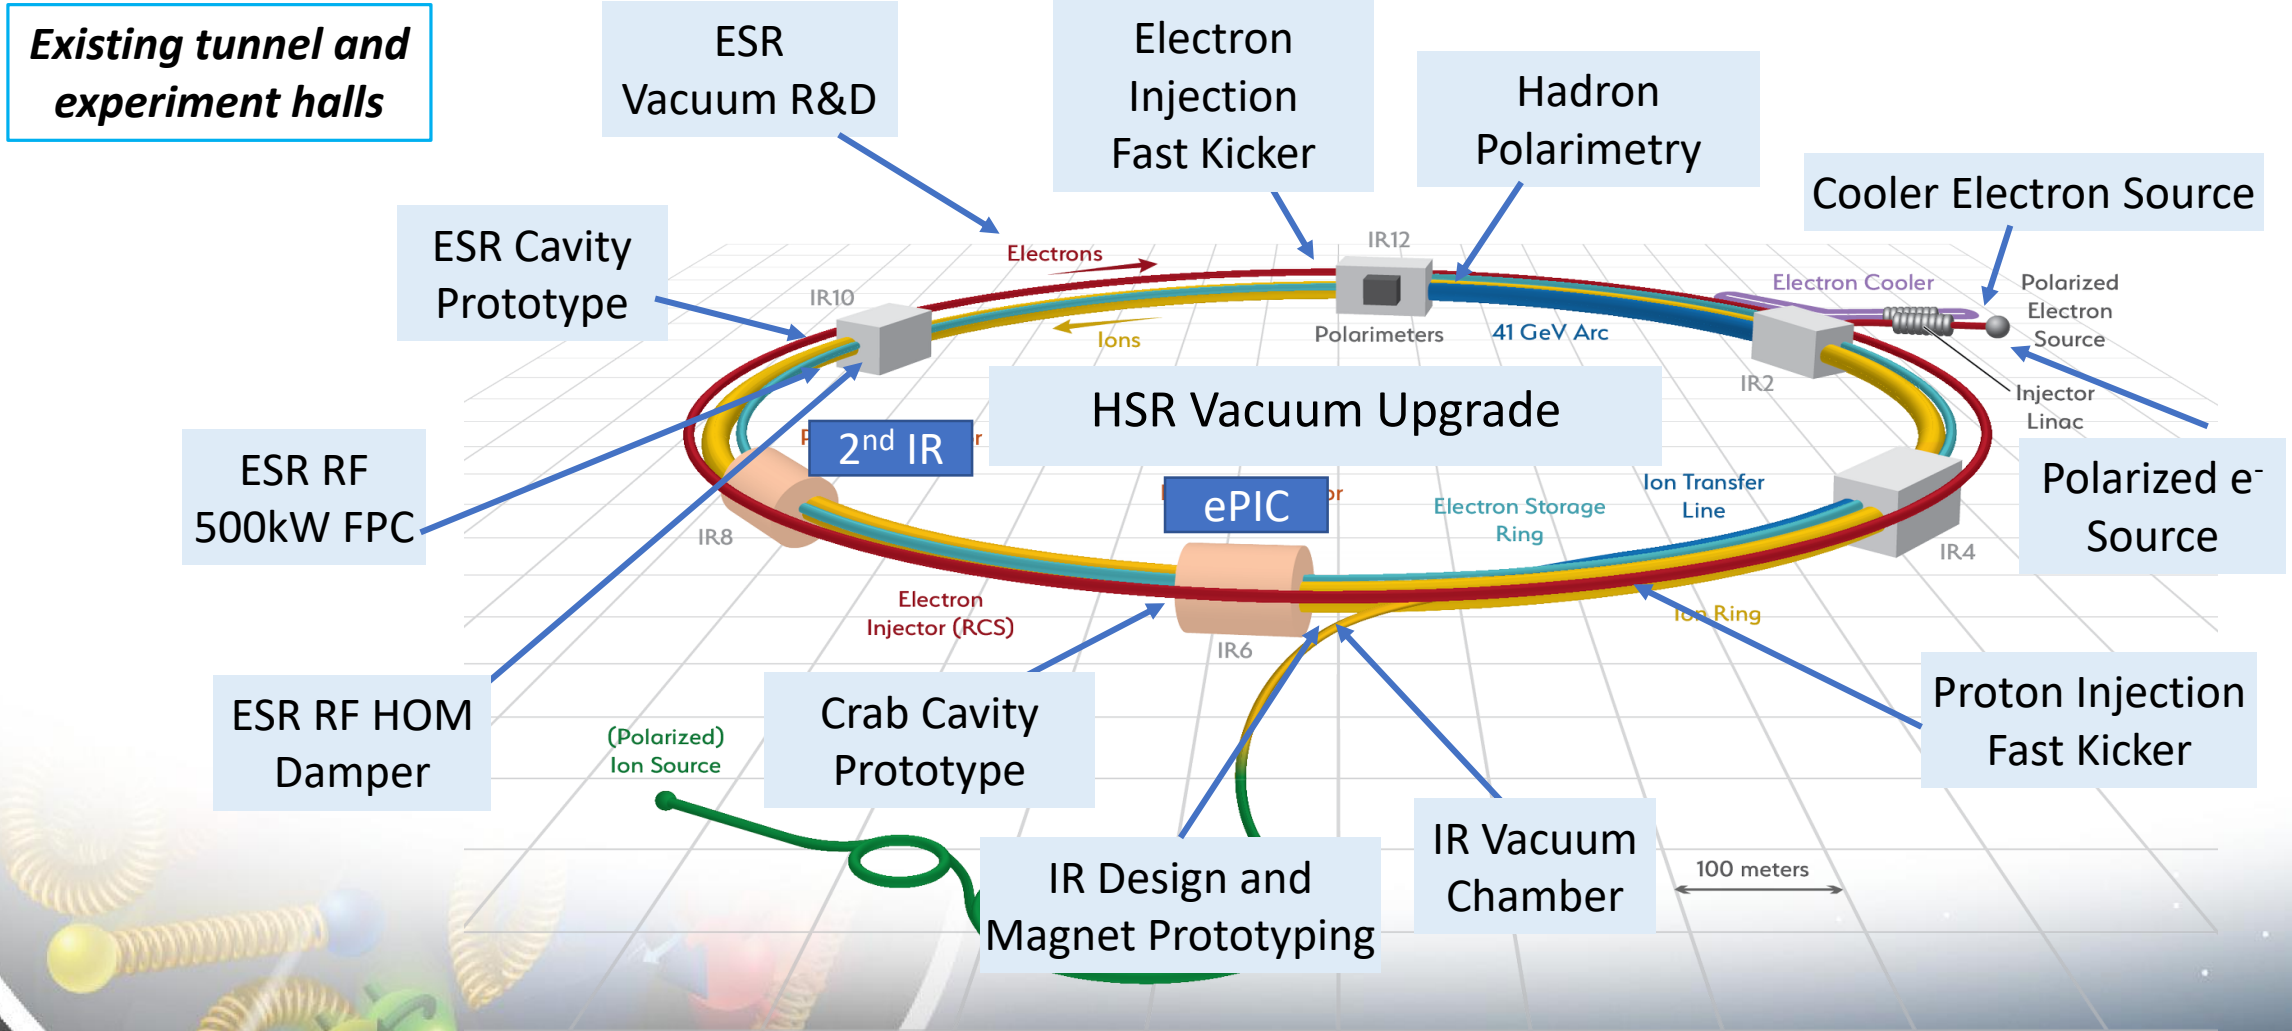



# EIC Accelerator Technology Challenges, R&D



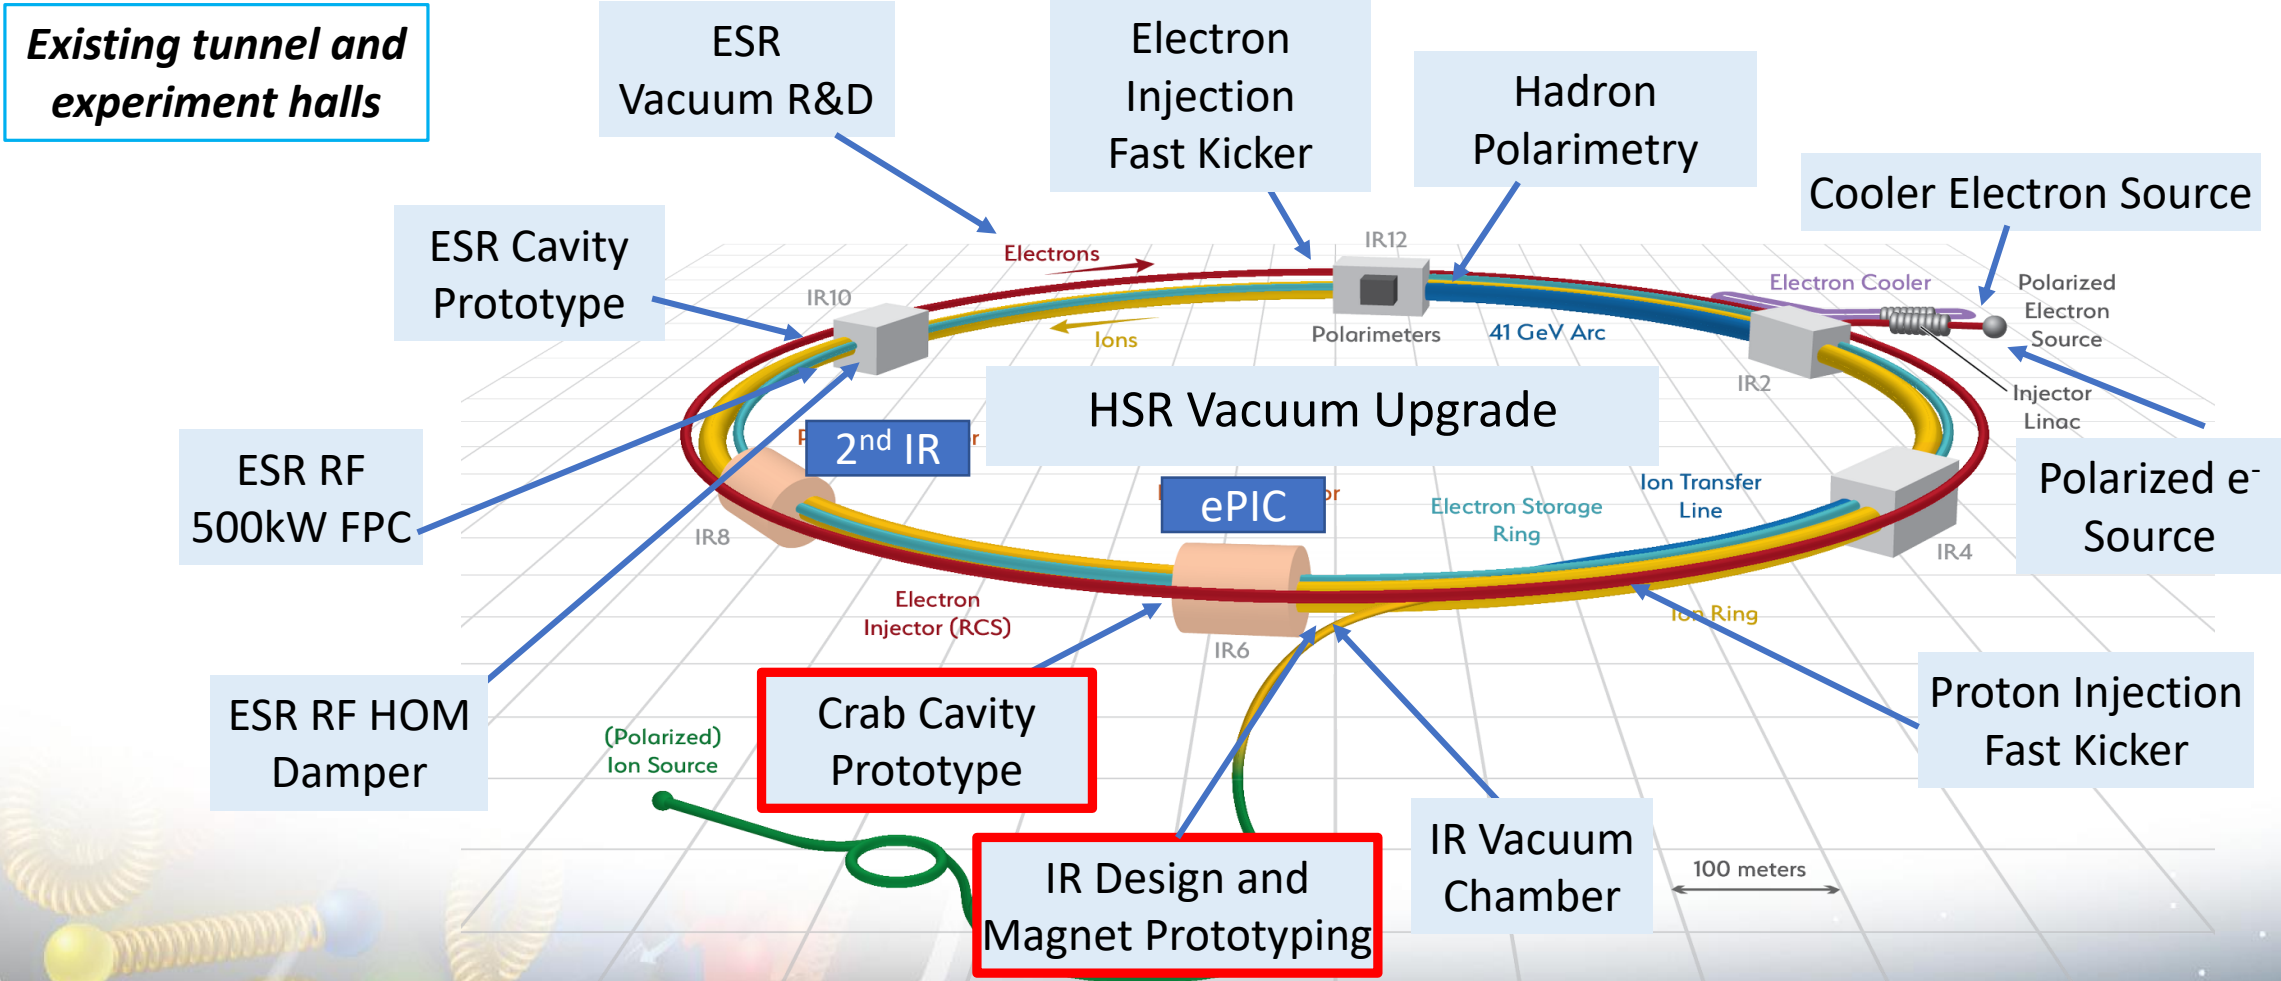


# EIC Primary Interaction Region

Existing tunnel and experiment halls

Different axis scales!

## 25 mrad crab crossing

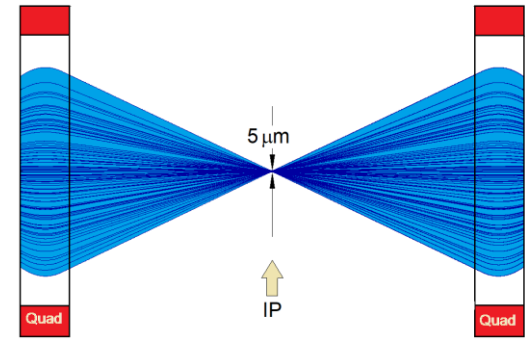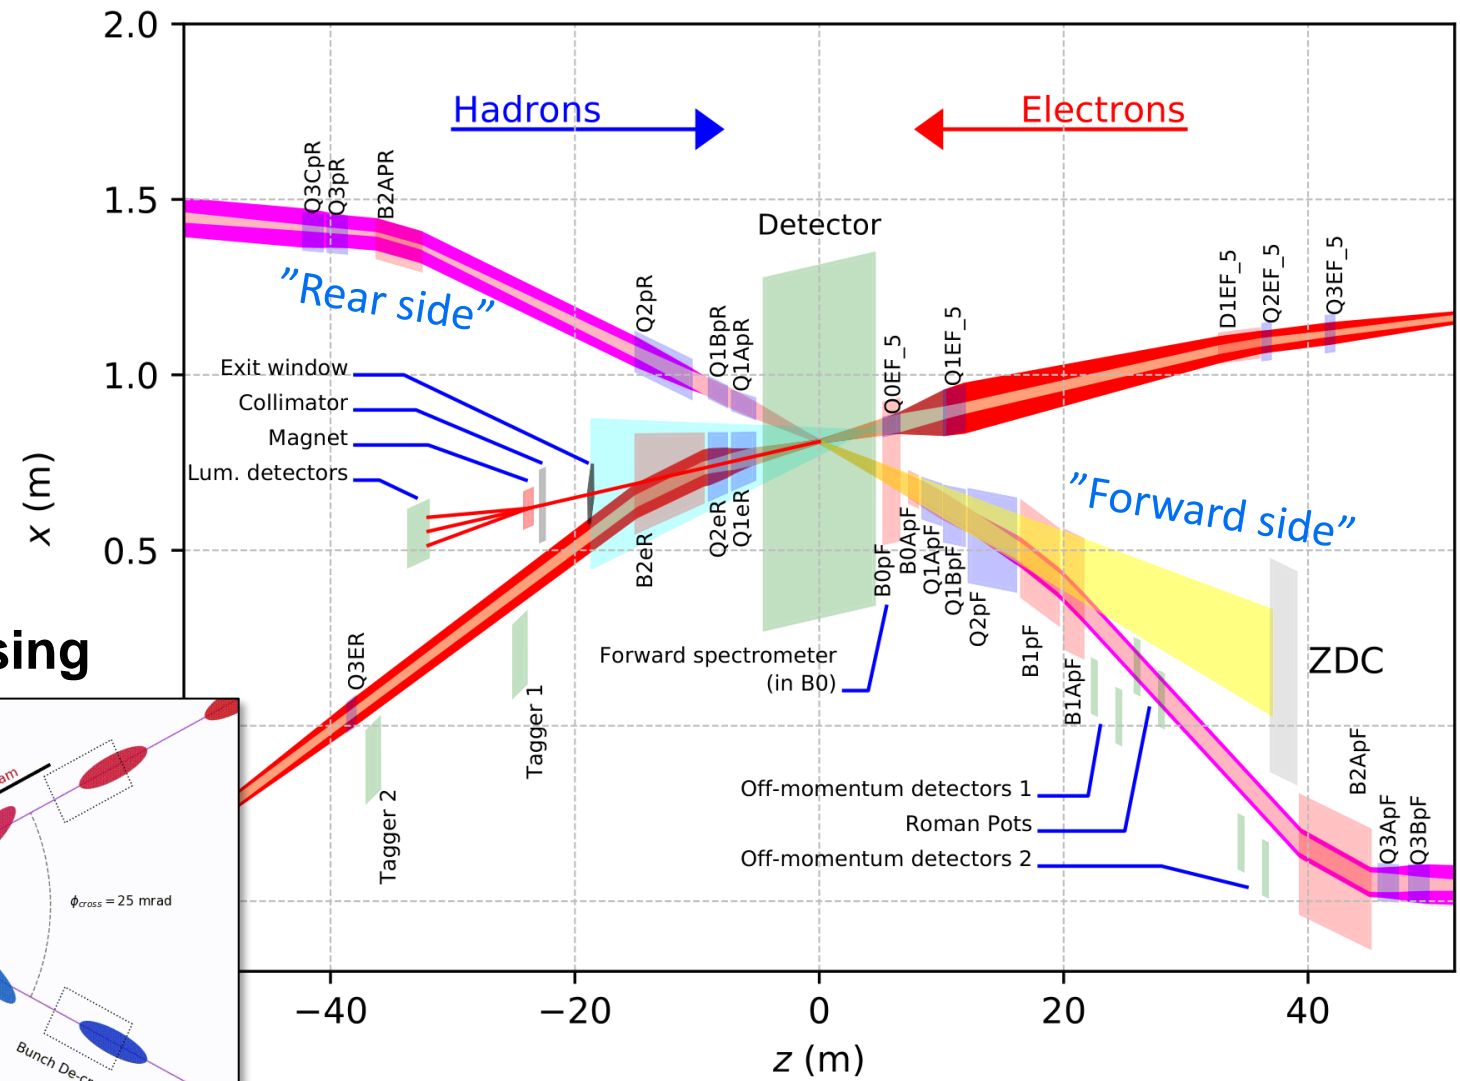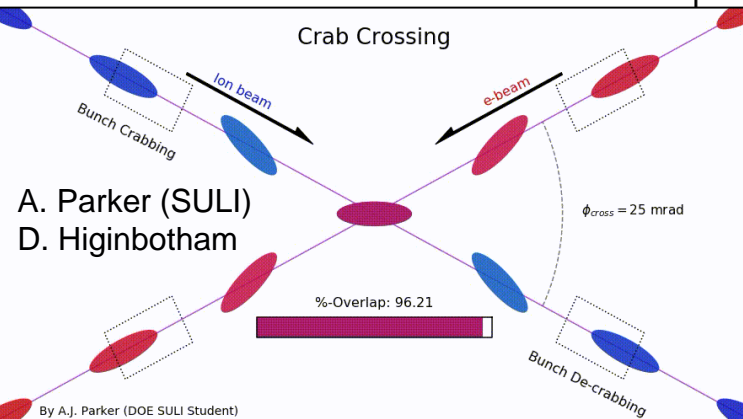

Focusing (quads) as close to IP as possible (~5m!)

### Tensions in magnet requirements:

- high field
- large apertures
- e/p magnet proximity near IP


**Chromaticity:** focusing dependence on particle energy



# EIC R&D: IR Superconducting Magnets


## Rear Side Integration / Beampipe

Separate cold masses - helium vessels  
Separate circular cryostats with decreasing OD's toward IP

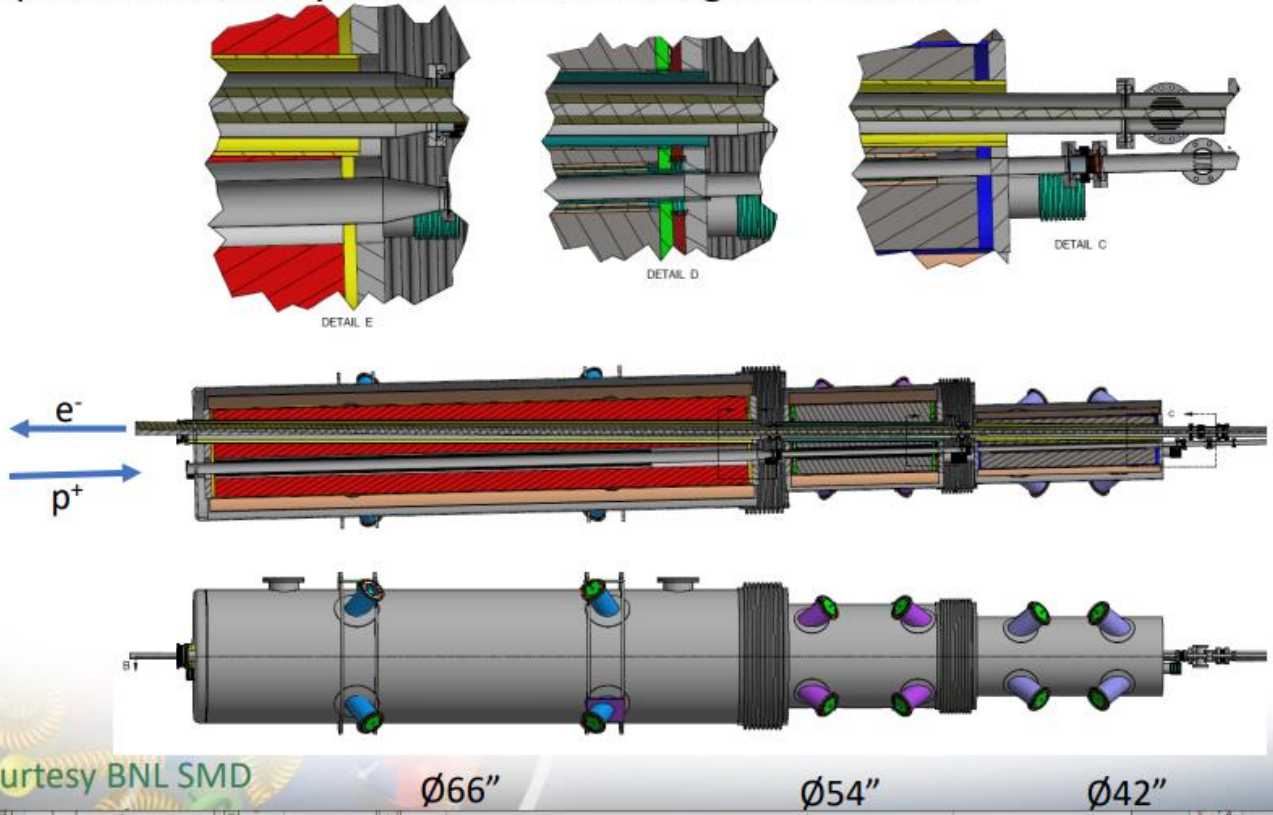


Courtesy BNL SMD

Forward superconducting magnet integration

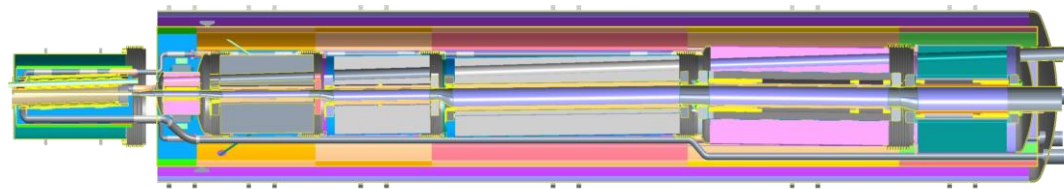





Multiple function spectrometer magnet at the forward hadron side

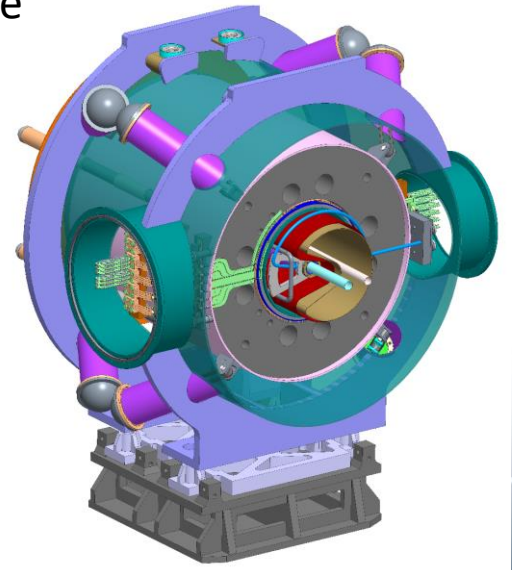


# EIC R&D: Crab Cavities

- **Hadron collider crabbing unprecedented**
  - Collaborating with HL-LHC
    - Beam dynamics, RF control stability
    - SPS tests: Phys. Rev. Accel. Beams 24, 062001 (2021)
  - **Electron crabbing** was performed at KEKB (arXiv:1410.4036)
- **Superconducting “RF dipole” cavity**
  - **ODU design**
  - High electric field and overall field quality requirements
- **197 MHz HSR crab cavity being prototyped**
  - Jefferson Lab/ODU/(BNL) collaboration
  - Two possible HOM damping schemes: Waveguide loaded and coaxial couplers
  - Stress analysis near completion, with stiffeners

Higher Order Mode (HOM) damping schemes

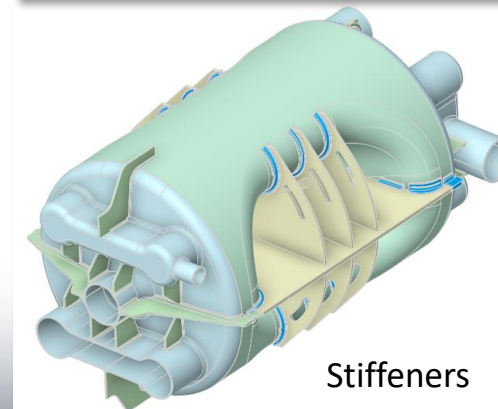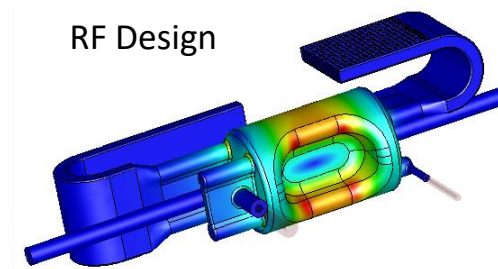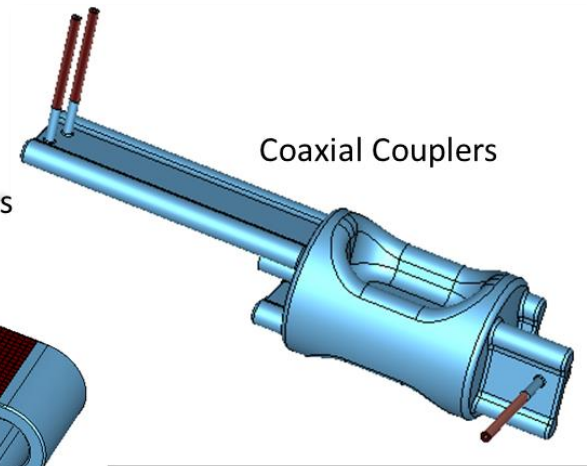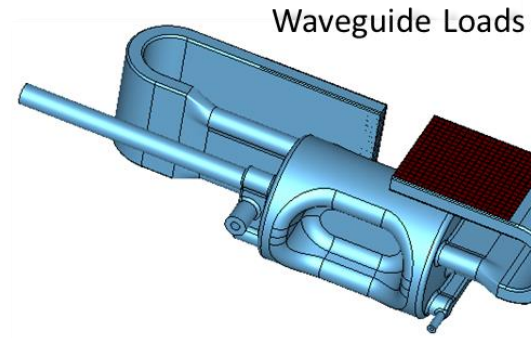

Preliminary Cryomodule Design (2 cavities per HSR cryomodule)

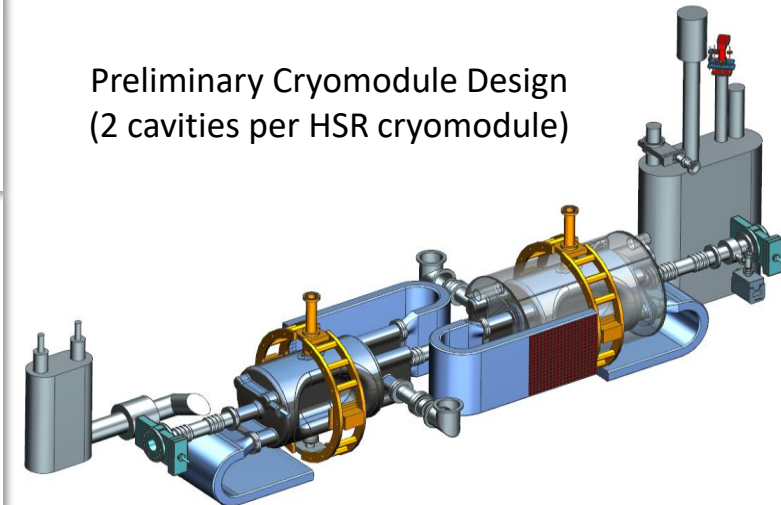




# Electrons and Hadrons in Synchrotrons (EIC)

## • **Electrons**

- **Larger charge/mass ratio**
  - Smaller B to bend/focus (E, crab)
  - Normal conducting magnets
  - Polarization time dependence
- **Synchrotron radiation**
  - Photonic backgrounds
  - Damping
  - Dynamic aperture: Touschek
  - Large RF power needs
  - **Flat beam aspect ratio**
- Harder collimation (multi-stage)

## • **Hadrons**

- **Smaller charge/mass ratio**
  - Larger B to bend/focus (E, crab)
  - Superconducting magnets
  - No depolarization (in principle)
- **No synchrotron radiation**
  - Hadronic backgrounds
  - Negligible damping (EIC energies)
  - Dynamic aperture: “Diffusion”
  - Modest RF power needs
  - **Round beam aspect ratio**
- Easier collimation (single-stage)

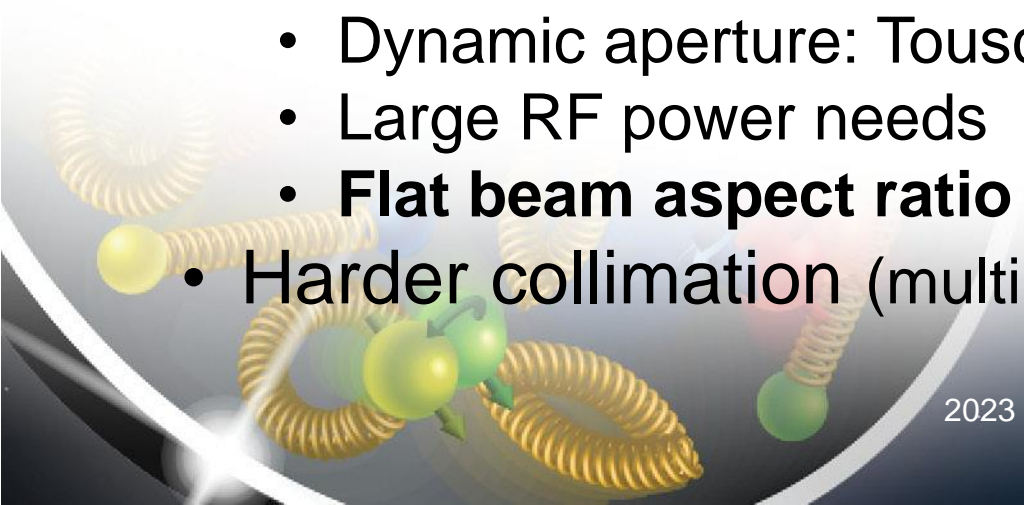

# Lumi Limits In (more than) One Slide<sup>NoTM</sup>

$$L \propto f_{\text{coll}} N_1 N_2 / \sigma_x^* \sigma_y^*$$

$f_{\text{coll}}$  : collision frequency

$N_{1,2}$  : particles per bunch

$\sigma_{x,y}^*$  : (equal) beam sizes at IP

## Challenge: colliding asymmetric beams

electrons: flat

hadrons: round

SuperKEKB: 10  $\mu\text{m}$  x 50 nm, 200:1


EIC collision point: 11:1 transverse aspect ratio

- **Maximize collision frequency (~90 MHz)**
  - Limited by kicker rise times
  - Limited by parasitic collisions (crabbing)
- **Maximize particles per bunch (~ $10^{11}$ )**
  - Limited by sources, space charge
  - Limited by collective effects
    - Interaction of beam with impedances
    - Also total currents:  $I_{1,2} = q_{1,2} N_{1,2} f_{\text{coll}} \sim 1\text{-}3\text{A}$
- **Minimize beam sizes at IP (~250/25  $\mu\text{m}$ )**
  - Limited by IR focusing, magnets
  - Limited by chromatic dynamic aperture
  - Limited by emittance growth (IBS)



# EIC CDR (CD-1) Parameters for $E_{cm}$ and Luminosity

	Electrons	Protons
Beam energies	2.5 - 18 GeV	41- 275 GeV
Center of mass energy range	$E_{cm} = 20-140$ GeV	
	Electrons	Protons
Beam energies	10 GeV	275 GeV
Center of mass energy	$E_{cm} = 105$ GeV	
number of bunches	nb =1160	
crossing angle	25 mrad	
Bunch Charge	$1.7 \cdot 10^{11}e$	$0.7 \cdot 10^{11}e$
Total beam current	2.5 A	1 A
Beam emittance, horizontal	20 nm	9.5 nm
Beam emittance, vertical	1.2 nm	1.5 nm
$\beta$ - function at IP, horizontal	43 cm	90 cm
$\beta$ - function at IP, vertical	5 cm	4 cm
Beam-beam tuneshift, horizontal	0.073	0.014
Beam-beam tuneshift, vertical	0.1	0.007
Luminosity at $E_{cm} = 105$ Gev	$1 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$	

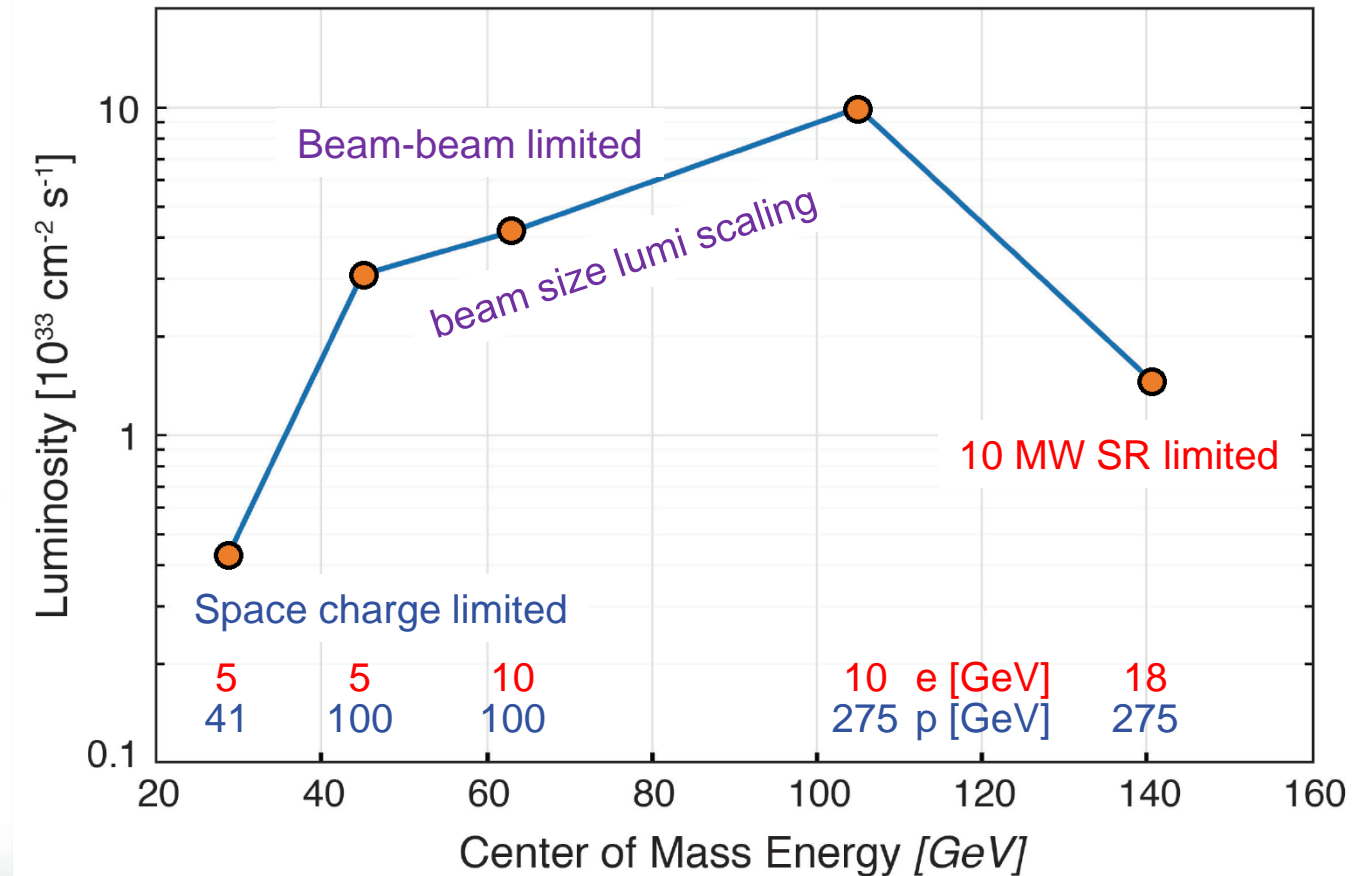


$$L = 10^{34} \text{ cm}^{-2} \text{ s}^{-1} = 10 \text{ kHz-uba}$$

# Lumi Limitations: Space-Charge (low $E_{cm}$ )

- Dense charged particle bunches **electrostatically repel** in rest frame
- Creates **nonlinear** space charge force and equation of motion in lab frame
- Fortunately scales with  $1/\gamma^3$  so worst at low energies
  - Great example of time dilation
  - Limits high-intensity injector emittances
  - Force applies continuously within beam
- Tolerable linear “space charge tune spread” of 0.05 limits total current of 41 GeV proton beam to  $\sim 0.4A$ .
- (IBS: intra-beam hard scattering also contributes)

$$\frac{d^2y}{d\theta^2} + Q_V^2 y = \frac{2Nr_0R^2}{l\beta^2\gamma^3} \left[ \frac{1 - \exp\left(-\frac{y^2}{2\sigma_V^2}\right)}{y} \right]$$

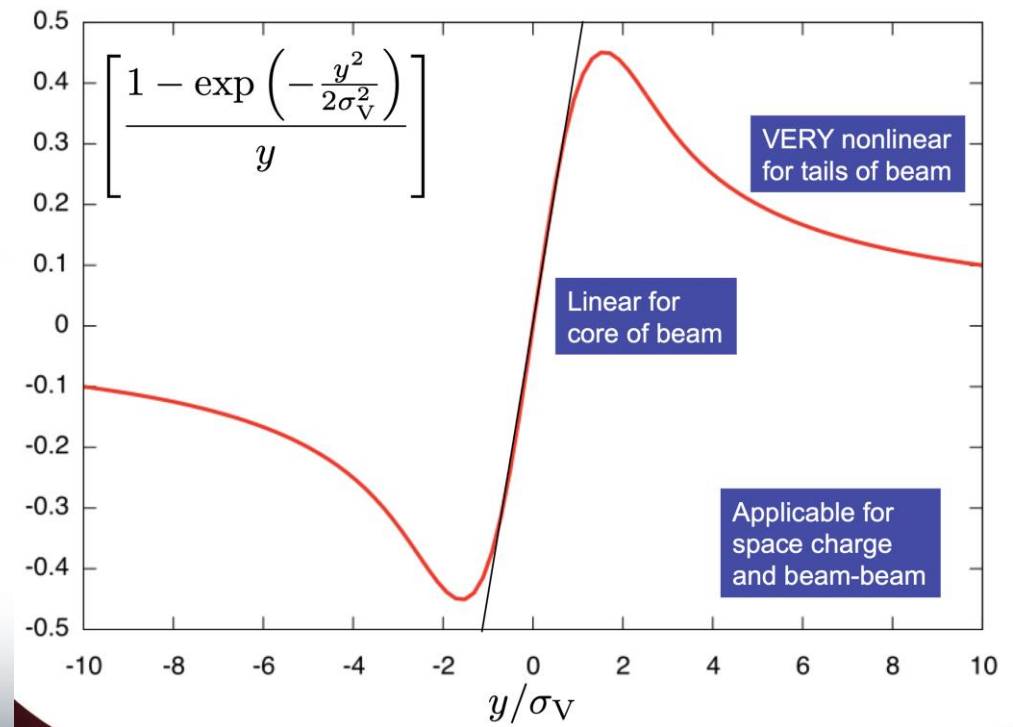




# Lumi Limitations: Beam-Beam (mid $E_{cm}$ )



- Colliding beams see each other's collective charge distributions
- Creates **nonlinear** beam-beam force and equation of motion similar to space charge
  - **BUT** now the fields and force are in the lab frame already
  - **NO** benefit of relativistic scaling
  - **Force applies only once per turn**
- Tolerable “beam-beam tune spread” of 0.015 limits highest EIC luminosity

$$F(r) = \frac{Nq^2}{2\pi\epsilon_0 l} \frac{1 + \beta^2}{r} \left[ 1 - \exp\left(-\frac{r^2}{2\sigma^2}\right) \right]$$

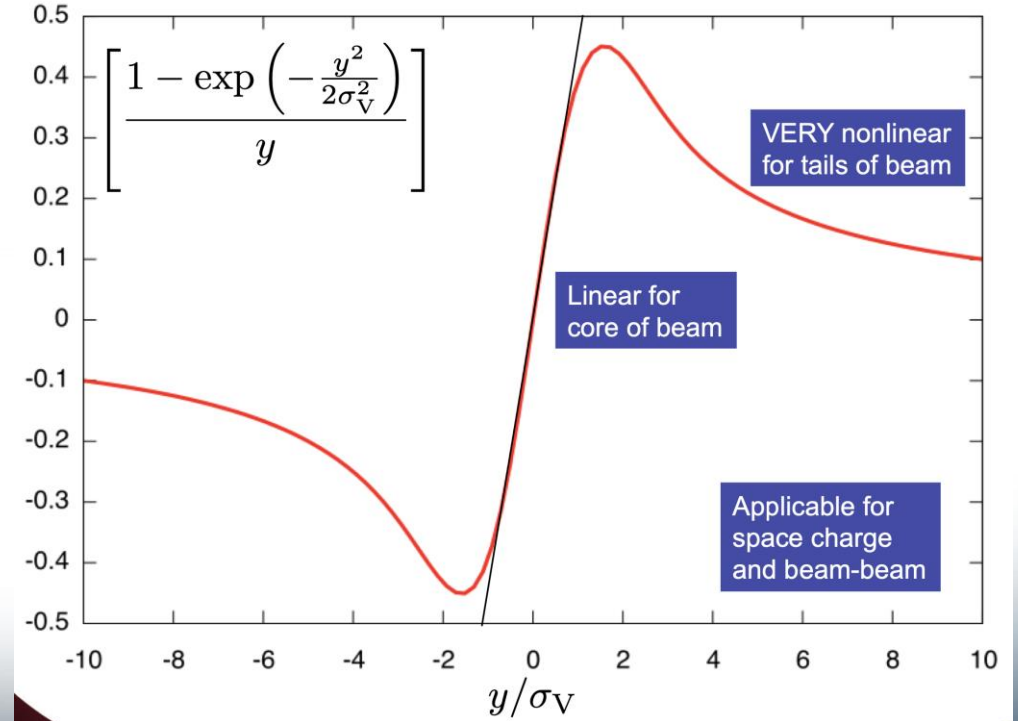

# Lumi Limitations: Electron SR Power (high $E_{CM}$ )

- Accelerated charged particles emit photons
  - Electrons in synchrotron: radially accelerated
  - **Synchrotron radiation** emitted in forward cone
    - Cone opening angle  $\propto 1/\gamma$
    - Radiated power  $P_\gamma = \frac{2}{3} \frac{e^2 c}{4\pi\epsilon_0} \frac{(\gamma\beta)^4}{\rho^2}$
    - $\gamma$  scaling **much** worse for electrons
      - 18 GeV e:  $\gamma=3.5 \times 10^4$  vs 255 GeV p:  $\gamma=3 \times 10^2$
- **Design: 9 MW @ 18 GeV** (facility limit 10 MW)
- **Expensive:** Power must be provided by SRF
- Raise electron energy last (e current limit)

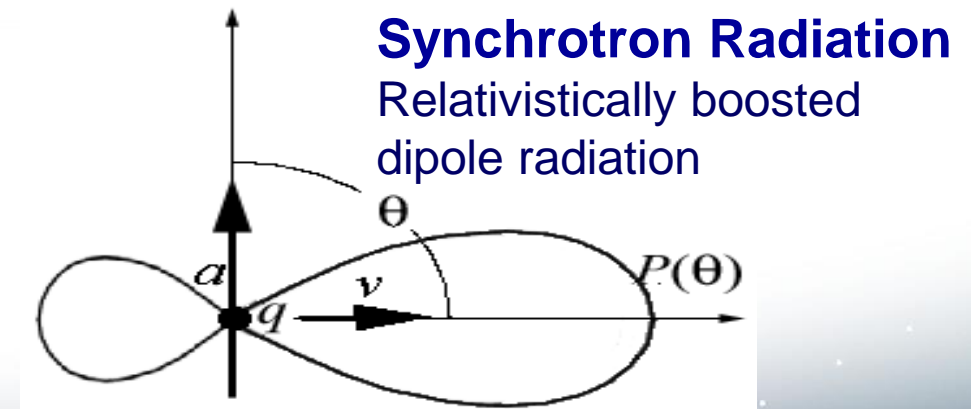
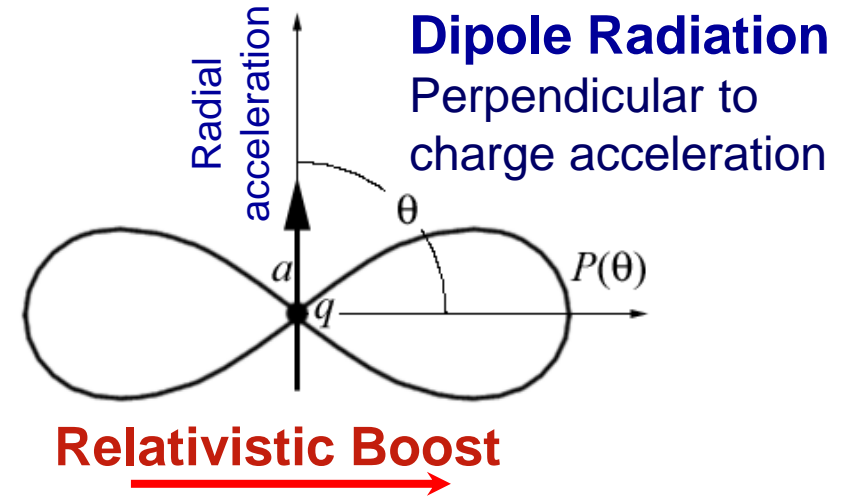




# Collider Luminosity Ramp-Up


- Luminosity ramp-up to design takes **years**
  - Useful paper: arxiv 1202.3950 (V. Shiltsev)
  - Contextualizes Tevatron Run-II and early LHC
  - Luminosity ramp-up parameter C: **complexity**
    - **C: time (years) to increase lumi by e**
    - C=2: factor of e luminosity increase in 2 years
  - Early commissioning can make quick strides
    - C<1 (or <<1) but do not get too exuberant
  - Long-term commissioning usually C~2-3
- **EIC will very likely take years to reach design luminosities**
  - **But we will get there!**

Tevatron Run-II: design  $275 \times 10^{30}$

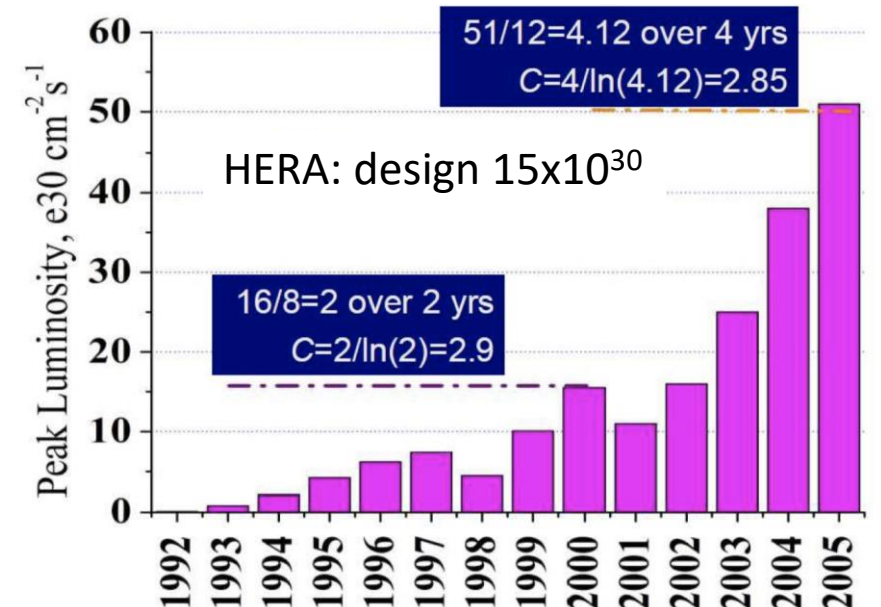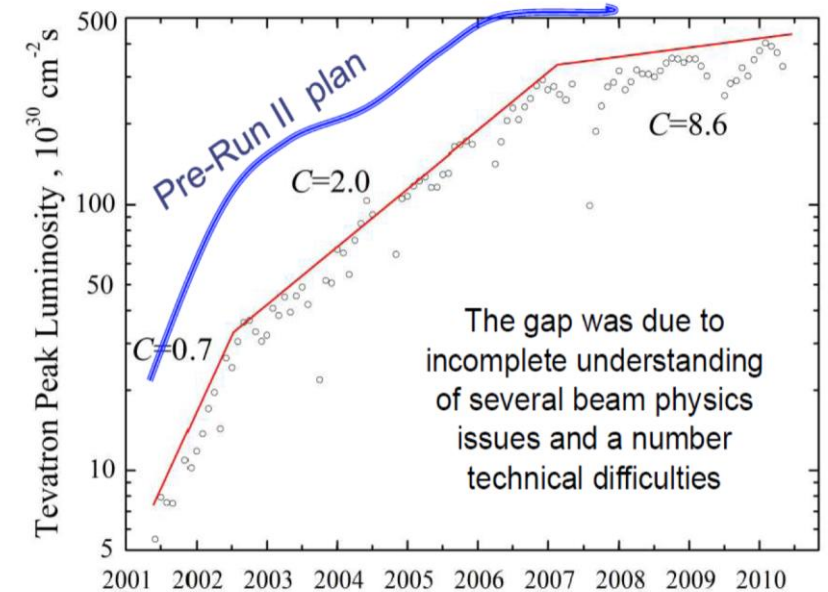


# Summary

- EIC design meets all design requirements
- EIC luminosity is **highly optimized**
  - Balances several individual parameter optimizations
- EIC R&D progressing
  - Focus: challenging technical components
- e/p beam differences drive EIC choices
  - e.g. luminosity vs  $E_{cm}$ , IP aspect ratio
- Luminosity ramp-up will take time
  - will last substantially beyond project end
  - project provides excellent basis to get there!

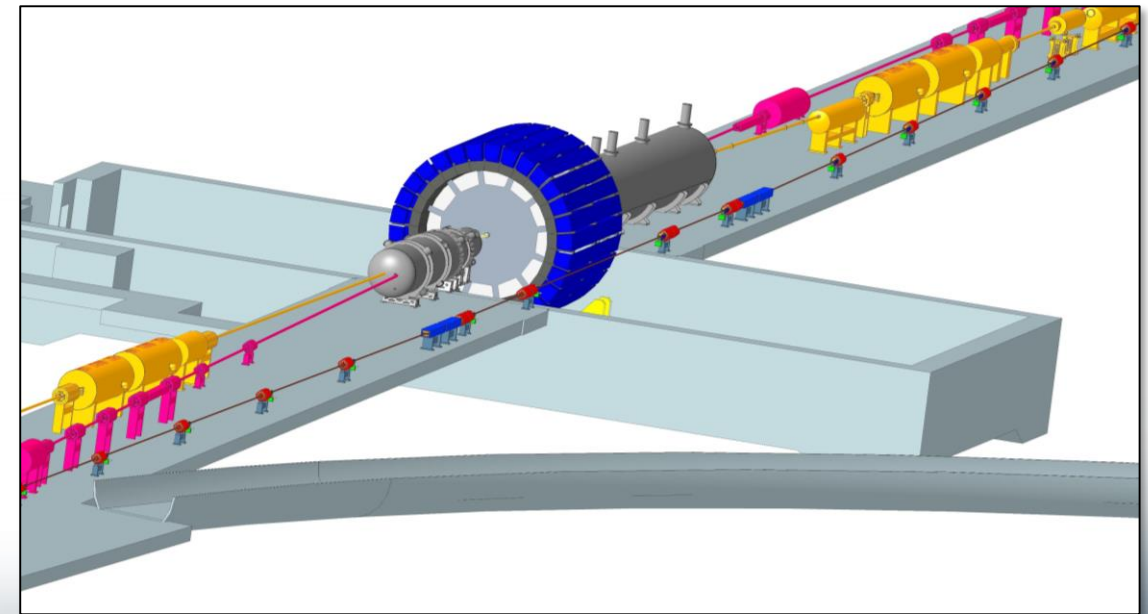

# Backup Slides

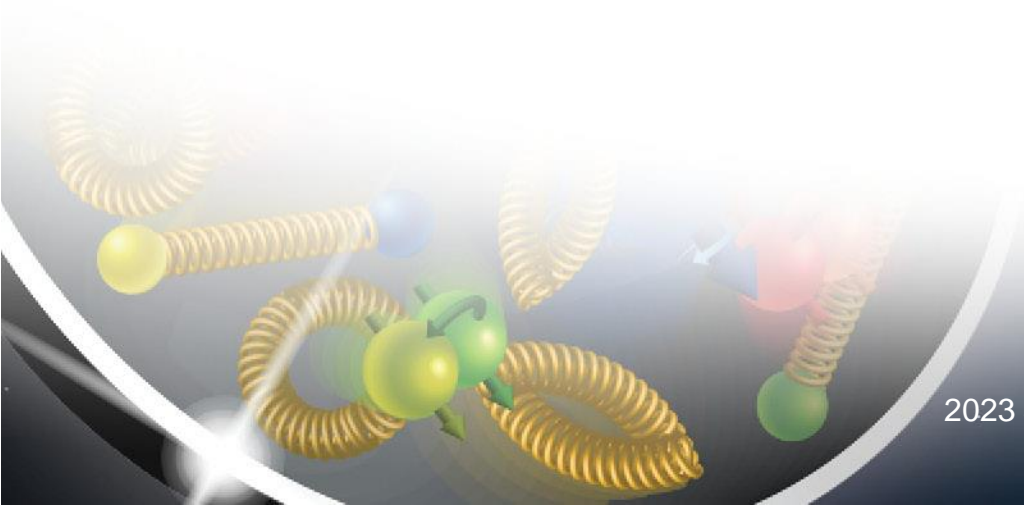



**Table 3.3:** EIC beam parameters for different center-of-mass energies  $\sqrt{s}$ , with strong hadron cooling. High divergence configuration.

Species	proton	electron	proton	electron	proton	electron	proton	electron	proton	electron
Energy [GeV]	275	18	275	10	100	10	100	5	41	5
CM energy [GeV]	140.7		104.9		63.2		44.7		28.6	
Bunch intensity [ $10^{10}$ ]	19.1	6.2	6.9	17.2	6.9	17.2	4.8	17.2	2.6	13.3
No. of bunches	290		1160		1160		1160		1160	
Beam current [A]	0.69	0.227	1	2.5	1	2.5	0.69	2.5	0.38	1.93
RMS norm. emit., h/v [ $\mu\text{m}$ ]	5.2/0.47	845/71	3.3/0.3	391/26	3.2/0.29	391/26	2.7/0.25	196/18	1.9/0.45	196/34
RMS emittance, h/v [nm]	18/1.6	24/2.0	11.3/1.0	20/1.3	30/2.7	20/1.3	26/2.3	20/1.8	44/10	20/3.5
$\beta^*$ , h/v [cm]]	80/7.1	59/5.7	80/7.2	45/5.6	63/5.7	96/12	61/5.5	78/7.1	90/7.1	196/21.0
IP RMS beam size, h/v [ $\mu\text{m}$ ]	119/11		95/8.5		138/12		125/11		198/27	
$K_x$	11.1		11.1		11.1		11.1		7.3	
RMS $\Delta\theta$ , h/v [ $\mu\text{rad}$ ]	150/150	202/187	119/119	211/152	220/220	145/105	206/206	160/160	220/380	101/129
BB parameter, h/v [ $10^{-3}$ ]	3/3	93/100	12/12	72/100	12/12	72/100	14/14	100/100	15/9	53/42
RMS long. emittance [ $10^{-3}$ , eV·s]	36		36		21		21		11	
RMS bunch length [cm]	6	0.9	6	0.7	7	0.7	7	0.7	7.5	0.7
RMS $\Delta p/p$ [ $10^{-4}$ ]	6.8	10.9	6.8	5.8	9.7	5.8	9.7	6.8	10.3	6.8
Max. space charge	0.007	neglig.	0.004	neglig.	0.026	neglig.	0.021	neglig.	0.05	neglig.
Piwinski angle [rad]	6.3	2.1	7.9	2.4	6.3	1.8	7.0	2.0	4.2	1.1
Long. IBS time [h]	2.0		2.9		2.5		3.1		3.8	
Transv. IBS time [h]	2.0		2		2.0/4.0		2.0/4.0		3.4/2.1	
Hourglass factor $H$	0.91		0.94		0.90		0.88		0.93	
Luminosity [ $10^{33}\text{cm}^{-2}\text{s}^{-1}$ ]	1.54		10.00		4.48		3.68		0.44	

