



Sustainability of Particle Accelerators

Mike Seidel

Paul Scherrer Institute and EPFL, Switzerland
CERN Accelerator School – Introductory Course

October 4, 2023

Santa Susanna



Copyright statement and speaker's release for video publishing


The author consents to the photographic, audio and video recording of this lecture at the CERN Accelerator School. The term "lecture" includes any material incorporated therein including but not limited to text, images and references.

The author hereby grants CERN a royalty-free license to use his image and name as well as the recordings mentioned above, in order to post them on the CAS website.


The material is used for the sole purpose of illustration for teaching or scientific research. The author hereby confirms that to his best knowledge the content of the lecture does not infringe the copyright, intellectual property or privacy rights of any third party. The author has cited and credited any third-party contribution in accordance with applicable professional standards and legislation in matters of attribution.

**Sustainability = Meeting the needs of the present
without compromising the ability of future generations.**

(one of many debated formulations)

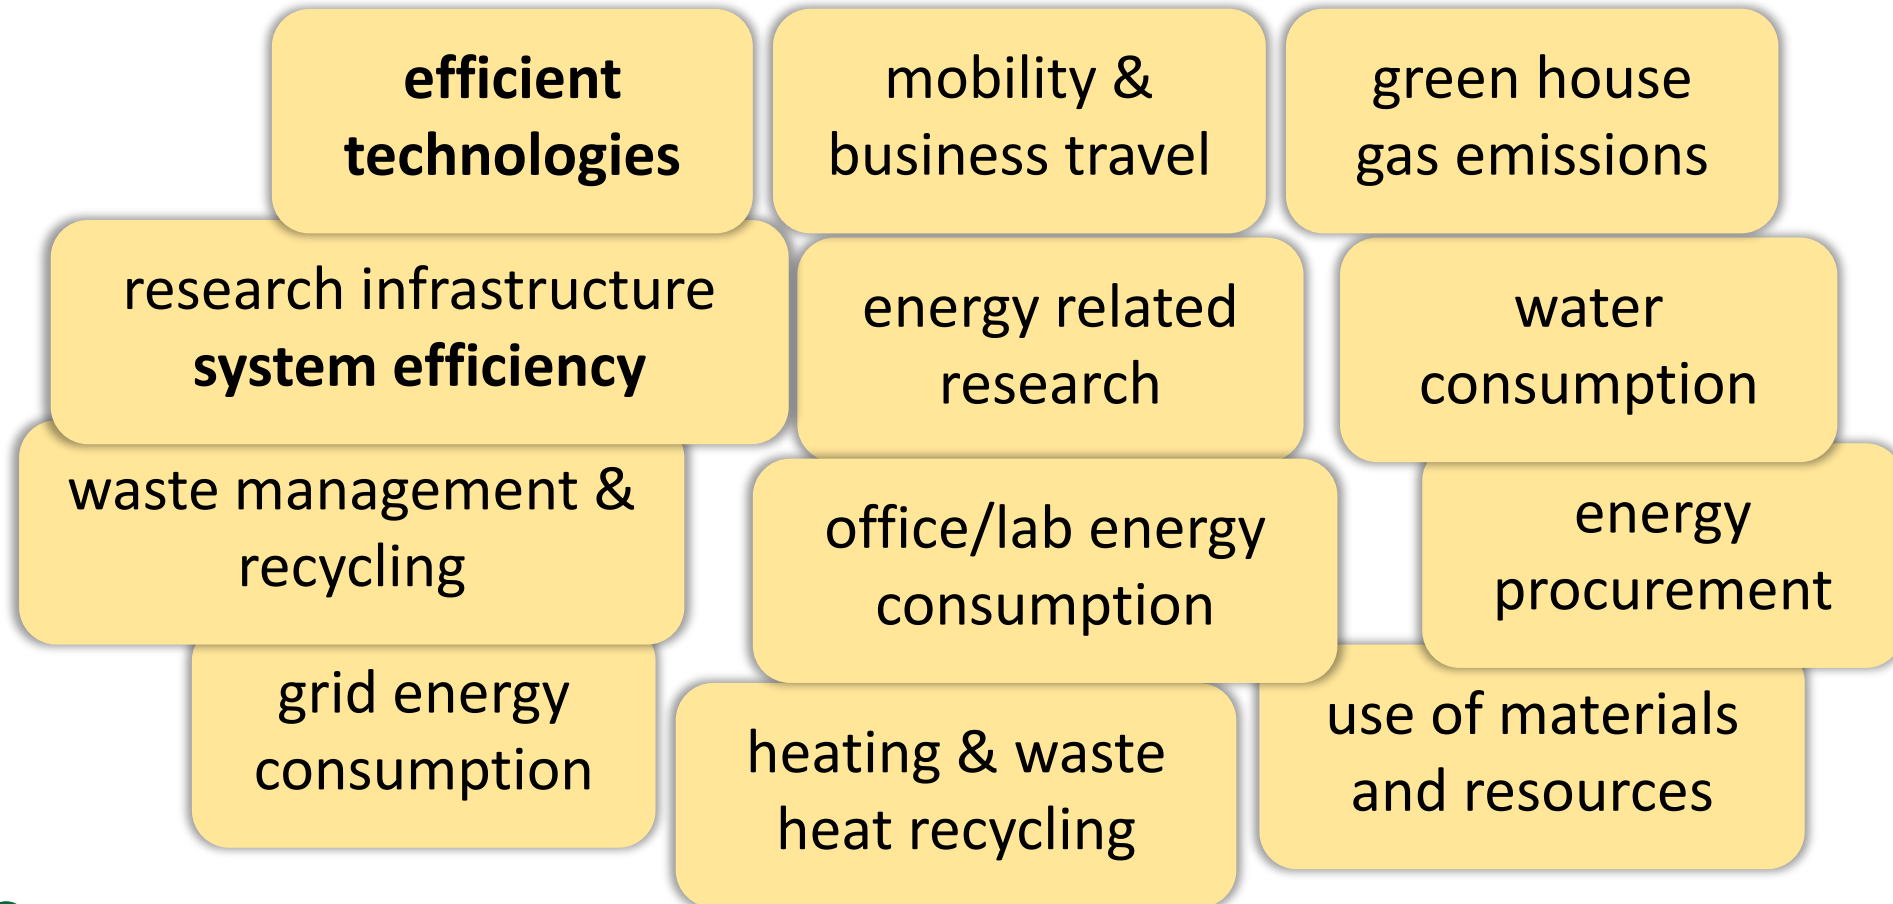

Energy Consumption - Motivation

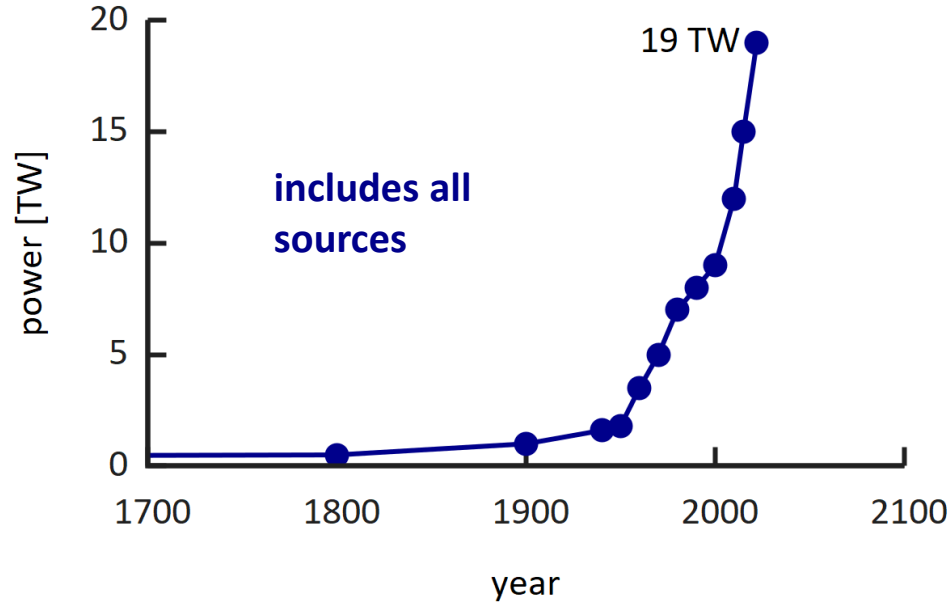


The world energy consumption has been continuously rising, reaching ca **19 TW** today.

As a science community we rather want to contribute to solutions and not be part of the problem.

example from nature:
the Earth-Moon system dissipates **3.8 TW** power from the rotation energy of earth

[Williams, Boggs, 2016]

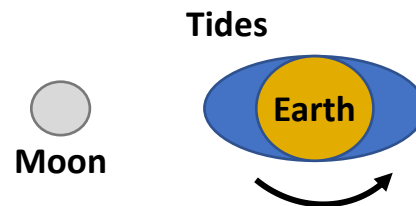

School Strike
for Climate
Wikipedia



Community Activities on Sustainability

2014-17: EUCARD-2, WP Energy Efficient Accelerator Technologies

<https://www.psi.ch/enefficient>

2017-21: ARIES, Work Package Efficient Energy Management

<https://www.psi.ch/aries-eem>

2021-25: I.FAST, Work Package Sustainable Concepts

<https://www.psi.ch/scat>



Enhanced European Coordination for Accelerator
Research & Development




ACCELERATOR RESEARCH AND
INNOVATION FOR EUROPEAN
SCIENCE AND SOCIETY



Innovation Fostering in Accelerator Science
and Technology


→ consult websites for link collection to workshops and documentation



- ICFA panel on sustainable accelerators, chair: Thomas Roser (BNL)
- <https://icfa.hep.net/icfa-panel-on-sustainable-accelerators-and-colliders/>



Accelerator driven Research Infrastructures (RI)

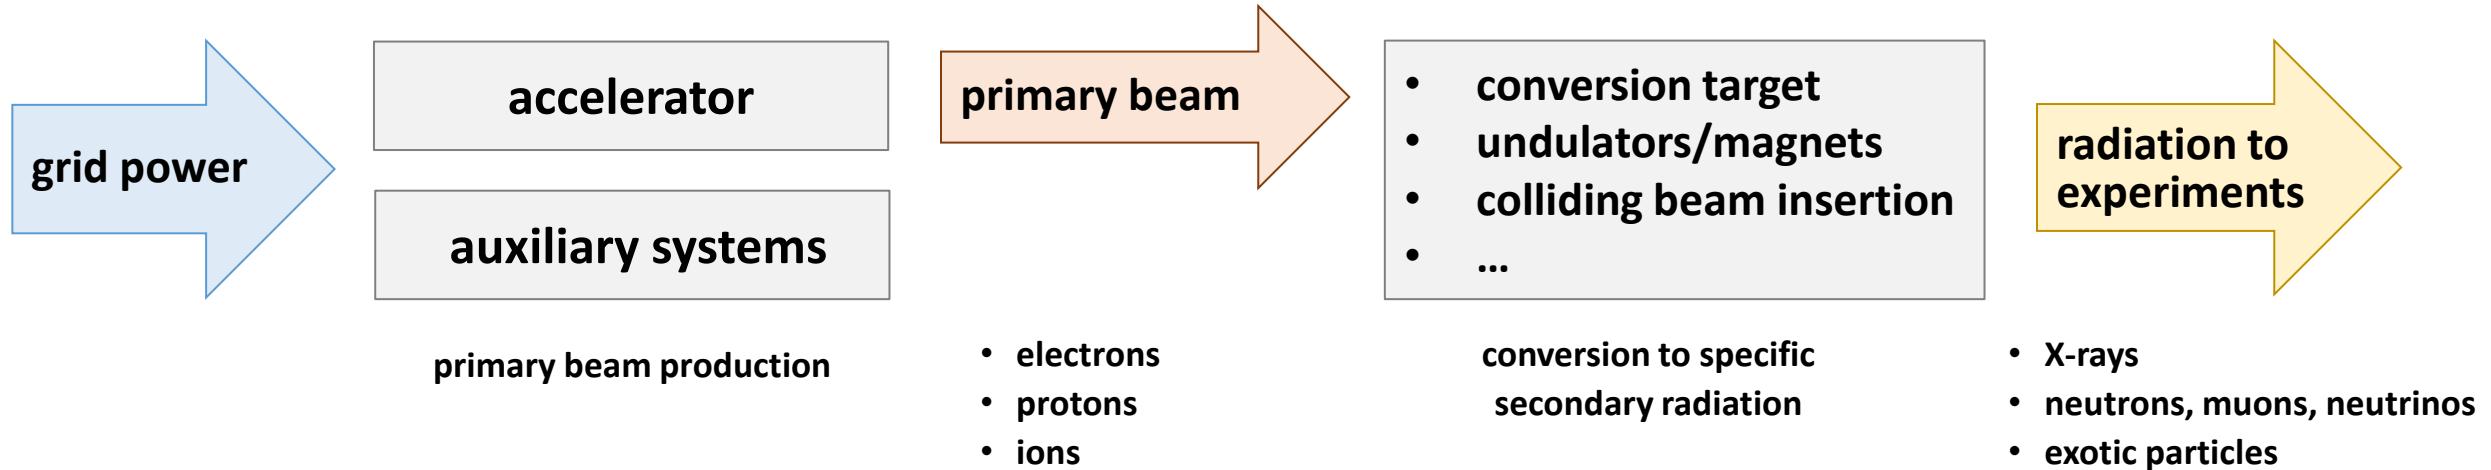

high level goal:

Science output per grid power, per operating/investment cost.



Accelerator Concepts and Technologies

[with emphasize on energy efficiency]

concepts, RI's

Proton Drivers with high intensity applications

Synchrotron Light Sources and FELs

Particle Colliders

Resonators and high Power RF Systems

Accelerator Magnets and Power Supplies

technologies

Cryogenic Systems

Component Cooling, Air Conditioning, Vacuum, Instrumentation ... and other aux. systems




Efficient Accelerator Technologies

Accelerator Magnets with Permanent Magnet Material

Dipole and Quad for SLS2.0, S.Sanfilippo et al (PSI)

permanent magnets:


- + extremely compact → low emittance lattices
- + no power consumption
- + no cooling, thus no heat introduced, no vibrations from cooling loop
- field tuning difficult
- use of rare earth materials

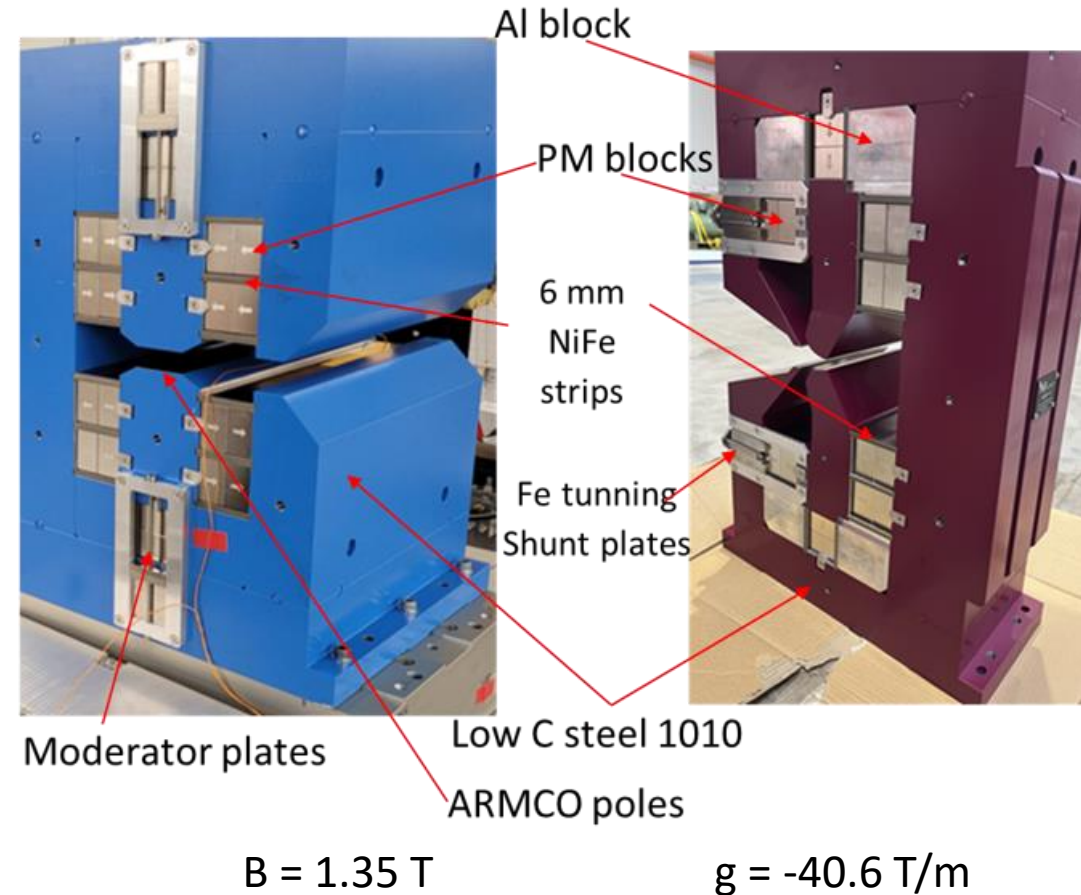

Accelerator Magnets with High Temperature Superconductor Coils

magnets with High Temperature Superconductor (HTS) coils:

- + medium fields for all applications (high fields in block config.)
- + ReBCO and Bi-2212 materials are studied
- + no ohmic losses, can replace power hungry large aperture dipoles/quads
- + cryogen free conduction-cooling possible (no He)
- + much improved cryogenic efficiency at elevated temperatures (e.g. 4.5K...15K instead 2K)
- today expensive materials
- field ramping and field quality difficult (wide tapes)

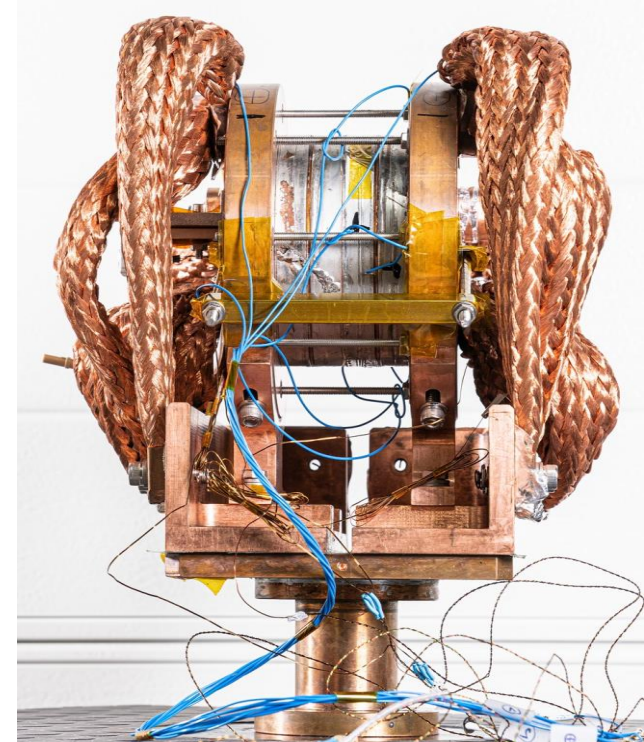

solenoid test magnet, 18T @ 12K
PSI/CHART, B.Auchmann et al



Efficient RF Power Sources

- **Klystrons**, $\eta > 70\%$ within reach
e.g. CLIC two stage multi-beam klystron, J.Cai, I.Syratchev, IEEE Trans, 2020
- **Magnetron**, R&D at various groups, $\eta = 60-80\%$ within reach
e.g. Wang et al, J-Lab, IPAC 2019; A.Dexter, Lancaster U., LINAC-2014; B.Chase, Fermilab, JINST-2015
- **Solid state amplifiers (SSA)** at various groups, $\eta = 60-90\%$ depending of freq.

3362

IEEE TRANSACTIONS ON ELECTRON DEVICES, VOL. 67, NO. 8, AUGUST 2020



Modeling and Technical Design Study of Two-Stage Multibeam Klystron for CLIC

Jinchi Cai[✉] and Igor Syratchev[✉]

Example: study 1GHz for CLIC drive beam; 6 cavities, 30 beamlets; 25+140kV; $\eta_{\text{sat}} = 82\%$

IEEE TRANSACTIONS ON MICROWAVE THEORY AND TECHNIQUES, VOL. 70, NO. 2, FEBRUARY 2022

1401

Kilowatt Power Amplifier With Improved Power Back-Off Efficiency for Cyclotron Application

Renbin Tong[✉], Olof Bengtsson[✉], *Senior Member, IEEE*, Jörgen Olsson[✉], *Senior Member, IEEE*,
Andreas Bäcklund, and Dragos Dancila[✉]


Example: SSA for Isotope production Cyclotron, 98.5MHz, 12x1kW units, $\eta_D = 93\%$ (90% with regulation overhead)
Uppsala group, WP in I.FAST program

I.FAST efficient RF workshop, July 4-6, 2022, Switzerland:

<https://indico.cern.ch/event/1138197/>



Technology R&D: Superconducting RF at higher temperature

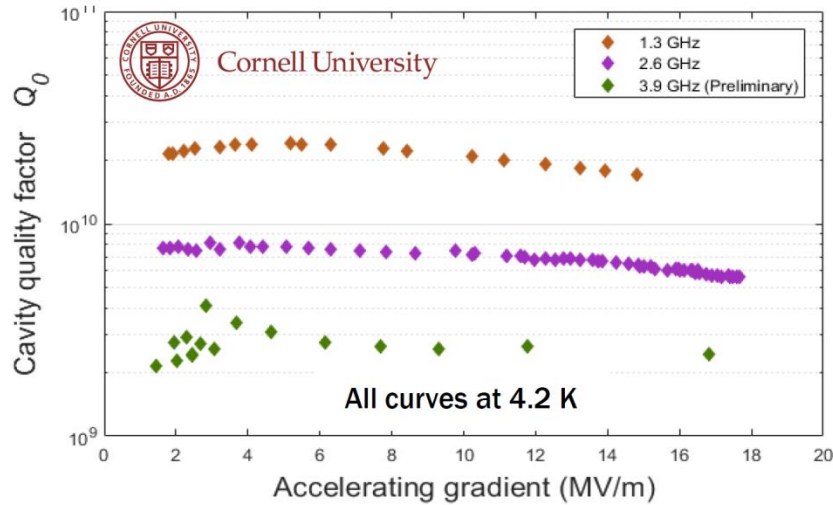


- promising R&D: Nb₃Sn coated cavities at Cornell
- 4.2 vs. 2.0K → efficiency

[M.Liepe, Cornell, IPAC'19]

Cornell, FERMILAB
→ simplicity, cost, efficiency, smaller size

S Posen et al 2021 Supercond. Sci. Technol. 34 025007
record cw gradient in Nb₃Sn-coated, E_{acc} = 24 MV/m

SMART recipe leads to a T_c of 15.4 K on Nb-samples coated with 15 / 25 nm of AlN / NbTiN

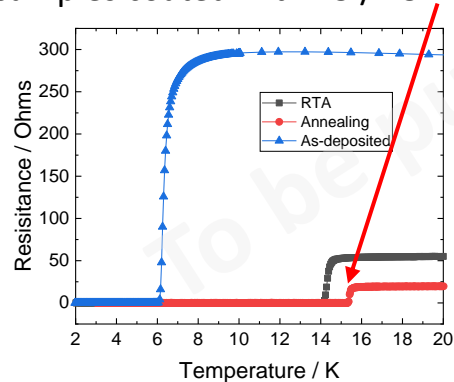

DESY, Hamburg U.

aim for sustained SRF accelerator technology

10y Goal: >70 MV/m with a Q₀ of 1x10¹⁰ and at 4K

contact: M.Wenskat, DESY

G. Deyu et al., „Al₂O₃ coating of Superconducting Niobium Cavities with thermal ALD“, in preparation



Proton Driver Accelerators

or: Best attainable Grid-to-Beam efficiency?

Comparison: Megawatt p-Drivers



Workshop: Efficiency of Proton Driver Accelerators, 2016, PSI
<https://indico.psi.ch/event/3848/>

Yakovlev, FNAL, invited talk, IPAC 2017

FRXCBI

Proceedings of IPAC2017, Copenhagen, Denmark

THE ENERGY EFFICIENCY OF HIGH INTENSITY PROTON DRIVER CONCEPTS*

J. K. Grillenberger, Paul Scherrer Institut, 5232 Villigen, Switzerland,
 S-H. Kim, Oak Ridge National Laboratory, Oak Ridge, TN 37831, USA
 M. Yoshii, KEK and JAEA J-PARC Center, 2-4 Shirakata-Shirane, Tokai, Ibaraki 319-1195, Japan
 M. Seidel, Paul Scherrer Institut, 5232 Villigen, Switzerland
 V.P. Yakovlev[†], Fermi National Accelerator Laboratory, Batavia, IL 60510, USA

Megawatt class facilities
operating today:


optimized for application,
not efficiency

facility	accelerator type	Economy	Energy Reach	Power Reach	operational complexity	grid-to-beam Efficiency
SNS	superconducting linac	--	++	++	++	9%
J-PARC	rapid cycling synchrotron	++	++	-	-	3%
PSI	isochronous cyclotron	+	--	+	-	18%



Superconducting Linac : High Efficiency Potential

example: PIP-II design of Fermilab

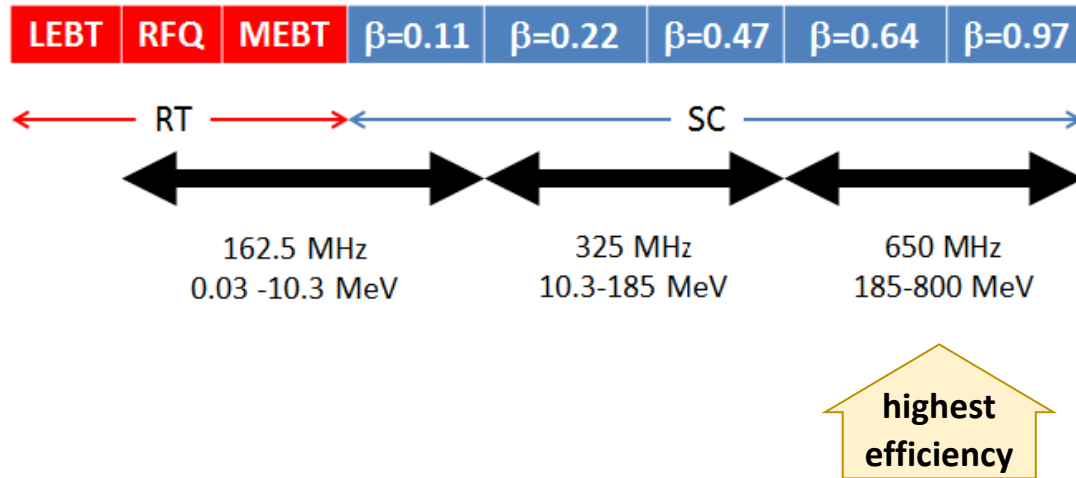


PIP-II base parameters:

- H^- , 800MeV, 2.0mA, part of Fermilab complex
- aim: neutrino production (1MW @ 60..120GeV)
- CW operation as upgrade path


not efficient in pulsed operation:

operating regime	avg. RF power	cryogenic power	avg. beam power	grid-to-beam Efficiency
PIP-II pulsed operation	1.44MW	1.19MW	17.6kW	0.7%
PIP-II CW operation	9.10MW	1.83MW	1.60MW	15%

[from presentation B.Chase, Y.Yakovlev, 2018]

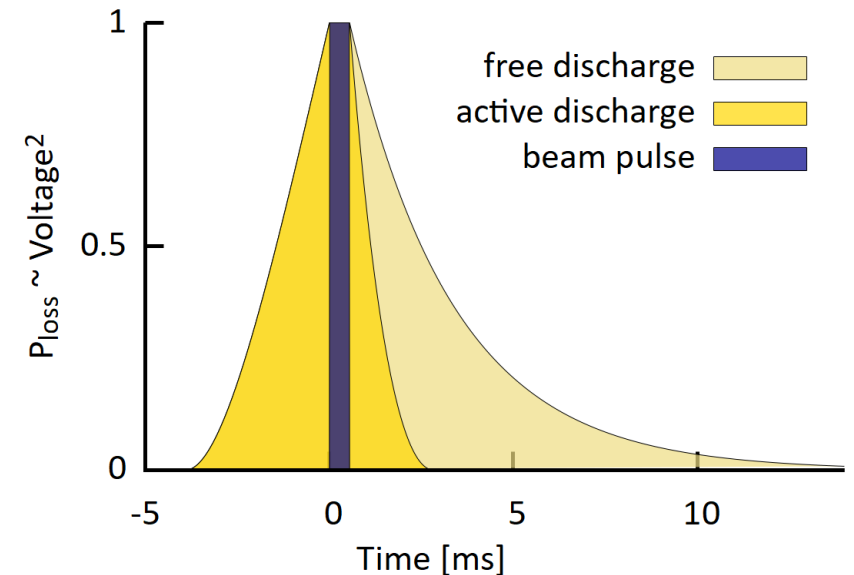

Low Loss Superconducting Resonators

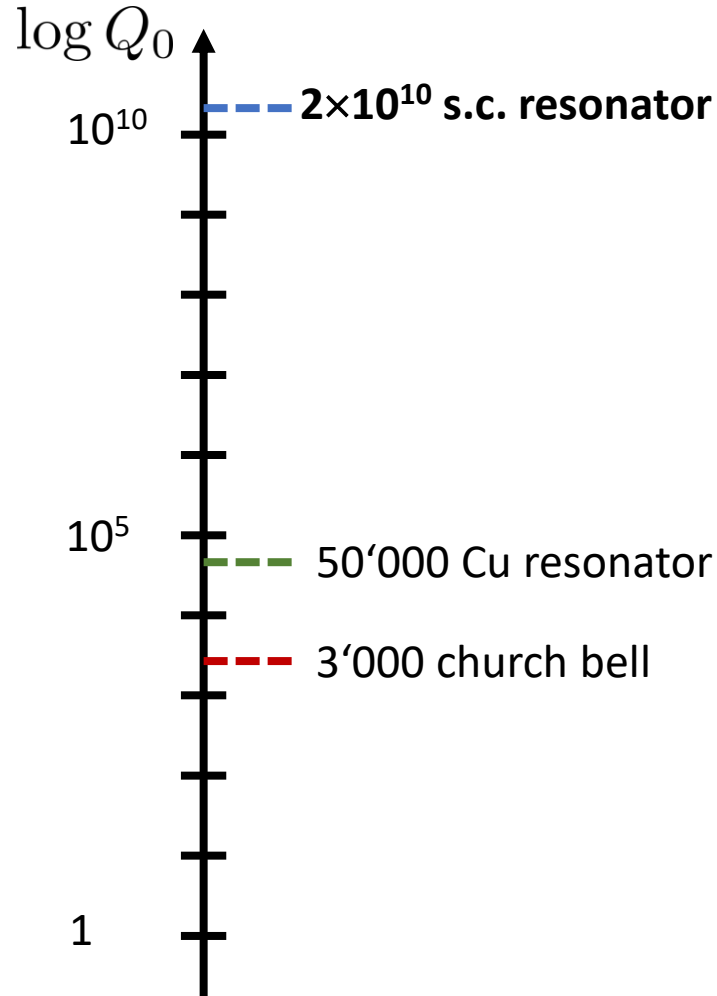

Q_0 = quality factor

→ e-folding decay and resonance width

dissipated power:

$$P_{\text{dissip}} = \frac{U_a^2}{\left(\frac{R}{Q}\right) Q_0}$$

example:


$$U_a = 20\text{MV}, (R/Q) = 609\Omega, Q_0 = 2 \times 10^{10}, I_b = 2\text{mA}$$

$$\rightarrow P_{\text{dissip}} = 33\text{ W}$$

$$\rightarrow P_{\text{beam}} = 40.000\text{ W}$$

high Q resonators, 1.3GHz, 2K, FNAL



[A.Grassellino, A.Romanenko et al, 2013]

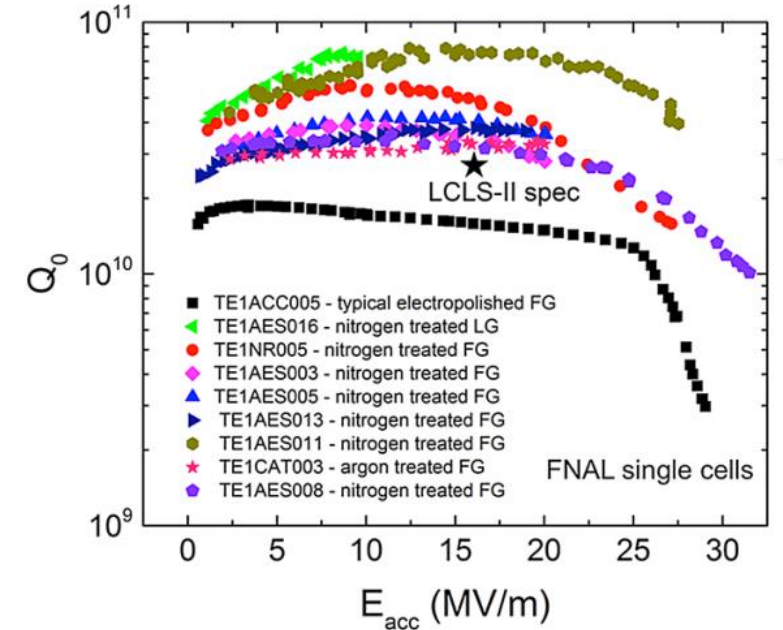

but: cryogenic efficiency!



Cryogenic Efficiency

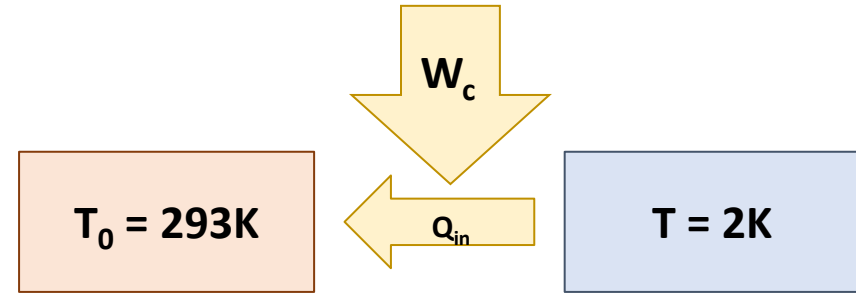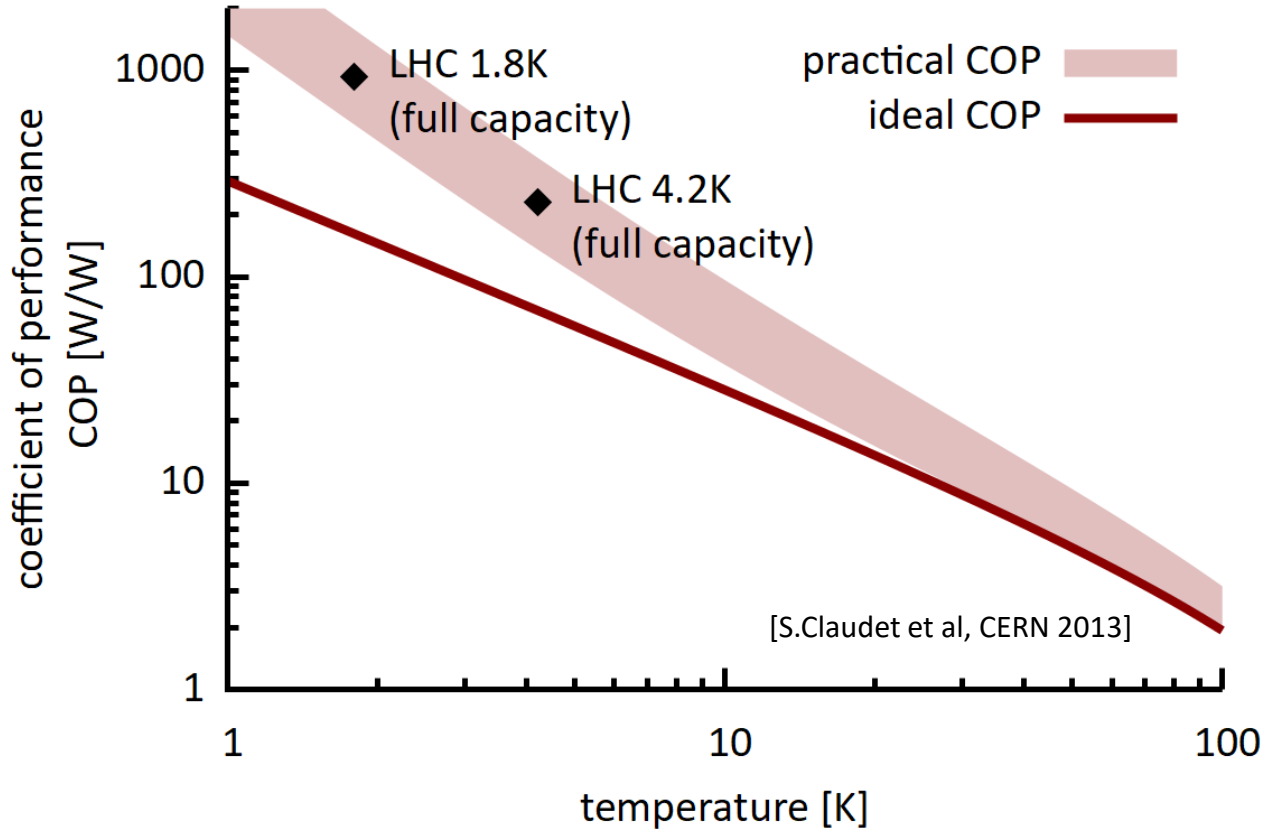

best possible coefficient of performance (COP):


$$\text{COP} = \left(\frac{W_c}{Q_{in}} \right)_{\text{Carnot}} = \frac{T_0 - T}{T}, \quad T_0 = 293 \text{ K}$$

W_c = amount of work required to remove heat Q_{in} at cold temperature T

$$P_{\text{cryo}} = \text{COP} \cdot P_{\text{dissip}}$$



Powerflow s.c. Linac – Minimum System Example for a Single Cavity

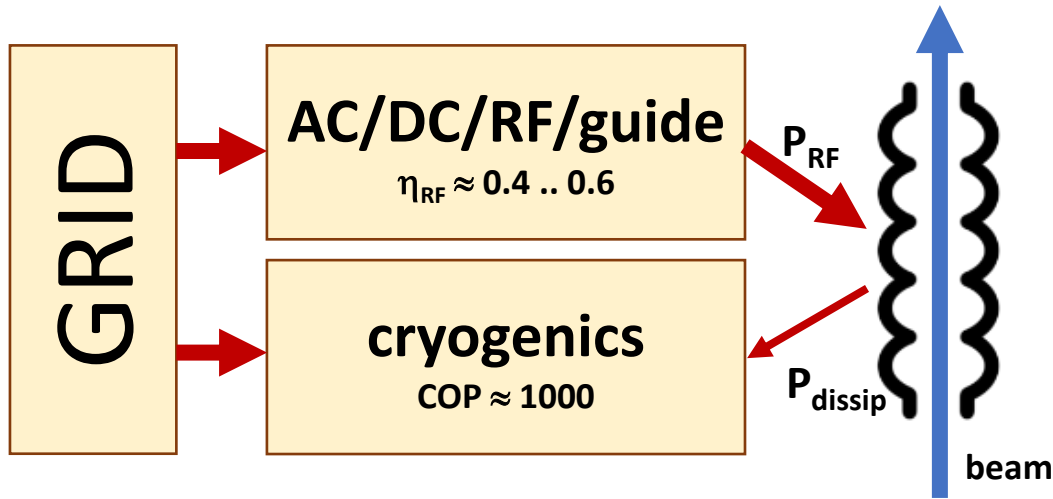

power balance:

$$P_{\text{grid}} = P_{\text{cryo}} + P_{\text{RF}}$$

$$= \text{COP} \cdot P_{\text{dissip}} + \frac{1}{\eta_{\text{RF}}} \Delta P_{\text{beam}}$$

$$\eta_{\text{total}} = \frac{\Delta P_{\text{beam}}}{P_{\text{grid}}}$$

considered:

- one 650MHz cavity
- $U_a = 20\text{MV}$
- $l = 1.1\text{m}$

ignored: cavity detuning,
 $\beta < 1$, regulation overhead,
 aux. systems ...

regime	I_b [mA]	Q_0	η_{RF}	ΔP_{beam} [kW]	grid-to-beam Efficiency
TDR, CW	2.0	$2 \cdot 10^{10}$	0.44	40.0 kW	30%
high Q	2.0	$3 \cdot 10^{10}$	0.44	40.0 kW	33%
high current	4.0	$3 \cdot 10^{10}$	0.65	80.0 kW	50%



} extrapolation



Light Sources

Synchrotron Light Sources and Free Electron Lasers

- over the history ring light sources have improved the brilliance by more than 10 orders of magnitude, the last step is made using **multi bend achromat lattices** and miniaturization using permanent magnets
- **power consumption** of ring light sources is in the range of a few Megawatt and **often not a critical factor**; however, s.c. FELs might use O(20MW)
- the production of tailored radiation – spectral distribution, coherence, ultrashort pulses etc. is in the focus today

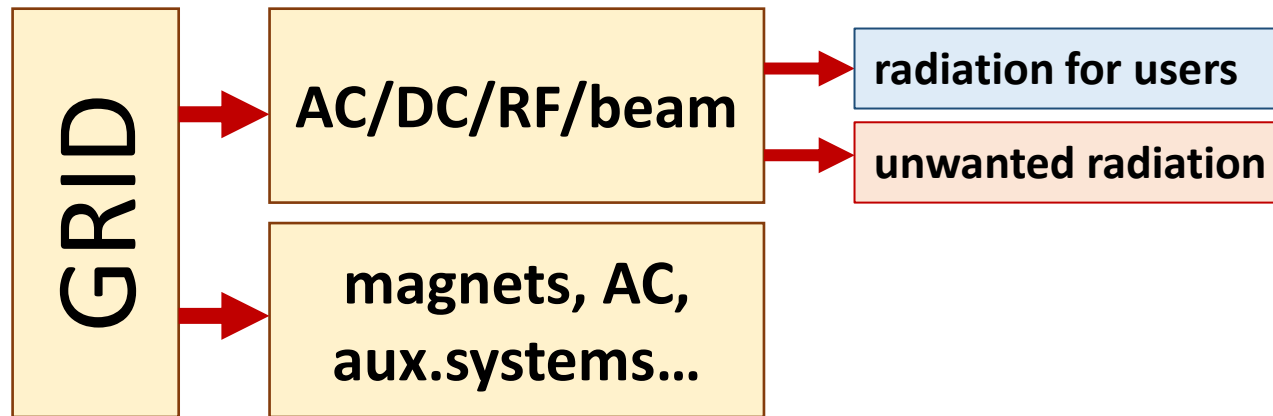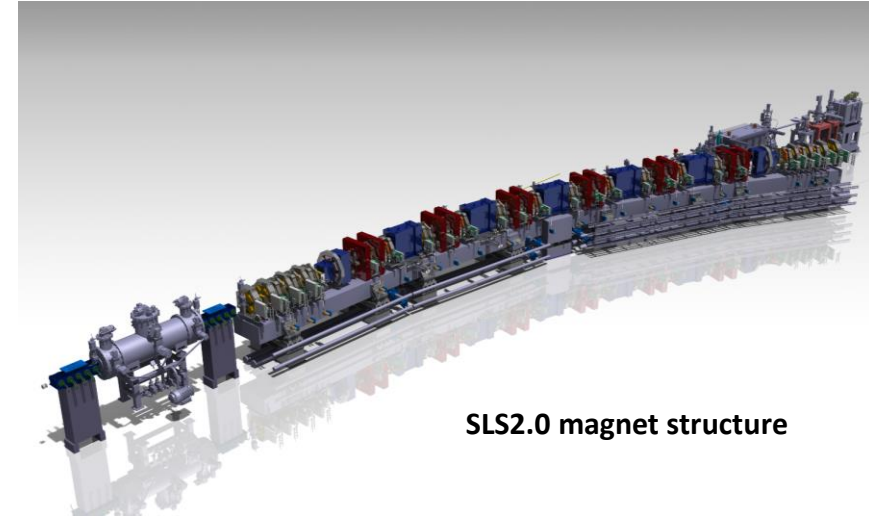


possible efficiency
measure:

$$\eta_{\text{total}} = \frac{P_{\gamma, \text{users}}}{P_{\text{grid}}}$$



Example Swiss Light Source SLS and its Upgrade

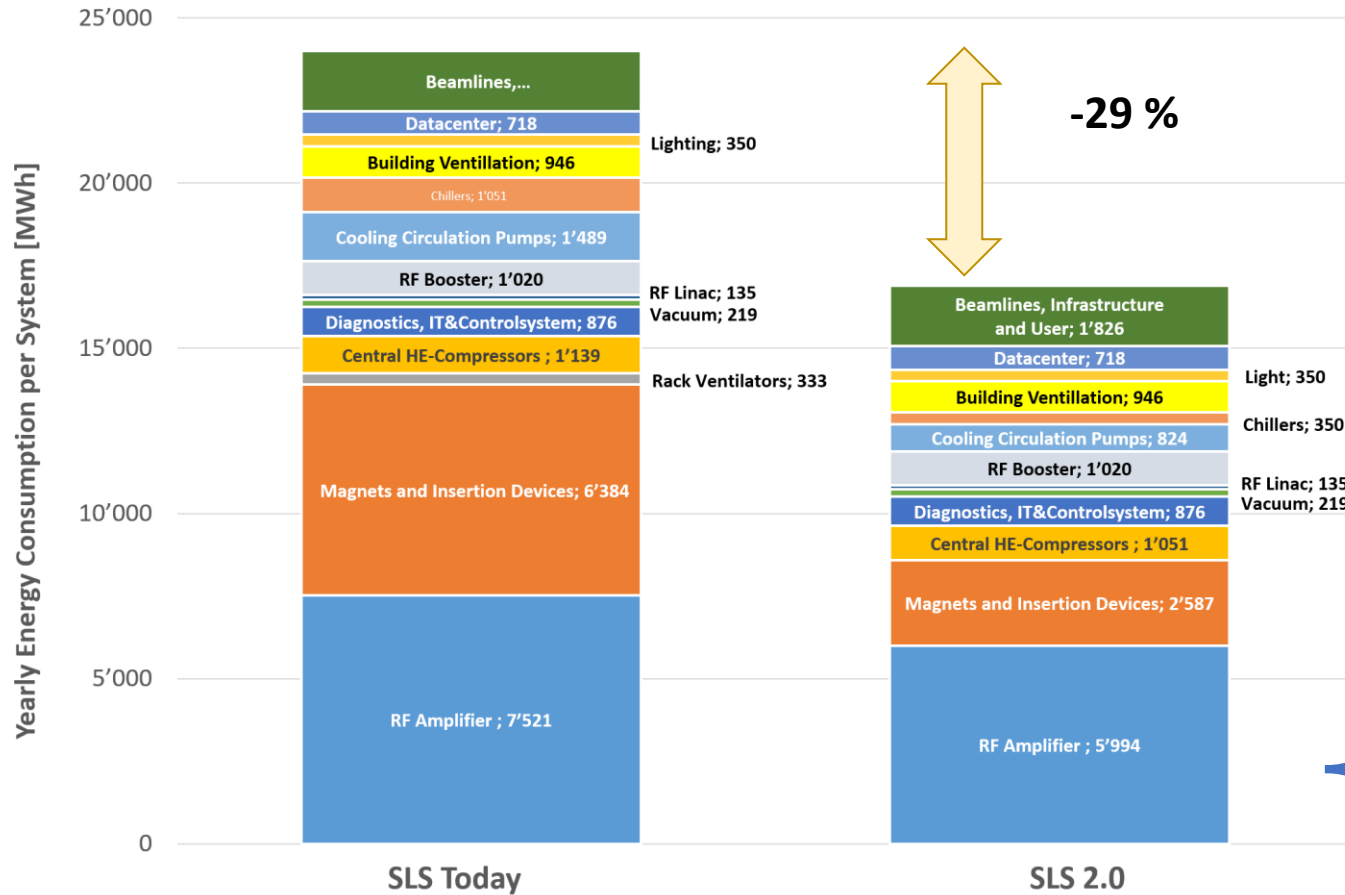

**More radiated X-ray power for users
Less electricity consumption**

	SLS	SLS2.0
E_{e^-}	2.4 GeV	2.7 GeV
P_{SR}	310 GeV	365 kW
W_{elec}/y	24 GWh	17 GWh

Key savings:

- Electromagnets → Permanent magnets
- Klystrons → Solid state amplifiers
- standard pumps → modern pumps for cooling


main RF power flow SLS2.0	
AC power	816 kW
DC power	772 kW
RF power to beam	488 kW
power to beam	366 kW
dipole/undulator radiation	275 kW / 91 kW

95%
63% SSA
75%


[M.Jörg, PSI]



Free Electron Laser

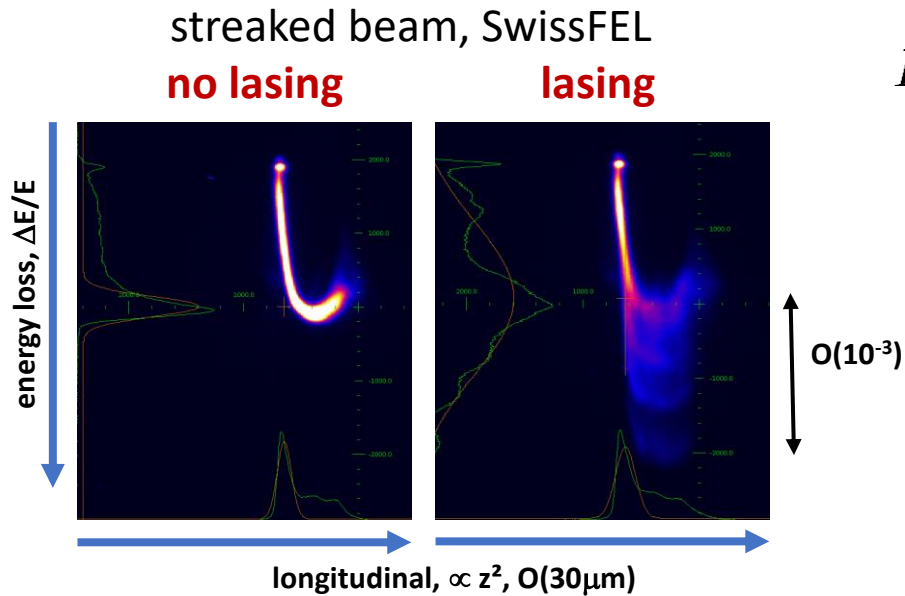

Grid Power Consumption
 (order of magnitude)
 examples: n.c. / s.c.

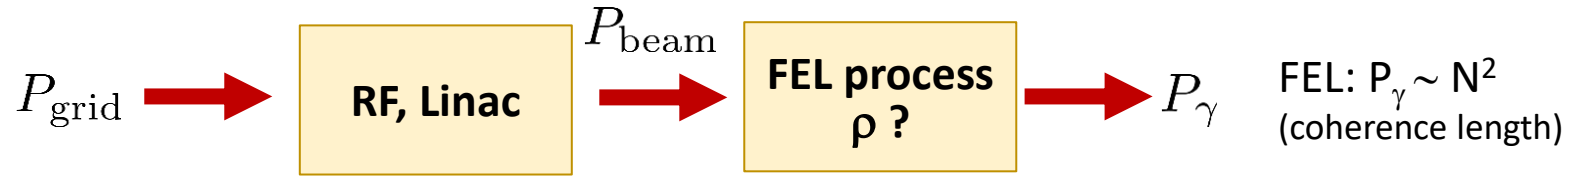

best demonstrated
 energy extraction:
 $\Delta E/E = 30\%$

($E_k=65MeV$, Laser seeded FEL)

PRL 117, 174801 (2016) PHYSICAL REVIEW LETTERS week ending 21 OCTOBER 2016

High Efficiency Energy Extraction from a Relativistic Electron Beam in a Strongly Tapered Undulator

N. Sudar, P. Musumeci, J. Duris, and I. Gadjev
Particle Beam Physics Laboratory, Department of Physics and Astronomy, University of California Los Angeles, Los Angeles, California 90095, USA

M. Polyanskiy, I. Pogorelsky, M. Fedurin, C. Swinson, K. Kusche, and M. Babzien
Accelerator Test Facility, Brookhaven National Laboratory, Upton, New York 11973, USA

A. Gover
Faculty of Engineering, Department of Physical Electronics, Tel-Aviv University, Tel-Aviv 69978, Israel
 (Received 3 May 2016; published 19 October 2016)



Facility	Technology	P_{grid} (typ)	P_{beam} (typ)	Photon Power
SwissFEL	n.c., 6 GHz, pulsed	≈ 3.0 MW	100 W	up to 0.2 W
XFEL	s.c., 1.3 GHz, pulsed	≈ 10 MW	40'000 W	up to 40 W



Particle Colliders

Colliders - Concepts

Next generation: high Luminosity, high Energy reach needed
Energy Efficiency: Luminosity per Grid Power

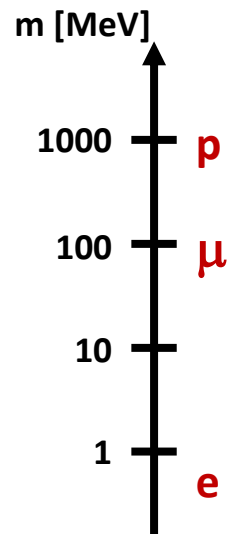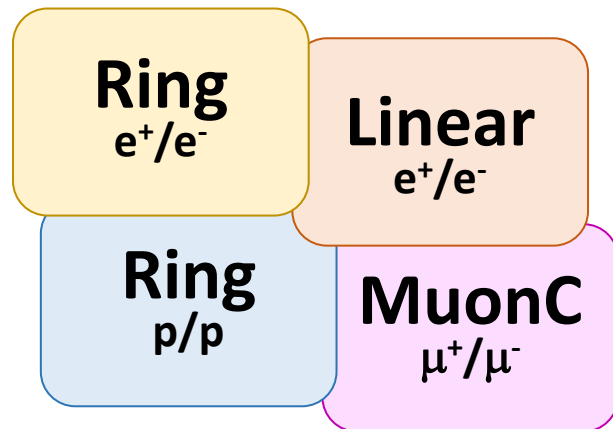

particle mass impacts synchrotron radiation and beamstrahlung (collision)

→ scaling laws and grid power drivers are quite different for the concepts under discussion



Colliders Types and Power Drivers

Ring
e⁺/e⁻

FCC-ee 240GeV:
P_{grid} = 273MW

+ beam recirculation
- synchrotron radiation

$$P_{\text{SR}} \propto I_{\text{beam}} \left(\frac{E}{m_0} \right)^4 \frac{1}{R}$$

Linear
e⁺/e⁻

CLIC 380GeV (3.0TeV):
P_{grid} = 252MW (589MW)
ILC 250GeV (1TeV):
P_{grid} = 111MW (300MW)

+ no synchrotron radiation
- no recirc., small beam needed
power drivers: cryo (ILC) vs RF (CLIC)

$$L_{\text{lin.col.}} \propto H_D \sqrt{\frac{\delta E}{\varepsilon_{x,n}}} P_{\text{beam}}$$

MuonC
μ⁺/μ⁻

MAP 6.0TeV:
P_{grid} = 270MW

+ no Beamstrahlung-Limitation
- inefficient RCS, complexity

$$L_{\text{mu.col.}} \propto B \frac{N_0}{\varepsilon_{xy,n}} \gamma P_{\text{beam}}$$

Ring
p/p

FCC-hh 100TeV:
P_{grid} = 580MW

+ high energy reach
- SR deposited @50K, cryogenics

$$P_{\text{SR}} \approx 5 \text{ MW}$$

$$\rightarrow P_{\text{grid,SR}} \approx 100 \text{ MW (17\%)}$$



Ring Collider


- energy recirculated, thus efficient concept
- however, SR losses at higher energies
- comment: for LHC burnup dominates beam loss (no SR)

quality factor storage ring: $Q_\gamma = \omega \frac{E_{\text{stored}}}{P_{\text{dissipated}}} = 2\pi \frac{E}{\tau P_\gamma} = 2\pi \frac{E}{U_0} \gg 1$ = „decay time of beam energy in number of turns due to SR“

bending radius

$$Q_\gamma = \frac{3}{2} \frac{\rho}{r_c} \gamma^{-3}$$

classical particle radius

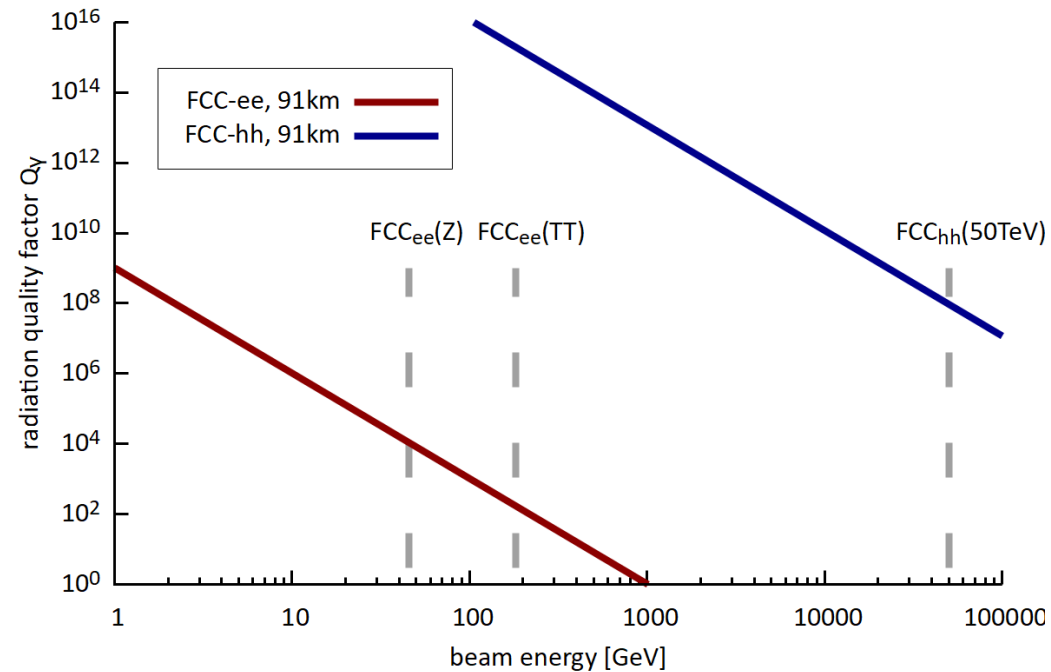


FCC-ee – Optimized Lepton Ring Collider

conceptual measures:

- crab waist scheme (specific luminosity)
- 4 IP's instead 2
- maximise bending field fill factor (next talk)

technology measures:

- high-efficiency klystrons (HEIKA collaboration)
- 4.5 K s.c. cavities, high Q (400 MHz Nb/Cu)
- twin aperture dipoles (50% savings of bends)
- HTS quads and sextupoles

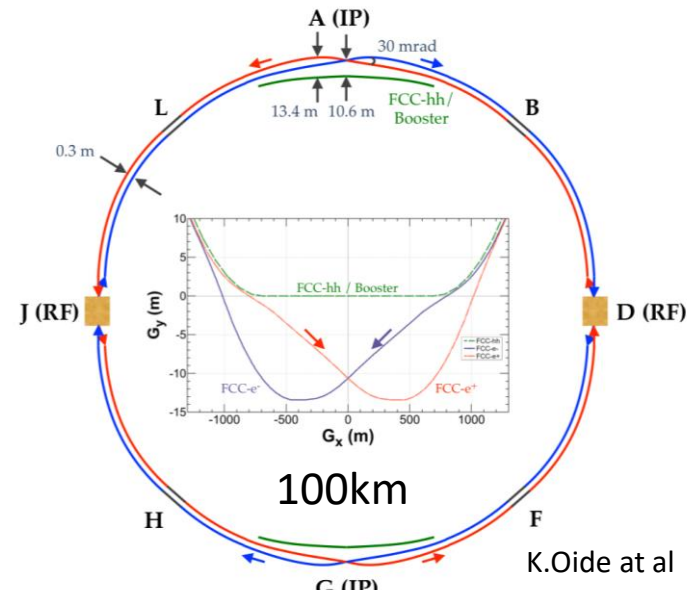

A. Milanese, Efficient twin aperture magnets for the future circular e^+/e^- collider, Phys. Rev. Accel. Beams 19, 112401 (2016)


similar as
CERN total
today

$$E_{cm} = 240 \text{ GeV (H)}$$

$$P_{grid} = 273 \text{ MW}$$

$$E_{grid}/y = 1.33 \text{ TWh}$$

→ dominated by RF
(compensating SR losses)

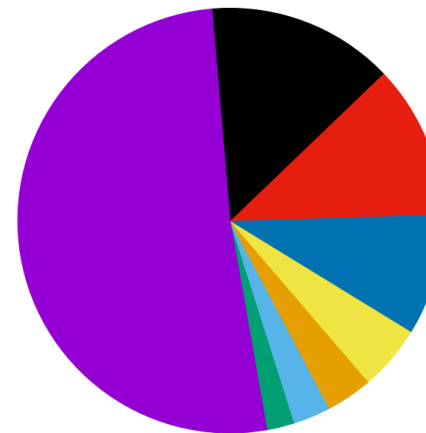


- Radiofrequency
- Services
- Ventilation
- Magnets
- Cryogenics
- Injector
- Experiments
- Booster



Overview Lepton Proposals

energy specific
luminosity production:

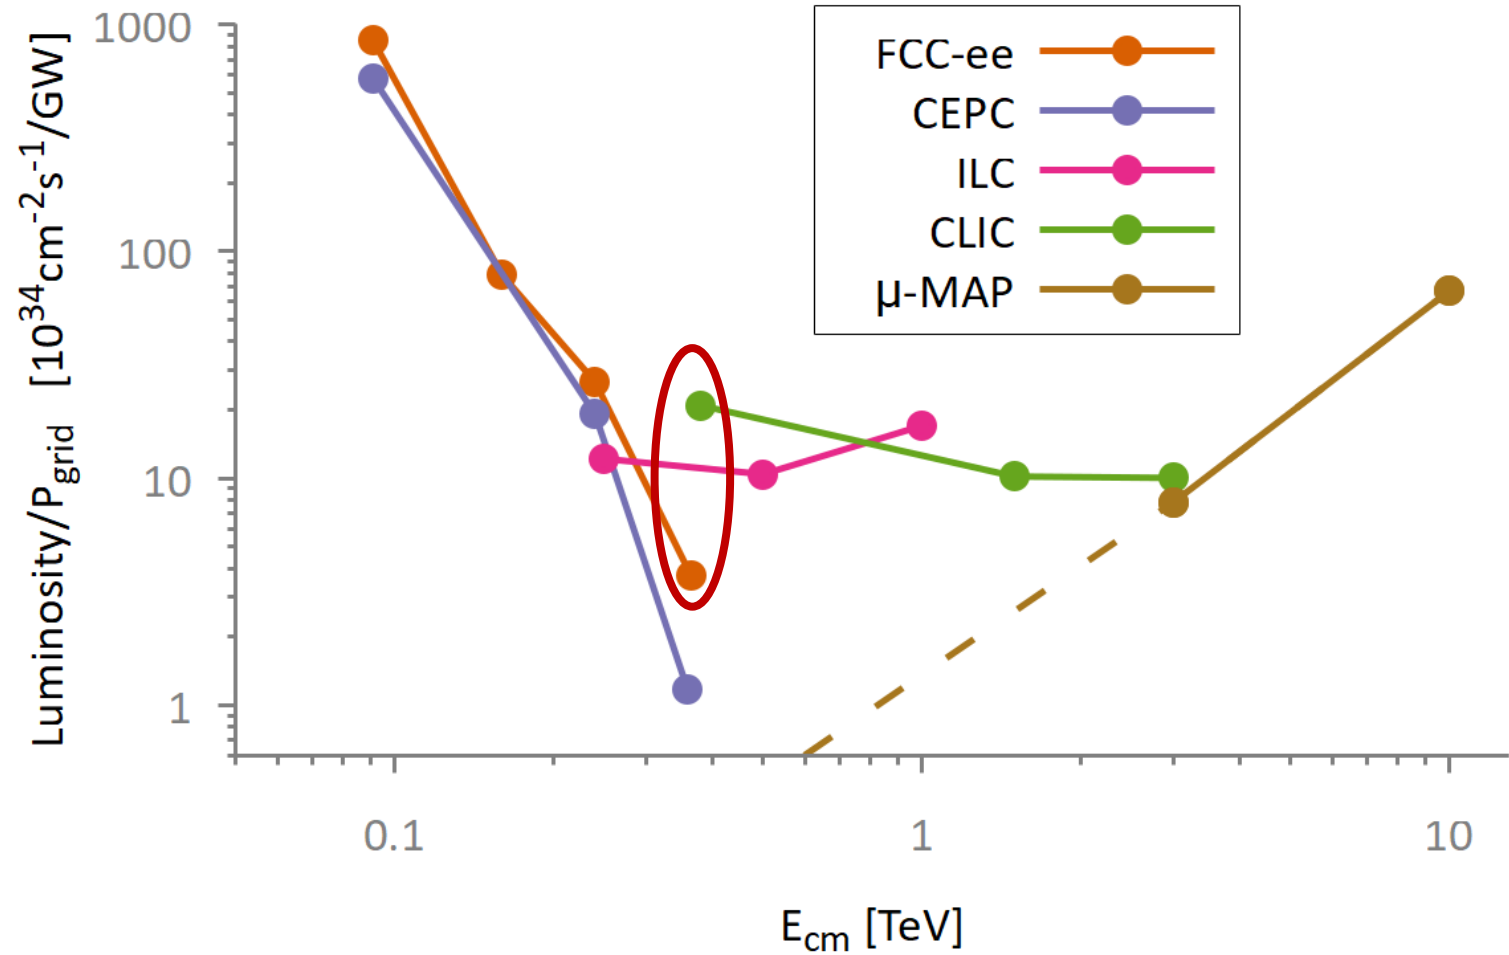


Snowmass Implementation Task Force, Th.Roser et al

– Assessment of 24 Collider Proposals


- includes **energy recovery concepts** and **advanced acceleration concepts**
 - PWFA = plasma wake field
 - SWFA = structure wake field
 - LWFA = laser wakefield accelerator
- includes uncertainties, maturity, integrated luminosity per energy scale

full report: [arXiv:2208.06030v2](https://arxiv.org/abs/2208.06030v2)

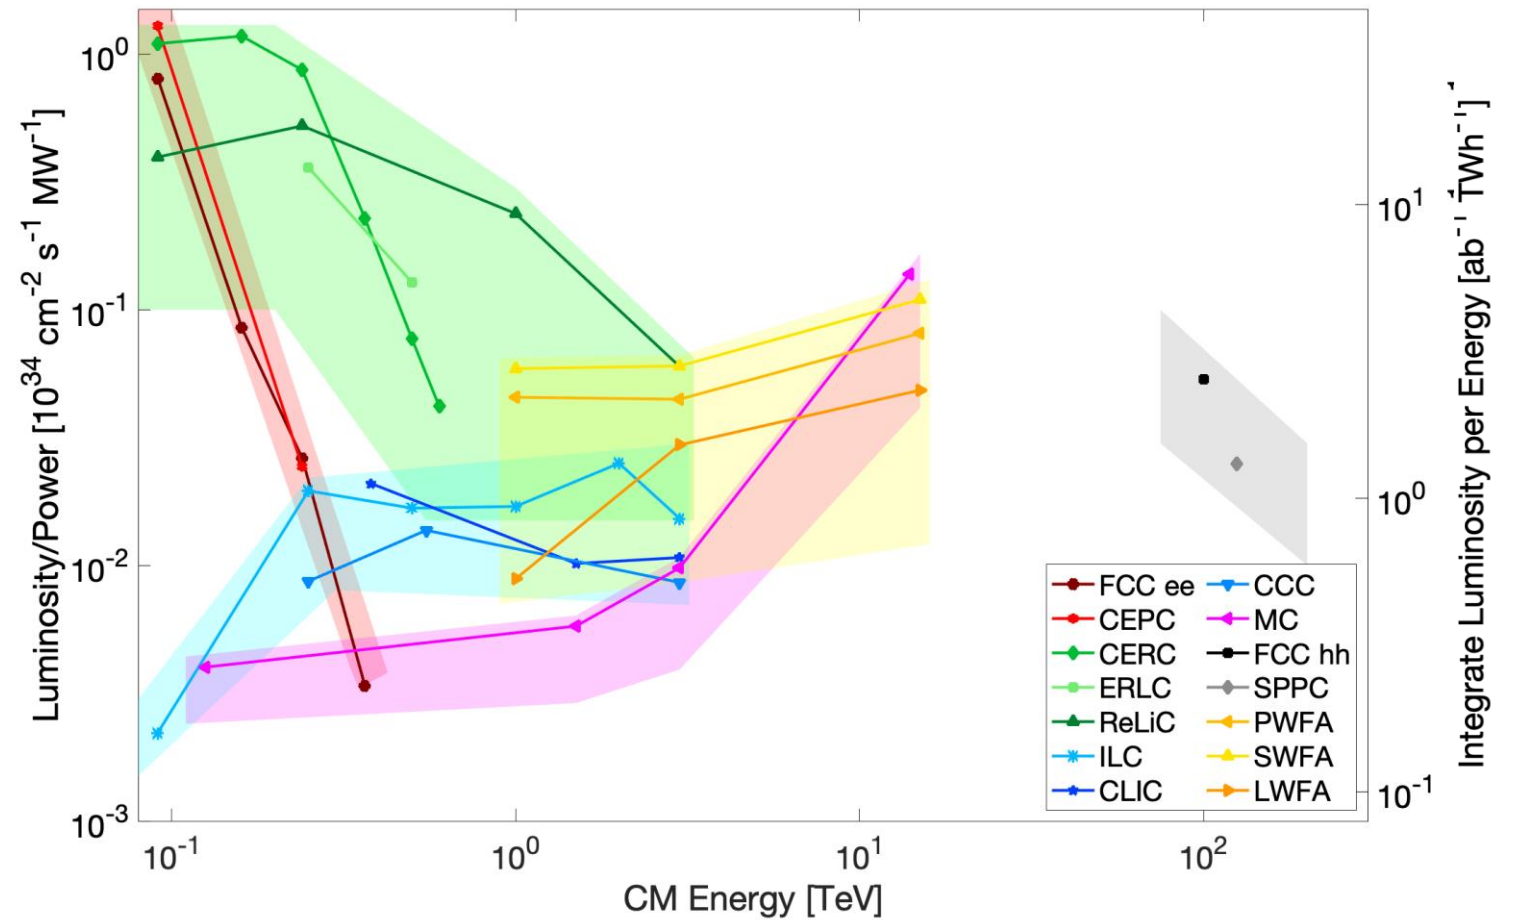

Ring vs. Linear Collider

Ring Collider
beams circulate

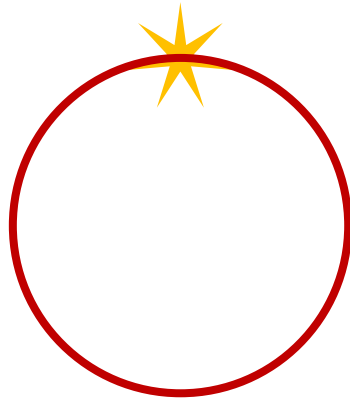

- beam reused
- synchrotron radiation dominated
- equilibrium beamsizes → collision parameters limited

Linear Collider
beams collide once




- beam used only once
- no synchrotron radiation
- ambitious collision parameters possible (no ring dynamics)

	FCC-ee 365GeV	CLIC 380GeV
σ_x [nm]	39'000	150
σ_y [nm]	69	2
σ_z [μm]	2'950	70
N [10^9]	264	5,2
f_b [kHz]	118	17,6
P_b [MW]	912	2.8



Combining Linear- and Ring-Collider using the ERL Concept

ERL
power circulates

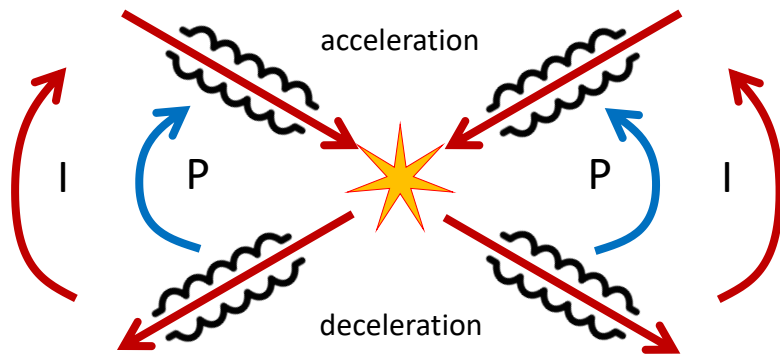

- power recirculated, beam recirc. at low E
- benefit from better collision parameters


→ high L per grid power, but higher investments & complexity

two ERL proposals published:

1) Circular Energy Recovery Collider

V. Litvinenko, T. Roser, M. Llatas, Physics Letter B 804 (2020) 135394

multi turn ERL, modification FCC-ee

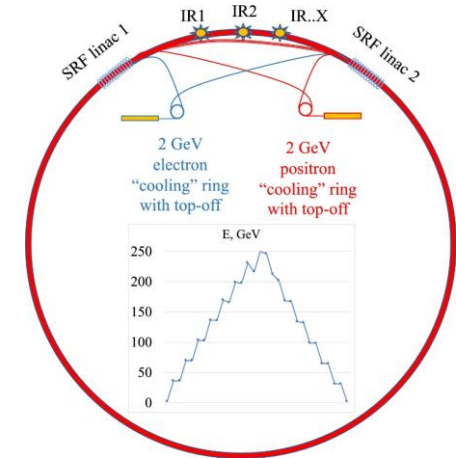


2) Energy Recovery Linear Collider

V.I. Telnov 2021 JINST 16 P12025

twin s.c. linacs, beam recirculation, wiggler damping

Twin LC with energy recovery

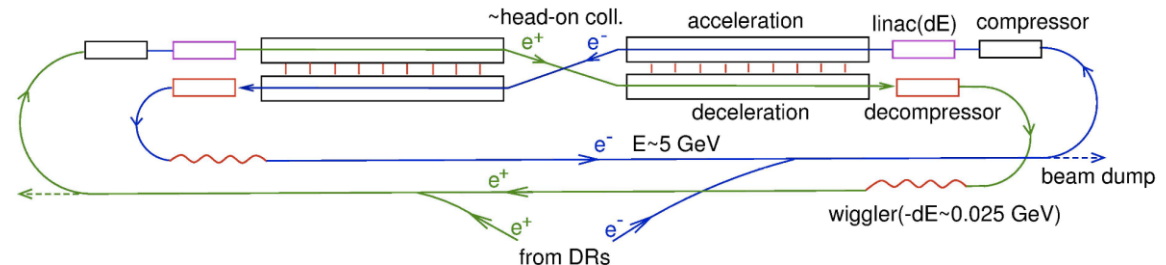


Muon Collider – Efficient at Highest Energies


Muon: $E_0 = 106 \text{ MeV}$, $\tau_\mu = 2.2 \mu\text{s}$

mass x 200 compared to electrons:

low SR, low beamstrahlung during collisions!

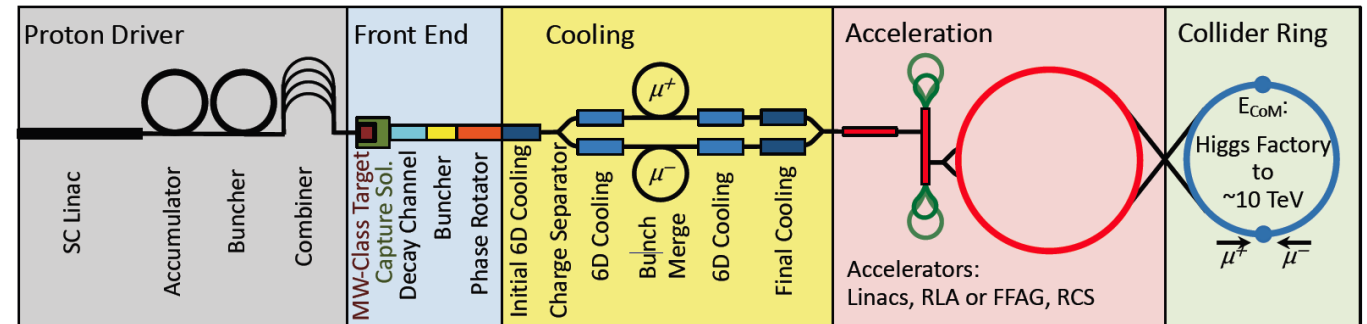

Beamstrahlung in e^+/e^- collider, mitigation results in limitation of IP beam parameters and flat beams: $\sigma_x \gg \sigma_y$

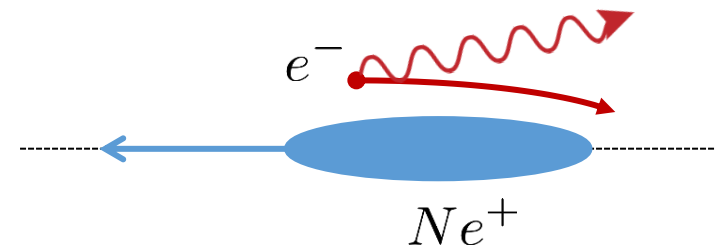

Energy scaling of the Muon Collider

- 1) particle physicists demand a fixed relative energy spread during collisions, across varying collision energies $\longrightarrow \frac{\delta E}{E} \approx 10^{-3}$
- 2) with given longitudinal emittance the product of bunch length and energy spread is constant across energies $\longrightarrow \sigma_z \propto \frac{1}{\delta E}$
- 3) hourglass effect: length of IP waist and bunch length are of same order of magnitude (beta-function at IP) $\longrightarrow \beta_{x,y}^* \propto \sigma_z$
- 4) the beam can be made smaller with increasing energy $\longrightarrow \beta_{x,y}^* \propto \frac{1}{\gamma}$

thus L/P is increasing with energy*:

$$\mathcal{L} \propto \frac{N^2}{\sigma_x \sigma_y} \propto \frac{N^2}{\sqrt{\varepsilon_x \beta_x^* \varepsilon_y \beta_y^*}} \propto \frac{N^2}{\varepsilon_n} \gamma^2 \propto \frac{N}{\varepsilon_n} \gamma P_{\text{beam}}$$

* the grid power is assumed roughly proportional to beam power



other aspects of sustainability

- rare earths, critical materials
- carbon footprint of components, construction, operation
- heat recovery
- carbon footprint of tunnel dominates

Übersicht

Zeitplan

Anmeldung

Information

Participant list

Impressions of the work shop

Orga

✉ denise.voelker@desy.de

✉ andrea.klumpp@desy.de

Life Cycle Assessments get more and more in the focus in industry and also in science. iFAST presents a platform for discussing and finding solutions in these topics.

In our workshop we want to focus on the Life Cycle Management using the example of Rare Earths Elements (REE), the key material in permanent magnets used in a variety of fields like accelerator, turbines, hard drives and many more.

On the workshop we will discuss the following points:

- Life cycle management
Consider entire life cycle of technical component using critical materials: construction – operation – deconstruction
- Mining and processing of REE
a socio-ecological approach – energy savings versus destructive mining and processing
- Using permanent magnets
Examples of the use of permanent magnets and its Pro and Con
- Certification for mining and processing of REE
How to force more sustainable thinking in the production of REE
- Recycling of permanent magnets
New processes for the re-use and recycling of permanent magnets
- Alternatives for permanent magnets with REE
New magnetic materials as well as improved electromagnets

Science, industry, politics and NGO in cooperation can forces to tackle the problem – we can develop solutions together.


Topics:

- rare earths: benefits and issues
- assessing carbon footprint, env. impact, societal impact ...
- supply chains and certification
- recycling



Petra Zapp (IEK-STE), excerpt: Comparison of Wind Generator Types

Influence of RE origin (ore type, mining location, specific site conditions) on environmental impacts per 1 kWh electricity generated by 3 MW wind power plant

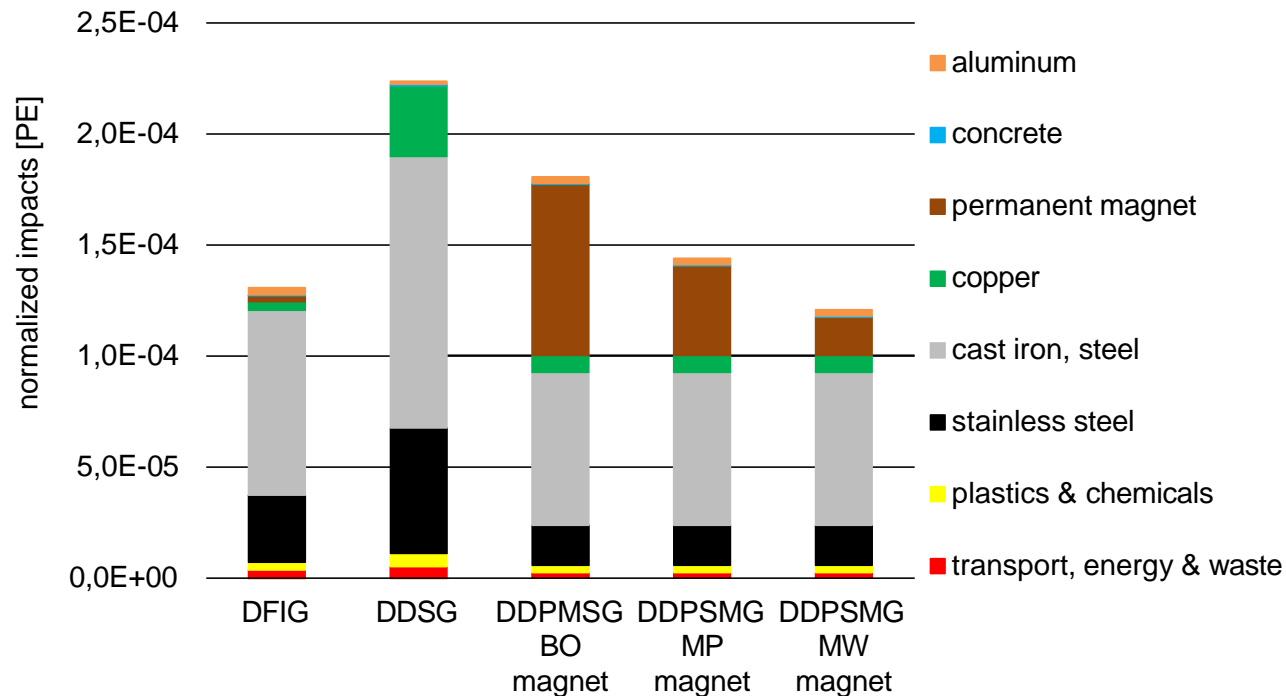

- Electricity generation by DDPMSG with permanent magnet produced from Chinese RE (Bayan Obo) has higher normalized environmental impacts compared to
 - U.S. Mountain Pass (→ 20%)
 - Mt. Weld (Aus) (→ 33%)
- Electricity generation by Australian DDPMSG is 8% better than by DFIG

DFIG: doubly-fed induction generator

DDSG: direct driven synchronous generator


DDPMSG: electrically excited and direct drive permanent magnet synchronous generator

A. Schreiber, J. Marx and P. Zapp: **Comparative life cycle assessment of electricity generation by different wind turbine types**; Journal of Cleaner Production **2019** Vol. 233 Pages 561-572





B.Shepherd (STFC): manufacturing electro- vs. permanent magnet comparison

- Much higher per kg due to more intensive mining processes

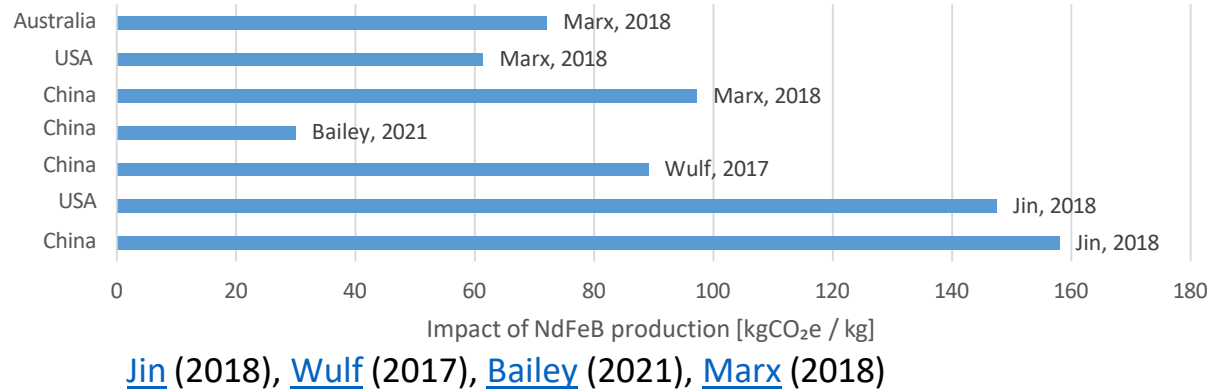

Jin (2018), Wulf (2017), Bailey (2021), Marx (2018)

- Use average figure: **89.1 kgCO₂e/kg**
- Impact for one magnet: (*PM material only*)
 - CLARA 1: **50 kgCO₂e**
 - CLARA 2: **170 kgCO₂e**
 - FEBE: **593 kgCO₂e**
- Similar order of magnitude to EM manufacture

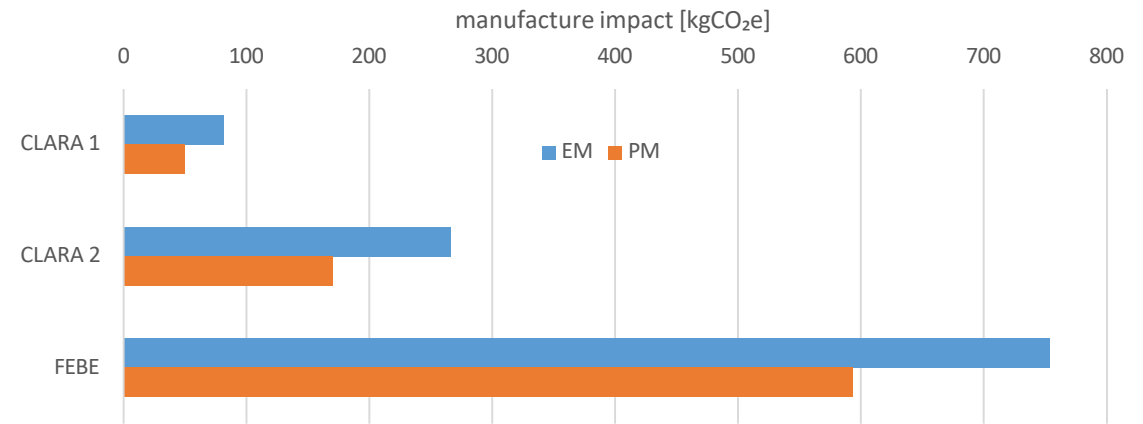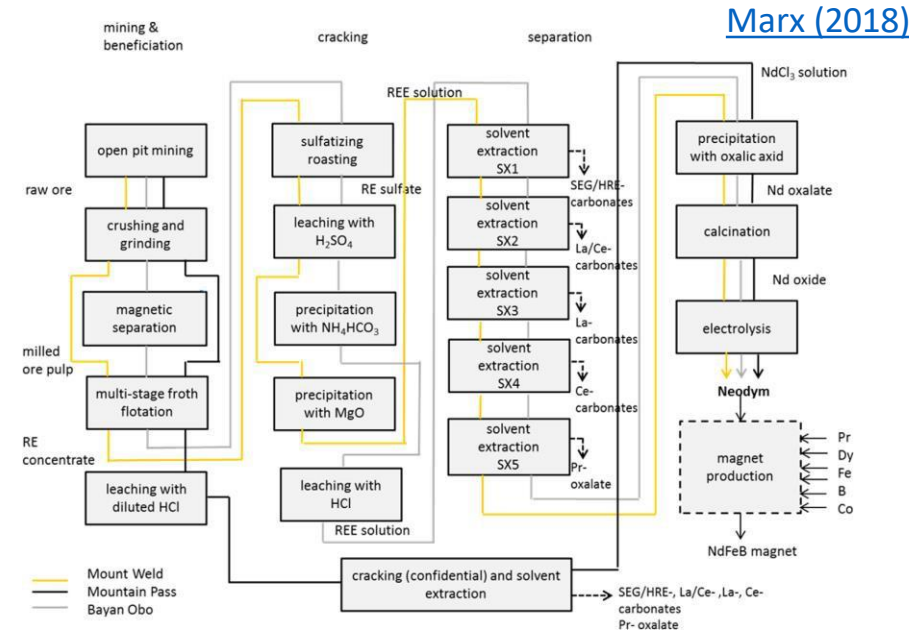

B.Shepherd (STFC): Electromagnet Operation vs. Manufacturing Footprint

- Power usage at nominal operating point

- CLARA 1: **385 W**
- CLARA 2: **2.01 kW**
- FEBE: **3.72 kW**

- UK electricity carbon intensity 2022: **193 gCO₂e / kWh**
(and improving every year!)

- Highly dependent on fuel mix:




Sweden 21g; France 102g; USA 432g; Germany 481g; Switzerland 153g
(source: [Electricity Maps](#))

- Assume operated for 5 years, 250 days per year, 16 hours per day

- Total impact of operation (*note: cooling not included*)

- CLARA 1: **1.49 tCO₂e**
- CLARA 2: **7.76 tCO₂e**
- FEBE: **14.4 tCO₂e**


- Much greater than
manufacture impact

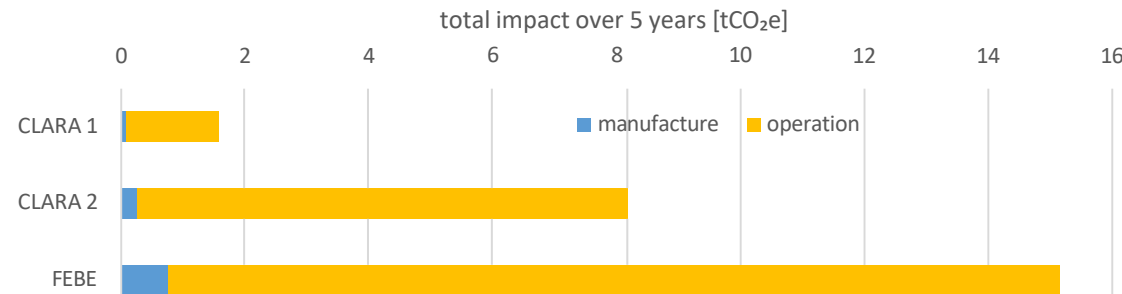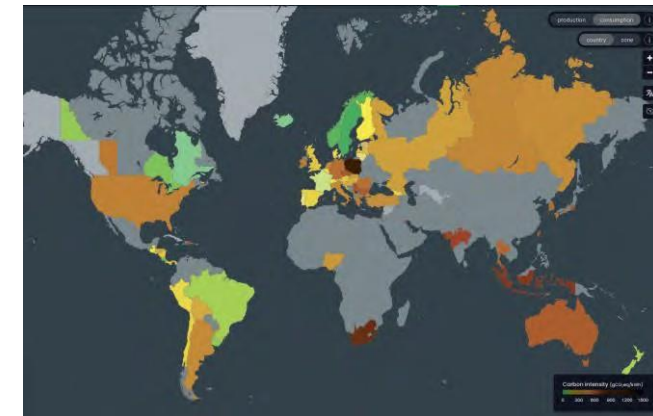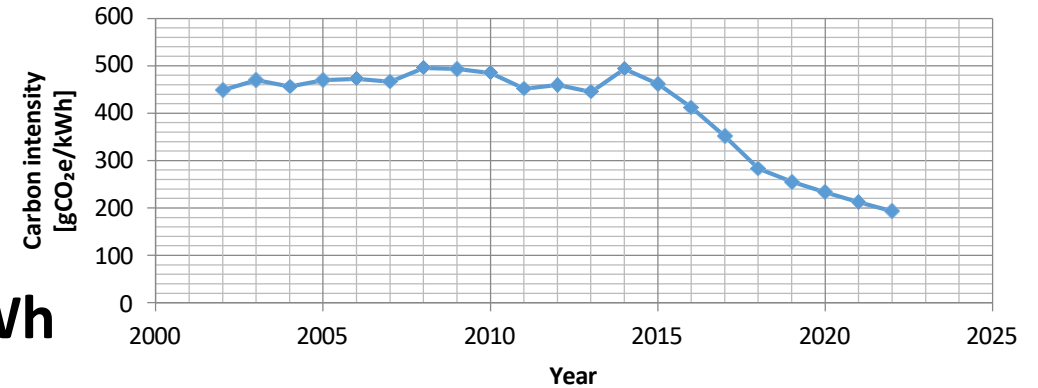

Supporting measures to increase sustainability of accelerators

photovoltaic energy production

Option: direct injection of DC power for accelerator systems

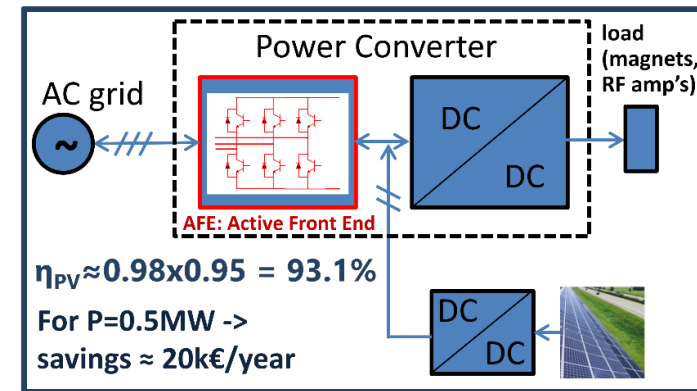

concept idea
DC injection of PV power
[C.Martins, ESS, I.FAST]


use of **waste heat for heating**, often limited by low temperature of cooling water
→ Use heat pumps to provide higher T at the expense of some additional grid power



heat pumps at MAX-4
[Björn Eldvall / E.ON,
Martin Gierow / Krafringen]




B.List et al: CLIC CO₂ Footp.-Tunnel Cross Sections

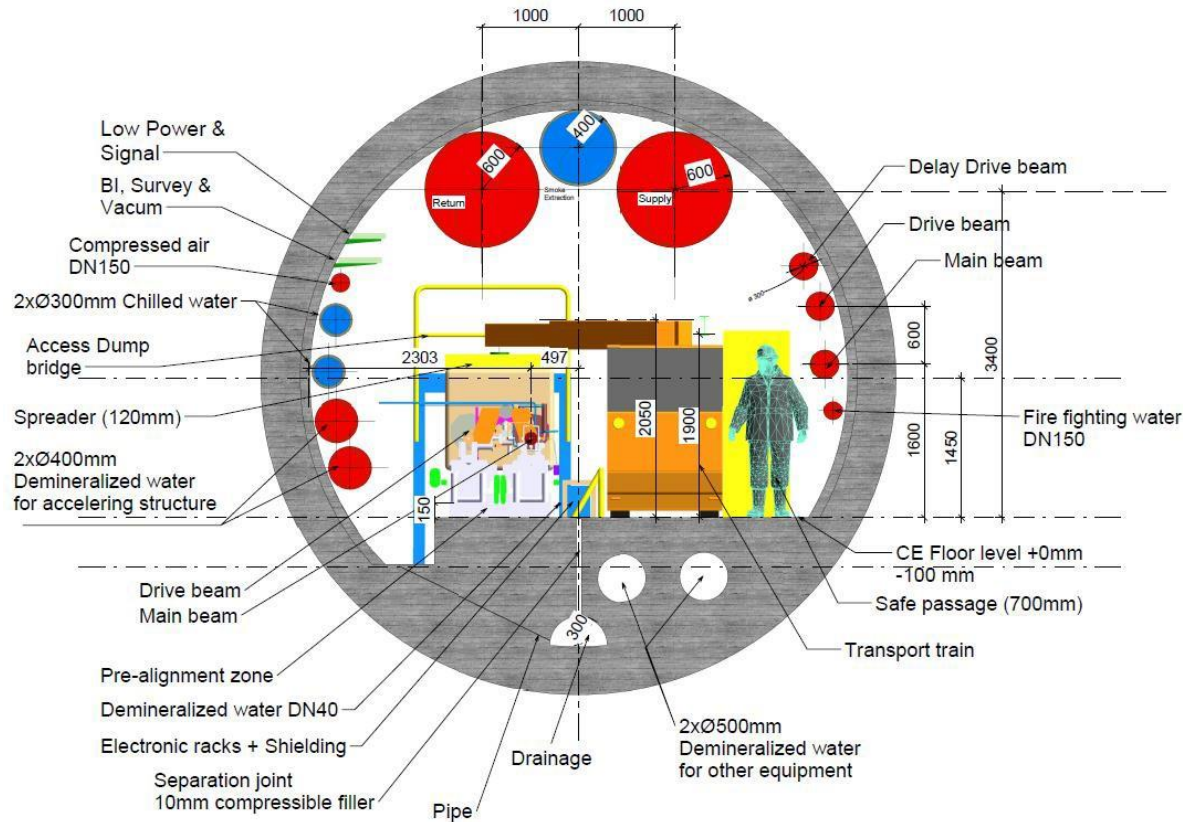

CLIC tunnel (drive beam option), 5.6m diameter

My estimate: 12.4m² concrete
 -> 31 t/m concrete

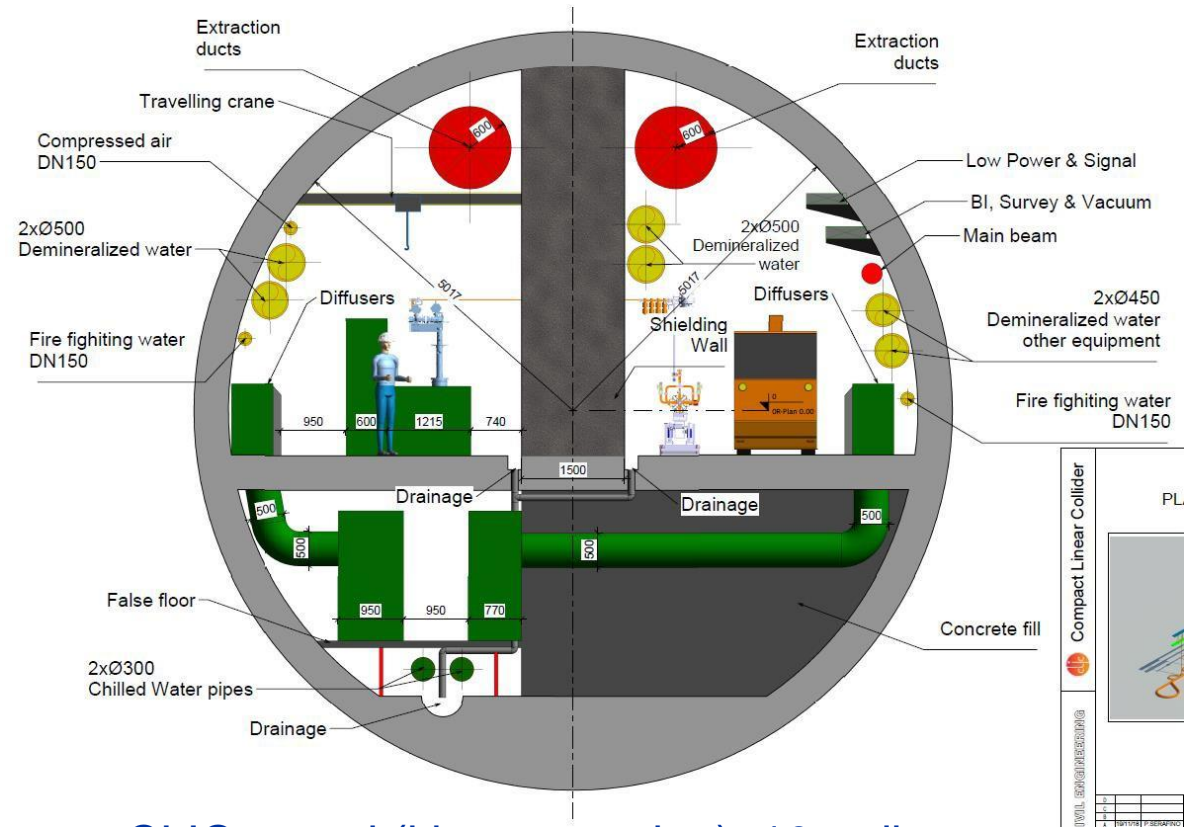

CLIC tunnel (klystron option), 10m diameter


My estimate: 44.8m² concrete
 -> 112 t/m concrete



The Future – Fluctuating Energy Sources

simulation: April 2050, sustainable energy system, Germany

- production of power
- solar, wind
 - release from storage
 - variation: x5!

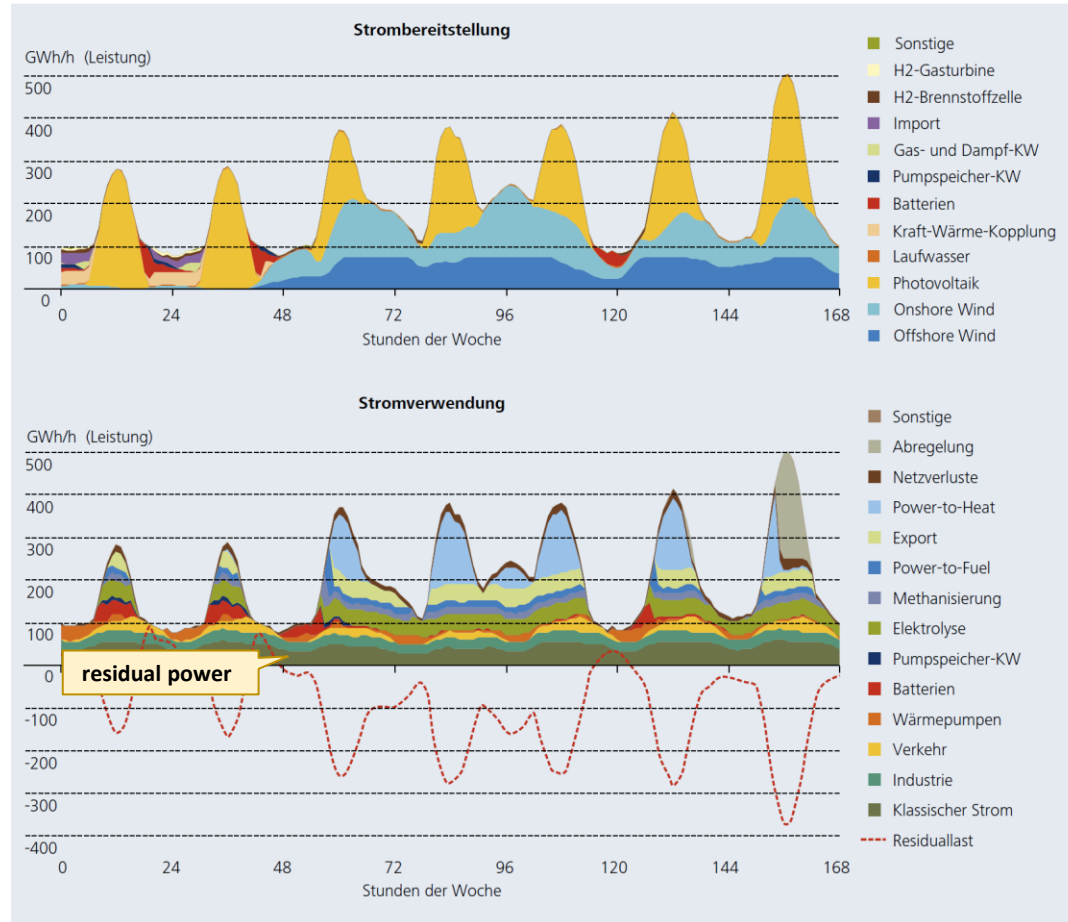


- use of power
- industry, traffic etc
 - energy storage

- full collider operation at times of high grid production
- reduced operation or standby modes with fast L recovery otherwise

courtesy: FRAUNHOFER-INSTITUT FÜR SOLARE ENERGIESYSTEME ISE, Karlsruhe (2020)



Comment on Energy Production (actually Conversion)

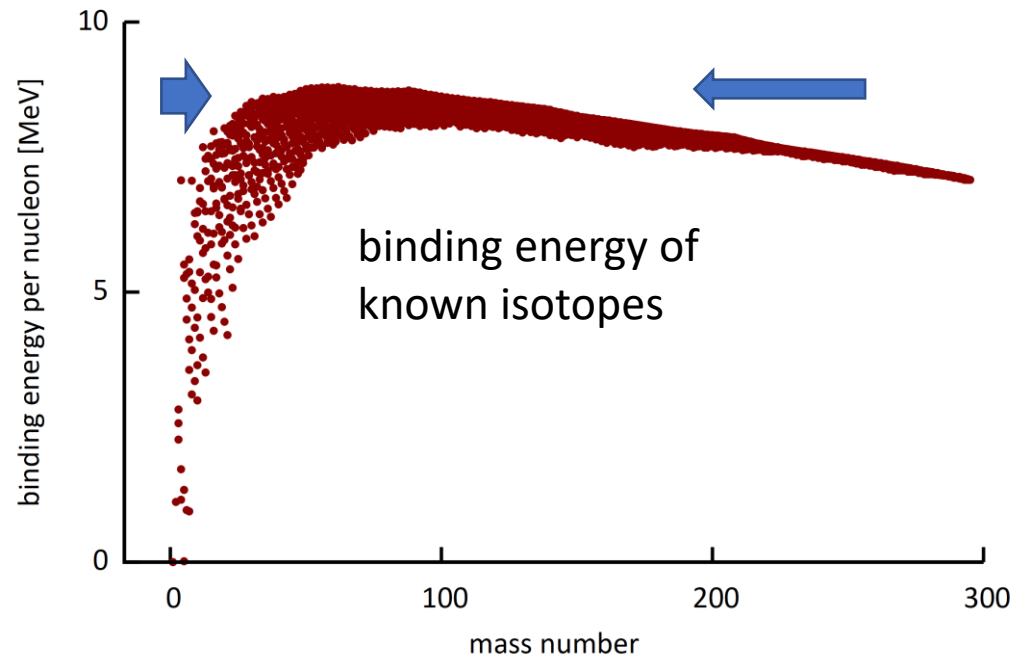

With accelerator driven systems (ADS) nuclear power can be made safer and more sustainable.

For fusion reactors synergetic R&D in the field of accelerators, like RF power generation, s.c. magnet - and vacuum technology.

- **The Sun** (:: wind, PV)
- fusion reactor

- fission reactor
- radioactive decays (geothermal energy)



Summary Particle Accelerators

Grid to Beam

- State of the art 20%, up to 50% reachable for s.c. linacs & high beam power; cyclotrons provide solutions for $E < 1\text{GeV}$, e.g. ADS systems

Colliders

- e⁺/e⁻ ring collider is a powerful yet simple scheme; advanced efficient schemes include energy recovery collider and muon collider
- fluctuating sustainable energy: E management / dynamic operation
→ use surplus energy for RIs

Technology

- s.c. magnets & high Q cavities are efficient, **higher temperature operation (HTS)**
- **efficient RF sources, permanent magnets**, heat recovery & photovoltaics
- other: water & He consumption, critical materials, managed lifecycle, carbon footprint, energy procurement, advanced energy production



Thank you for your attention.

Many thanks for discussions and input:
V.Yakovlev (Fermilab), V.Ziemann (U.Uppsala),
M.Jörg (PSI), D.Schulte, F.Zimmermann (CERN).