

AXEL-2023

Introduction to Particle Accelerators

Transverse optics 2:

- ✓ *Hill's equation*
- ✓ *Phase Space*
- ✓ *Emittance & Acceptance*
- ✓ *Matrix formalism*

Rende Steerenberg (BE/OP)

28 February 2023

Hill's equation

- ✓ The betatron oscillations exist in both horizontal and vertical planes.
- ✓ The number of betatron oscillations per turn is called the betatron tune and is defined as Q_x and Q_y .
- ✓ Hill's equation describes this motion mathematically

$$\frac{d^2x}{ds^2} + K(s)x = 0$$

- ✓ If the restoring force, K is constant in 's' then this is just a Simple Harmonic Motion.
- ✓ 's' is the longitudinal displacement around the accelerator.

Hill's equation (2)

- ✓ In a real accelerator **K varies strongly with 's'**.
- ✓ Therefore we need to solve Hill's equation for K varying as a function of 's'

$$\frac{d^2x}{ds^2} + K(s)x = 0$$

- ✓ Remember what we concluded on the mechanical equivalent concerning the shape of the gutter.....
 - ✓ The **phase advance** and the **amplitude modulation** of the oscillation are determined by the shape of the gutter.
 - ✓ The overall **oscillation amplitude** will depend on the **initial conditions**, i.e. how the motion of the ball started.

Solution of Hill's equation (1)

$$\frac{d^2 x}{ds^2} + K(s)x = 0$$

- ✓ Remember, this is a 2nd order differential equation.
- ✓ In order to solve it let's try to guess a solution:

$$x = \sqrt{\varepsilon \cdot \beta(s)} \cos(\phi(s) + \phi_0)$$

- ✓ ε and Φ_0 are constants, which depend on the initial conditions.
- ✓ $\beta(s)$ = the amplitude modulation due to the changing focusing strength.
- ✓ $\Phi(s)$ = the phase advance, which also depends on focusing strength.

Solution of Hill's equation (2)

✓ Define some parameters

✓ ...and let $\phi = (\phi(s) + \phi_0)$

$$x = \sqrt{\varepsilon} \omega(s) \cos \phi$$

Remember Φ is still a function of s

$$\alpha = \frac{-\beta'}{2}$$

$$\beta = \omega^2$$

$$\gamma = \frac{1 + \alpha^2}{\beta}$$

✓ In order to solve Hill's equation we differentiate our guess, which results in:

$$x' = \sqrt{\varepsilon} \frac{d\omega}{ds} \cos \phi - \sqrt{\varepsilon} \omega \phi' \sin \phi$$

✓and differentiating a second time gives:

$$x'' = \sqrt{\varepsilon} \omega'' \cos \phi - \sqrt{\varepsilon} \omega' \phi' \sin \phi - \sqrt{\varepsilon} \omega' \phi' \sin \phi - \sqrt{\varepsilon} \omega \phi'' \sin \phi - \sqrt{\varepsilon} \omega \phi'^2 \cos \phi$$

✓ Now we need to substitute these results in the original equation.

Solution of Hill's equation (3)

- ✓ So we need to substitute $x = \sqrt{\varepsilon} \beta(s) \cos(\phi(s) + \phi_0)$
and its second derivative

$$x'' = \sqrt{\varepsilon} \omega'' \cos \phi - \sqrt{\varepsilon} \omega' \phi' \sin \phi - \sqrt{\varepsilon} \omega' \phi' \sin \phi - \sqrt{\varepsilon} \omega \phi'' \sin \phi - \sqrt{\varepsilon} \omega \phi'^2 \cos \phi$$

into our initial differential equation

$$\frac{d^2 x}{ds^2} + K(s)x = 0$$

- ✓ This gives:

$$\begin{aligned} &\sqrt{\varepsilon} \omega'' \cos \phi - \sqrt{\varepsilon} \omega' \phi' \sin \phi - \sqrt{\varepsilon} \omega' \phi' \sin \phi - \sqrt{\varepsilon} \omega \phi'' \sin \phi - \sqrt{\varepsilon} \omega \phi'^2 \cos \phi \\ &+ K(s) \sqrt{\varepsilon} \omega \cos \phi = 0 \end{aligned}$$

Sine and Cosine are orthogonal and will never be 0 at the same time

The sum of the coefficients must vanish separately to make our guess valid for all phases

Solution of Hill's equation (4)

$$\sqrt{\varepsilon}\omega'' \cos \phi - \sqrt{\varepsilon}\omega' \phi' \sin \phi - \sqrt{\varepsilon}\omega' \phi' \sin \phi - \sqrt{\varepsilon}\omega \phi'' \sin \phi - \sqrt{\varepsilon}\omega \phi'^2 \cos \phi + K(s)\sqrt{\varepsilon}\omega \cos \phi = 0$$

- ✓ Using the 'Sin' terms $\longrightarrow 2\omega' \phi' + \omega \phi'' = 0 \longrightarrow 2\omega\omega' \phi' + \omega^2 \phi'' = 0$
- ✓ We defined $\beta = \omega^2$, which after differentiating gives $\beta' = 2\omega\omega'$
- ✓ Combining $2\omega\omega' \phi' + \omega^2 \phi'' = 0$ and $\beta' = 2\omega\omega'$ gives: $\beta' \phi' + \beta \phi'' = (\beta \phi')' = 0$
- ✓ As condition for our guessed solution to be valid we get: $\frac{d\beta}{ds} = \frac{d\beta}{d\omega} \frac{d\omega}{ds}$
 $\beta \phi' = \text{const.} = 1$ hence $\phi' = \frac{d\phi}{ds} = \frac{1}{\beta}$
- ✓ So our **guess** seems to be **correct**

Solution of Hill's equation (5)

- ✓ Since our solution was correct we have the following for x :

$$x = \sqrt{\varepsilon \cdot \beta} \cos \phi$$

$$\frac{d\omega}{ds} = \frac{\beta'}{2\omega} = -\frac{\alpha}{\sqrt{\beta}}$$

- ✓ For x' we have now:

$$x' = \sqrt{\varepsilon} \frac{d\omega}{ds} \cos \phi - \sqrt{\varepsilon} \omega \phi' \sin \phi$$

$$\omega = \sqrt{\beta}$$

- ✓ Thus the expression for x' finally becomes:


$$x' = -\alpha \sqrt{\varepsilon / \beta} \cos \phi - \sqrt{\varepsilon / \beta} \sin \phi$$

Phase Space Ellipse

- ✓ So now we have an expression for x and x'


$$x = \sqrt{\varepsilon \cdot \beta} \cos \phi \quad \text{and} \quad x' = -\alpha \sqrt{\varepsilon / \beta} \cos \phi - \sqrt{\varepsilon / \beta} \sin \phi$$

- ✓ If we plot x' versus x as ϕ goes from 0 to 2π we get an ellipse, which is called the phase space ellipse.

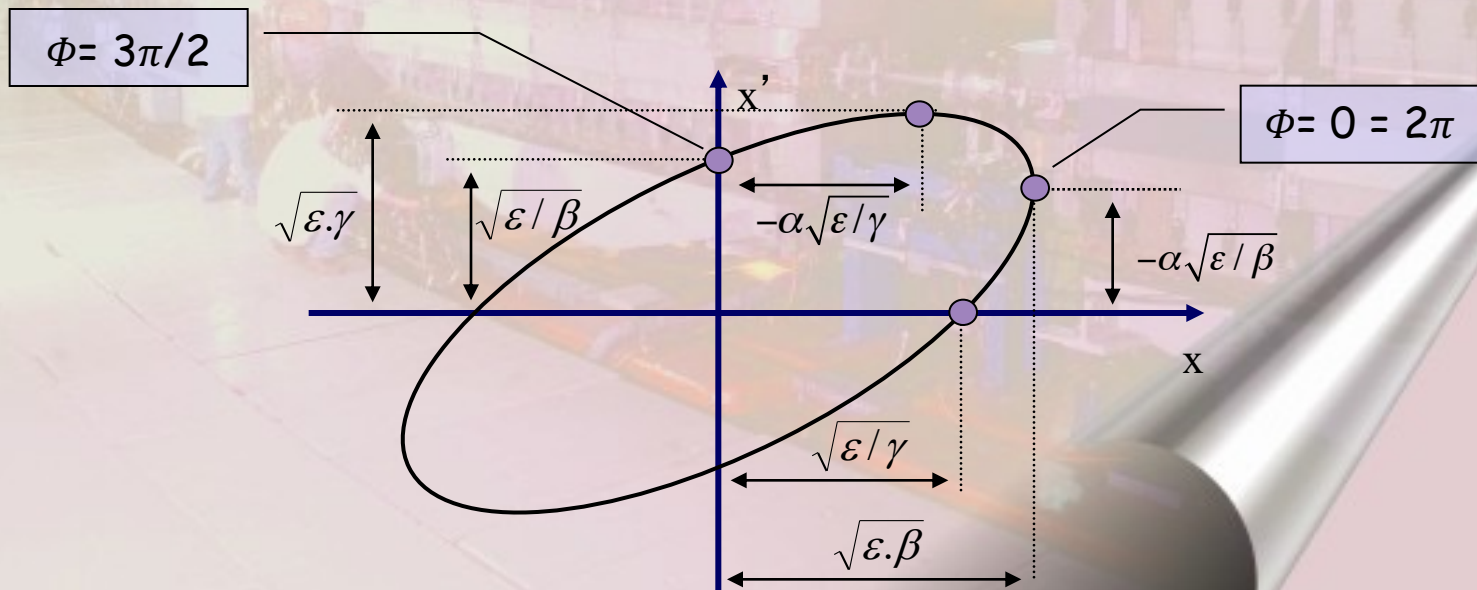


Phase Space Ellipse (2)

- ✓ As we move around the machine the shape of the ellipse will change as β changes under the influence of the quadrupoles
- ✓ However the area of the ellipse ($\pi\varepsilon$ does not change

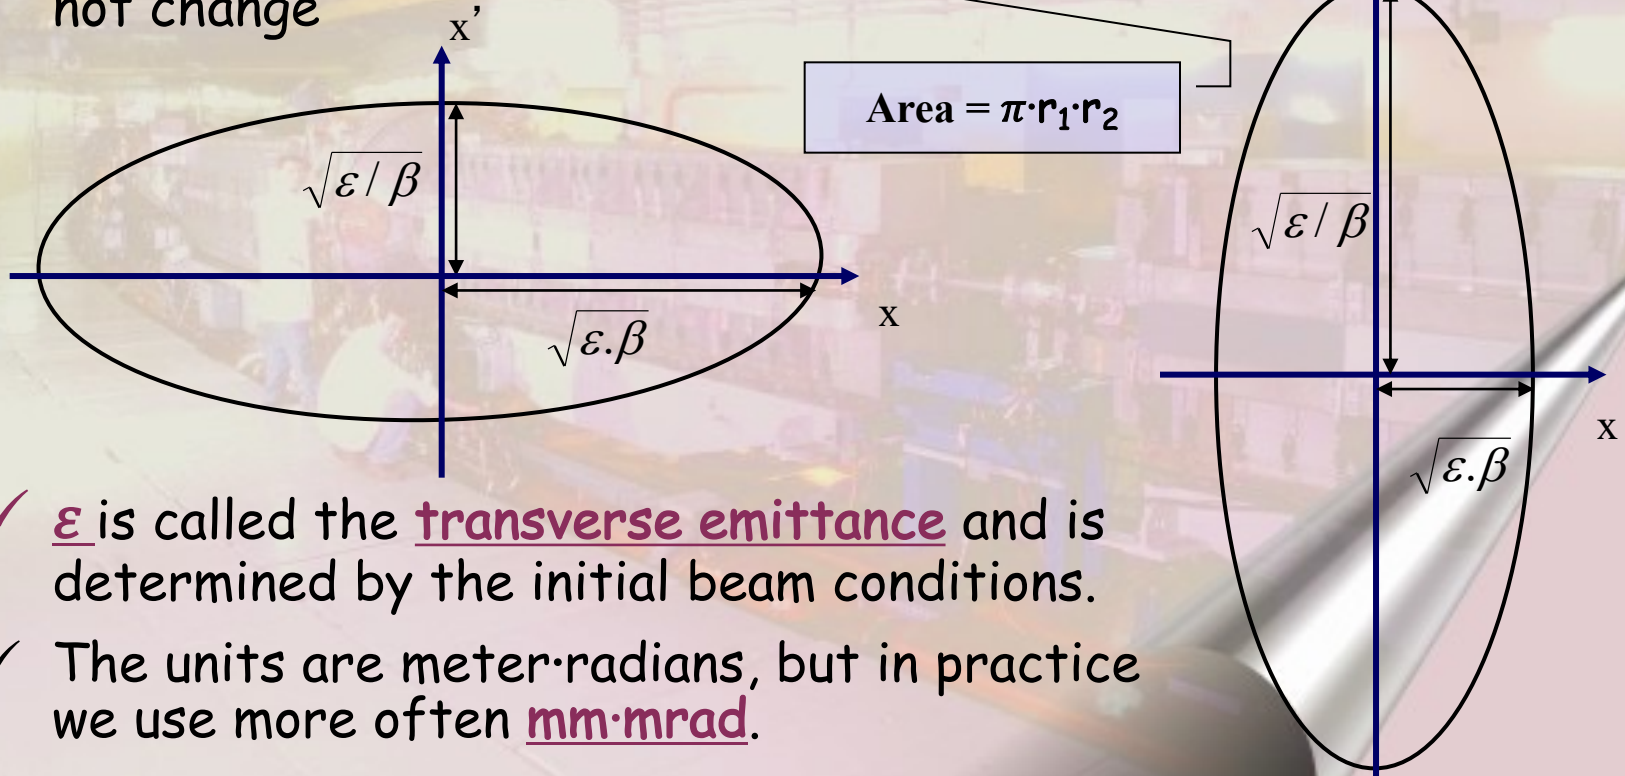



- ✓ ε is called the transverse emittance and is determined by the initial beam conditions.
- ✓ The units are meter·radians, but in practice we use more often mm·mrad.

Phase Space Ellipse (3)

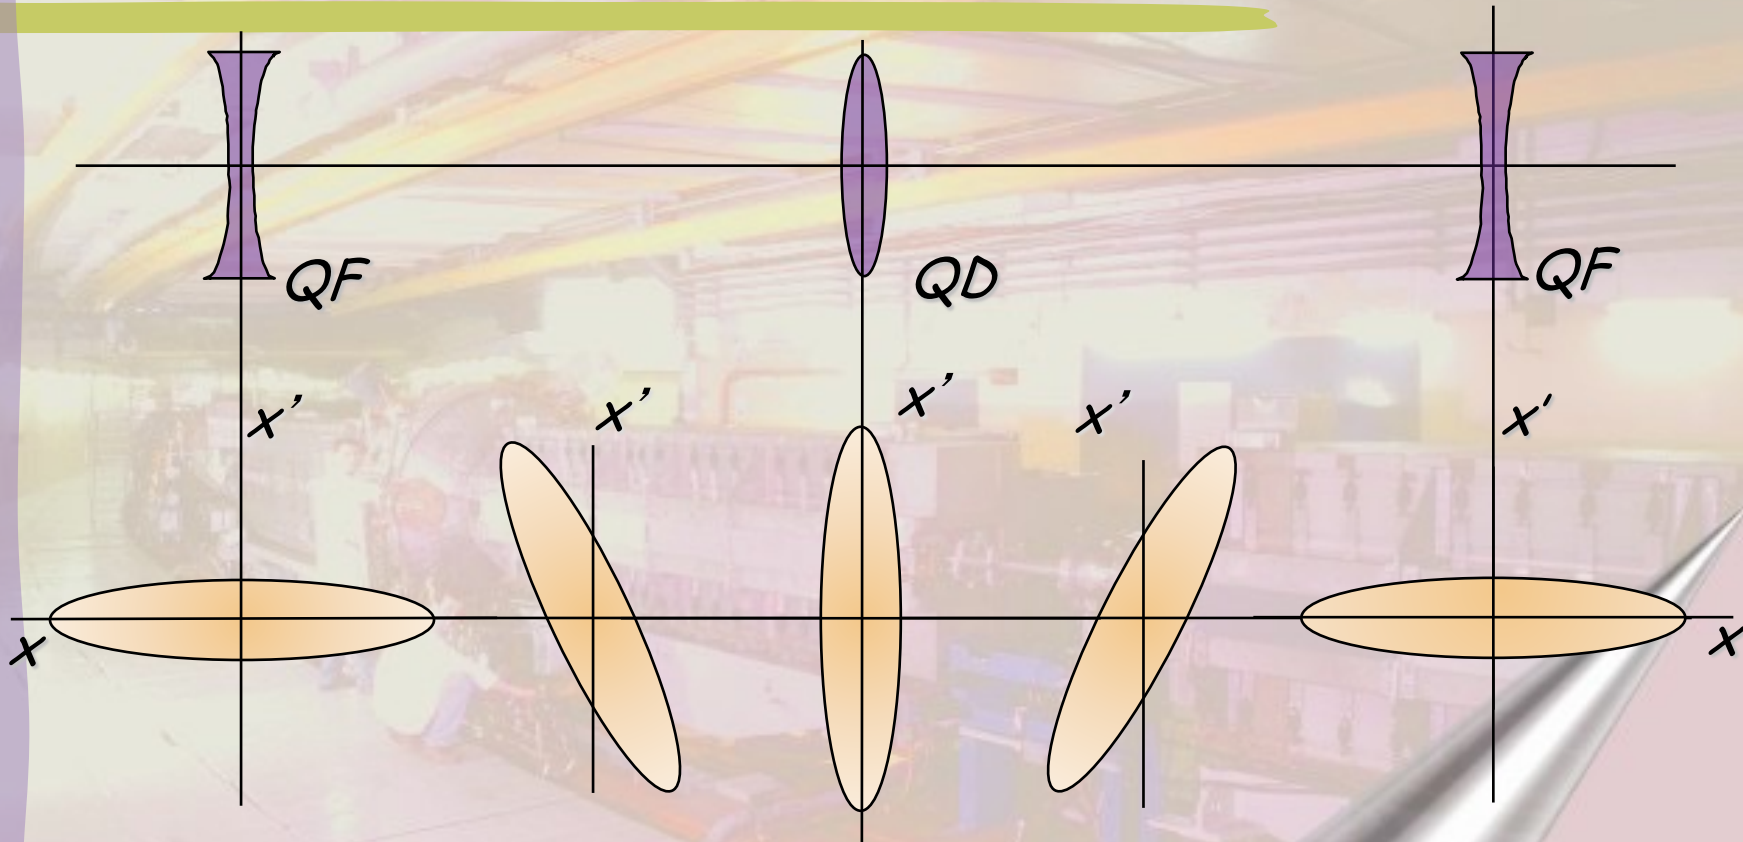

- ✓ For each point along the machine the ellipse has a particular orientation, but the area remains the same


Phase Space Ellipse (4)

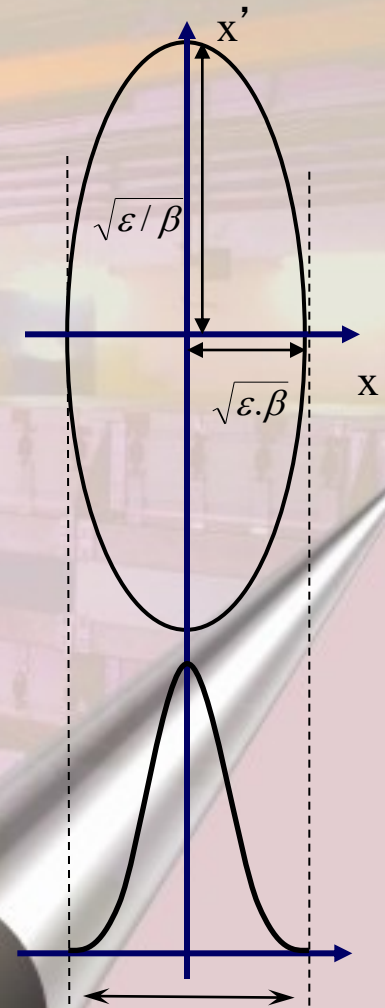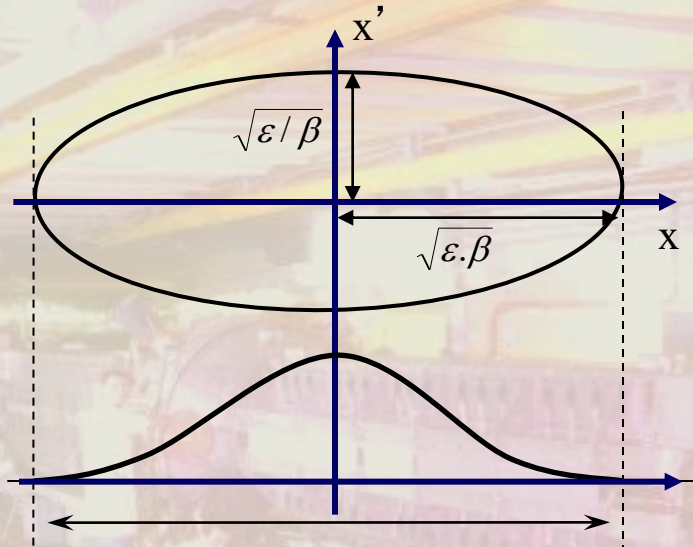

- ✓ The projection of the ellipse on the x -axis gives the **Physical transverse beam size**.
- ✓ Therefore the variation of $\beta(s)$ around the machine will tell us how the transverse beam size will vary.





Emittance & Acceptance

- ✓ To be rigorous we should define the emittance slightly differently.
 - ✓ Observe all the particles at a single position on one turn and measure both their position and angle.
 - ✓ This will give a large number of points in our phase space plot, each point representing a particle with its co-ordinates x, x' .

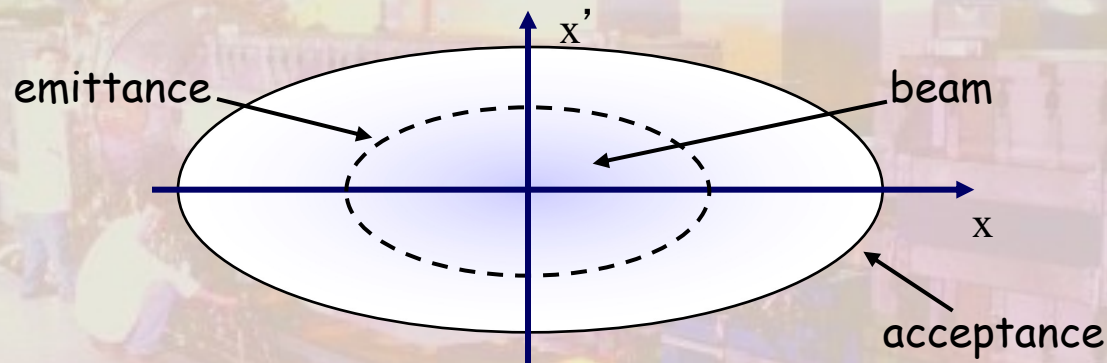

- ✓ The emittance is the area of the ellipse, which contains all, or a defined percentage, of the particles.
- ✓ The acceptance is the maximum area of the ellipse, which the emittance can attain without losing particles.

Emittance measurement

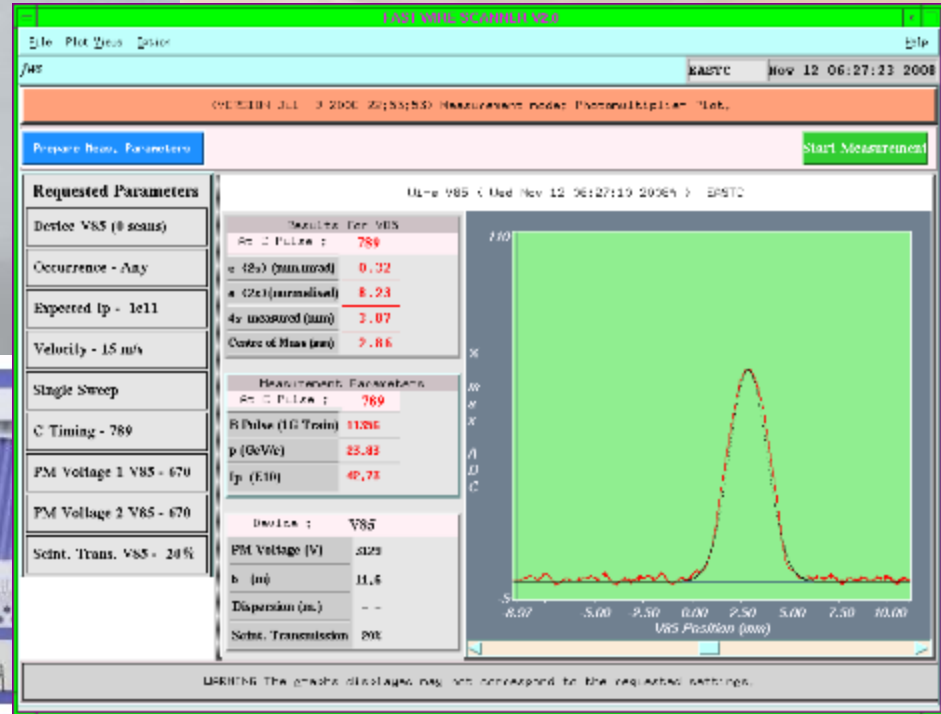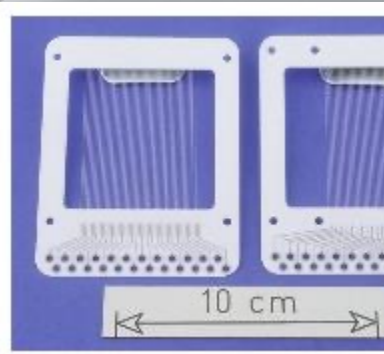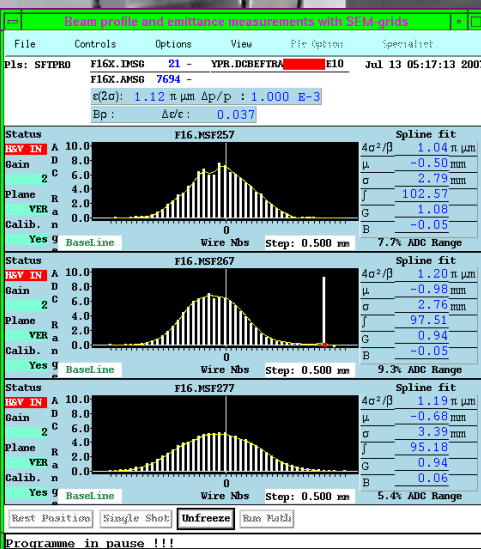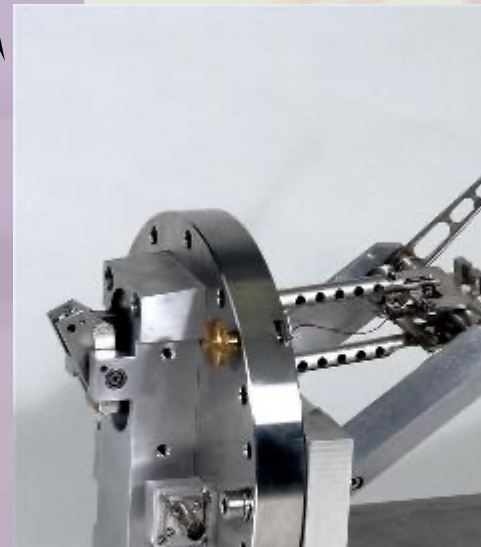

Matrix Formalism

- ✓ Lets represent the particles transverse position and angle by a column matrix.

$$\begin{pmatrix} x \\ x' \end{pmatrix}$$

- ✓ As the particle moves around the machine the values for x and x' will vary under influence of the dipoles, quadrupoles and drift spaces.
- ✓ These modifications due to the different types of magnets can be expressed by a **Transport Matrix M**
- ✓ If we know x_1 and x_1' at some point s_1 then we can calculate its position and angle after the next magnet at position s_2 using:


$$\begin{pmatrix} x(s_2) \\ x(s_2)' \end{pmatrix} = M \begin{pmatrix} x(s_1) \\ x(s_1)' \end{pmatrix} = \begin{pmatrix} a & b \\ c & d \end{pmatrix} \begin{pmatrix} x(s_1) \\ x(s_1)' \end{pmatrix}$$

How to apply the formalism

- ✓ If we want to know how a particle behaves in our machine as it moves around using the matrix formalism, we need to:
 - ✓ **Split** our machine **into separate elements** as dipoles, focusing and defocusing quadrupoles, and drift spaces.
 - ✓ **Find the matrices** for all of these components
 - ✓ **Multiply them** all together
 - ✓ **Calculate** what happens to an individual particle as it makes **one or more turns** around the machine


Matrix for a drift space

- ✓ A drift space contains no magnetic field.
- ✓ A drift space has length L.

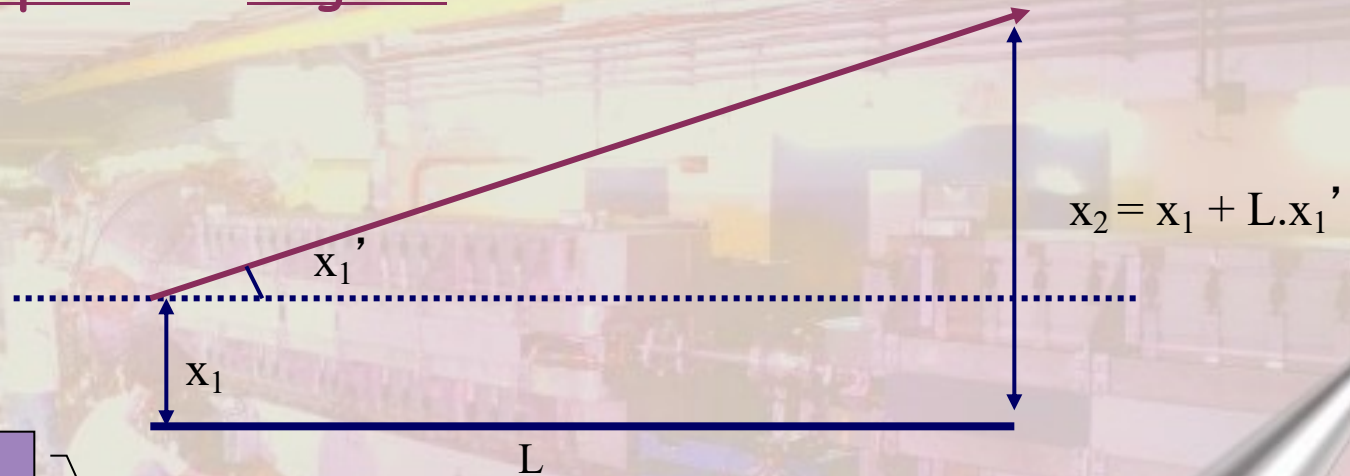

x_1' small


$$\left. \begin{aligned} x_2 &= x_1 + Lx_1' \\ x_2' &= 0 + x_1' \end{aligned} \right\}$$



$$\begin{pmatrix} x_2 \\ x_2' \end{pmatrix} = \begin{bmatrix} 1 & L \\ 0 & 1 \end{bmatrix} \begin{pmatrix} x_1 \\ x_1' \end{pmatrix}$$

Matrix for a quadrupole

✓ A quadrupole of length L.

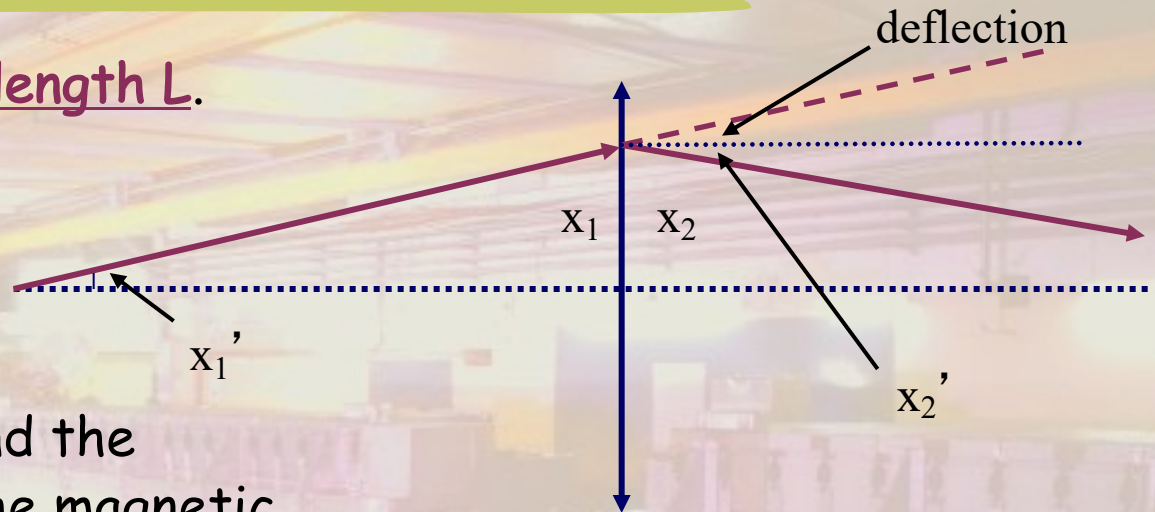

Remember $B_y \propto x$ and the deflection due to the magnetic field is:

$$\frac{LB_y}{(B\rho)} = -\frac{LK}{(B\rho)} \cdot x$$

Provided L
is small

$$\left. \begin{aligned} x_2 &= x_1 + 0 \\ x_2' &= -\frac{LK}{(B\rho)} x_1 + x_1' \end{aligned} \right\} \longrightarrow$$

$$\begin{pmatrix} x_2 \\ x_2' \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ -\frac{LK}{(B\rho)} & 1 \end{pmatrix} \begin{pmatrix} x_1 \\ x_1' \end{pmatrix}$$

Matrix for a quadrupole (2)

✓ We found :

$$\begin{pmatrix} x_2 \\ x_2' \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ -\frac{LK}{(B\rho)} & 1 \end{pmatrix} \begin{pmatrix} x_1 \\ x_1' \end{pmatrix}$$

✓ Define the focal length of the quadrupole as $f = \frac{(B\rho)}{KL}$

$$\begin{pmatrix} x_2 \\ x_2' \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{pmatrix} \begin{pmatrix} x_1 \\ x_1' \end{pmatrix}$$

How now further ?

- ✓ For our purpose we will treat dipoles as simple drift spaces as they bend all the particles by the same amount.
- ✓ We have Transport Matrices corresponding to drift spaces and quadrupoles.
- ✓ These matrices describe the real discrete focusing of our quadrupoles.
- ✓ Now we must combine these matrices with our solution to Hill's equation, since they describe the same motion.....

Questions....,Remarks...?

Hill's equation

Emittance & Acceptance

Phase space

Matrix formalism

