

# Future Colliders from the Accelerator Perspective


Emilio A. Nanni

LHCP 2024

6/4/2024


# Accelerators Drive Discovery for High Energy Physics

Experimental validation of the Standard Model of Particle Physics

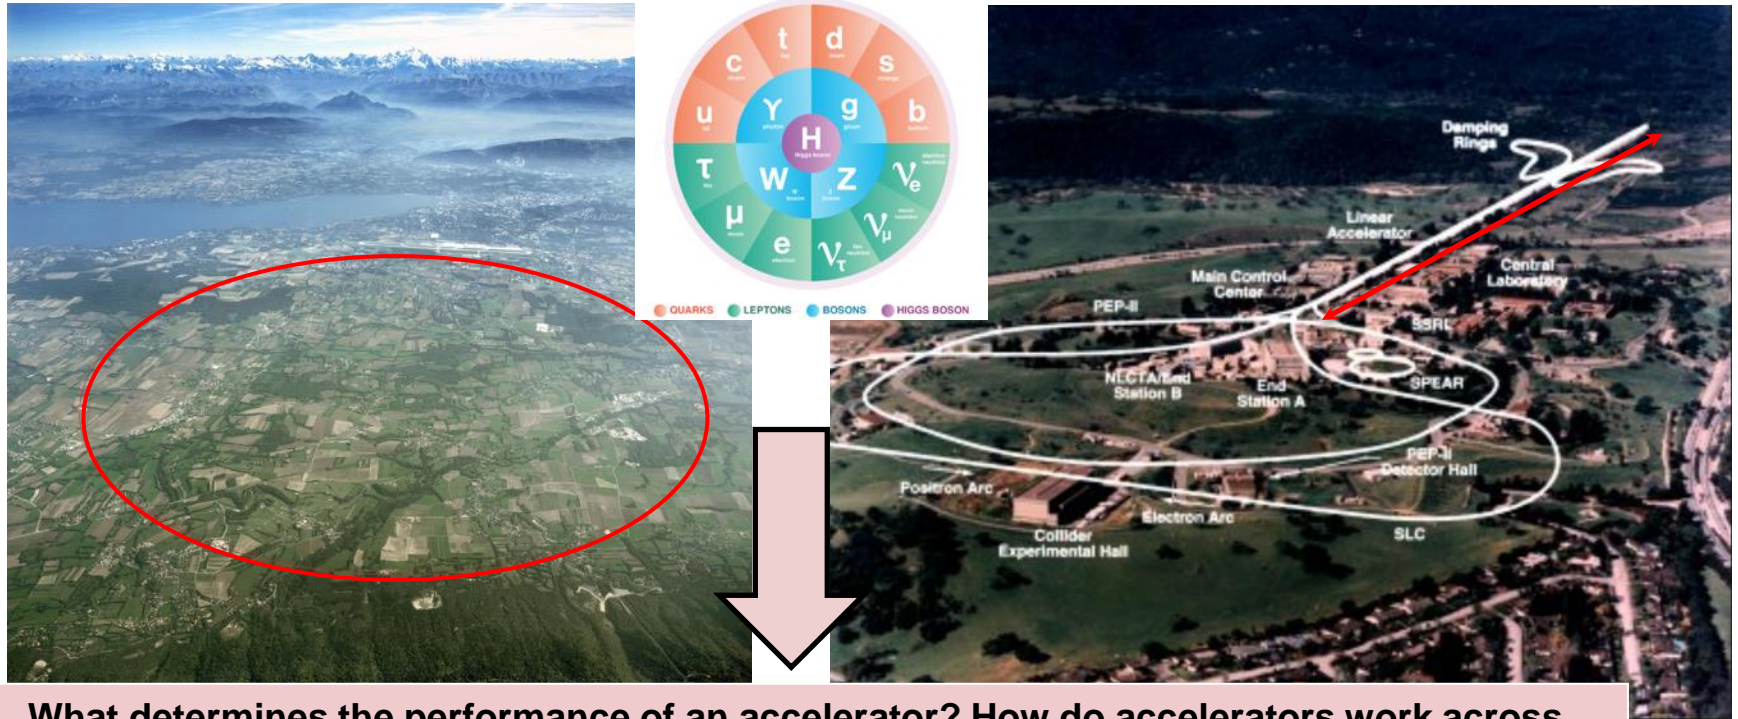

What determines the performance of an accelerator? How do accelerators work across different scales in size and energy?


# What's Next for the Energy Frontier?

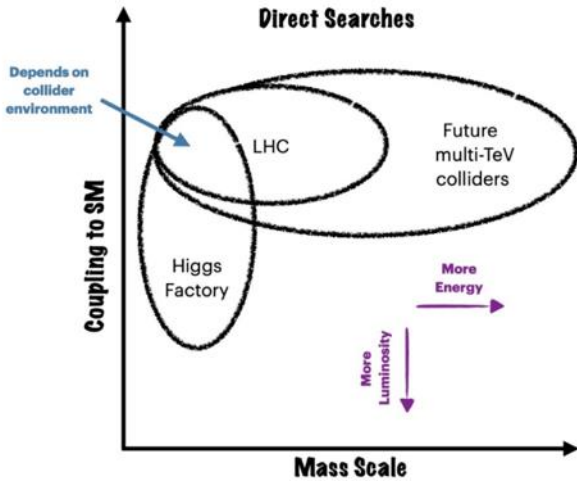

- Many options in consideration beyond HL-LHC
- Precision studies with Higgs Factories
- Discovery physics on the >TeV scale

Higgs coupling measurements and direct searches will complement each other in exploring the 1-10 TeV scale and beyond.


[Reina, P5 Town Hall](#)

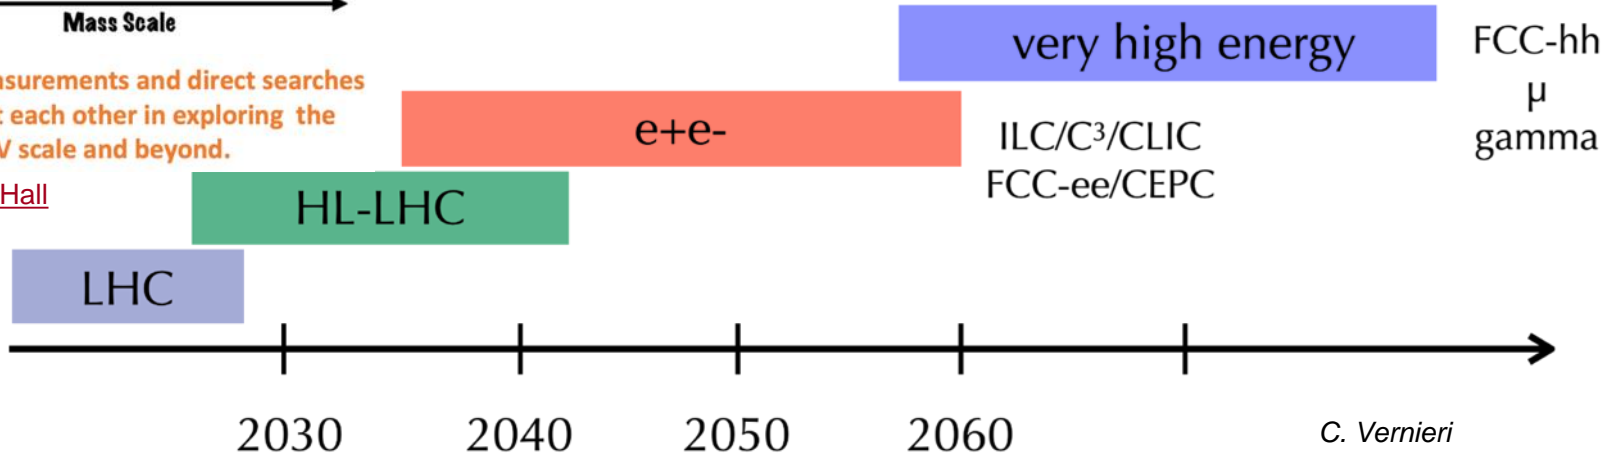

# Linear vs. Circular


## Linear $e^+e^-$ colliders: ILC, C<sup>3</sup>, CLIC

- Reach higher energies ( $\sim$ TeV), and can use polarized beams
- Relatively low radiation
- Collisions in bunch trains

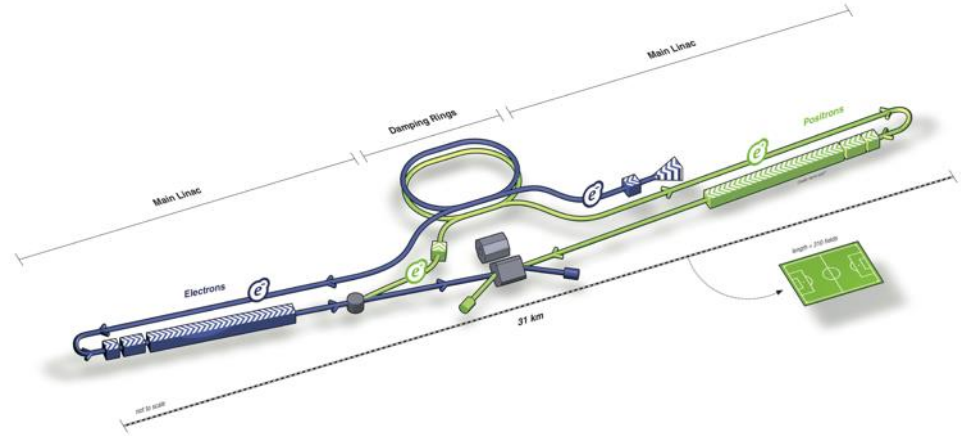

## Circular $e^+e^-$ colliders: FCC-ee, CEPC

- Highest luminosity collider at Z/WW/ZH
- limited by synchrotron radiation above 350 – 400 GeV ( $\sim \gamma^4 / \rho^2$ )
- Beam continues to circulate after collision

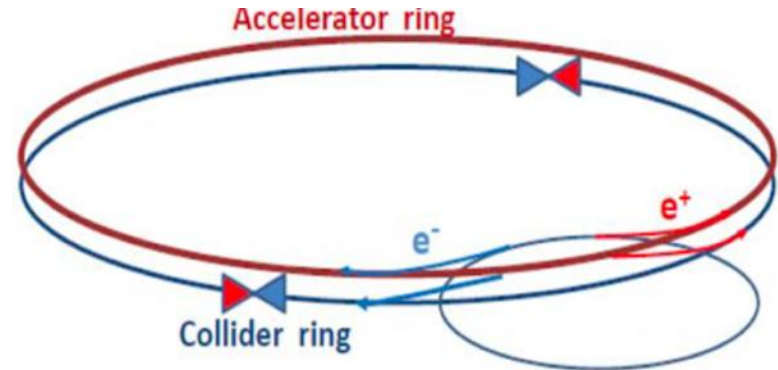


# Higgs Factory Proposals

## THE TOHOKU REGION OF JAPAN




ILC  
250/500 GeV

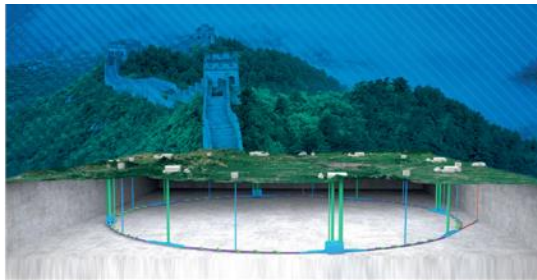

CEPC  
240 GeV

## CLIC 380/1000/3000 GeV

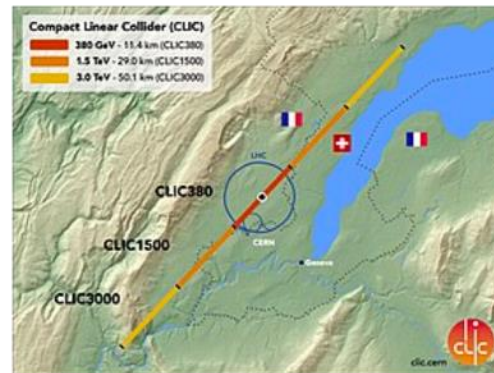


FCC-ee  
240/365 GeV



## COOL COPPER COLLIDER




250/550 GeV  
... > TeV

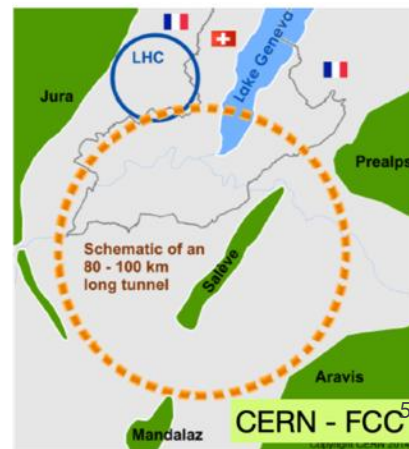


# Future Muon, Wakefield and hh Colliders

New magnet technology  $\text{Nb}_3\text{Sn}$  – 16 T (vs 8 T in the LHC with NbTi)  
 current record 14 T (CERN), Fermilab  $\rightarrow$  15 T



...either in a new or old tunnel

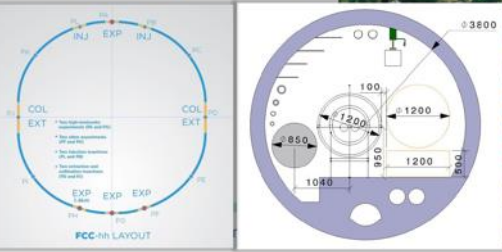


## FCC-hh



## Wakefield




## Muon Collider

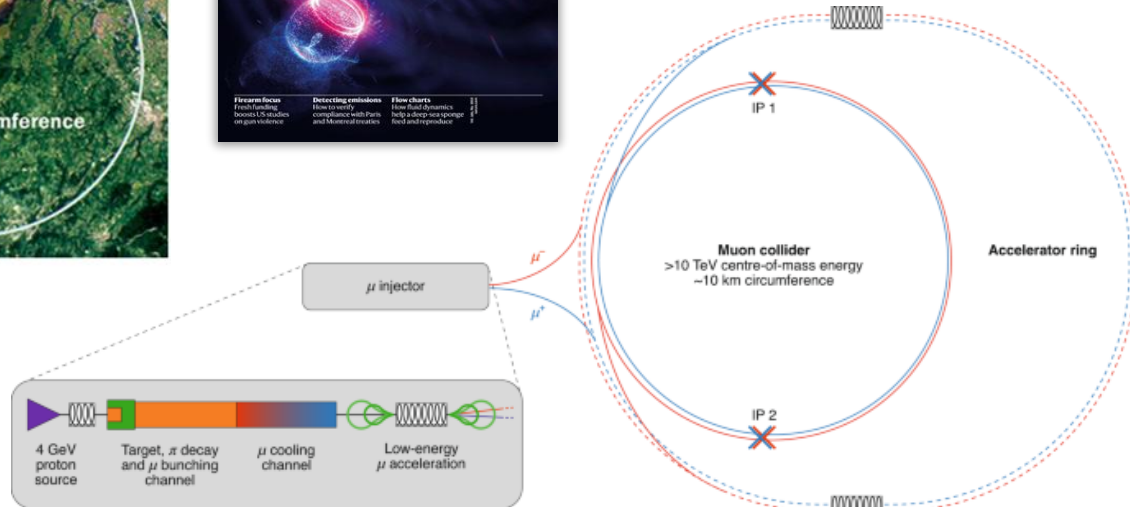

# Landscape of High Energy Colliders




Snowmass Implementation Task Force comparisons of machine concepts

Future studies focusing on physics potential for operation **AND** construction

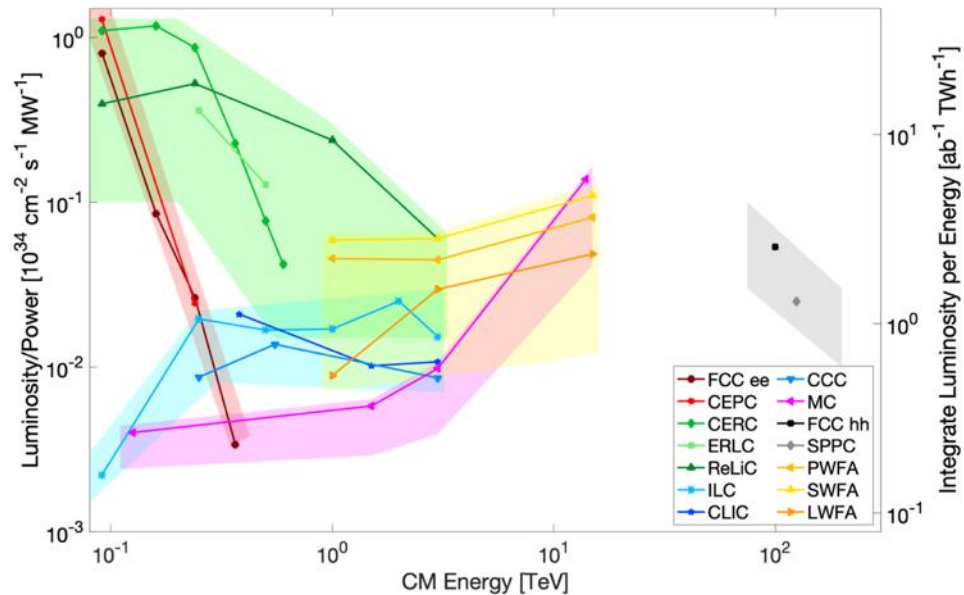

# ILC and the Accelerator Technology

International development team

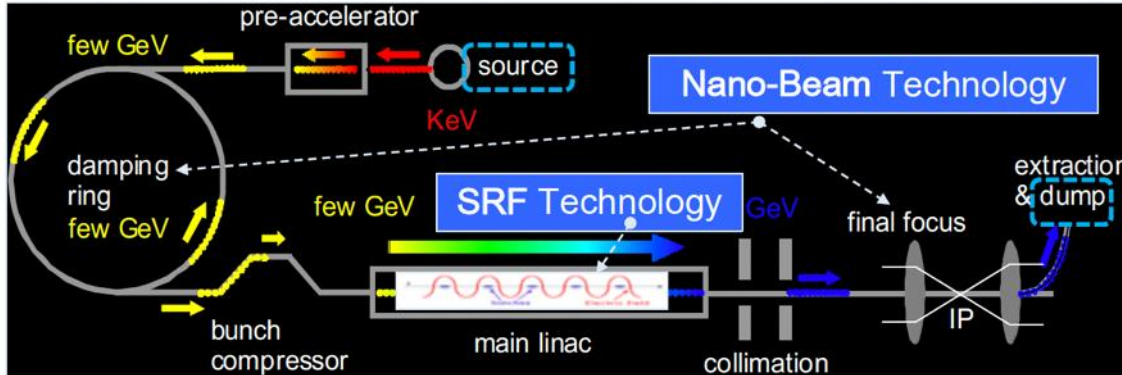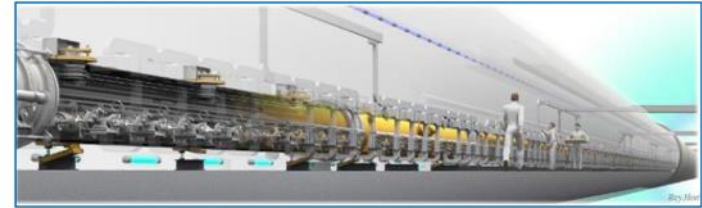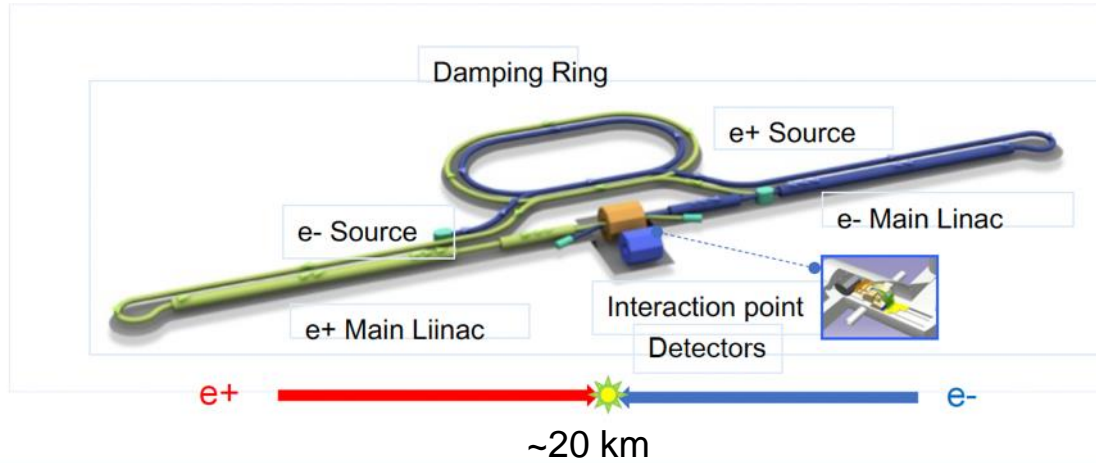

TDR was published in 2013.



P5 Town Hall at SLAC (May 3, 2023)

| Parameters                | Value   |
|---------------------------|---|
| Beam Energy               | 125 + 125 GeV   |
| Luminosity                | 1.35 / 2.7 x 10 <sup>10</sup> cm <sup>2</sup> /s              |
| Beam rep. rate            | 5 Hz  |
| Pulse duration            | 0.73 / 0.961 ms   |
| # bunch / pulse           | 1312 / 2625   |
| Beam Current              | 5.8 / 8.8 mA  |
| Beam size (y) at FF       | 7.7 nm  |
| SRF Field gradient        | < 31.5 > MV/m (+/-20%)<br>Q <sub>0</sub> = 1x10 <sup>10</sup> |
| #SRF 9-cell cavities (CM) | ~ 8,000 (~ 900)   |
| AC-plug Power             | 111 / 138 MW  |




# SRF technology for ILC-250 beyond present limits


- Advanced shape standing wave SRF cavities – Low Loss (LL), ICHIRO,
- Reentrant (RE) – increase peak quench magnetic field by 10-20%, potentially bringing accelerating gradient limit to  $\approx 60$  MV/m
- Traveling wave (TW) SRF offers better cryogenic efficiency and higher accelerating gradient up to  $\sim 70$  MV/m – possible application: ILC energy upgrade, HELEN collider, ACE at Fermilab
- Advanced SRF materials – Nb<sub>3</sub>Sn cavities can potentially reach  $\sim 90$  MV/m

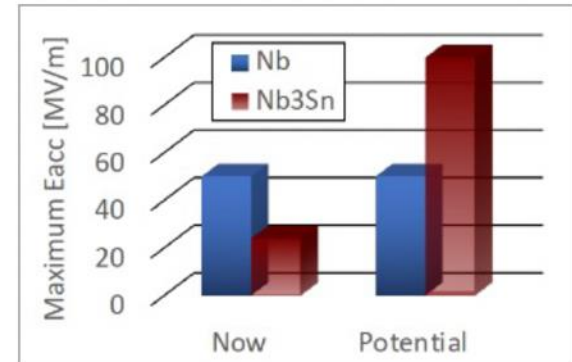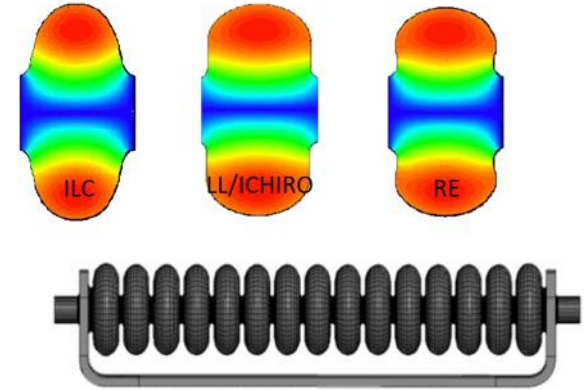

# The Compact Linear Collider (CLIC)

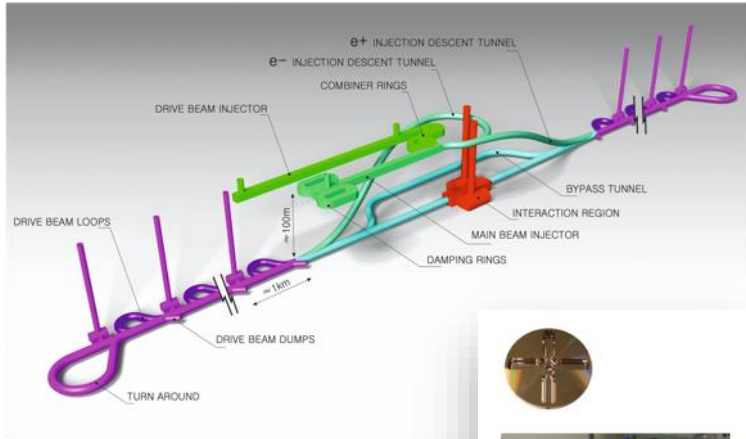

*Accelerating structure prototype for CLIC: 12 GHz ( $L \sim 25$  cm)*



- **Timeline:** Electron-positron linear collider at CERN for the era beyond HL-LHC
- **Compact:** Novel and unique two-beam accelerating technique with high-gradient room temperature RF cavities ( $\sim 20'500$  structures at 380 GeV),  $\sim 11$ km in its initial phase
- **Expandable:** Staged programme with collision energies from 380 GeV (Higgs/top) up to 3 TeV (Energy Frontier)
- CDR in 2012 with focus on 3 TeV. Updated project overview documents in 2018 (Project Implementation Plan) with focus 380 GeV for Higgs and top.

Recent talks (with more references): [eeFACT1](#) and [eeFACT2](#)



The CLIC accelerator studies are mature:



- Optimised design for cost and power
- Many tests in CTF3, FELs, light-sources and test-stands
- Technical developments of “all” key elements

# On-going CLIC studies towards next ESPP update

Project Readiness Report as a step toward a TDR

Assuming ESPP in ~ 2026, Project Approval ~ 2028, Project (tunnel) construction can start in ~ 2030.

The X-band technology readiness for the 380 GeV CLIC initial phase - more and more driven by use in small compact accelerators

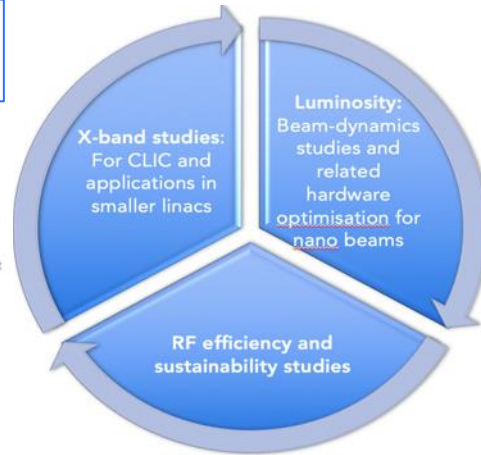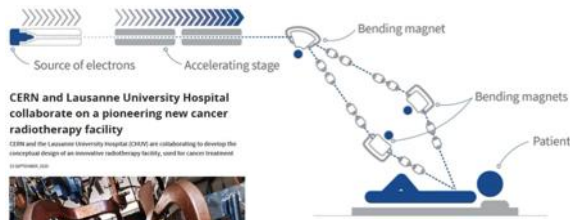

Optimizing the luminosity at 380 GeV – already implemented for Snowmass paper, further work to provide margins will continue.

Luminosity margins and increases:


- Initial estimates of static and dynamic degradations from damping ring to IP gave:  $1.5 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$
- Simulations taking into account static and dynamic effects with corrective algorithms give 2.8 on average, and 90% of the machines above  $2.3 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$  (this is the value currently used)

Improving the power efficiency for both the initial phase and at high energies, including more general sustainability studies

Power estimate bottom up (concentrating on 380 GeV systems)

- Very large reductions since the CDR, better estimates of nominal settings, much more optimised drive-beam complex and more efficient klystrons, injectors more optimized, main target damping ring RF significantly reduced, recent L-band klystron studies

Energy consumption ~0.6 TWh yearly, CERN is currently (when running) at 1.2 TWh (~90% in accelerators)

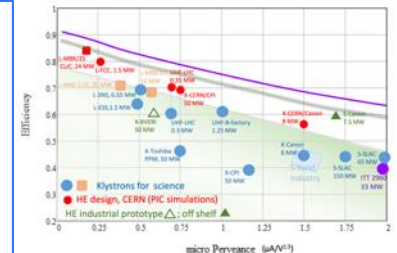



# Accelerator Complex

8 km footprint for 250/550 GeV CoM  $\Rightarrow$  70/120 MeV/m


Large portions of accelerator complex compatible between LC technologies

- Beam delivery / IP modified from ILC (1.5 km for 550 GeV CoM), compatible w/ ILC-like detector
- Damping rings and injectors to be optimized with CLIC as baseline


## C<sup>3</sup> Parameters

| Collider                        | C <sup>3</sup> | C <sup>3</sup> |
|---------------------------------|----------------|----------------|
| CM Energy [GeV]                 | 250            | 550            |
| Luminosity [ $\times 10^{34}$ ] | 1.3            | 2.4            |
| Gradient [MeV/m]                | 70             | 120            |
| Effective Gradient [MeV/m]      | 63             | 108            |
| Length [km]                     | 8              | 8              |
| Num. Bunches per Train          | 133            | 75             |
| Train Rep. Rate [Hz]            | 120            | 120            |
| Bunch Spacing [ns]              | 5.26           | 3.5            |
| Bunch Charge [nC]               | 1              | 1              |
| Crossing Angle [rad]            | 0.014          | 0.014          |
| Site Power [MW]                 | $\sim 150$     | $\sim 175$     |
| Design Maturity                 | pre-CDR        | pre-CDR        |

## C<sup>3</sup> Main Linac Cryomodule 9 m (600 MeV / 1 GeV)

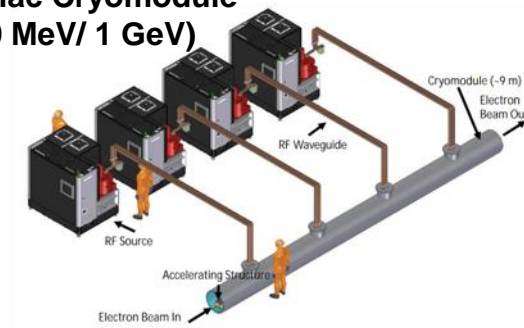

## C<sup>3</sup> - 8 km Footprint for 250/550 GeV (to scale)

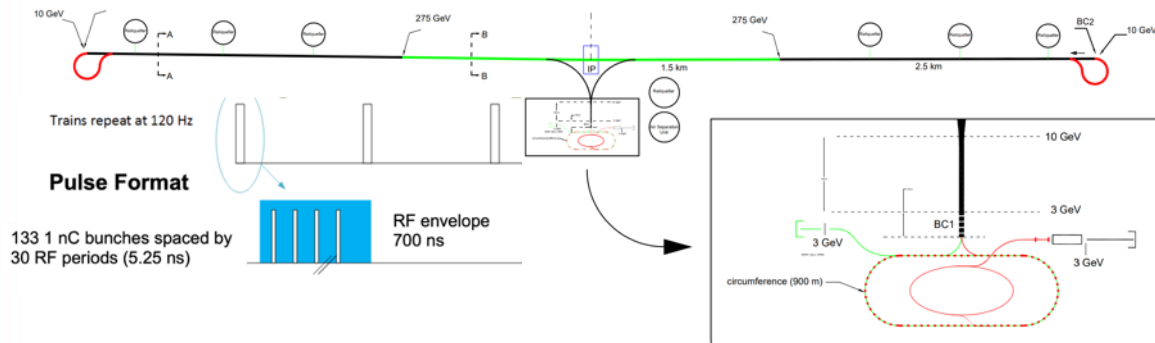




# Alignment and Vibrations

System level optimization essential for achieving performance

## RF Structure Optimization

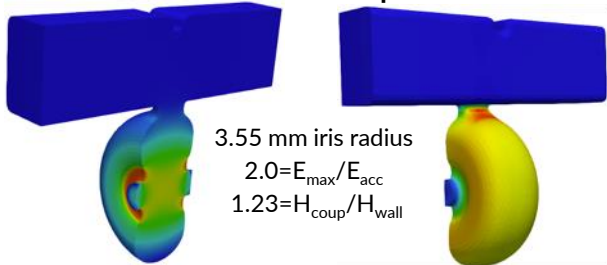


3.55 mm iris radius  
 $2.0 = E_{max}/E_{acc}$   
 $1.23 = H_{coup}/H_{wall}$

Electric Field

Magnetic Field


M. Shumail, Z. Li

## Vibration Measurements and Analysis

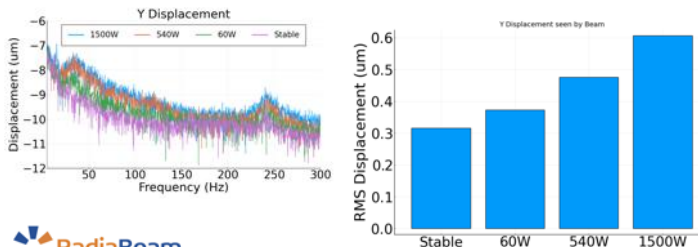

Z. George, V. Borzenets, A. Dhar, D. Palmer

## Two-Phase Fluid Simulations





K. Shoel

## Precision Short and Long Range Alignment

H. Van Der Graaf




100 nm resolution  
Approved effort to test cold vertical

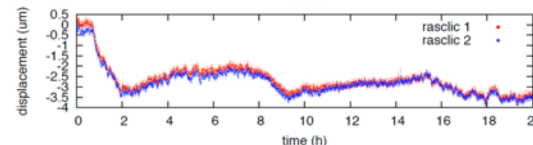

<https://arxiv.org/pdf/2307.07981.pdf>

## Main Linac Beam Dynamics

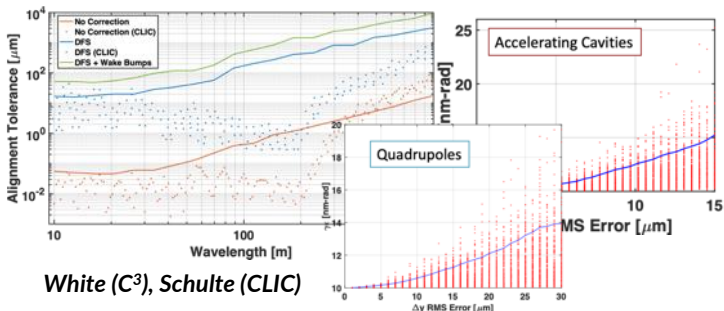


White (C<sup>3</sup>), Schulte (CLIC)

| Alignment Parameters      | Units | Value |
|---------------------------|-------|-------|
| Raft Components           | μm    | 5     |
| Short Range (~10m)        | μm    | 30    |
| Long Range (>200m)        | μm    | 1000  |
| Structure Vert. Vibration | μm    | 9     |
| Quad Vert. Vibration      | nm    | 15    |
| BPM Resolution            | μm    | 0.1   |
| BPM-Quad Alignment        | μm    | 2     |



## efficient RF power sources

(400 & 800 MHz)

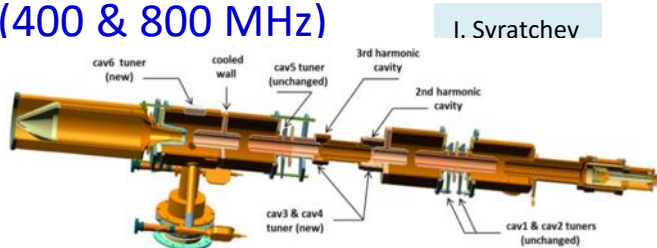

400 MHz  
1- & 2-  
cell  
Nb/Cu,  
4.5 K

high efficiency klystrons


& scalable solid-state amplifiers

FPC & HOM coupler, cryomodule,

thin-film coatings

energy efficient twin aperture arc dipoles




## efficient SC cavities

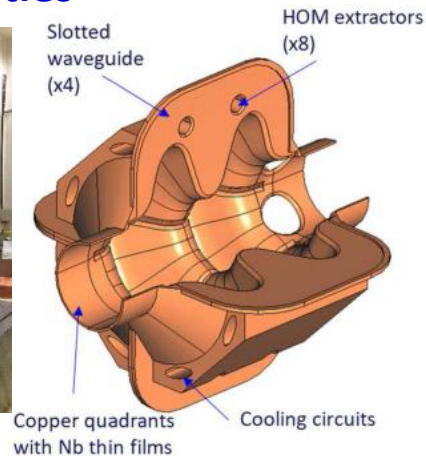

under study: CCT HTS quad's & sext's for arcs

reduce energy consumption by O(50 MW)

PAUL SCHERRER INSTITUT



M. Koratzinos,  
B. Auchmann

A. Milanese

I.  
Svratchev

## Slotted Waveguide

Elliptical cavity

(SWELL) for high

beam current & for

high gradient,


seamless by nature

– links to past work

at ANL (Liu & Nassiri,

[PRAB 13, 012001](#))

# Stage 2: FCC-hh: highest collision energies

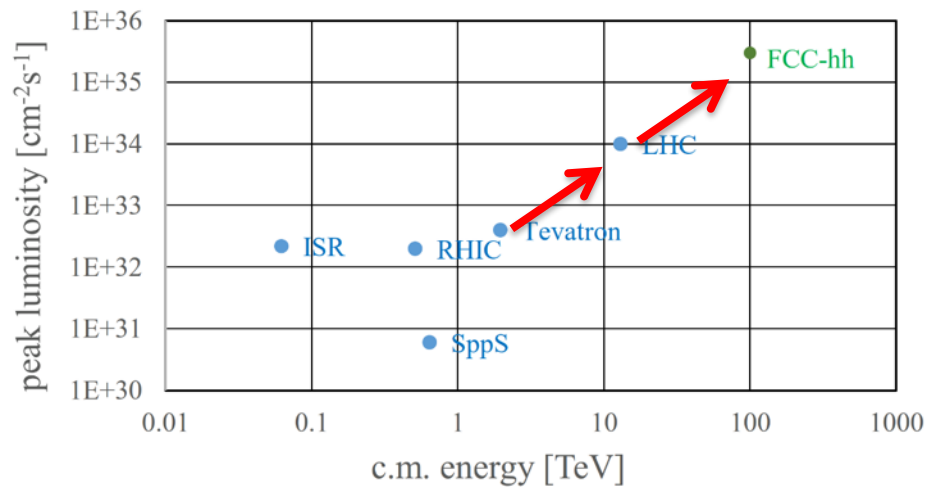

~order of magnitude performance increase in both energy & luminosity wrt LHC  
 ~100 TeV cm collision energy (vs 14 TeV for LHC)  
 20  $\text{ab}^{-1}$  per experiment over 25 years of operation (vs 3  $\text{ab}^{-1}$  for LHC)

similar performance increase as from Tevatron to LHC

from LHC technology  
8.3 T NbTi dipole

via HL-LHC technology  
12 T  $\text{Nb}_3\text{Sn}$  quadrupole

key technology: high-field magnets



FNAL dipole demonstrator  
4-layer cos $\theta$   
14.5 T  $\text{Nb}_3\text{Sn}$   
in 2019

HTS technology  
Hybrid Nb-Ti/HTS

A. Zlobin




# Muon Collider Concept

- Leading concept for Muon Collider is a proton driven target for muon production followed by 6D cooling to reduce the beam emittance
- Alternative concept – positron driven muon production


ArXiv: 1808.01858

- Challenges:

- Muon cooling for proton driven source
- High flux positron source

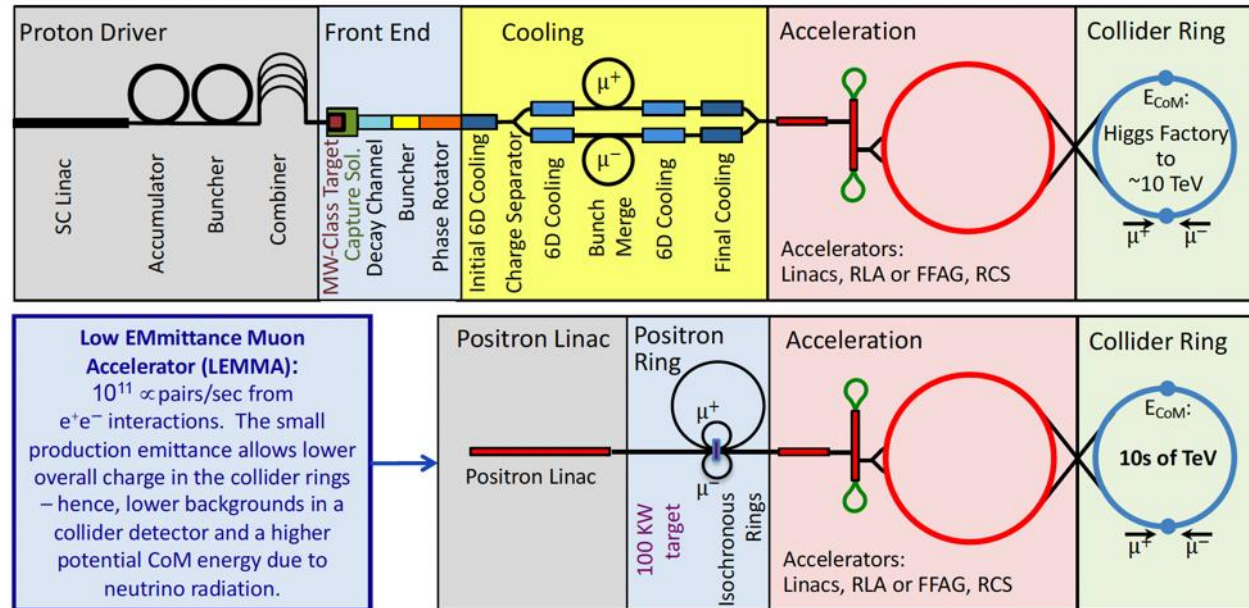

# Muon Cooling

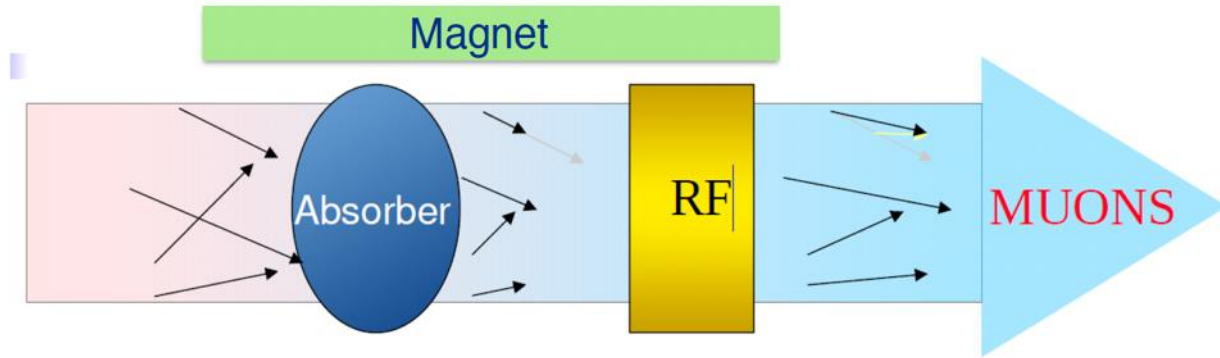


- Technology requirements for MuC cooling:
  - Large bore solenoidal magnets: From 2 T (500 mm IR), to 14 T (50 mm IR)
  - Normal conducting rf that can provide high-gradients within a multi-T fields
  - Absorbers that can tolerate large muon intensities
  - Integration: Solenoids coupled to each other, near high power rf & absorbers)

# Target Parameters for Muon Collider from Snowmass 2021


Accelerator R&D areas:

- High power proton driver
- Short lifetime of muons in injector (~microsec)
- **Cooling to reduce emittance**
- **Injection and acceleration**
- Mitigating radiation

| Parameter              | Symbol        | Unit                                     | Target value |      |      |
|------------------------|---------------|--|--------------|------|------|
| Centre-of-mass energy  | $E_{cm}$      | TeV                                      | 3            | 10   | 14   |
| Luminosity             | $\mathcal{L}$ | $10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ | 1.8          | 20   | 40   |
| Collider circumference | $C_{coll}$    | km                                       | 4.5          | 10   | 14   |
| Muons/bunch            | $N$           | $10^{12}$                                | 2.2          | 1.8  | 1.8  |
| Repetition rate        | $f_r$         | Hz                                       | 5            | 5    | 5    |
| Beam power             | $P_{coll}$    | MW                                       | 5.3          | 14.4 | 20   |
| Longitudinal emittance | $\epsilon_L$  | MeV m                                    | 7.5          | 7.5  | 7.5  |
| Transverse emittance   | $\epsilon$    | $\mu\text{m}$                            | 25           | 25   | 25   |
| IP bunch length        | $\sigma_z$    | mm                                       | 5            | 1.5  | 1.07 |
| IP beta-function       | $\beta$       | mm                                       | 5            | 1.5  | 1.07 |
| IP beam size           | $\sigma$      | $\mu\text{m}$                            | 3            | 0.9  | 0.63 |

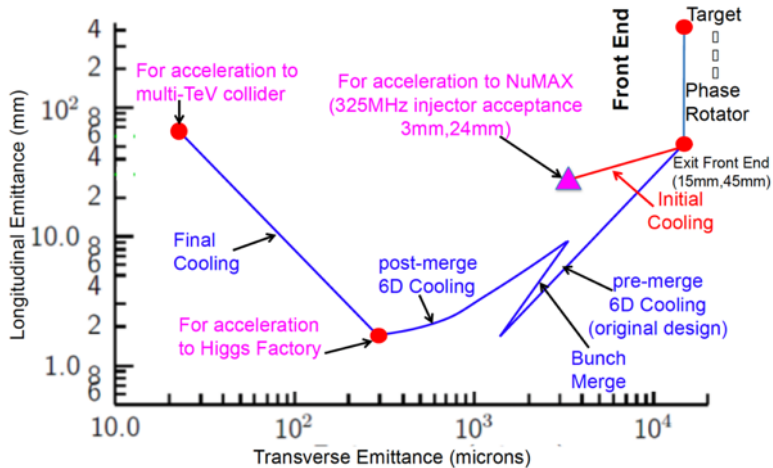


arXiv:2203.08033

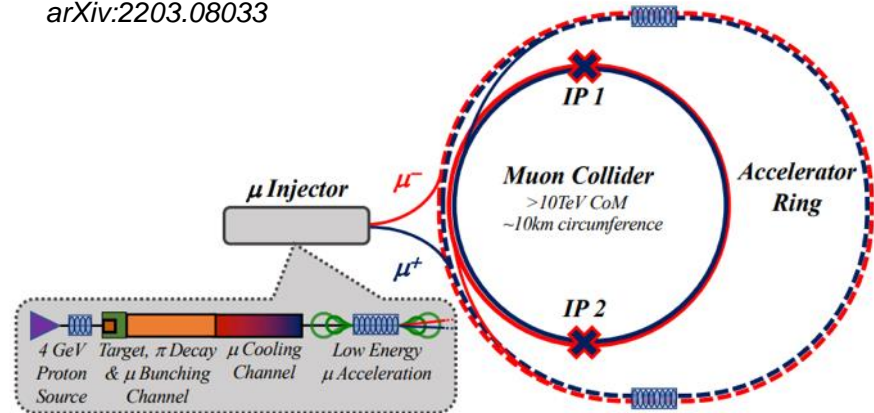


# Wakefield Accelerator Technologies

Structure Wakefield Accelerators @ 

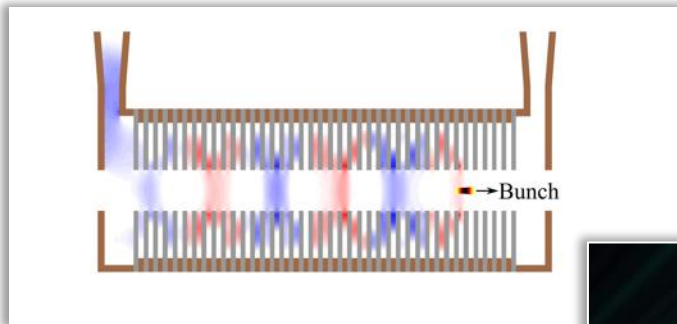

Argonne, SLAC, and LBNL are the stewards of SWFA, PWFA, and LWFA technology in the US, with university participation.

Beam Driven Plasma @ 

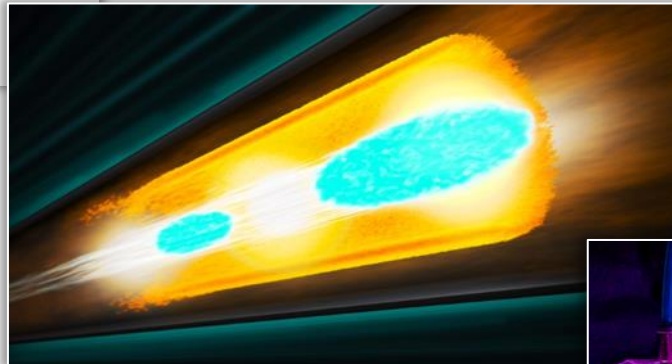

Laser Driven Plasma @ 



Key advantages:

Ultra-large gradients (1-100 GeV/m)

Ultra-short bunches (suppress beamstrahlung)

# Conclusions

- Accelerators are powerful tools for scientific discovery
- A great variety of parameters are achievable – species, power, wavelength, repetition rate
- Technology is evolving rapidly to enable new capabilities
- Ultimately accelerator technology will set the limits of collider performance
- Exciting time with great options for the community

Questions?