

# Electron source systems for AWAKE Run 2




EARLI meeting, 21.3.2023  
Steffen Doebert, SY-RF

# AWAKE Run 2



- Demonstrate possibility to use AWAKE scheme for high energy physics applications in mid-term future!
- Start 2021! Staged program for ~ 10 years


- Need to work in blow-out regime and do beam-loading
- New electron beam based on x-band: 150 MeV, 200 fs, 100 pC,  $\sigma = 5.75 \mu\text{m}$

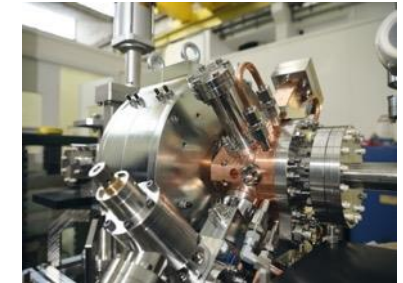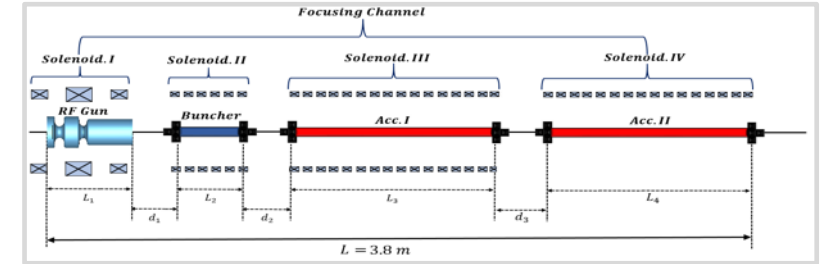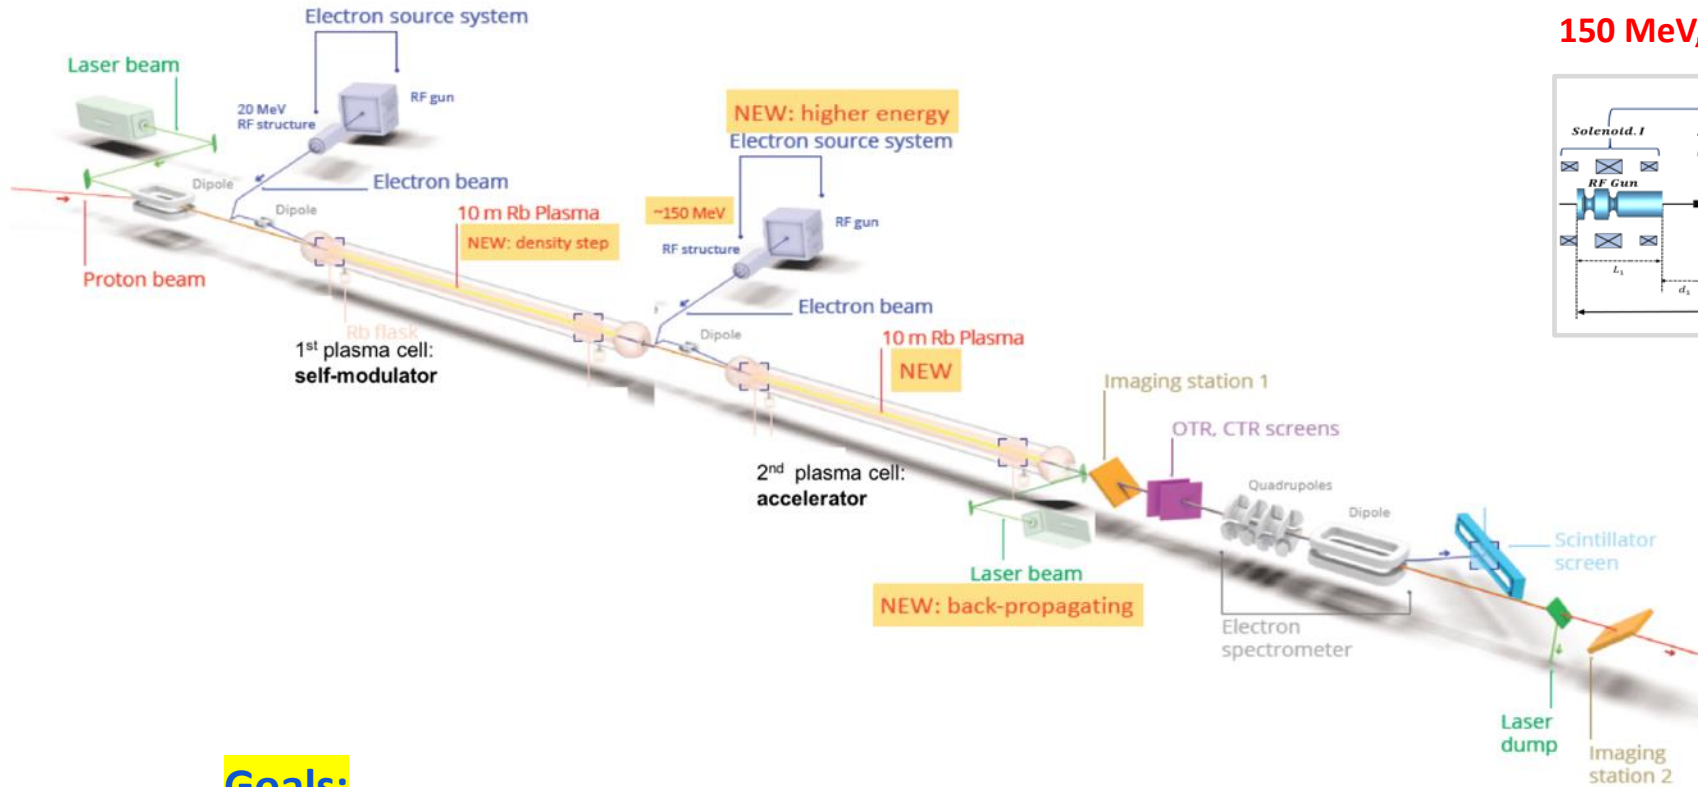

## Goals:

- Accelerate an electron beam to high energy (gradient of 0.5-1GV/m)
- Preserve electron beam quality as well as possible (emittance preservation at 10 mm mrad level)
- Demonstrate scalable plasma source technology (e.g. helicon prototype)


# AWAKE Run 2a: Demonstrate Electron Seeding of Self-Modulation in First Plasma Cell

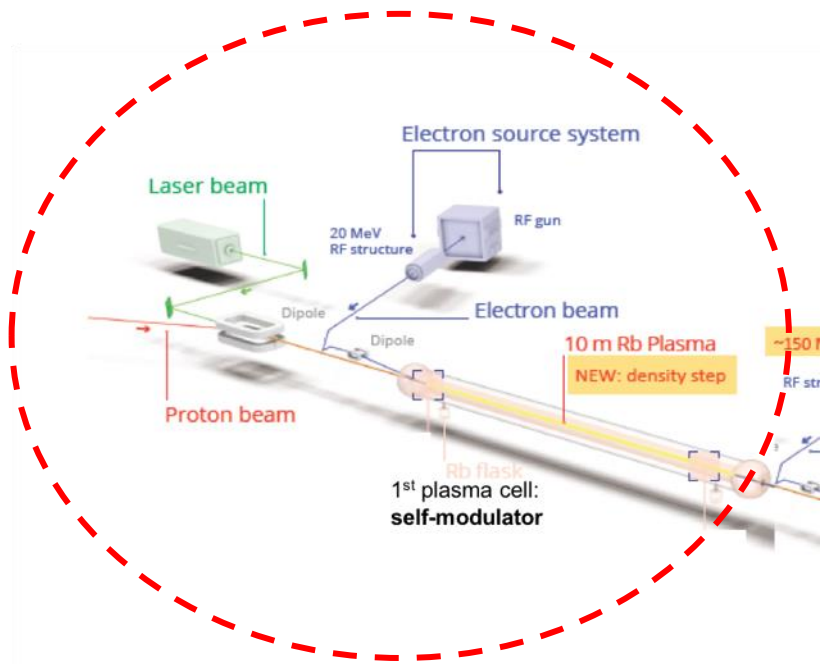


### Why electron bunch seeding:

→ Modulates entire proton bunch with phase reproducibility

AWAKE Run 1:

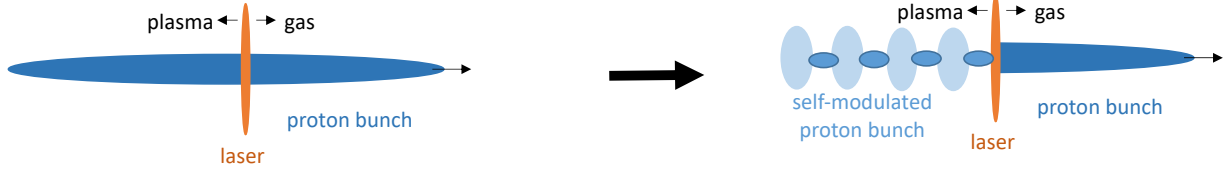

AWAKE Run 2:

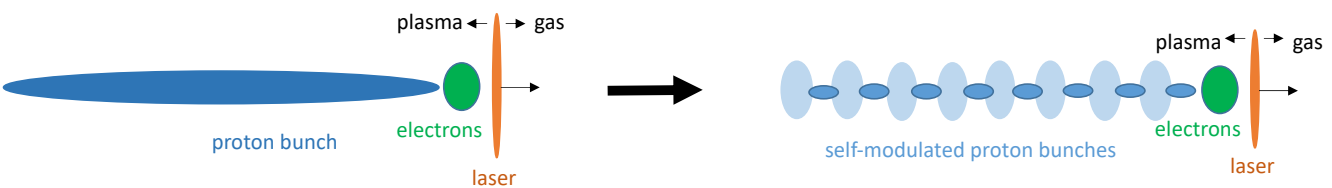


→ Run 2a: use the existing AWAKE Facility

→ Physics program in ~2021/2022

# Parameters for both injectors

Working documents held by Rebecca (Injector 2, EDMS 2378918) and John (Injector 1, EDMS 2417022,2588263)

	Beam Energy	Energy Spread	Energy stability	RMS Bunch Length	Bunch Charge	Emittance	Beam size plasma focus
<b>Injector 1</b>	<b>18.5 MeV</b>	<b>0.5 %</b>	<b><math>1 \times 10^{-2}</math></b>	<b><math>\approx 2 - 3 \text{ ps}</math></b>	<b>100 – 600 pC</b>	<b>2 - 5 <math>\mu\text{m}</math></b>	<b><math>\sim 190 \mu\text{m}</math></b>
<b>Injector 2</b>	<b>150 MeV</b>	<b>0.2 %</b>	<b><math>1 \times 10^{-3} ?</math></b>	<b><math>\approx 200 - 300 \text{ fs}</math></b>	<b>100 pC</b>	<b>2 <math>\mu\text{m}</math></b>	<b>5.75 <math>\mu\text{m}</math></b>

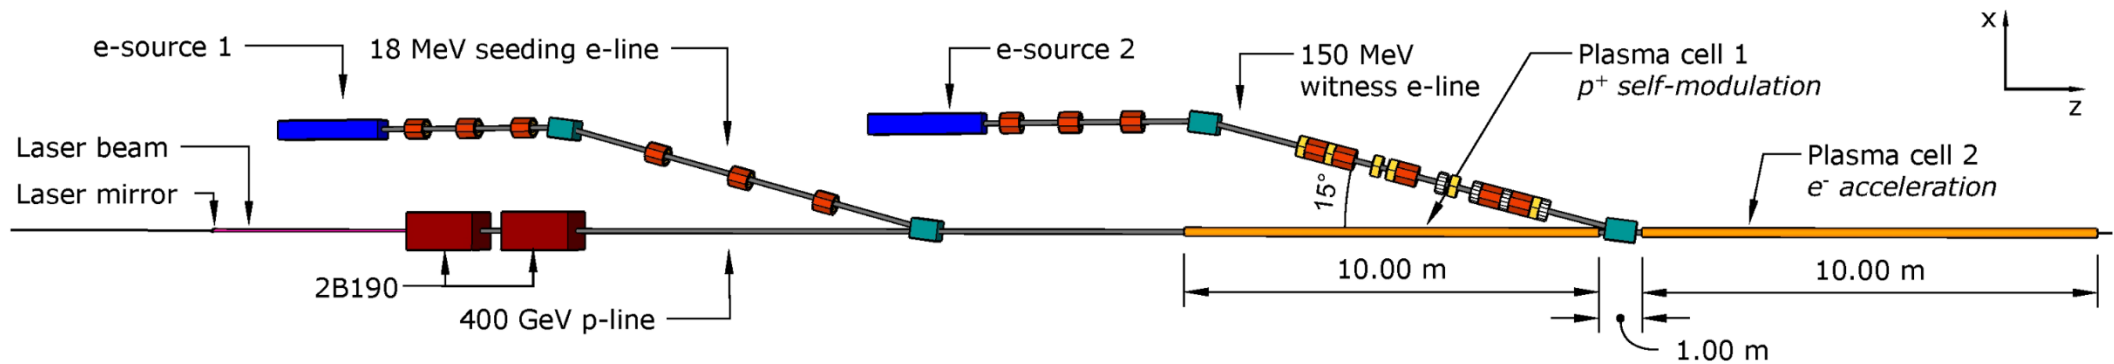


- Energy as high as affordable ?
- Energy spread as low as possible !
- Energy stability as good as possible !
- Emittance reasonably low, no need for ultra-low

# Reference design



- Well advanced concept and beam dynamics design

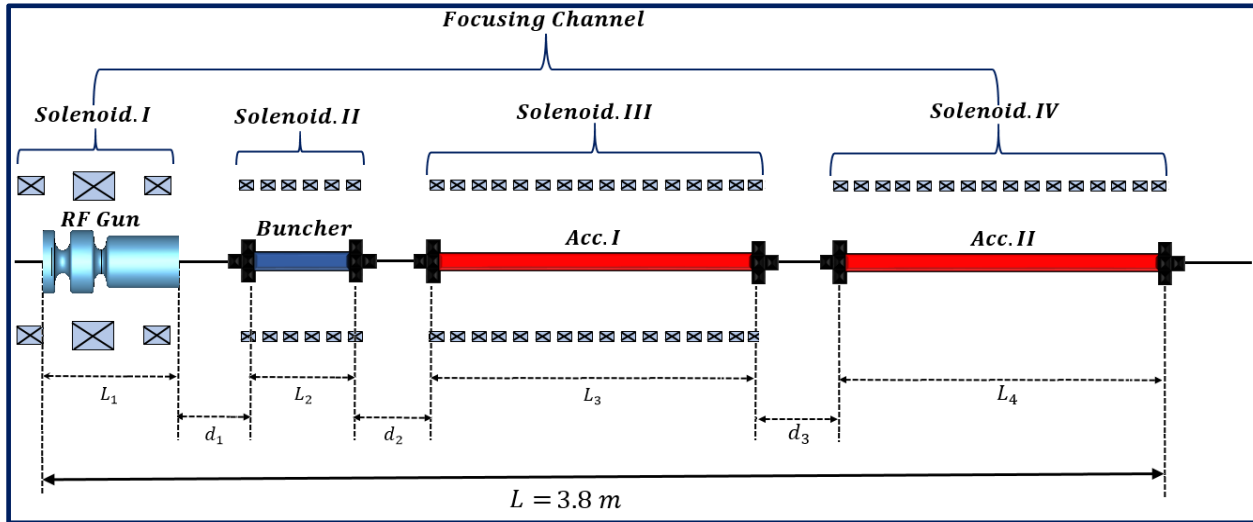

## Laser parameters


$\lambda$ [nm]	$w$ [ev]	$r$ [mm]	$t$ [ps]	$q$ [nC]
262	4.31	1.0	1.0 – 5.0	0.1-1.0

## RF parameters





Parameter	RF Gun	Buncher	Acc. I	Acc. II
Frequency	3.0	12.0	12.0	12.0
Gradient	120MV/m	35MV/m	80MV/m	80MV/m
N. Cell	1.5	30	120	120

$E_k$ [MeV]	$\sigma_r$ [mm]	$\sigma_t$ [fs]	$\epsilon_x$ [ $\mu$ m]	$\sigma_E$ [%]	$I_{av}$ [A]
165	0.14	207	0.44	0.09	168

Mohsen Dayyani Kelisani

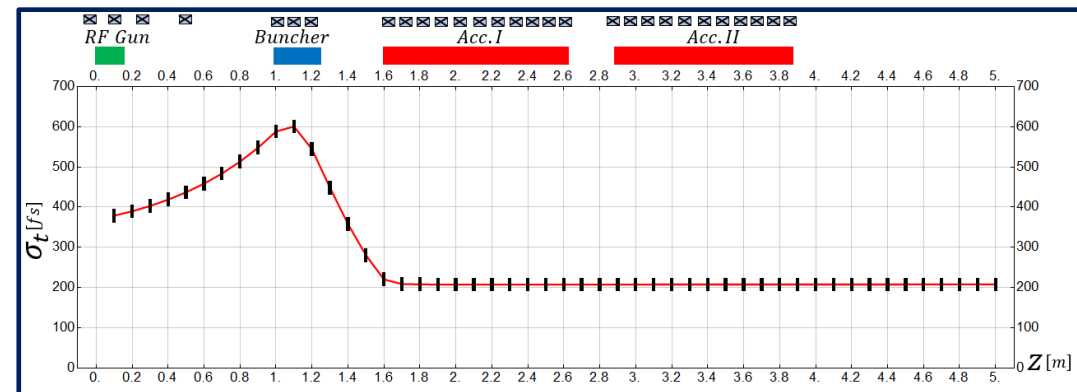


# Reference design

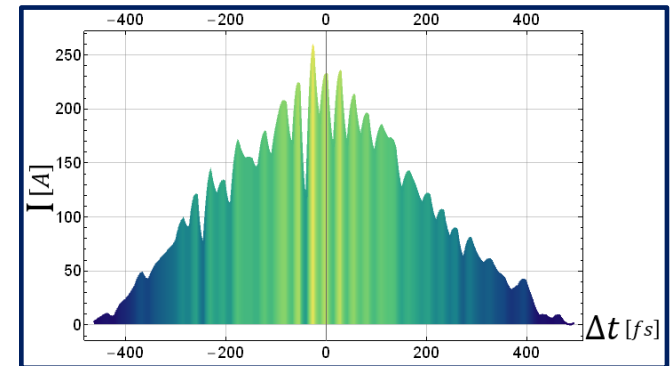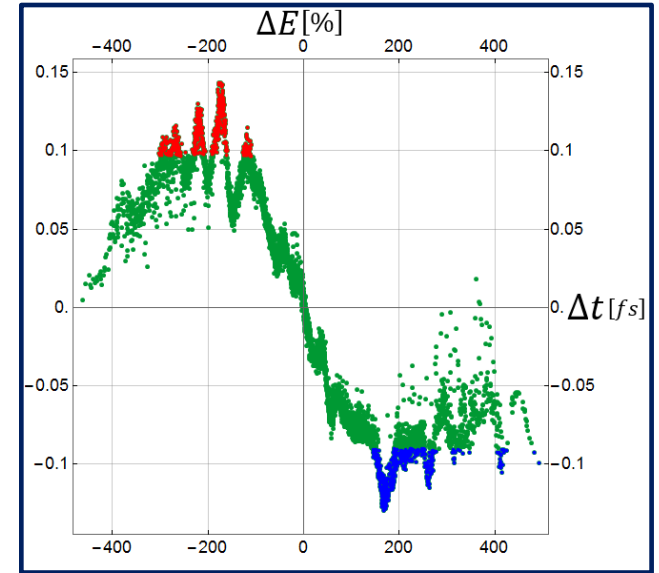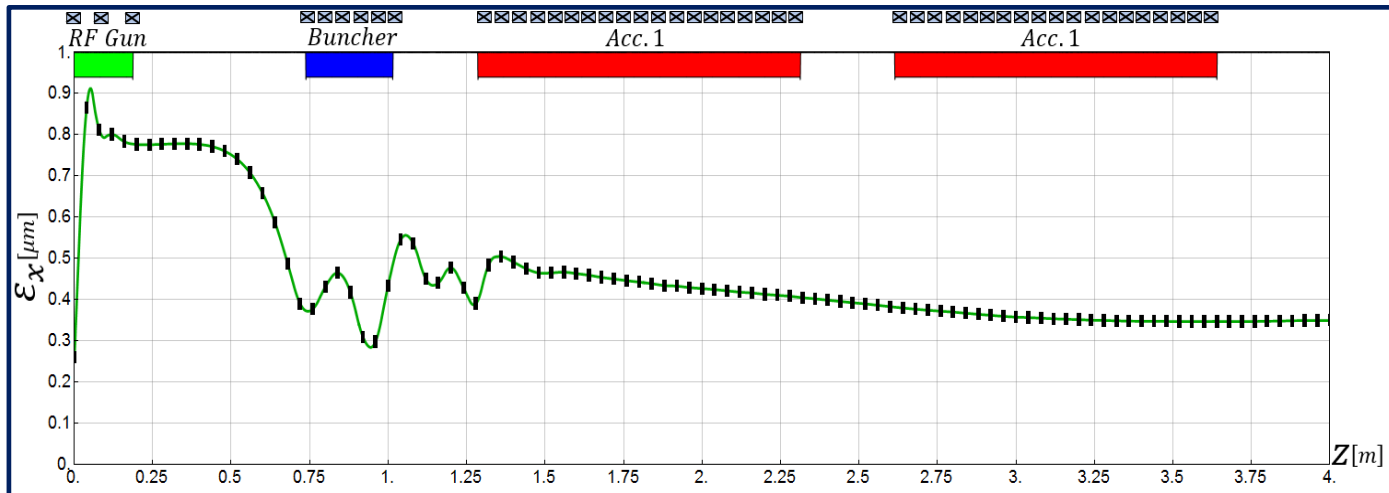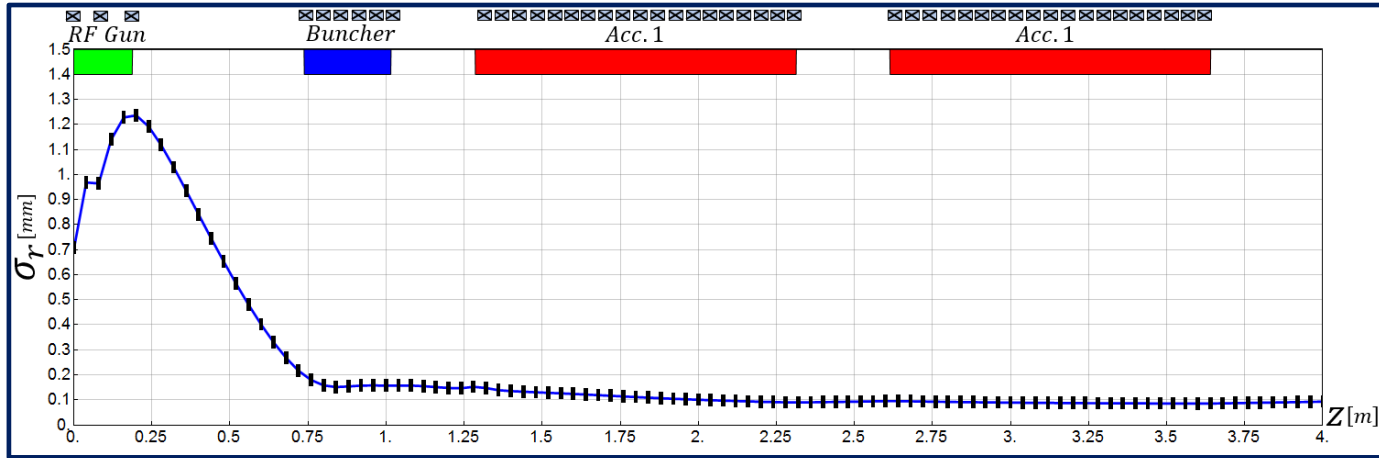

Mohsen Dayyani Kelisani


# Awake schematic RF layout

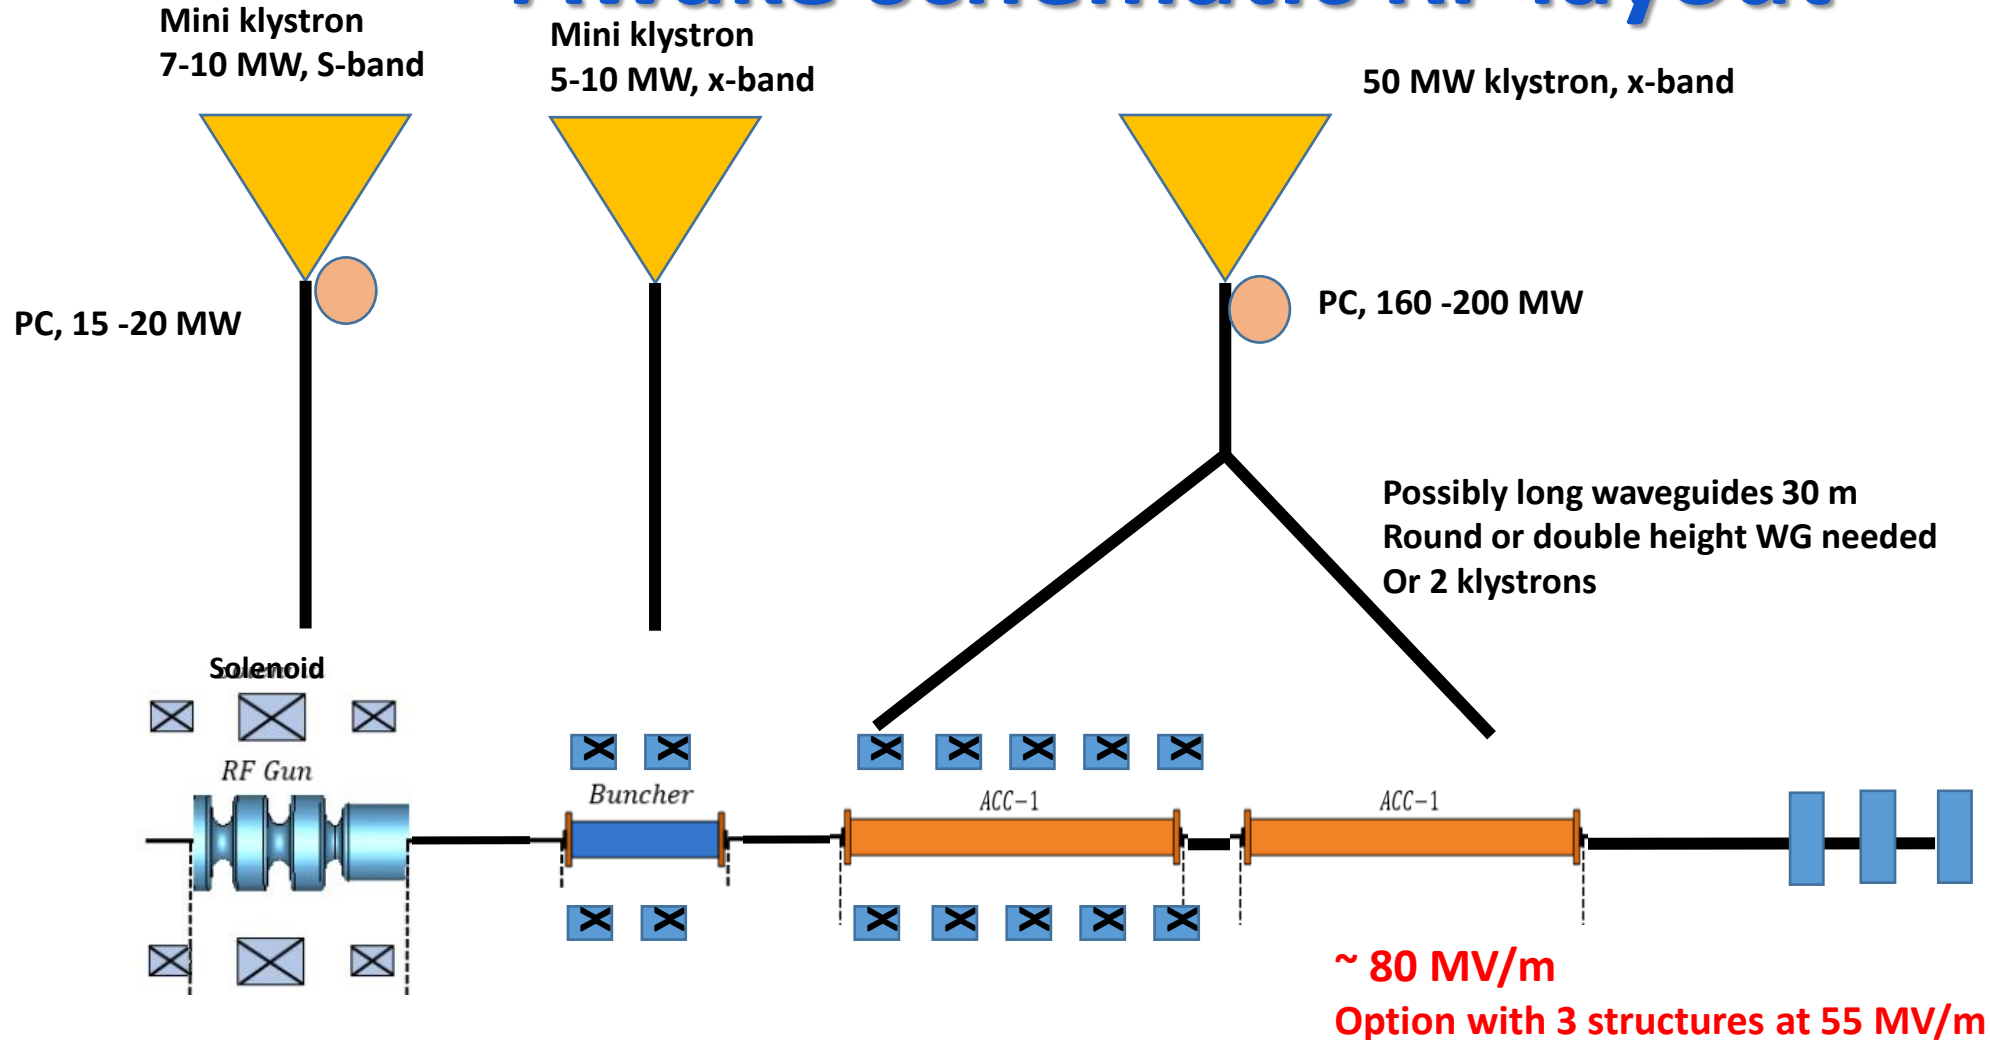

Total Energy 150- 160 MeV, 10 Hz rep. rate, single bunch  
Will try to use CLIC developed x-band components as much as possible

# Other requirements

- ❑ A certain flexibility in the beam parameters which can be delivered keeping good energy spread and emittance  
 Energy:  $\pm 10\%$ , Charge  $+400\%$  ?, Bunch length: 100%, beam size : see transport
- ❑ Constraint space for hardware
- ❑ Excellent timing stability and synchronisation with laser and self modulation device  
 30 fs stability

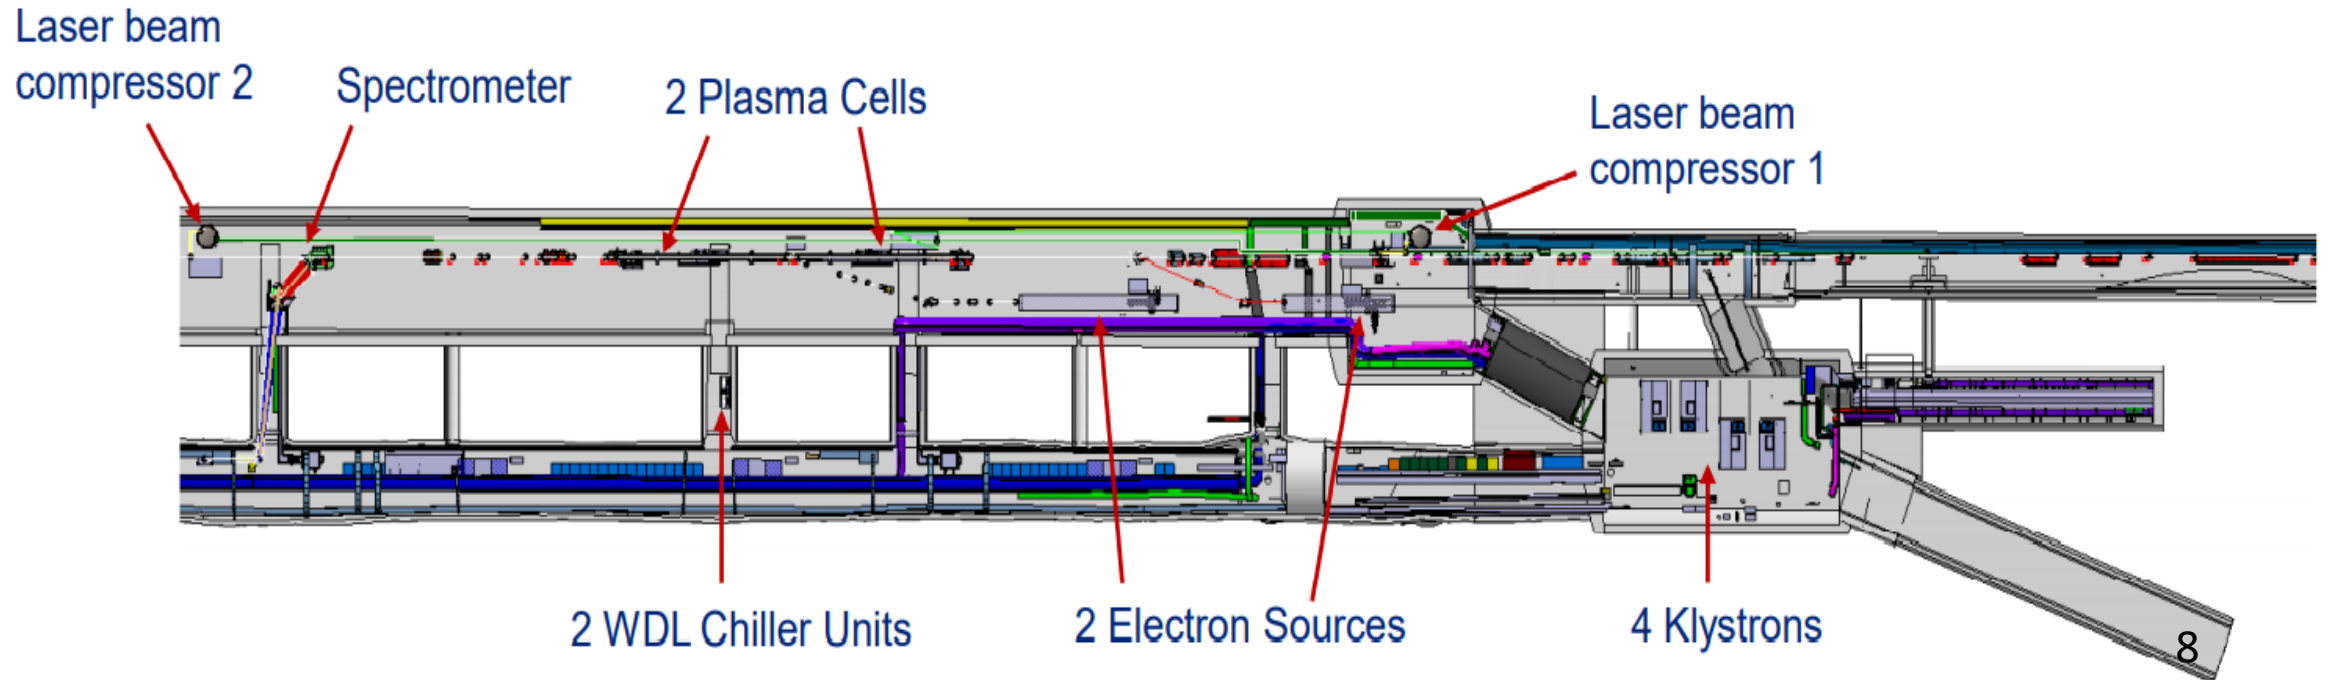




# Flexibility to produce higher charge



(for lower plasma density or experimental reasons)

Changing only laser pulse length and adapting magnetic field slightly

Laser Pulse Duration

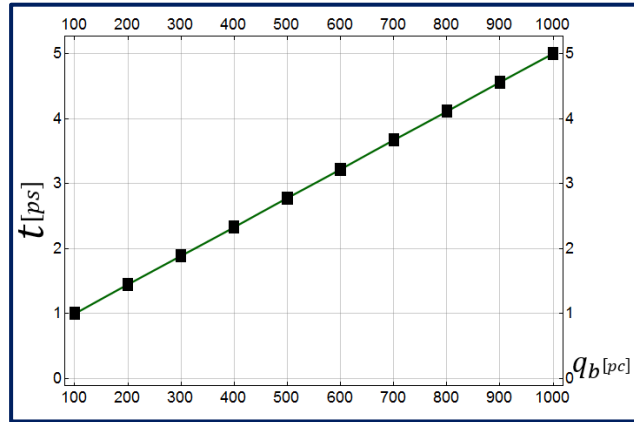

Laser Spot Size

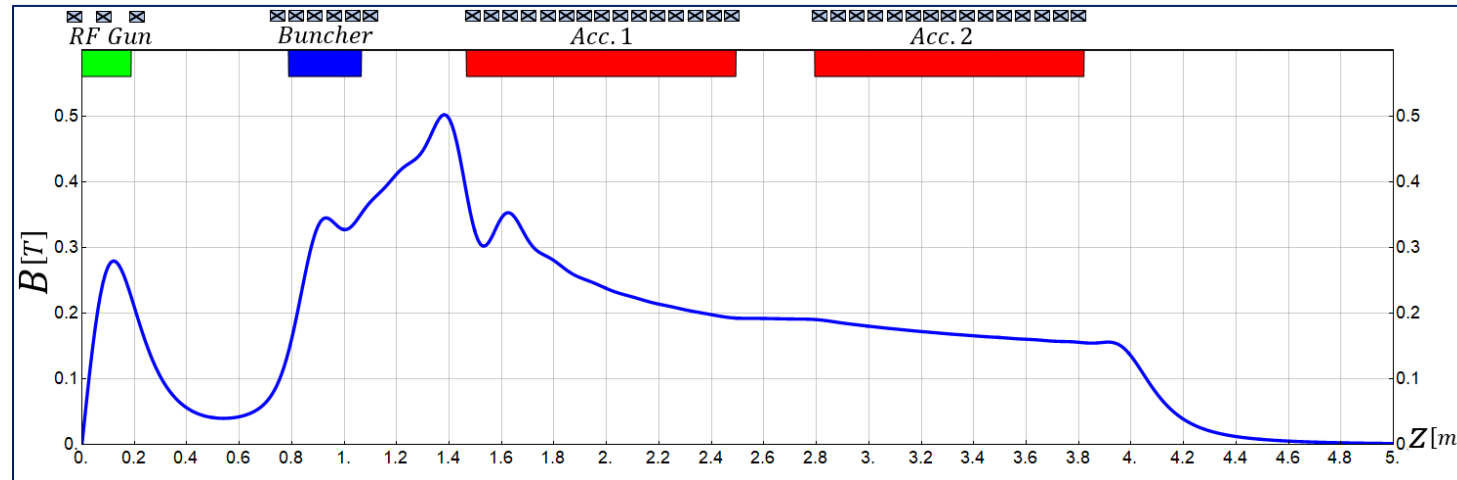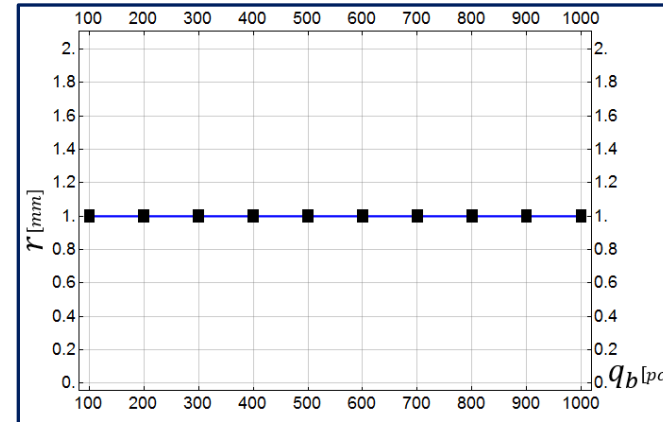


# Flexibility to produce higher charge


## 0.1 to 1 nC per bunch




Max\_  $B_z$

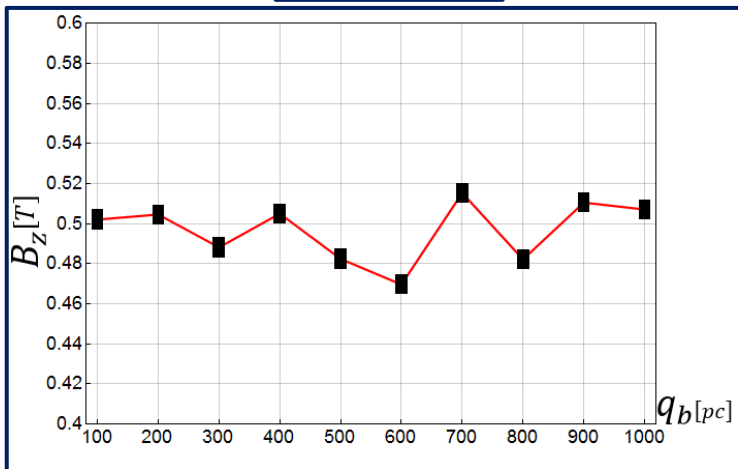


Bunch Length

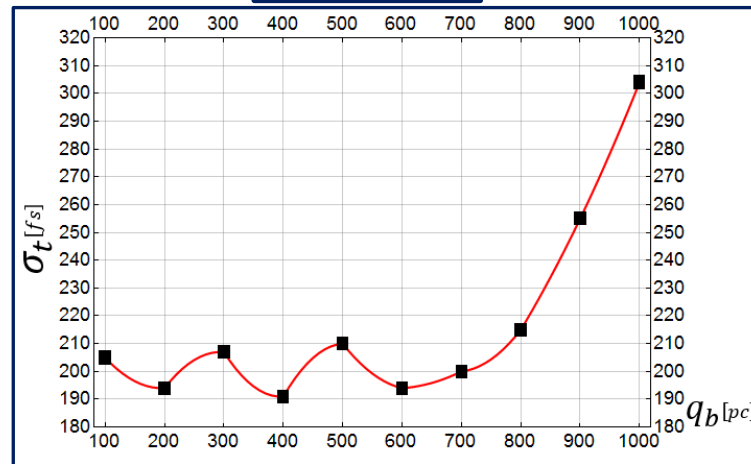

Energy Spread

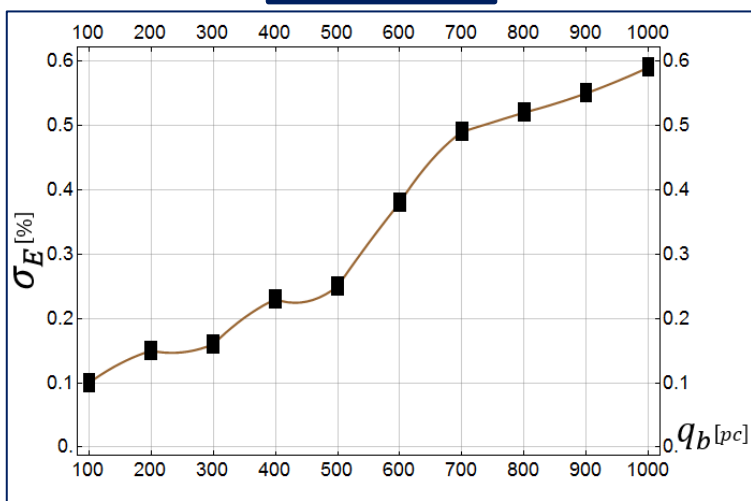


Bunch Emittance

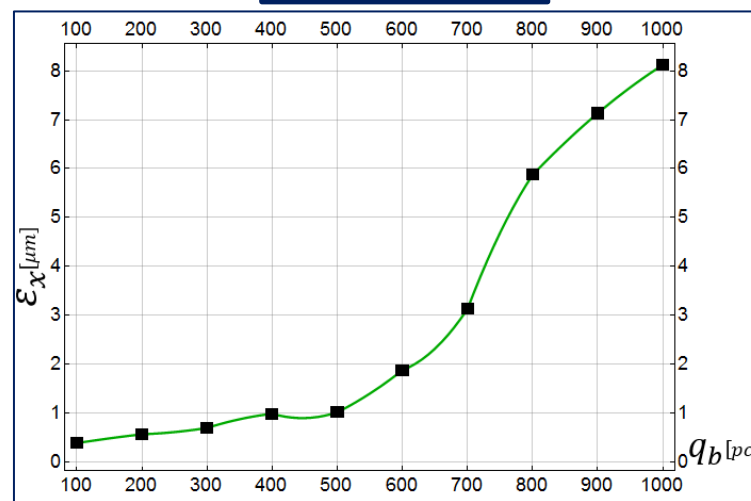

## Tentative RUN 2 injector parameter for 150 MeV


Only scaled down accelerating gradient, identical initial distributions,  
no new optimization

**Energy:** 151.8 MeV  
**Energy Spread:** 144.5 keV rms =  $9.5 \cdot 10^{-4}$   
**Emittance: x/y:** 0.7 mm mrad  
**Bunch length:** 60  $\mu$ m rms  
**Bunch Charge:** 100 pC

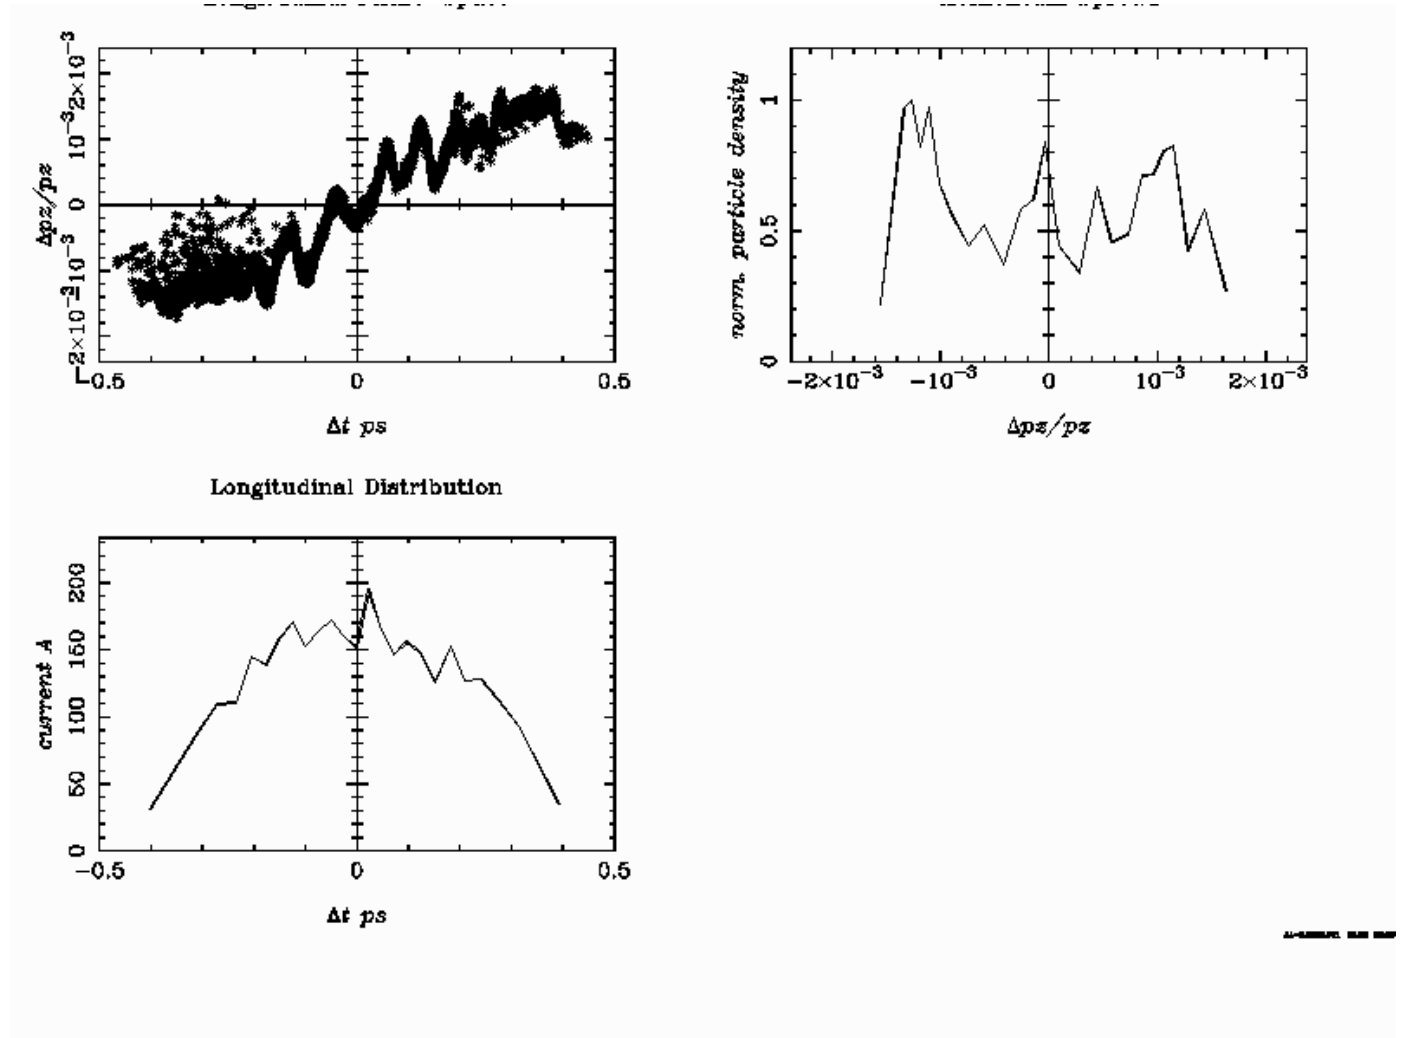


# Tentative RUN 2 injector parameter for 150 MeV


average particle energy

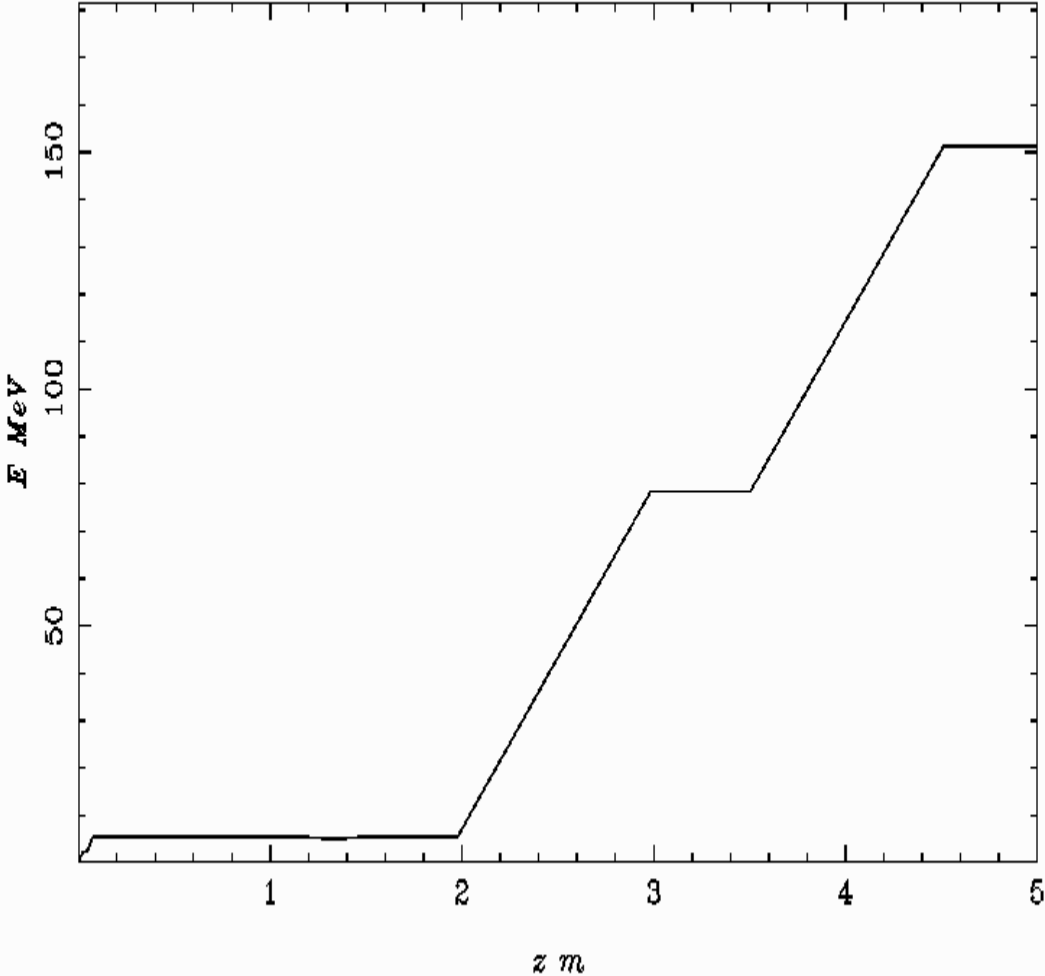

Bunch Length

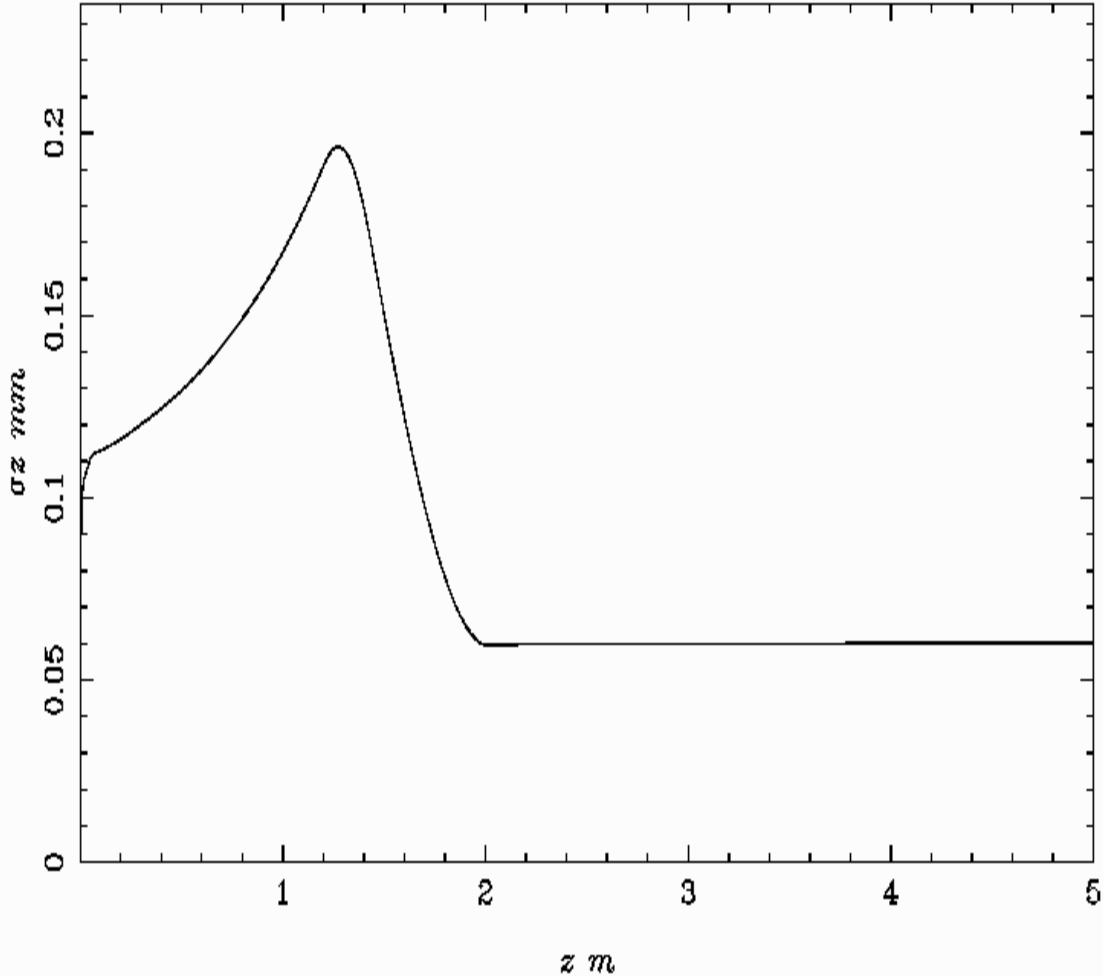


# Tentative RUN 2 injector parameter for 150 MeV

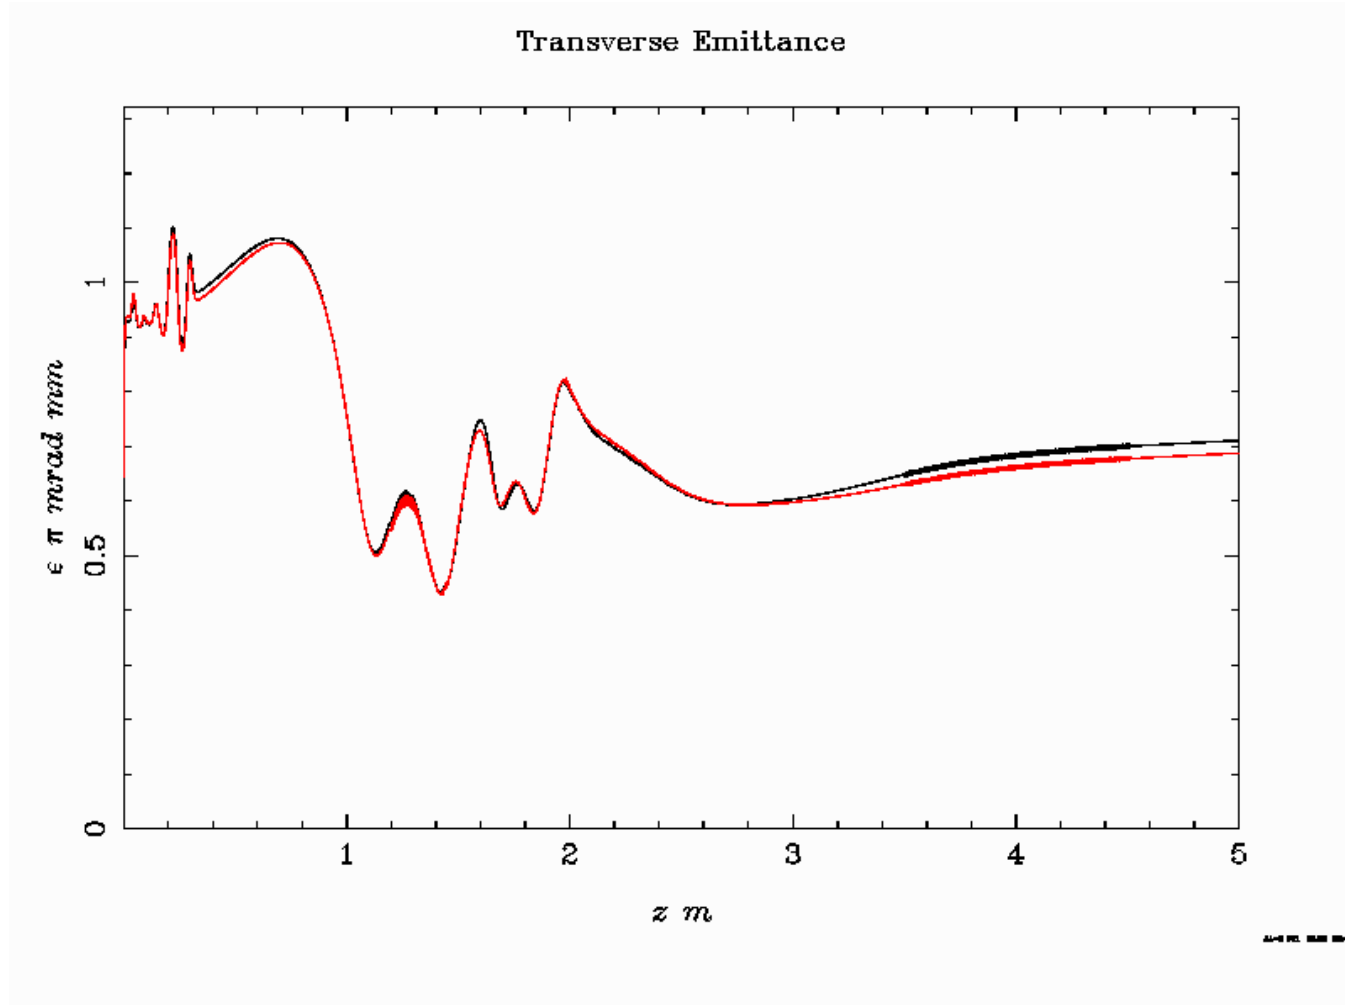

## **Collaborations:**


- **Uppsala, rf hardware and personnel**
- **Lancaster, personnel**
- **CLIC in kind contribution**
- **CLEAR support for the prototype (infrastructure, services, laser)**
- **INFN Frascati, RF-gun, acc-structure design**

# Injector prototype in CTF2 for CLEAR and AWAKE ARTI (AWAKE Run2 Test Injector)

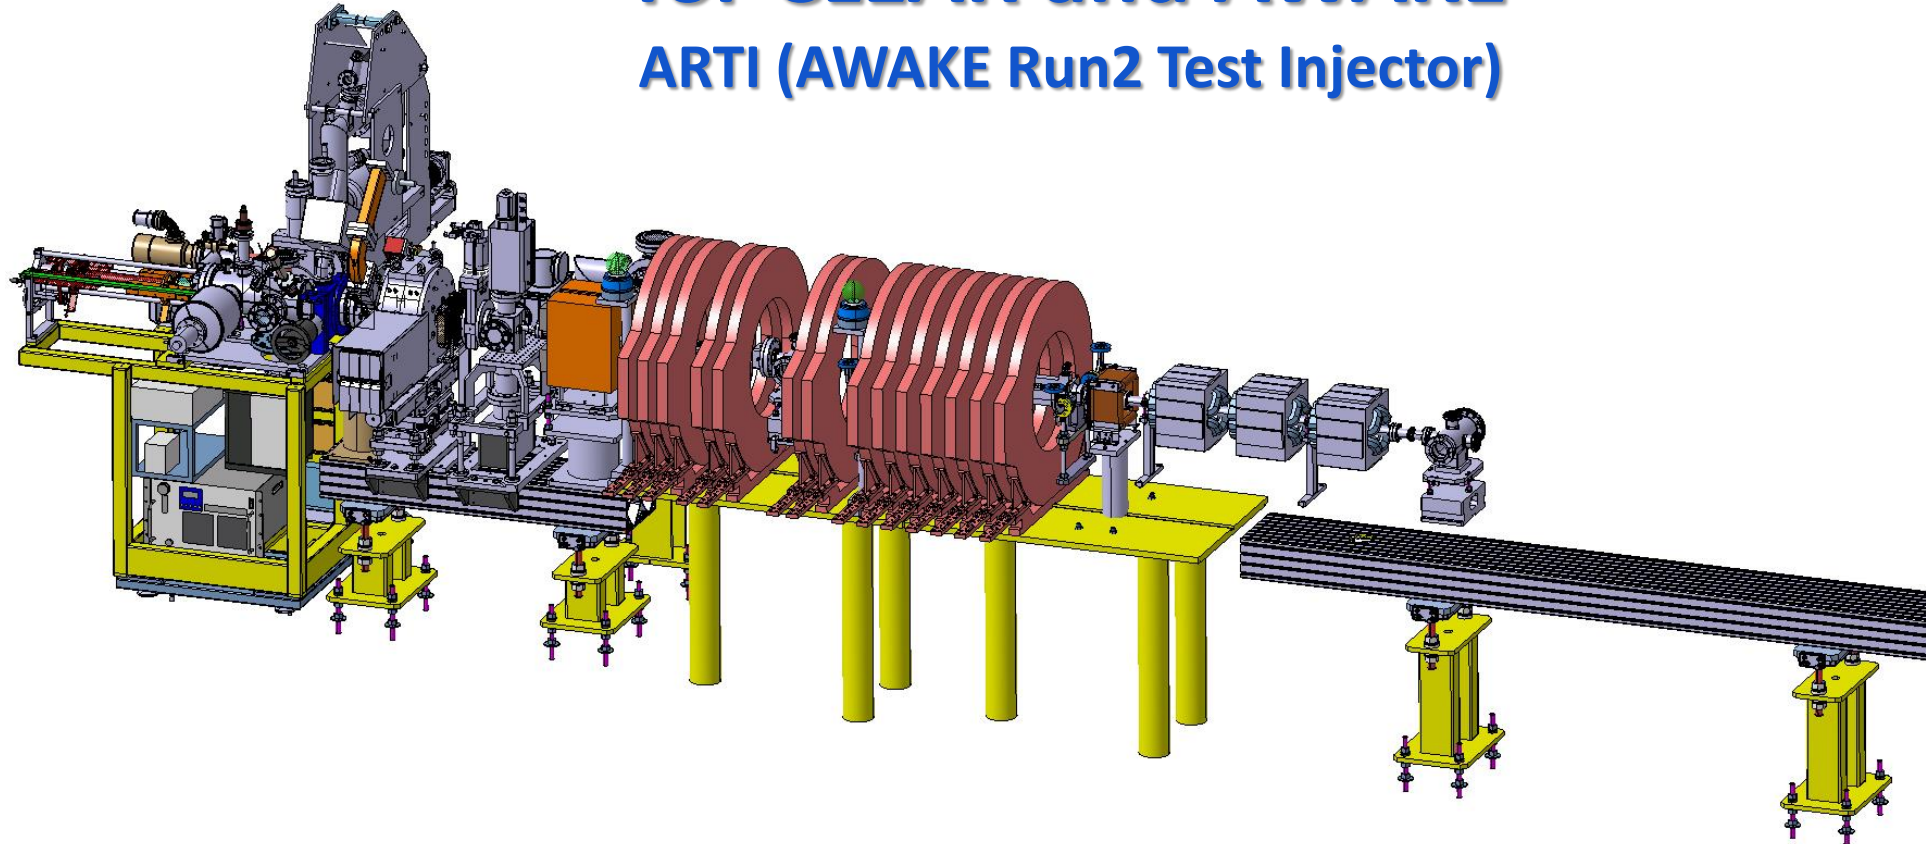

Reduced scale prototype, 60 MeV, INFN RF-GUN, T24 as buncher and PSI-structure for acceleration.  
Goal: demonstrate the velocity bunching and emittance preservation with x-band

# ARTI in CTF2

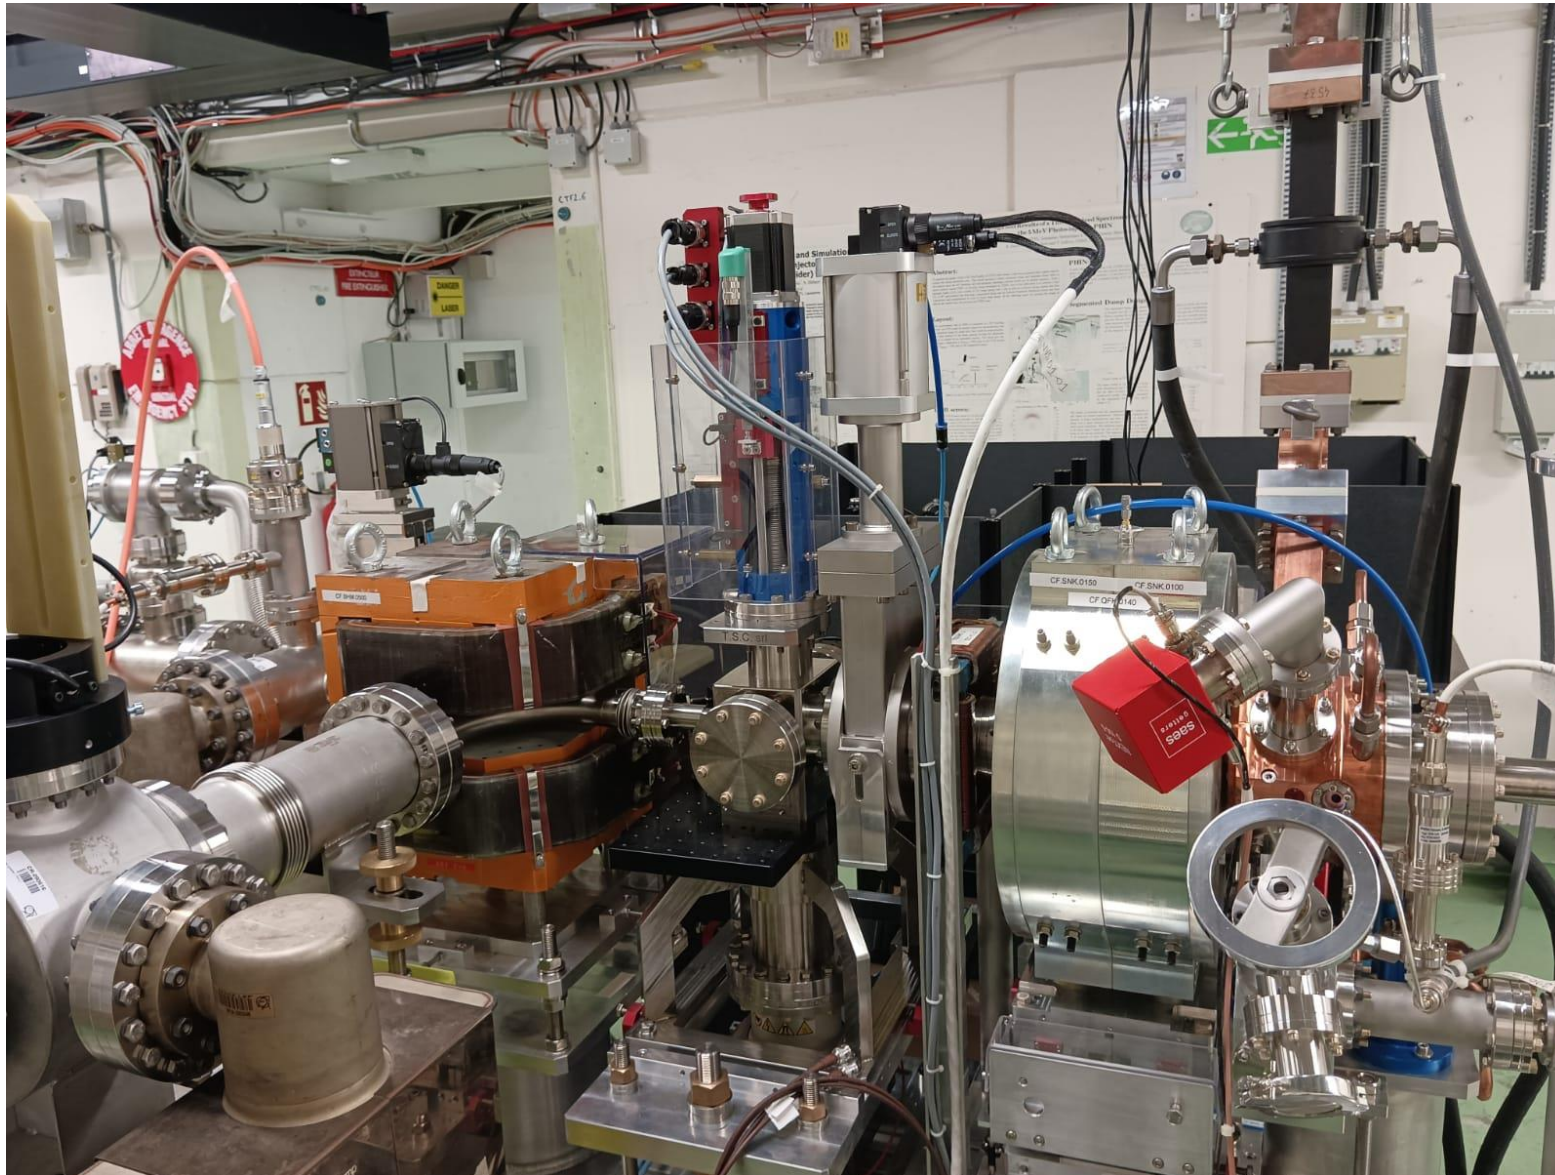




# X-band structure developments



## Travelling wave Constant Impedance

Shunt Impedance [ $M\Omega/m$ ]	100
Group Velocity $v_g/c$ [%]	2.4
Q-Factor	7061
Attenuation [1/m]	0.7
Length [m]	0.9

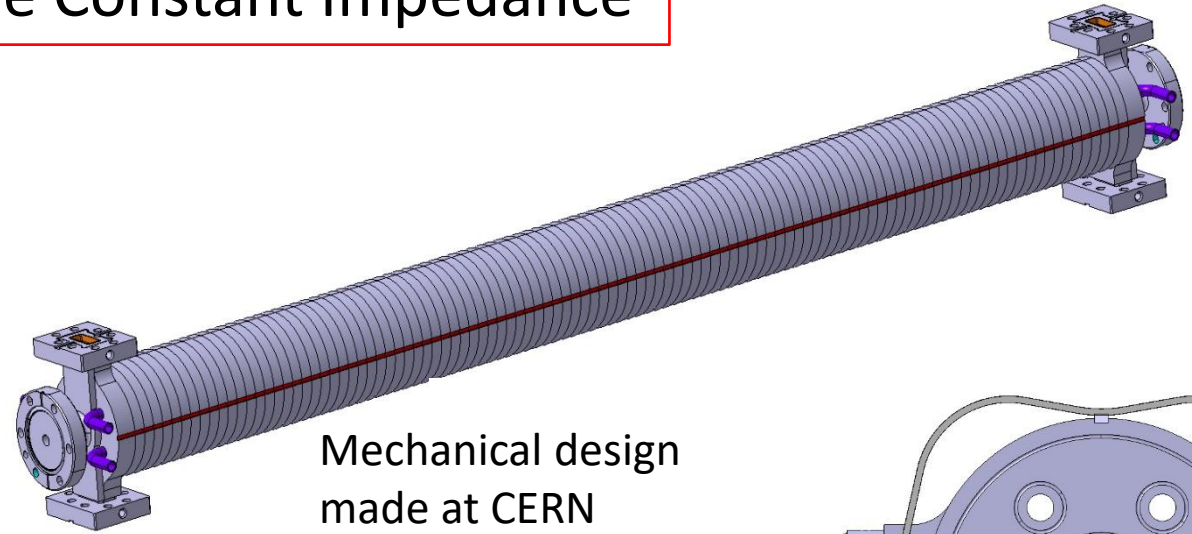

Mechanical design  
made at CERN  
(Candy and Nicolas)  
CLIC style tolerances  
Vacuum brazing design

Structure to be  
inserted in a solenoid  
of 150 mm diameter  
bore radius

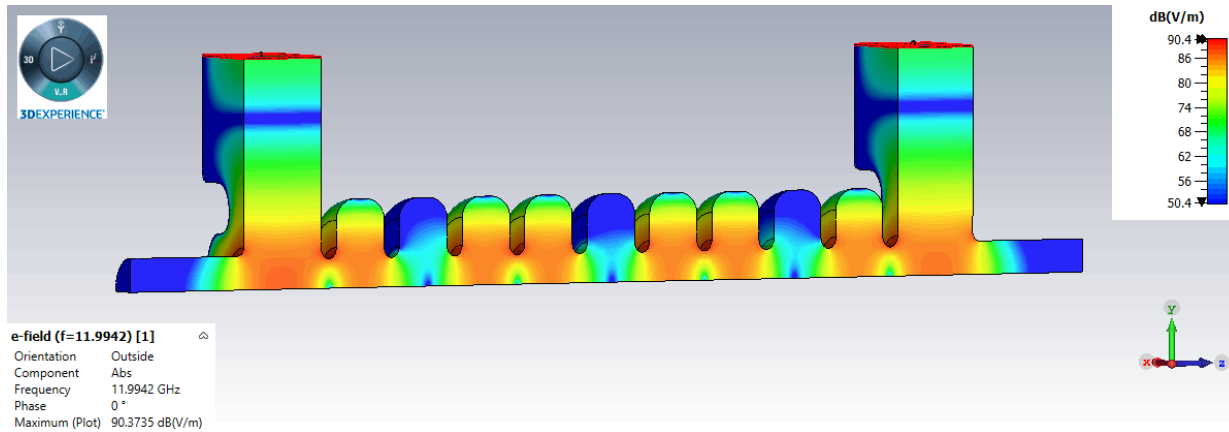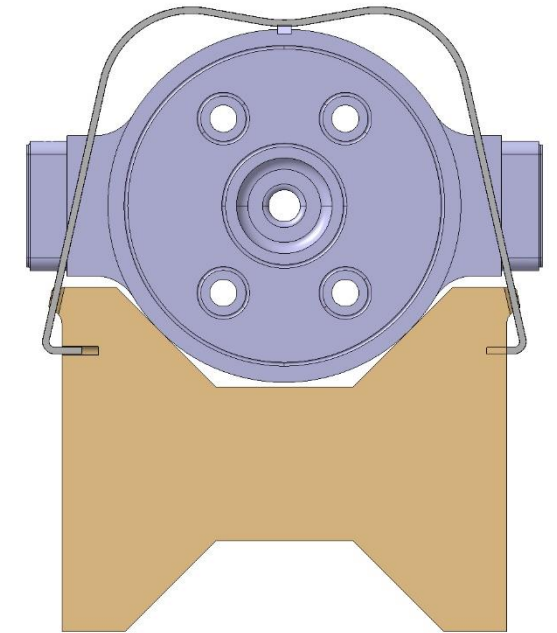

Designed by INFN Frascati, D. Alesini, M. Diomedè,  
for CompactLight and EuPraxia

**Short prototype under construction**

# Conclusion and Outlook

- Solid baseline of the new injector is existing**
- Technical Design, Integration and Parameter optimisation for both injectors ongoing**
- Prototyping of key elements (rf-gun, acc-structures, RF –system, diagnostics) and corresponding test injector already well advanced**
- Several important and active collaborations in place to support the tasks with significant contributions.**

# Additional material

# Schedule




AWAKE 150 MeV								
Schedule	2022	2023	2024	2025	2026	2027	2028	2029
Final design								
Mechanical design/Integration								
Procurement								
Installation								
Commissioning								
Start experiments								
Critical items	2022	2023	2024	2025	2026			
Modulators/Klystrons		Prepare Specs	Procurement		Accepted at CERN			
accelerating structure	define proto	build proto	proto test	production	Ready for installation			
load lock system		production	gun tests		Ready for installation			
solenoids		design/build	use with proto	production	Ready for installation			
wavguide system x-band		define	proto if needed	production	Ready for installation			



No more conflicts with CLEAR for time being

# Original tentative RUN 2 injector parameter for 160 MeV



**Energy:** 161.8 MeV  
**Energy Spread:** 172.8 keV rms  
**Emittance: x/y:** 0.7 mm mrad  
**Bunch length:** 60 um rms  
**Bunch Charge:** 100 pC

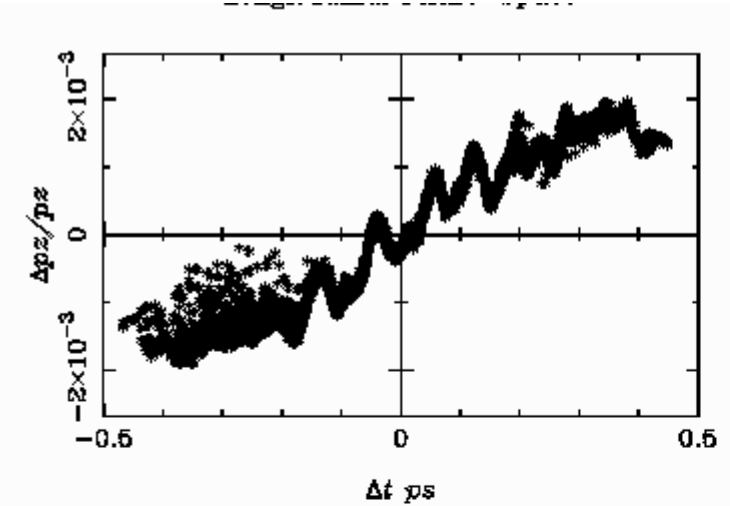

Longitudinal Distribution

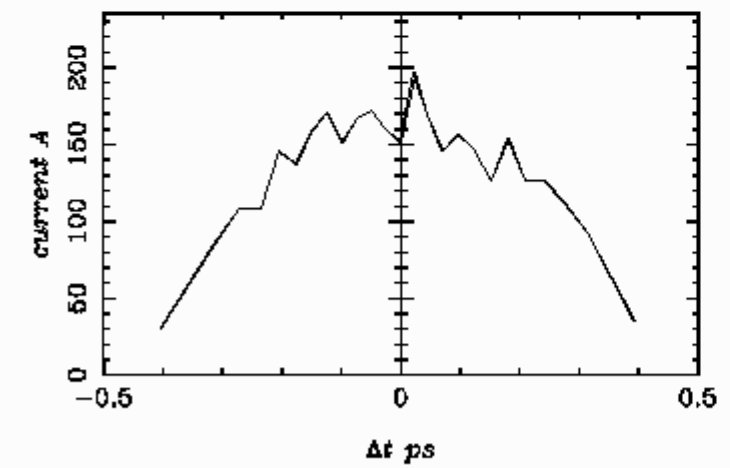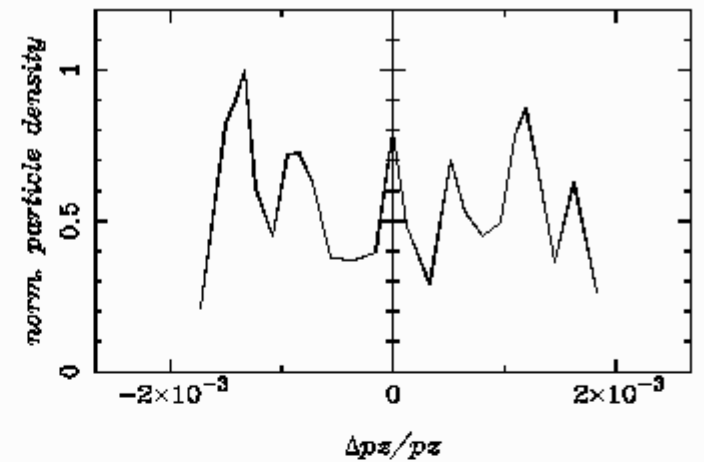

# First short prototype under construction

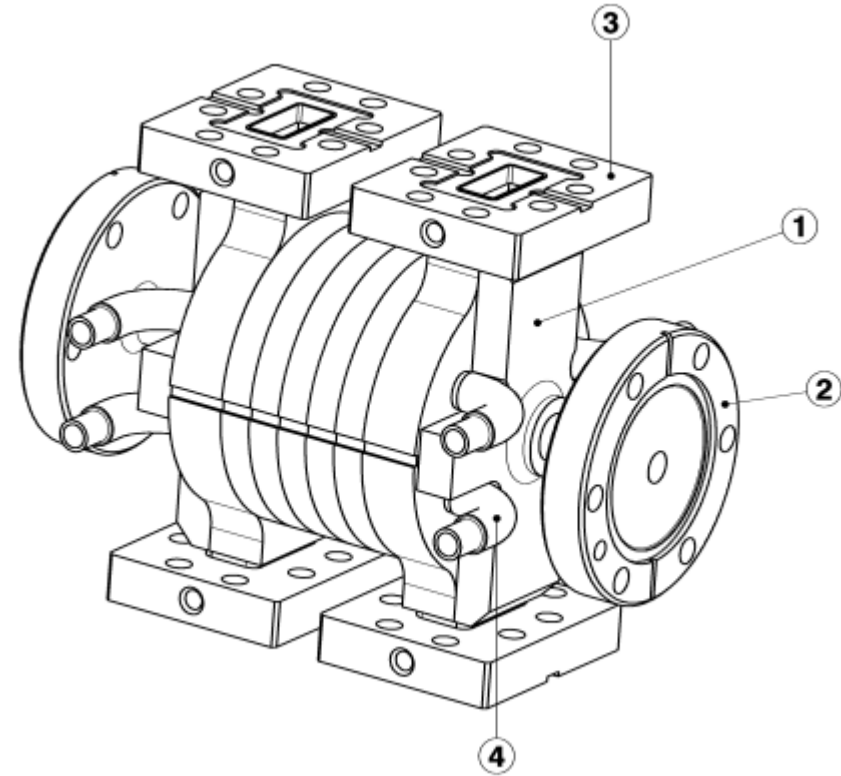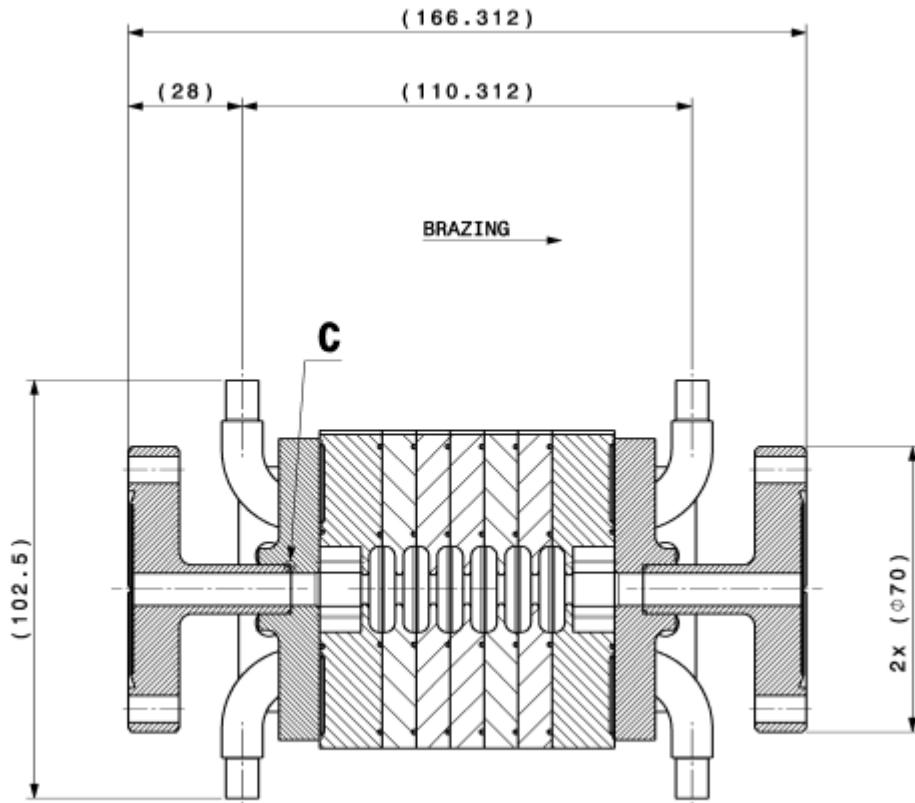

C. Capelli, N. Chritin

Verify mechanical design, brazing assembly and tolerances needed  
Maybe low power RF measurements but no high power test planned

# New layout proposal from Uppsala

