




Muon Collider - Parameter Consideration

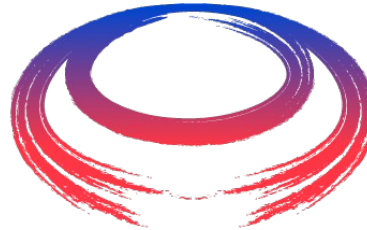

M International
UON Collider
Collaboration

C. T. Rogers

Rutherford Appleton Laboratory



Science & Technology Facilities Council

ISIS

Parameter Optimisation

- “Top down” optimisation of the low energy complex
 - Look at performance of the muon collider as a function of “low energy complex” parameters
 - Proton beam parameters
 - Target capability
 - Muon cooling system performance
- For this **first pass**, take luminosity as the figure of merit
 - To avoid controversy, I have taken arbitrary normalisation factor
 - Nb: **first pass** – model improvements are welcome (and needed)
- Other FoMs may be important
 - Energy spread at the detector
 - Capital & operating costs
 - Environmental considerations
- Developing better model for muon collider performance
 - Take this all with a “pinch of salt”

Facility Model



- Facility model is naive python script
 - Assume some proton beam power and rep rate (i.e. charge per proton pulse)
 - Use Soler et al to get proton → muon production yield
 - Normalised to HARP data
 - Other calculations exist, similar to O(factor 2)
 - Cooling performance from papers by Stratakis & Sayed
 - With some bespoke hacking which I will describe
- High energy complex
 - Assume acceleration average 4 MV/m over the whole complex
 - Gives muon survival
 - Assume negligible emittance growth
 - Assume 10 km circumference collider ring (at 5 TeV)
 - Assume β^* is 1.5 mm constant
 - Really this depends on longitudinal and transverse emittance

Facility Model (2)


- Relevant proton baseline parameters:
 - Proton energy 5 GeV
 - Beam power 2.4 MW
 - Rep Rate 5 Hz
 - Proton bunch length 2 ns
- Luminosity $L = N_1 N_2 / 4\pi\sigma_x^2$

Proton energy (1)


- How sensitive is Muon collider to proton energy?
 - Use data from Soler et al to get muon \rightarrow proton conversion rate vs energy
 - Normalised i.e. number of muons/proton/GeV

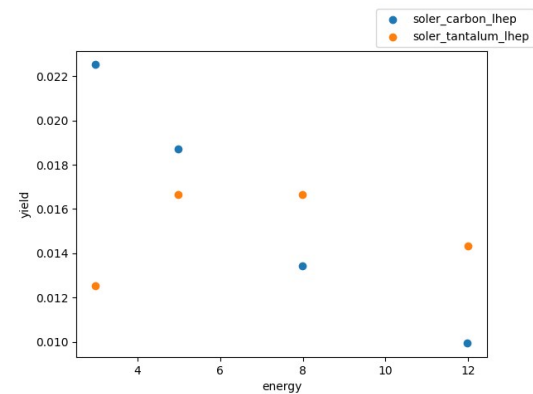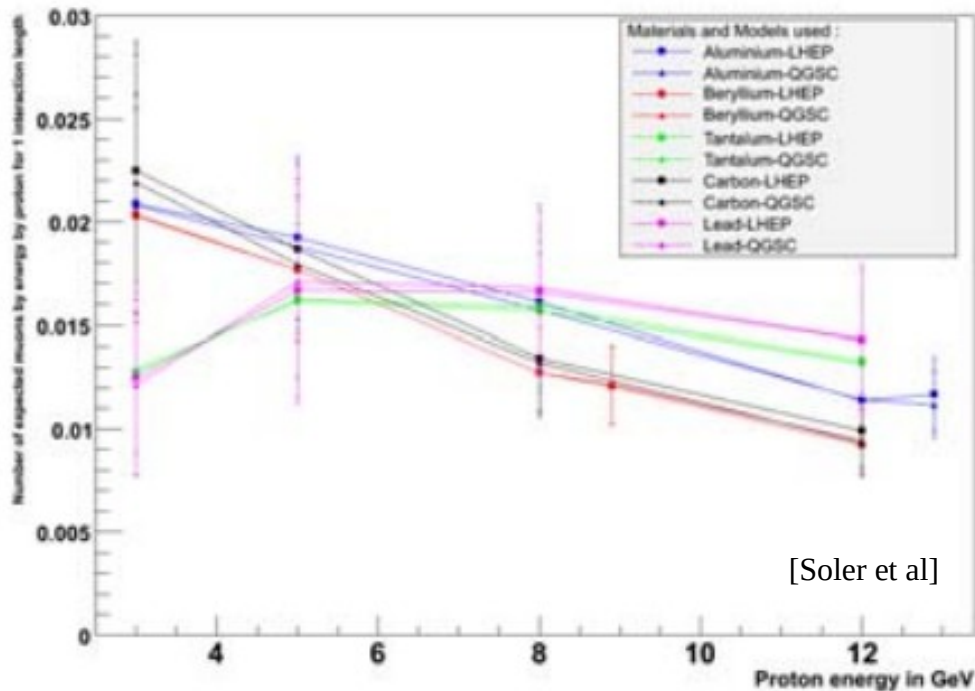

Proton energy (2)

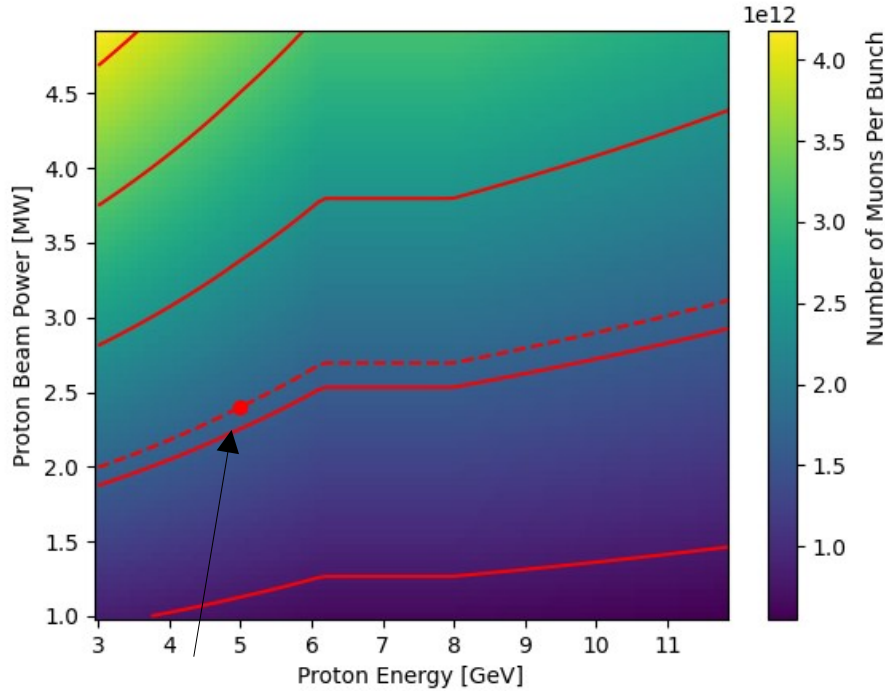

baseline


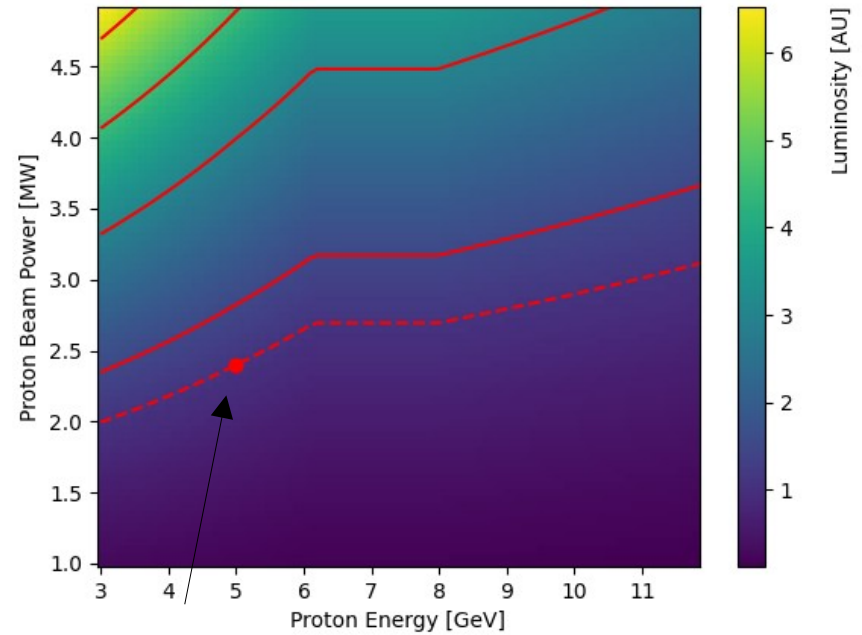


baseline

- How sensitive is Muon collider to proton energy?
 - Assumes heavy metal target at high energy
 - Red curves are contours



Proton bunch length (1)

- Consider proton bunch length
 - Sayed and Berg looked at yield for different magnetic tapers and proton bunch length
 - MAP baseline \sim taper length = 20 metres
 - How does the proton bunch length affect yield?

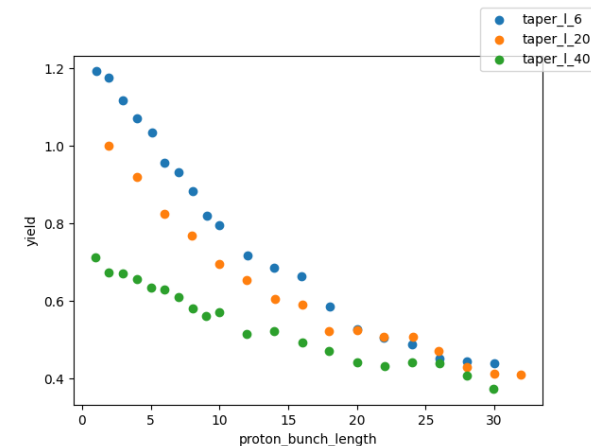
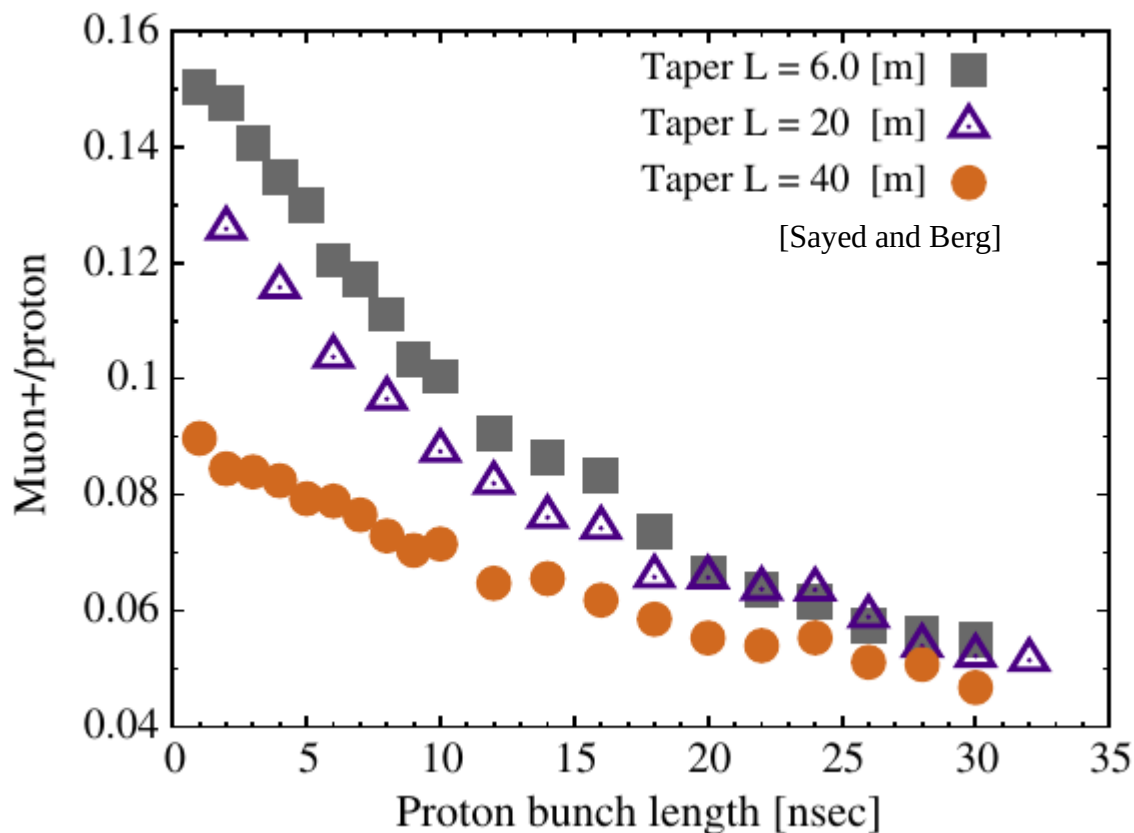


Proton bunch length (2)

- Muon yield is soft function of proton bunch length
 - Shorter bunch may be harder to achieve than slight uplift in muon beam power

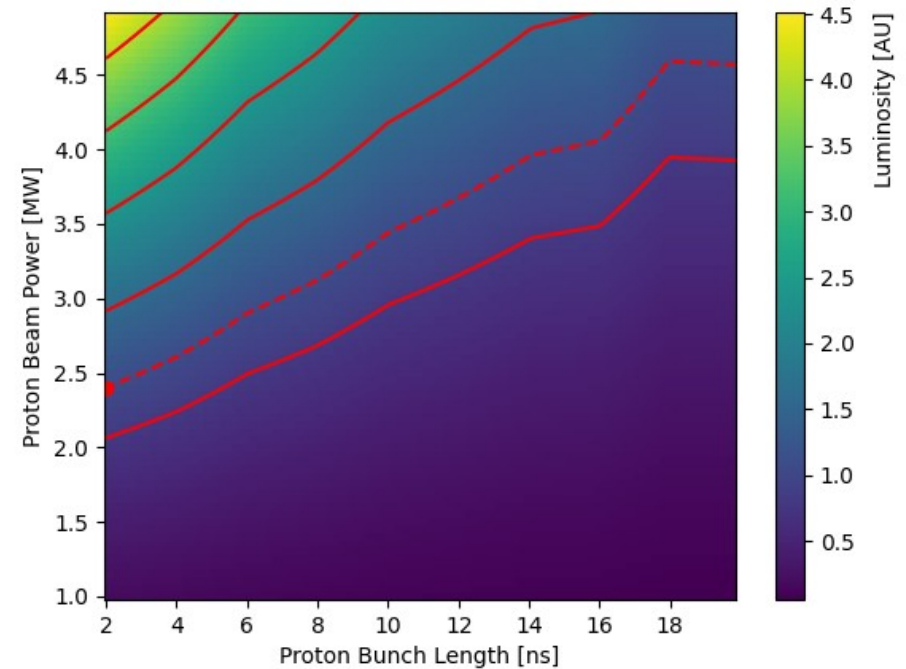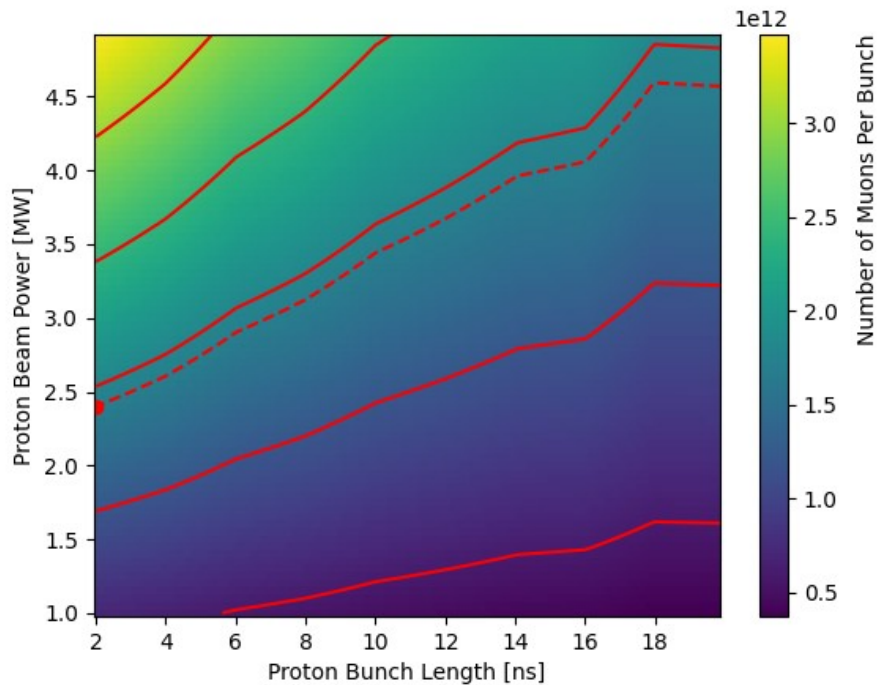


Rep rate vs number of muons

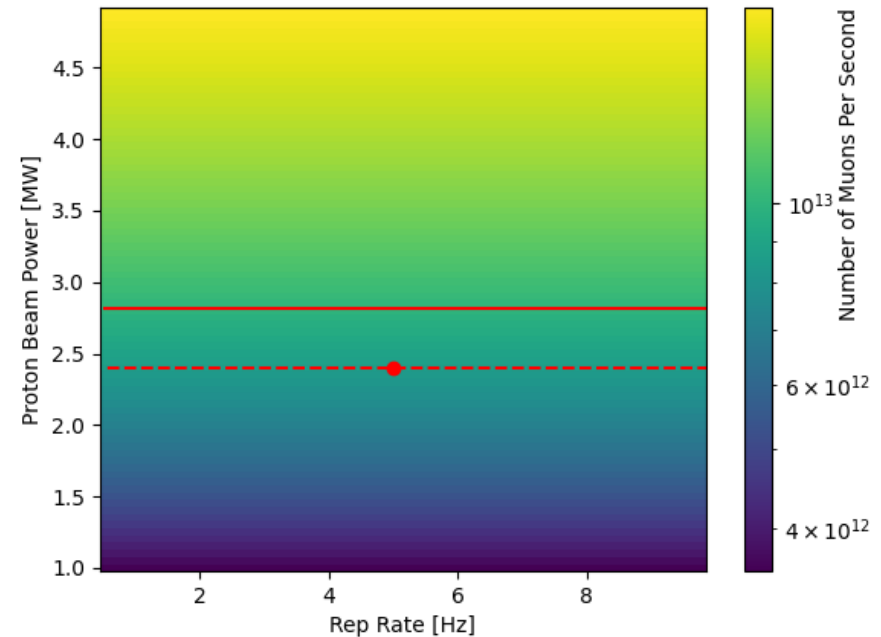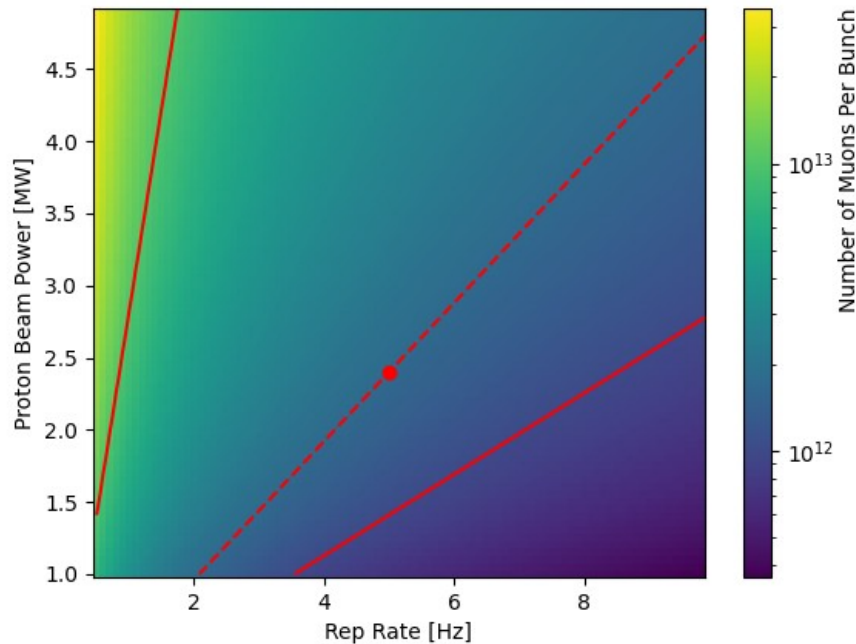


- Reducing the rep rate while holding power constant
 - Number of muons per second is unchanged
 - Number of muons per bunch increases
 - Increased luminosity
 - **Increased collective effects**

Rep rate vs luminosity

- Reducing rep rate → much higher instantaneous beam brightness
 - Higher luminosity
 - Where is the limit for collective effects in the accelerator system?

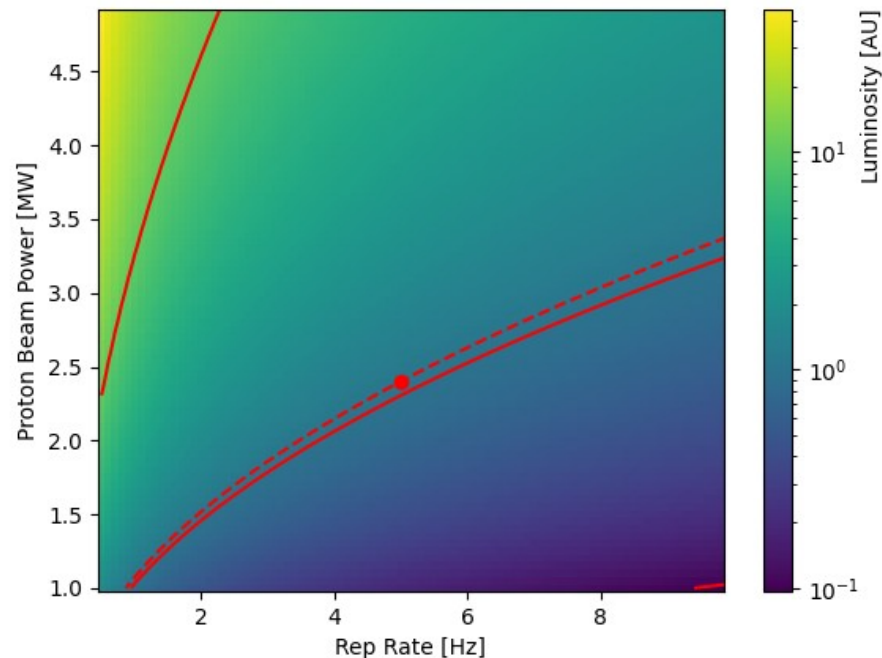


Cooling Performance



- Use Stratakis paper for rectilinear performance
- Use Sayed paper for final cooling performance
- Assume successful final cooling design
 - Fiat reduction to 0.025 mm emittance
 - Fiat 50 % loss during reacceleration



TABLE II. Simulation results of the normalized emittance and momentum at the exit of each stage of our proposed rectilinear channel. The last column shows the transmission, T , of each stage. [Stratakis et al]

Stage	ϵ_T^{sim} [mm]	ϵ_L^{sim} [mm]	P_z^{sim} [MeV/c]	T [%]
Begin	17.00	46.00	255	
A1	6.28	14.48	238	70.6
A2	3.40	4.64	229	87.5
A3	2.07	2.60	220	88.8
A4	1.48	2.35	215	94.6
Begin	5.10	10.04	209	
B1	3.76	7.76	210	89.7
B2	2.40	6.10	208	90.6
B3	1.55	4.28	207	89.2
B4	1.10	3.40	207	89.7
B5	0.68	2.97	204	87.5
B6	0.50	2.16	202	88.0
B7	0.38	1.93	200	89.6
B8	0.28	1.57	200	89.0

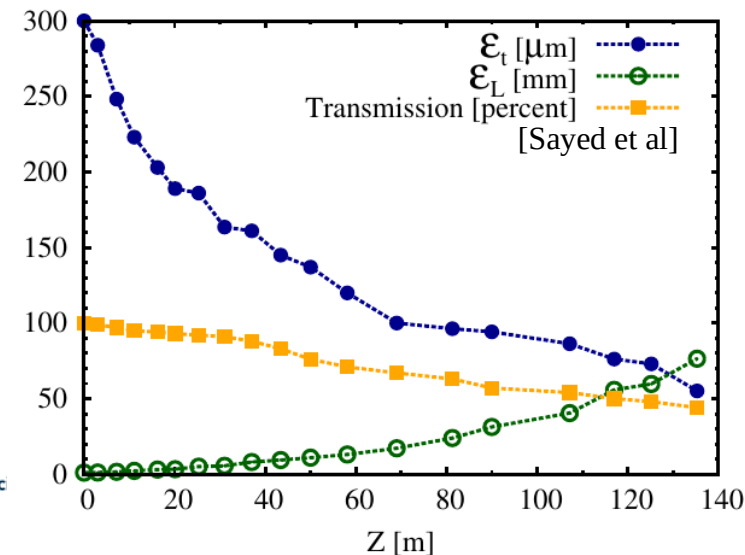

Cooling Emittance



- How does emittance vary along the cooling system?
 - Note - assume each “final cooling” cell is 10 m long
 - No allowance for
 - Emittance growth from bunch merge
 - Emittance growth from charge separation
- Assume successful final cooling design
 - Fiat reduction to 0.025 mm emittance
 - Fiat 50 % loss during reacceleration

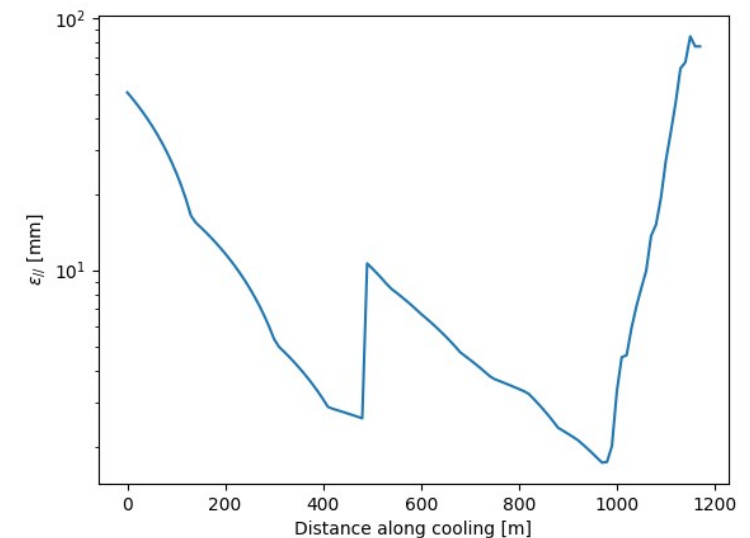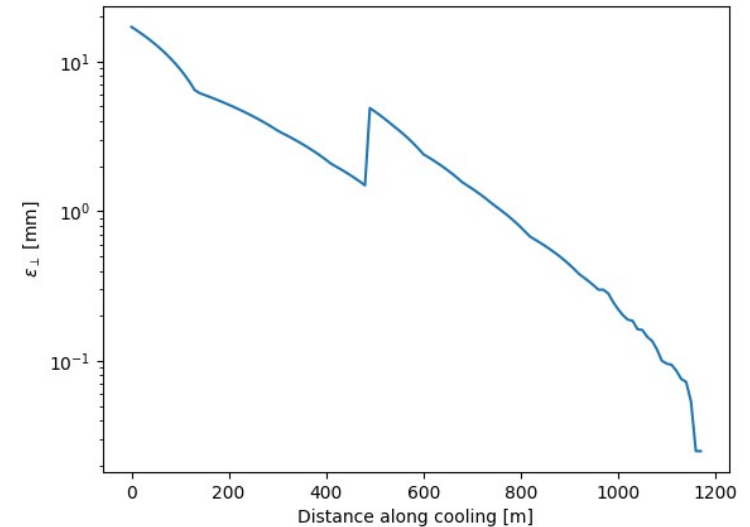

Cooling Emittance




- Significant reduction in 6D emittance
- Note transmission losses throughout the cooling system

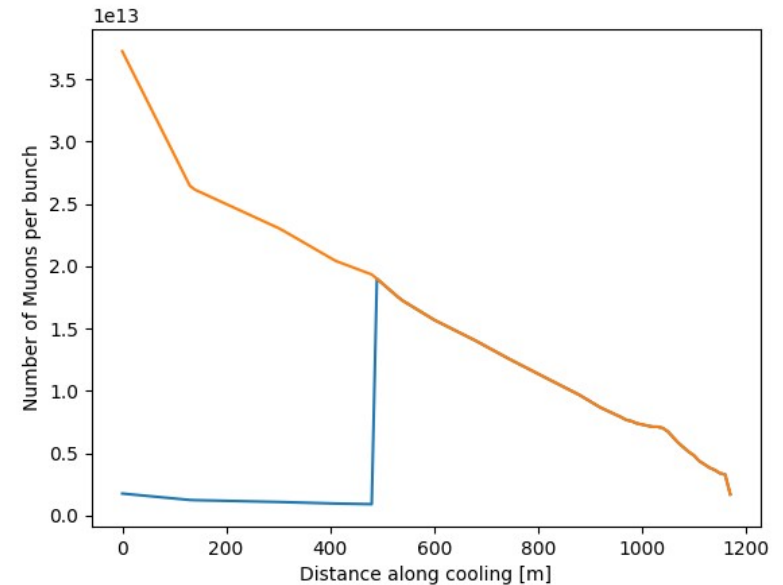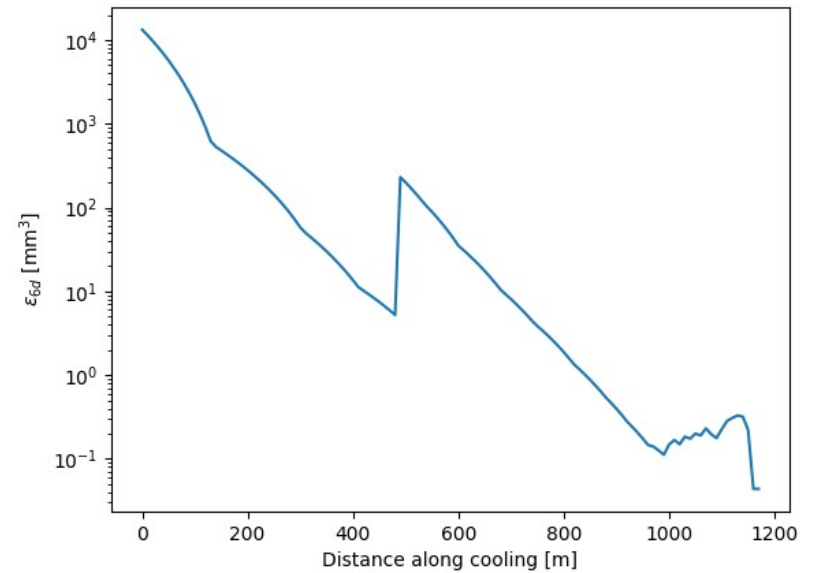

Luminosity

- Assuming MDI $\beta^*=1.5$ mm independent of emittance(!)
- Luminosity is only weakly helped by final cooling
 - Lots of transmission losses here
- Need to understand to what extent focus is limited by longitudinal and transverse emittances...

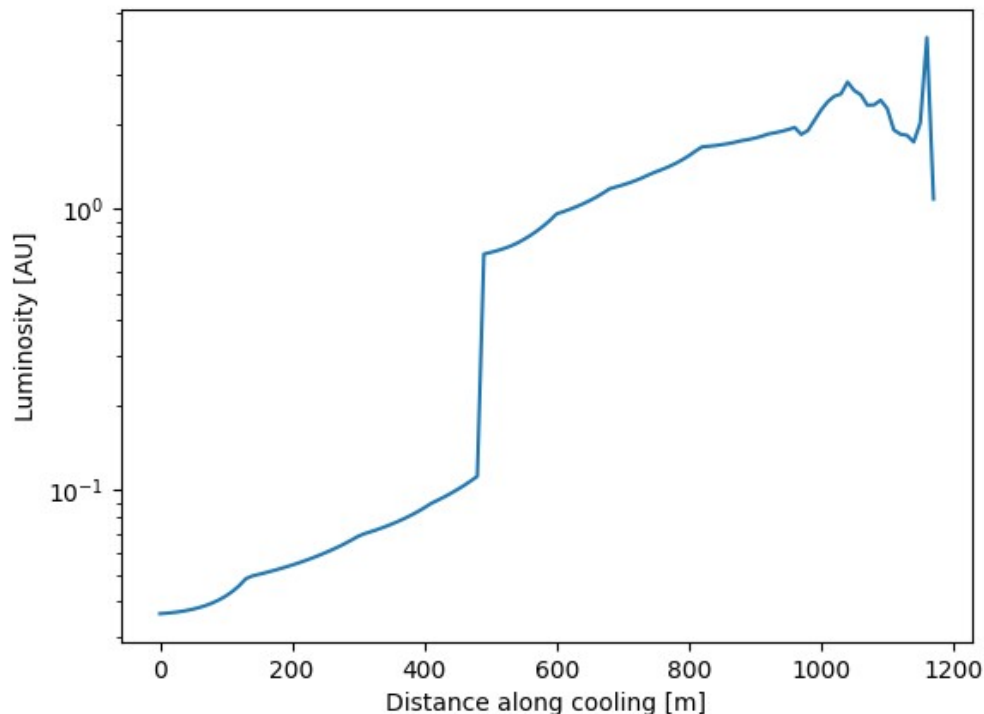

Conclusions

- Design choices for low energy complex are flexible
- Some areas for trade-offs
 - Can trade proton beam power against other design aspects
 - Add in target radius
 - Can lower rep rate to quickly improve luminosity
 - Where are the intensity/collective effects limits in the facility?
- Some areas for improvement
 - Efficacy of final cooling system can be improved