

NOTA:


-TIGHTENING IN VERTICAL POSITION

-SERRAGE EN POSITION VERTICALE

-Steepness of spring 6.6 N / mm.
Force by spring 13.2 daN.
3 Springs 39.6 daN

-Raideur Ressort 6.6 N/mm.
Effort par ressort 13.2 daN.
3 Ressorts 39.6 daN

- POSITION HORIZONTALE
- HORIZONTAL POSITION

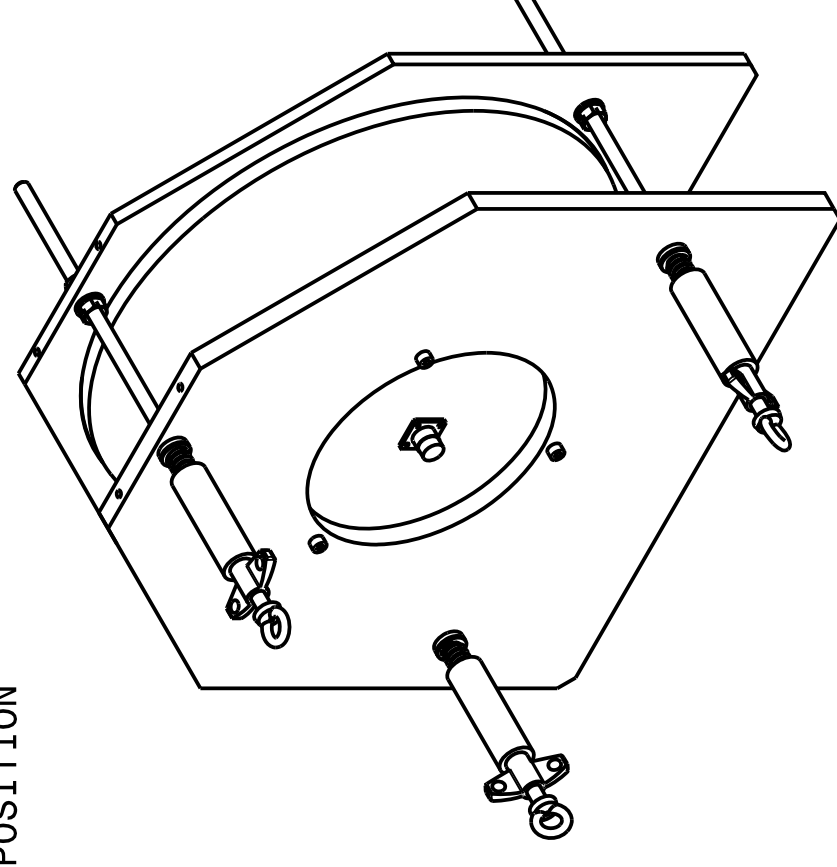

Mass=28.222kg

QTY	DESCRIPTION	POS	MAT.	REVISIONS	REF.CERN
1	FIXTURE HALF CENTRAL CELL	16	Cu OFE	SPLACST_0097	
	POSSAGE DEMI CELLULE CENTRALE		C10100 (H02)	ST0335519	
3	THREAD M10X1.6400	15	St. Steel 304L	SPLACST_0083	
			(1.4306)	ST0335454	
1	PLATE-04	14	Alu EN AW-6062	SPLACST_0092	
			(T6)	ST0335446	
3	SCREW M6	13	Steel	BOSSARD : BN 257 M6	
				ST0335161	
3	SPRING	12		VANEL : C.160.250.1000.I	
				ST0335087	
2	FEMALE CHASSIS SOCKET SOLDERING	11	St. Steel 304L		09.46.11
	PRISE CHASSIS FEMELLE A SOUDER		(1.4306)	ST0334929	840.3
3	GAUGE	10	Aluminium	SPLACST_0083	
				ST0334894	
3	NUT	9	St. Steel 304L	EMILE MAURIN : 16-225-57-10	
	ECROU PAPILLON		(1.4306)	ST0334866	
3	WASHER	8	St. Steel 304L	NORELEM : 07420-0210	
	RONDELLE		(1.4306)	ST0334880	
3	WASHER	7	St. Steel 304L	NORELEM : 07420-0110	
	RONDELLE		(1.4306)	ST0334879	
1	PLAQUE-01	6	Cu OFE	SPLACST_0081	
	HALF CENTRAL CELL		C10100 (H02)	ST0290119	
1	DEMI CELLULE CENTRALE	5	Cu OFE	SPLACST_0019	
	NORMAL PL WASHER 10X20		Stainless steel A4	ISO 7089_10X20-A4	47.78.15
6	RONDELLE PLATE NORMALE 10X20	4	Acier Inox A4		010.4
	HEX SKT HD CAP SCREW M6X25		St. Steel A4	ISO 4762 M6X25-A4	47.62.71
3	VIS CHC_M6X25	3			260.7
	HEX NUT STYLE1 GRADE A M10		Stainless steel A4	ISO 4032_M10-A4	
6	ECROU H STYLE1 GRADE A M10	1	Acier Inox A4		
QTY	DESCRIPTION	POS	MAT.	OBSERVATIONS	REF.CERN
ENS/ASS	S-ENS/S-ASS				
Superconducting Cavities; Tooling					
SCALE		CONTROLLED	DESIGNED	F. PILLON 2011-03-07	
1:2		RELEASED			
		APPROVED			
		CAD Document Number	ST0335517_02		
		REPLACES			
		NON VALABLE POUR EXECUTION	- SPLACST_0096		
		NOT VALID FOR EXECUTION	SIZE 1		