

# First simulations for a 4<sup>th</sup> (REAR) and 5<sup>th</sup> (DEAR) neutron beam lines at n\_TOF

**V. Bécares, D. Cano Ott, M. Bacak, E. Mendoza**

Avda. Complutense 40, 28040 Madrid – España

[daniel.cano@ciemat.es](mailto:daniel.cano@ciemat.es)

# Motivation

---

n\_TOF has excellent overall conditions for performing neutron induced reaction cross sections. The prompt spallation cascade and the fast neutrons deposit large amounts of energy in our detectors in a very short time. Many systems are limited due to that.


- (n, $\gamma$ ) – from thermal to  $\sim 1$  MeV.  $C_6D_6$  detectors work Ok but the TAC is limited up to  $\sim 10$  keV due to the background and the flash.
- (n,f) – from thermal up to hundreds of MeVs – GeVs. Some detectors are limited up to 10 MeV due to the flash / baseline oscillations.
- (n,xn) – work in progress and significant improvements, but still difficult due to the saturation of detectors.
- (n,ch.p) – thermal up to 100 MeV (typically in the fast range). Some experimental limitations due to the flash.

## Could we get rid of the high energy neutrons somehow?

- Looking from the rear side.
- Looking at a neutron moderator/scatterer and not at the target.


# Is there space for REAR?

The spallation cascade is highly directional and focussed forward, in the direction of the proton beam. Would an experimental area “behind” our spallation target (actual or future) offer better conditions.

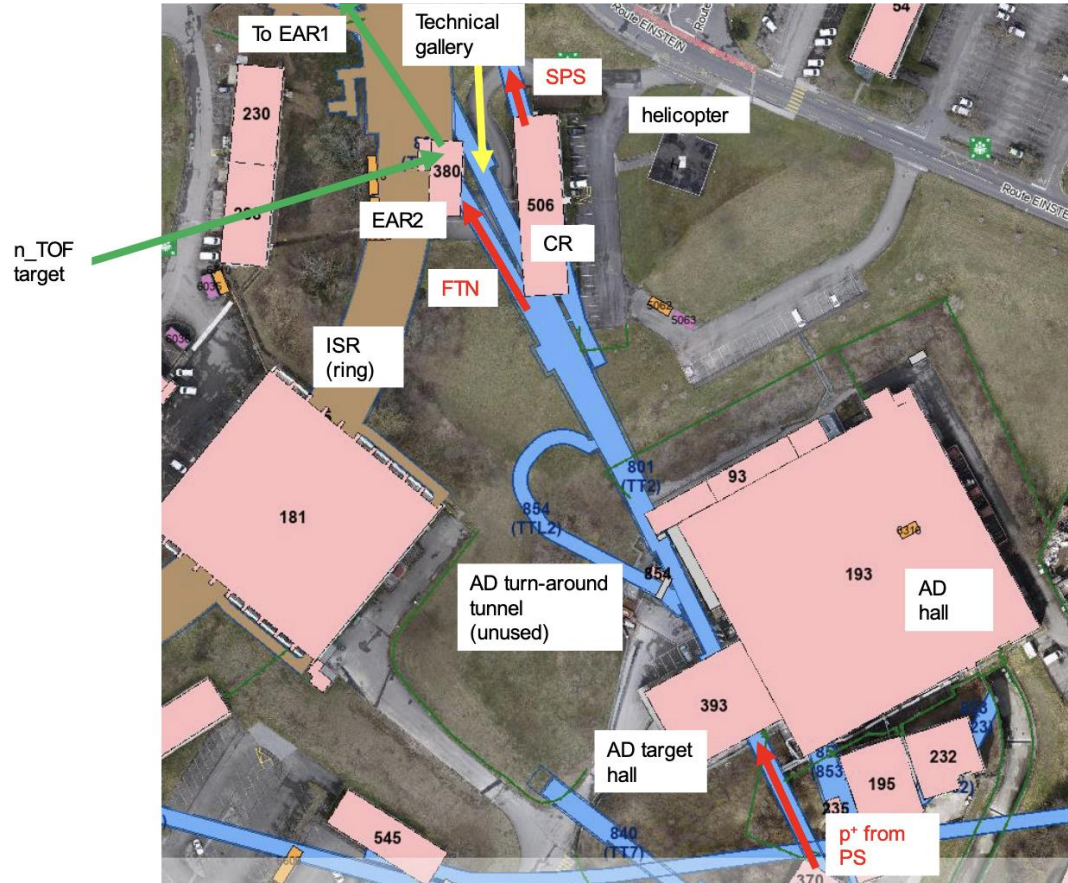

# Is there space for REAR?

The spallation cascade is highly directional and focussed forward, in the direction of the proton beam. Would an experimental area “behind” our spallation target offer better conditions.

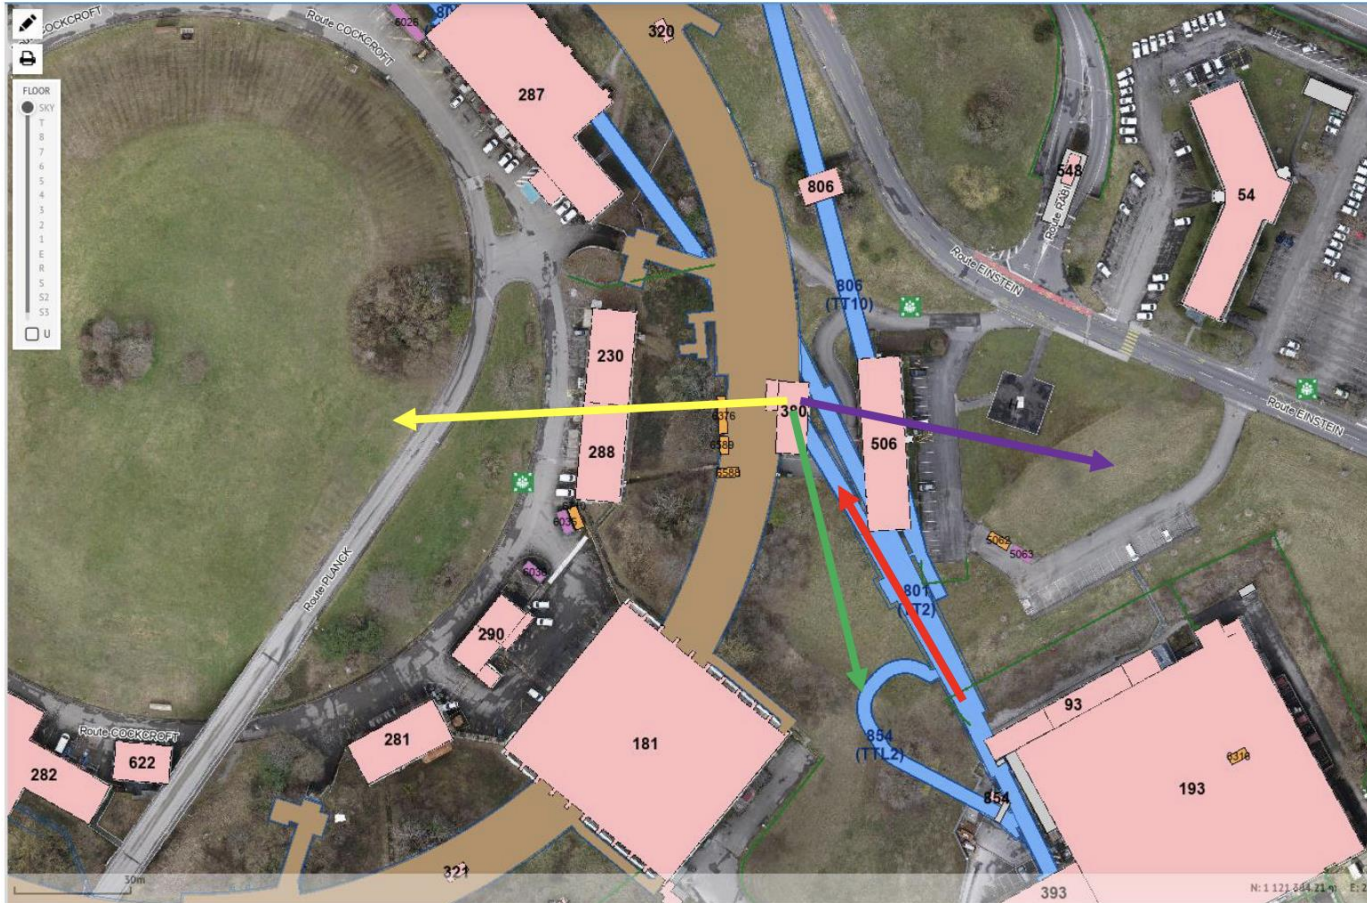


# A deflected neutron experimental area (DEAR)

Our actual **neutron beam** from the water moderator on top of the target.

**neutron beam** from a side water moderator (no direct neutrons from the target)

Check the idea of having a second vertical beam line looking at a new moderator, thus avoiding direct neutrons and gammas from our spallation target.

New beam line going to EAR-2, parallel to the existing one and not looking at the target.

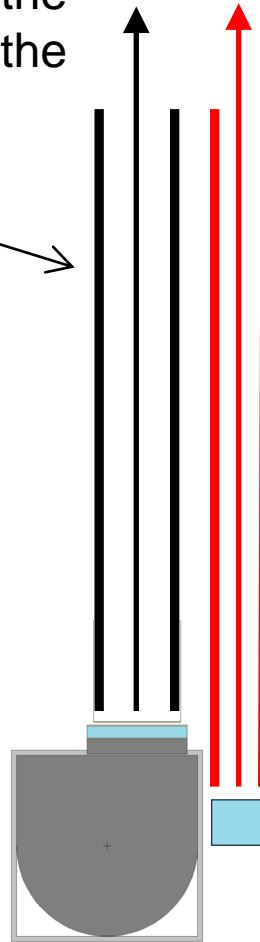

Small water moderator


# Simulations done for REAR and DEAR

---


The MCNP simulations carried out so far provide more qualitative than quantitative results:

- Simplified version of our actual target.
- Low statistics yet due to the target huge computing power required.
- Only approximate results due to the scoring of neutrons at large emission angles ( $5^\circ$ ).
- Use of an extra lead block backwards.
- Simplified version of the effect of having narrow collimators for neutron capture ( $\sim 2$  cm in diameter)

# The target geometry

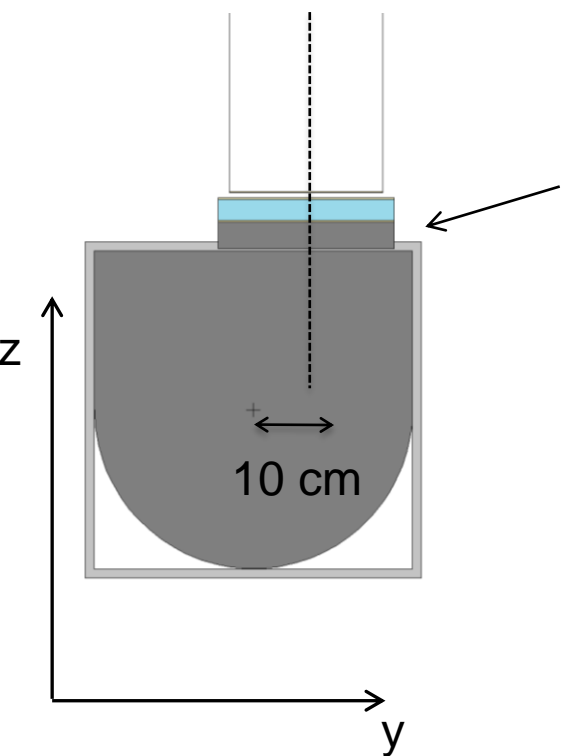


EAR-2 moderator and lead disk

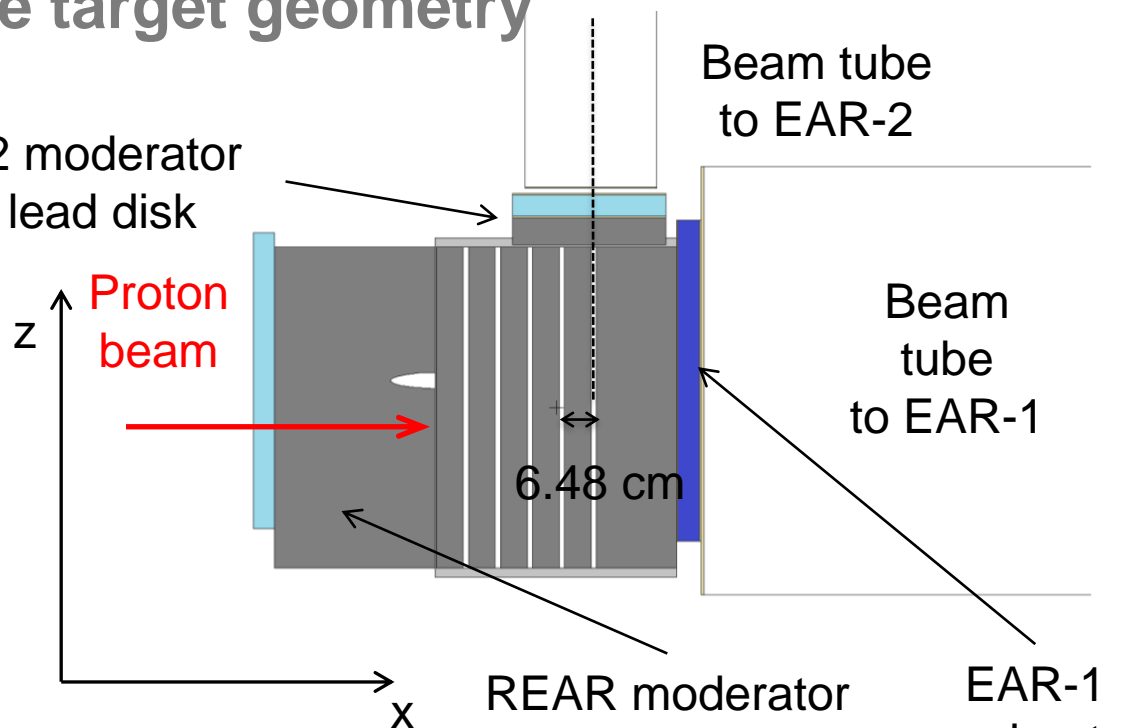


REAR moderator and lead block

EAR-1 moderator

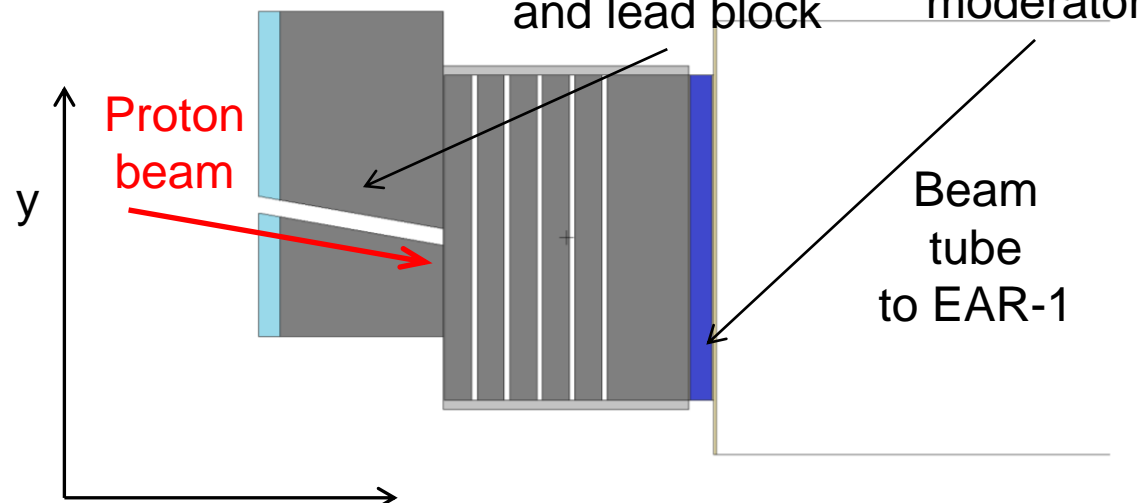

Lead  
Aluminium  
Steel (316L)  
Water  
Borated water (1.28% weight of boron, 99%  $^{10}\text{B}$ )


# The target geometry

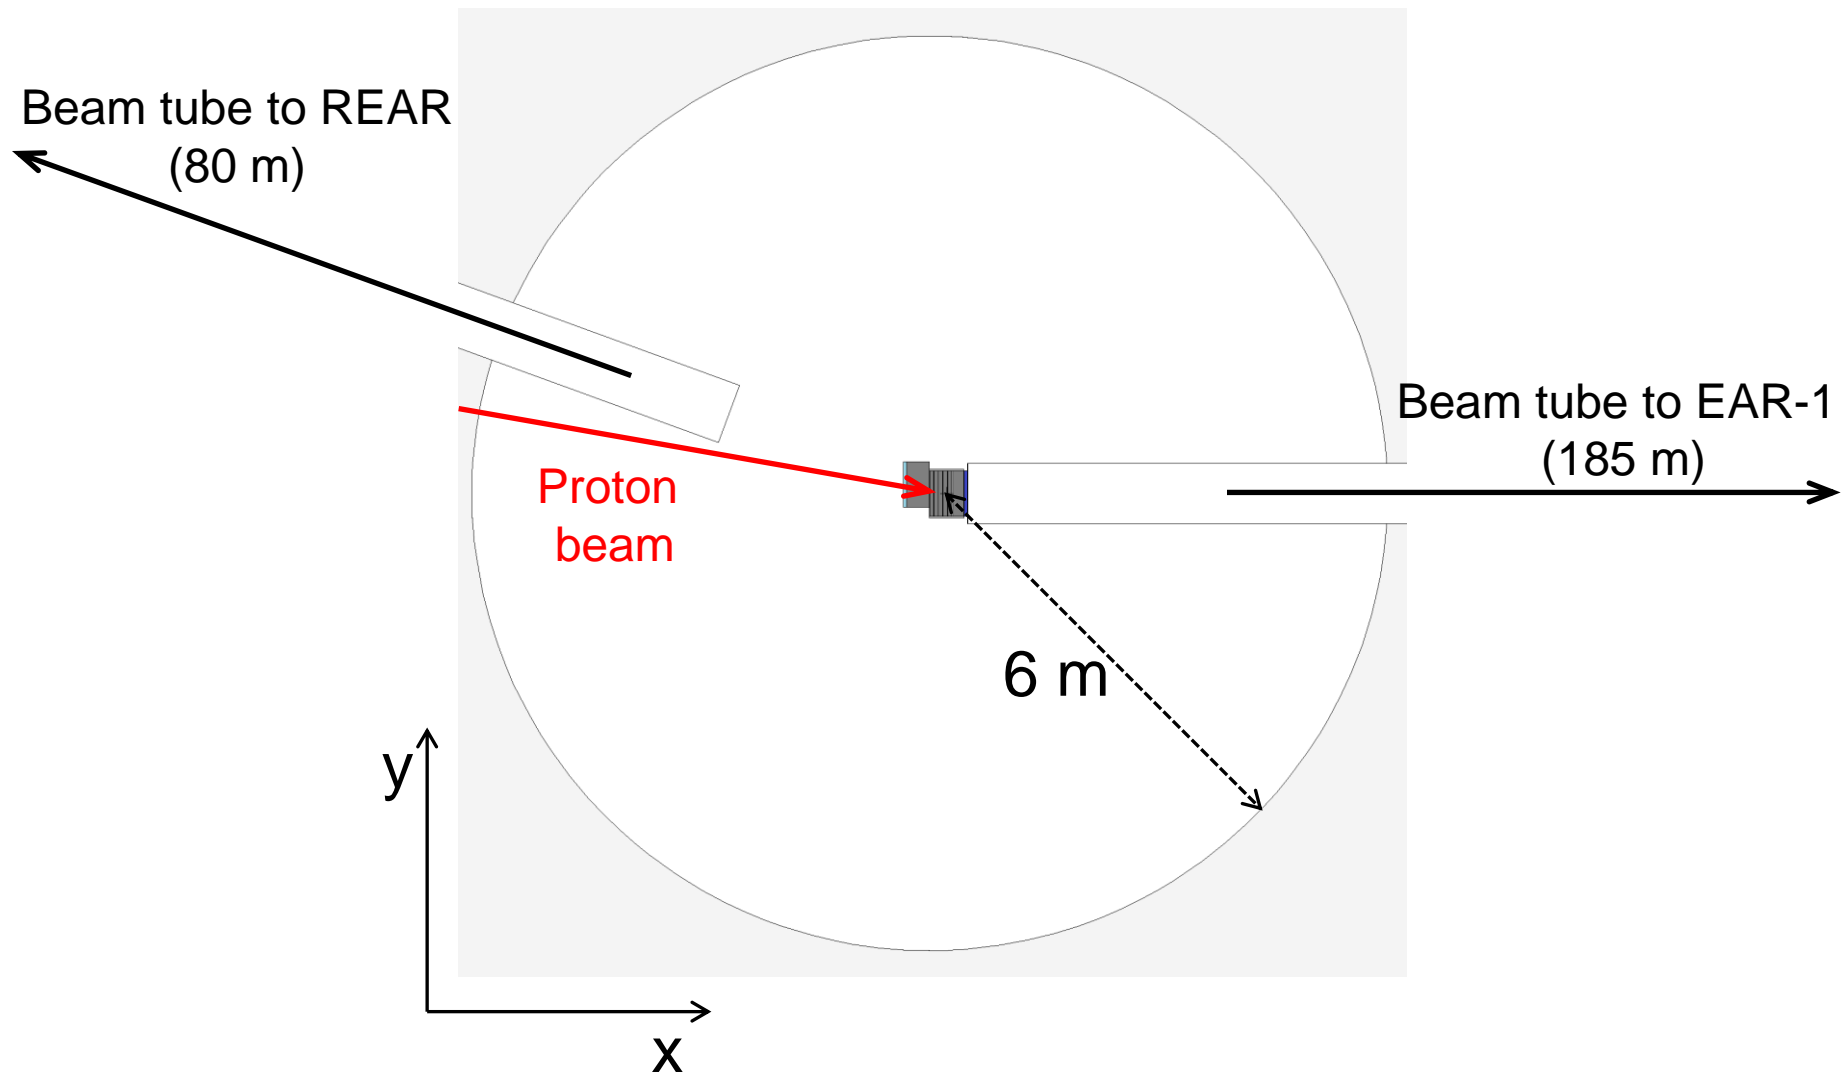




# Comparison of the EAR-1, EAR-2 and REAR fluences

## Neutron energy spectra in EARs

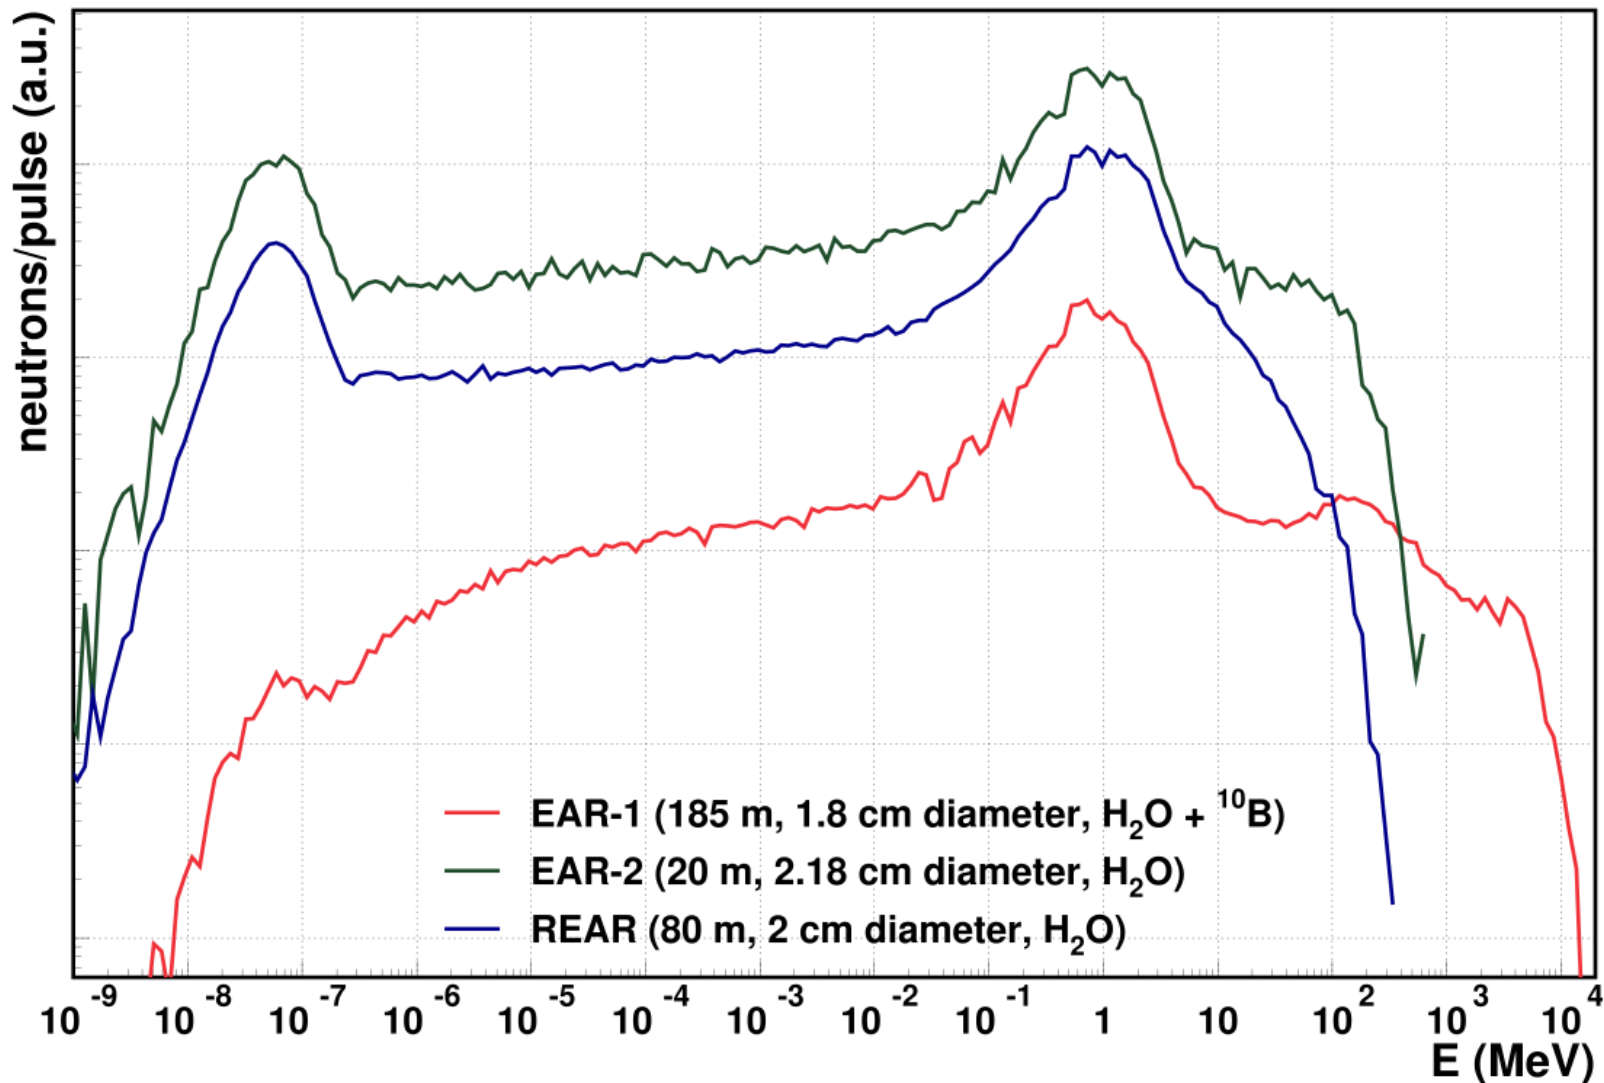


# Comparison of the neutron fluence shapes

## Neutron energy spectra in EARs

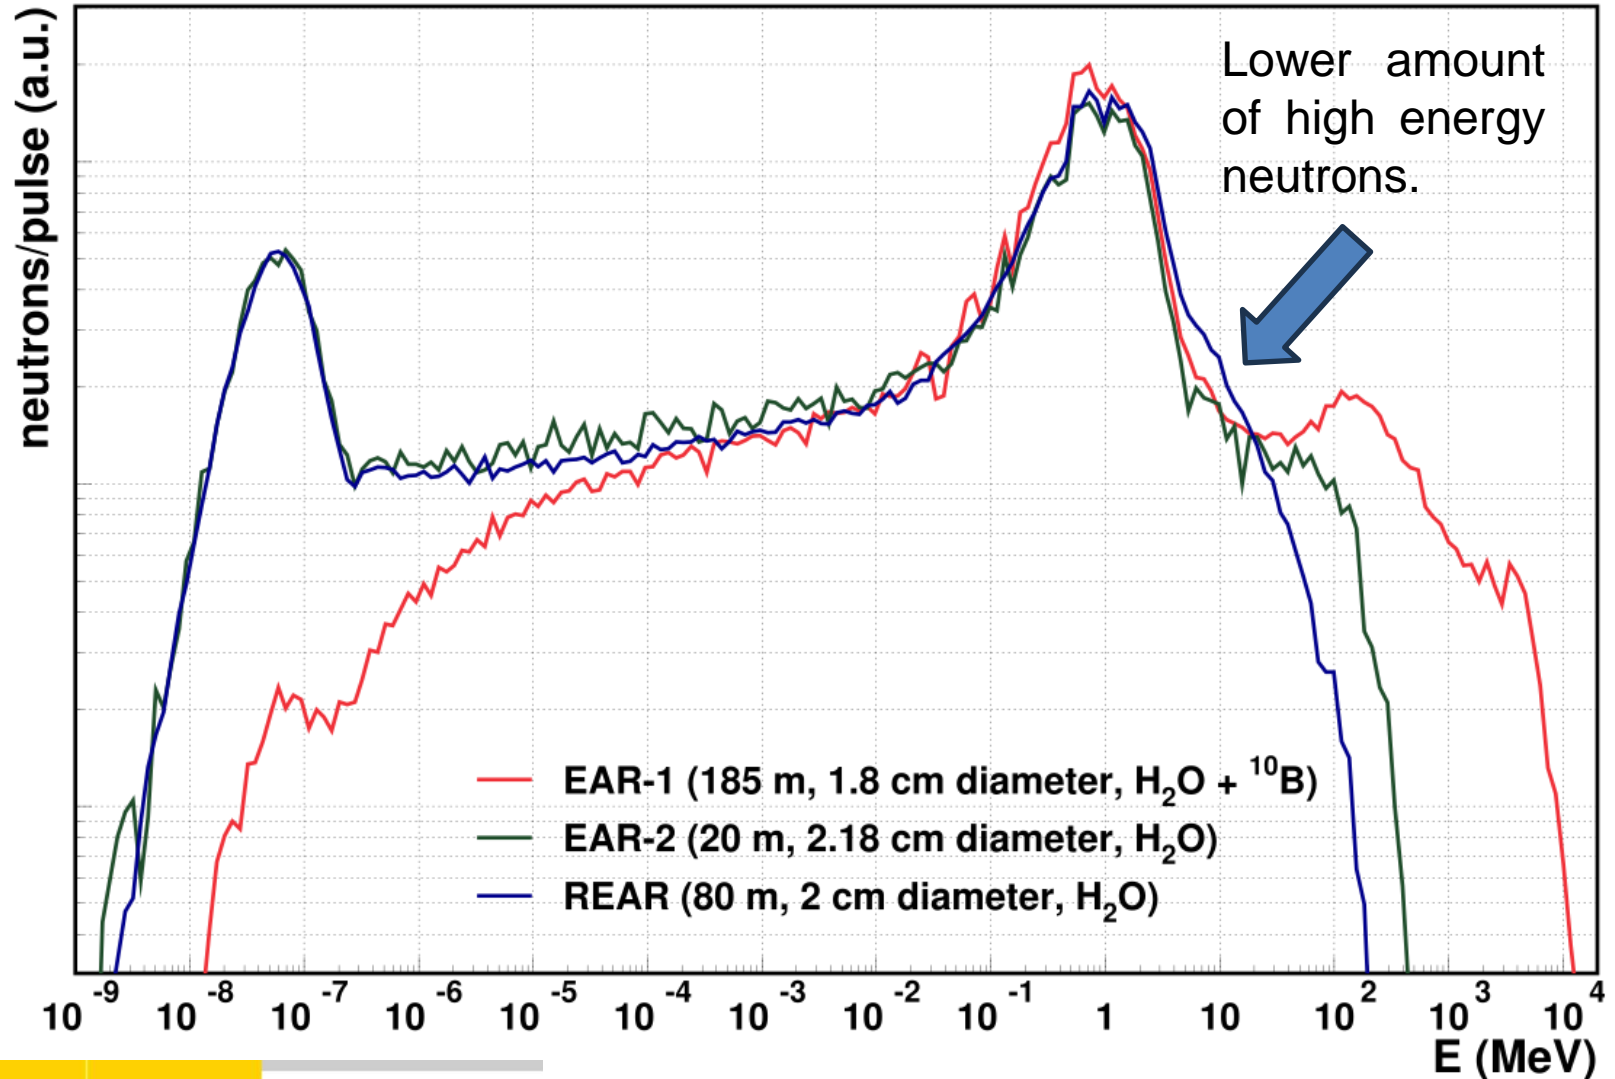


# EAR-1 neutron and $\gamma$ -ray TOF distributions


EAR-1 (185 m, 1.8 cm diameter,  $\text{H}_2\text{O} + {}^{10}\text{B}$ )

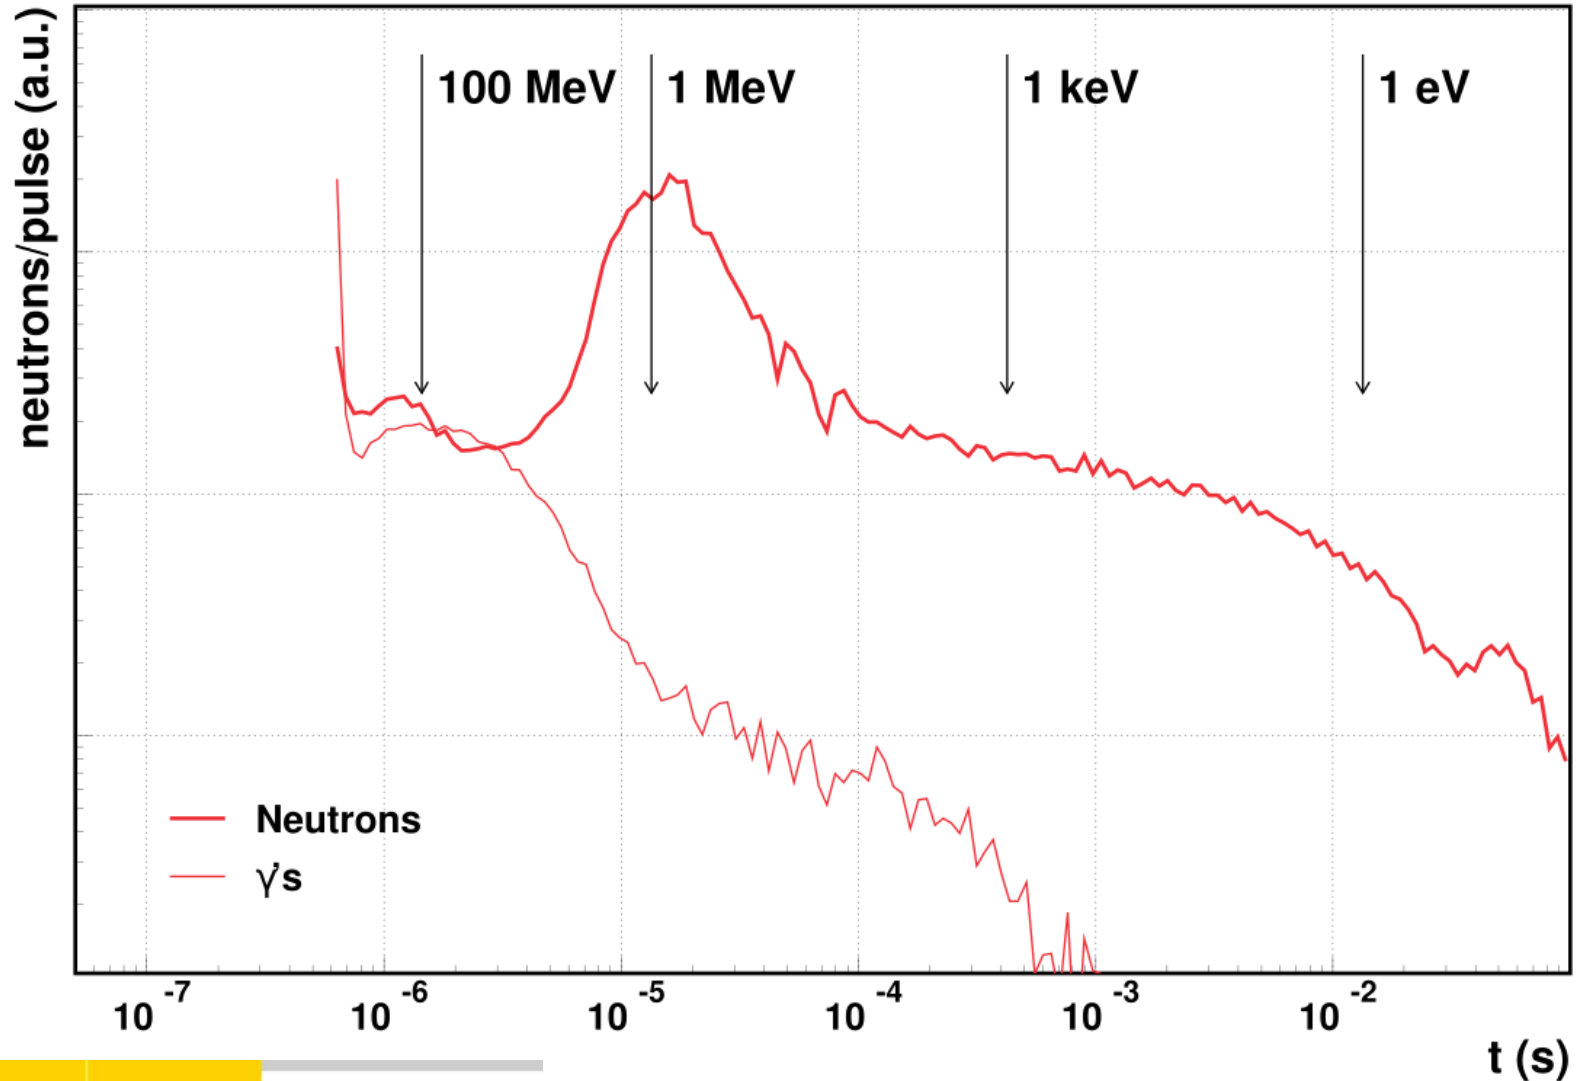

# EAR-2 neutron and $\gamma$ -ray TOF distributions

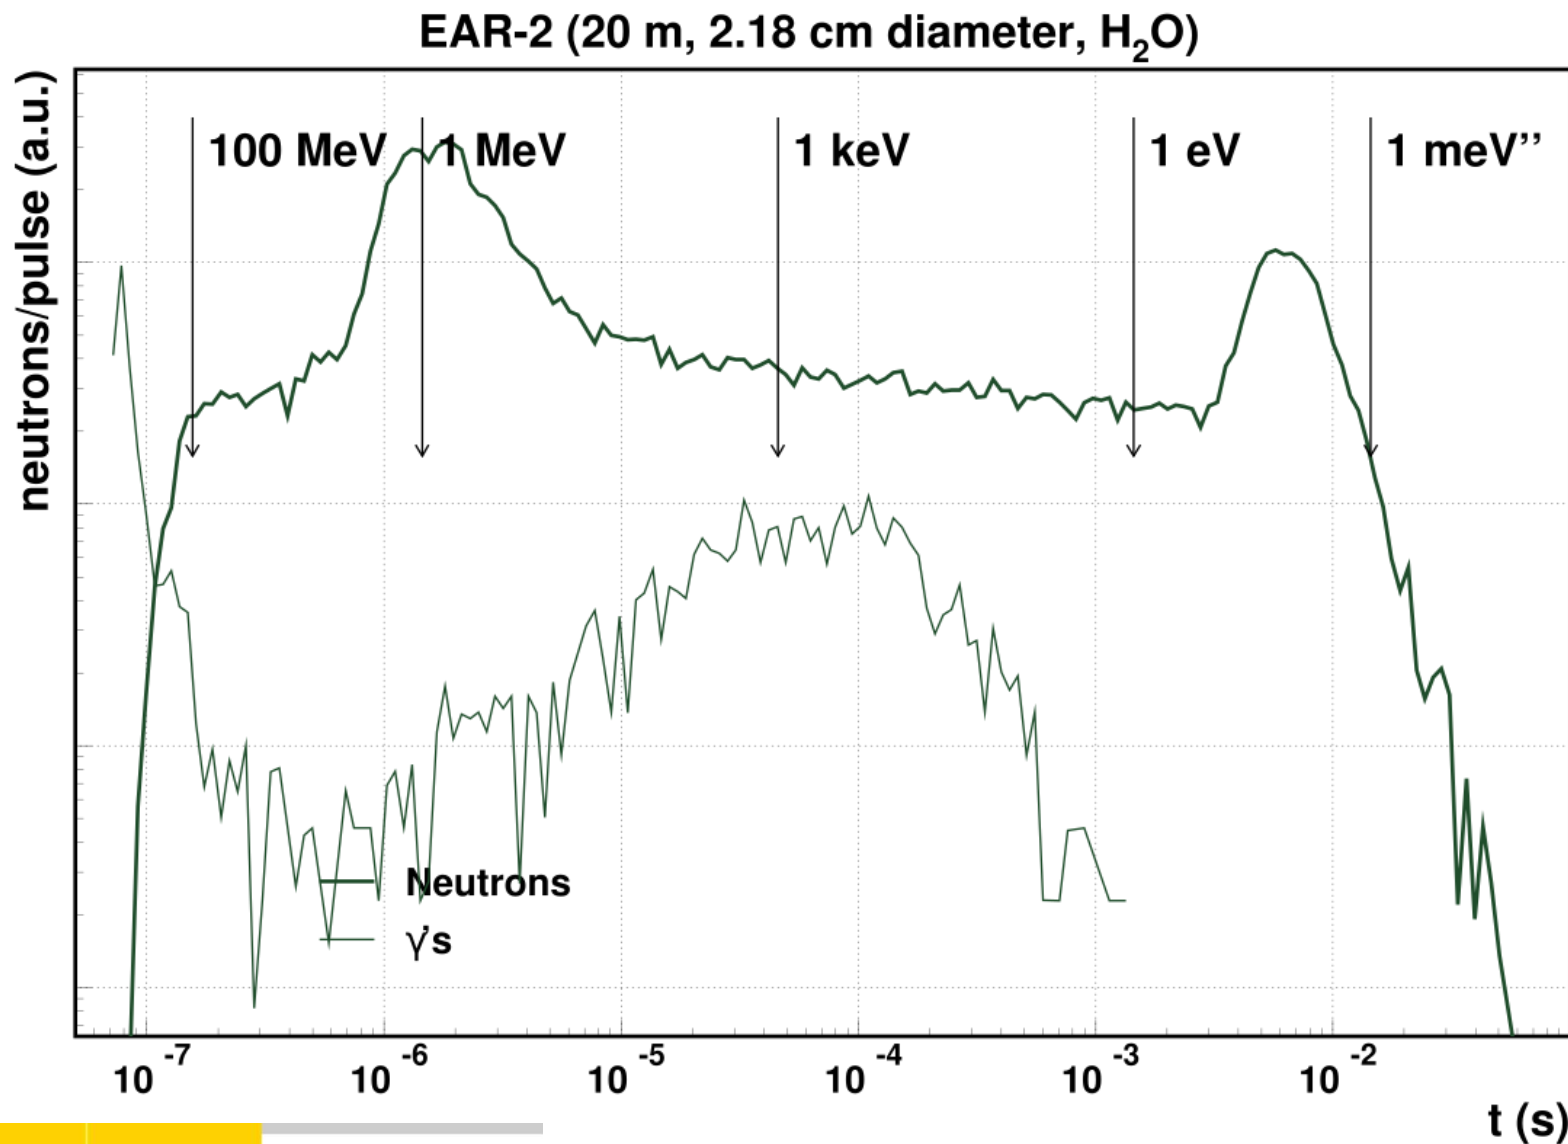


# REAR neutron and $\gamma$ -ray TOF distributions

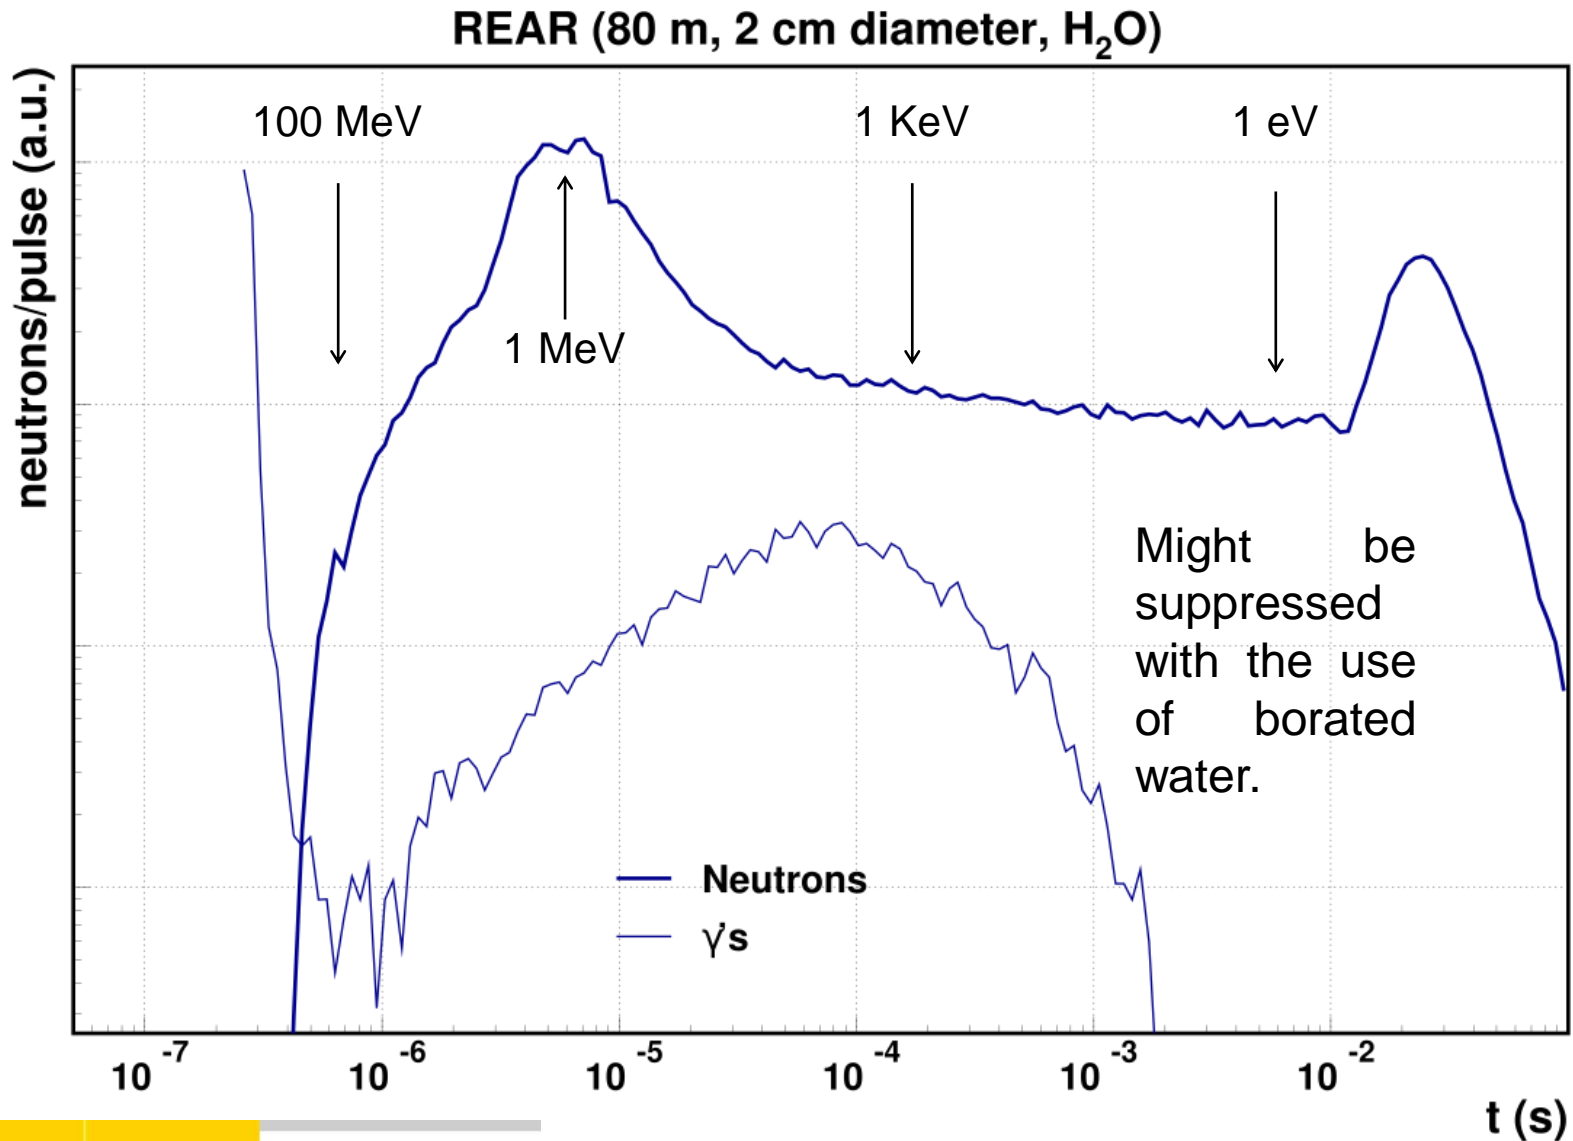


# neutron and $\gamma$ -ray TOF distributions

## Neutron & gamma ToF spectra in EARs

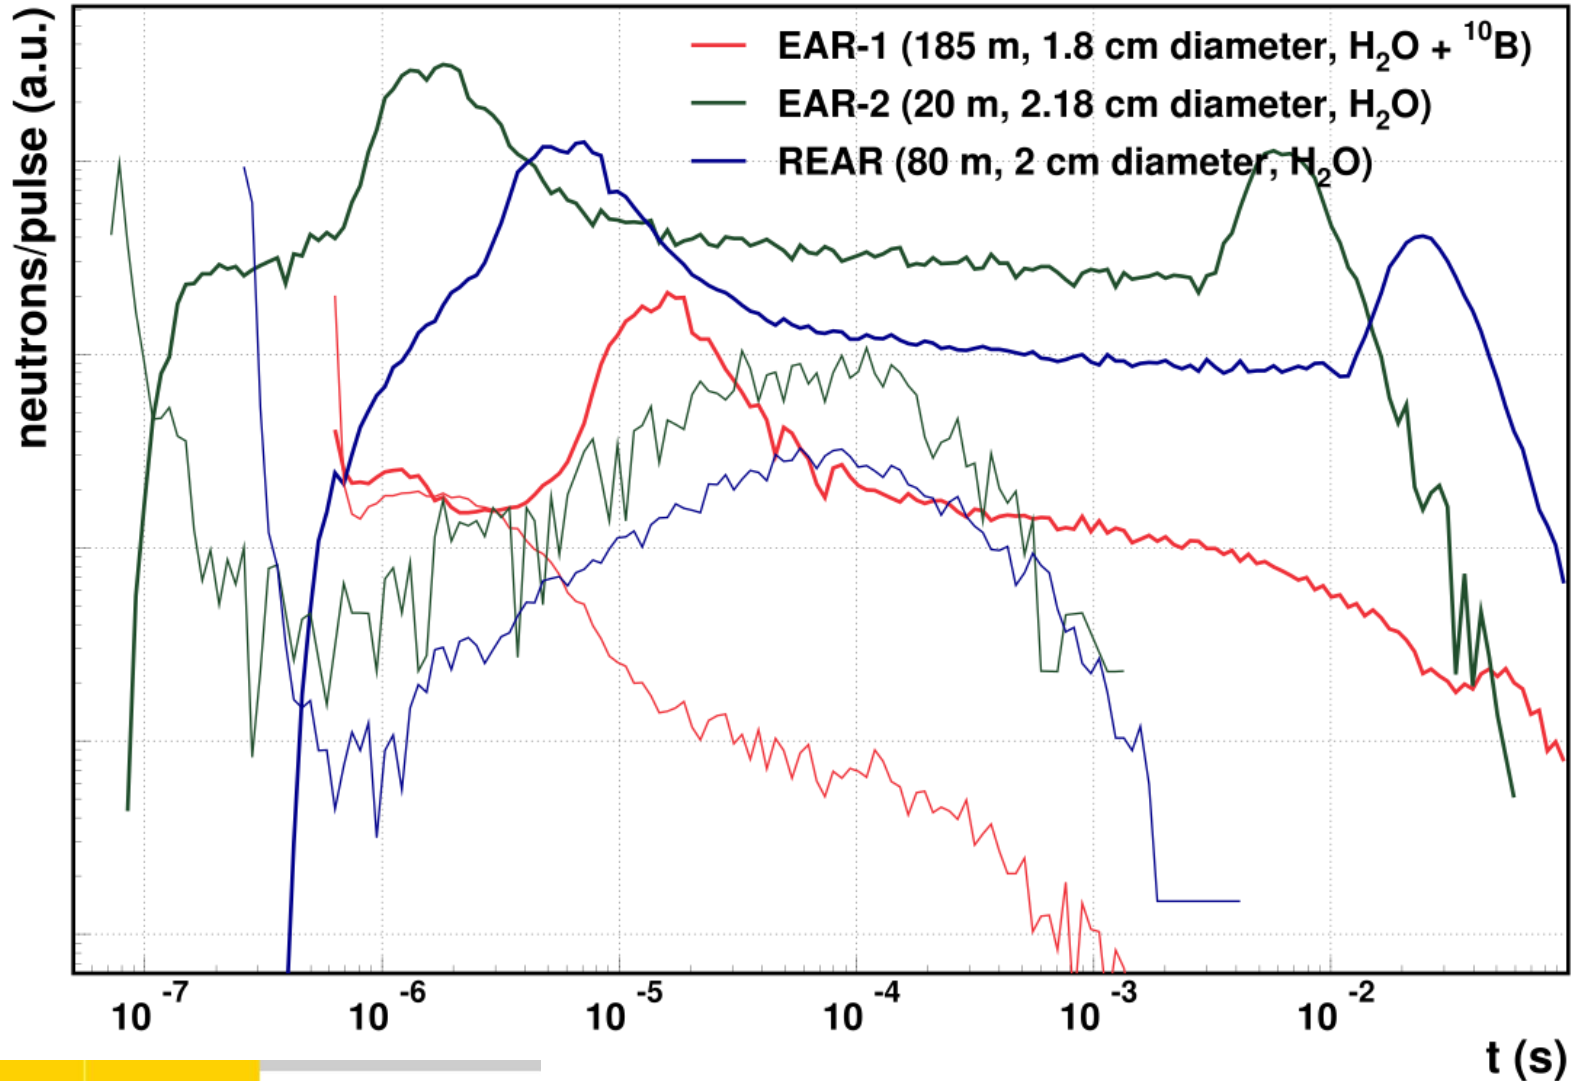


# The DEAR beam line facing only a moderator

We have tested 2 different moderators: 16 cm in diameter, and 5 cm and 60 cm long.

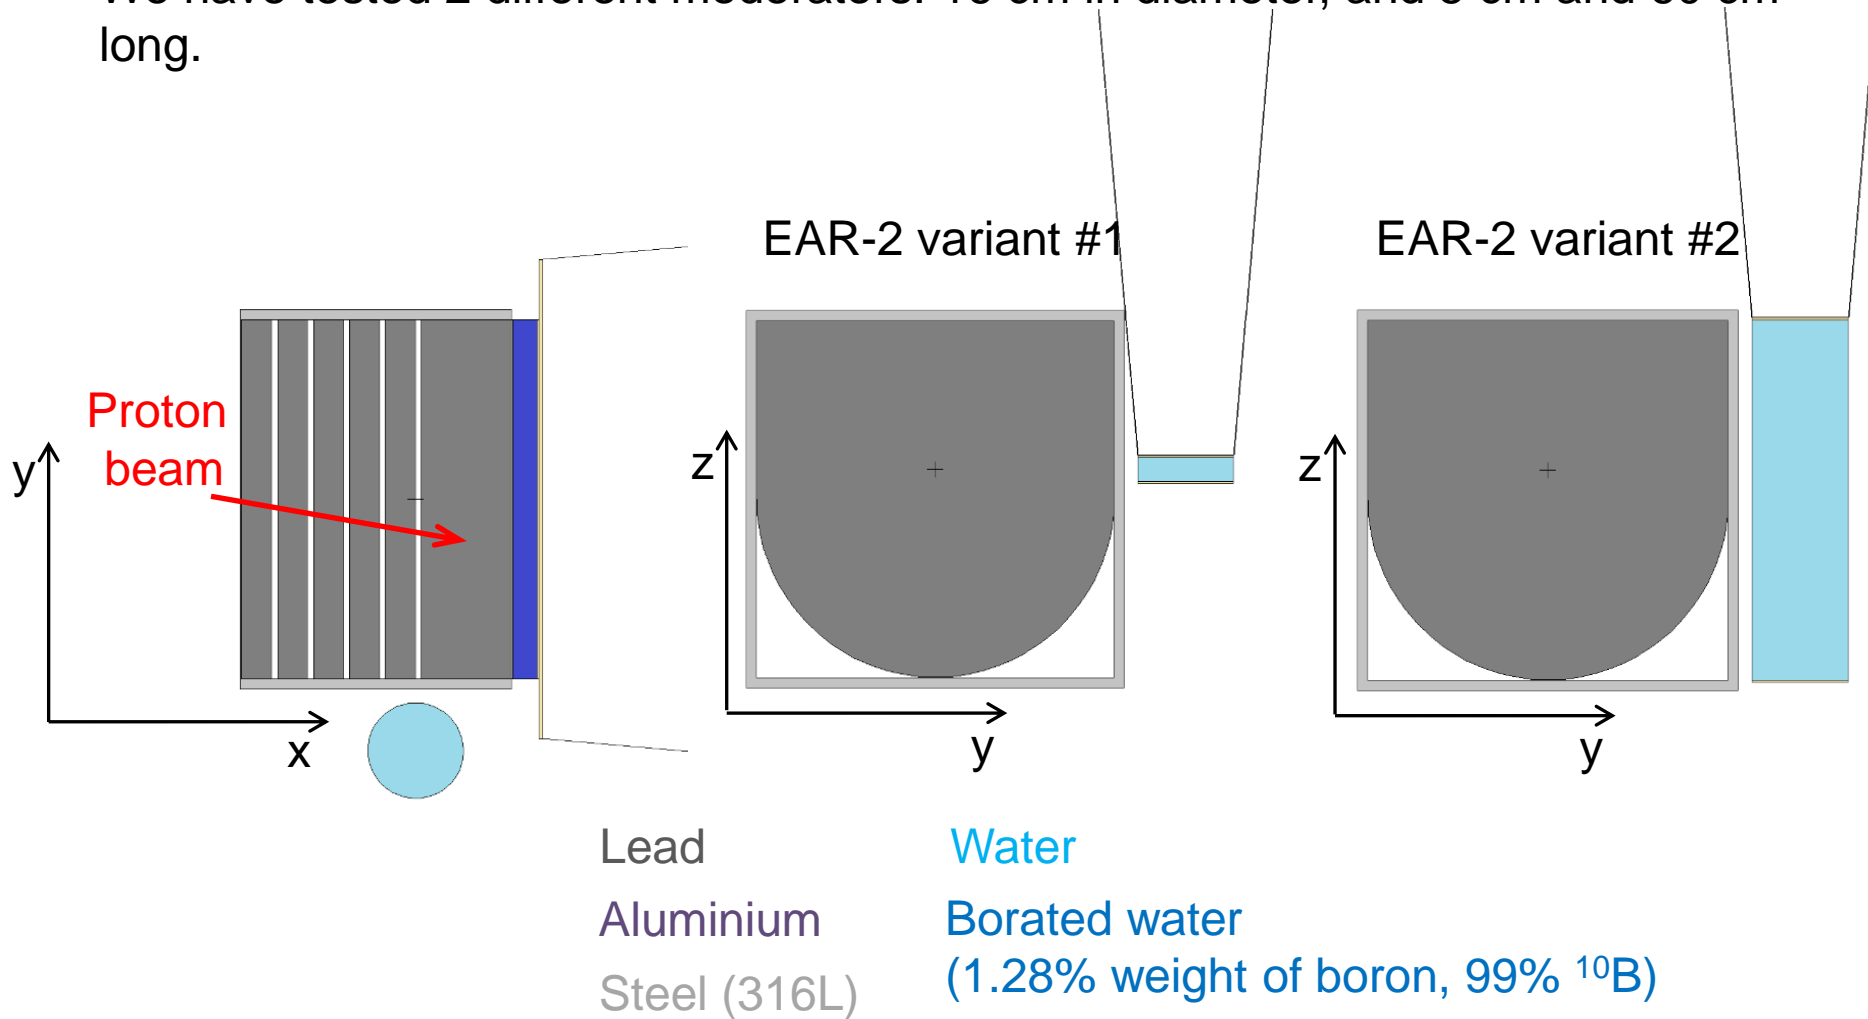


# Comparison of EAR-2 and DEAR

## Neutron energy spectra in different configurations of EAR-2

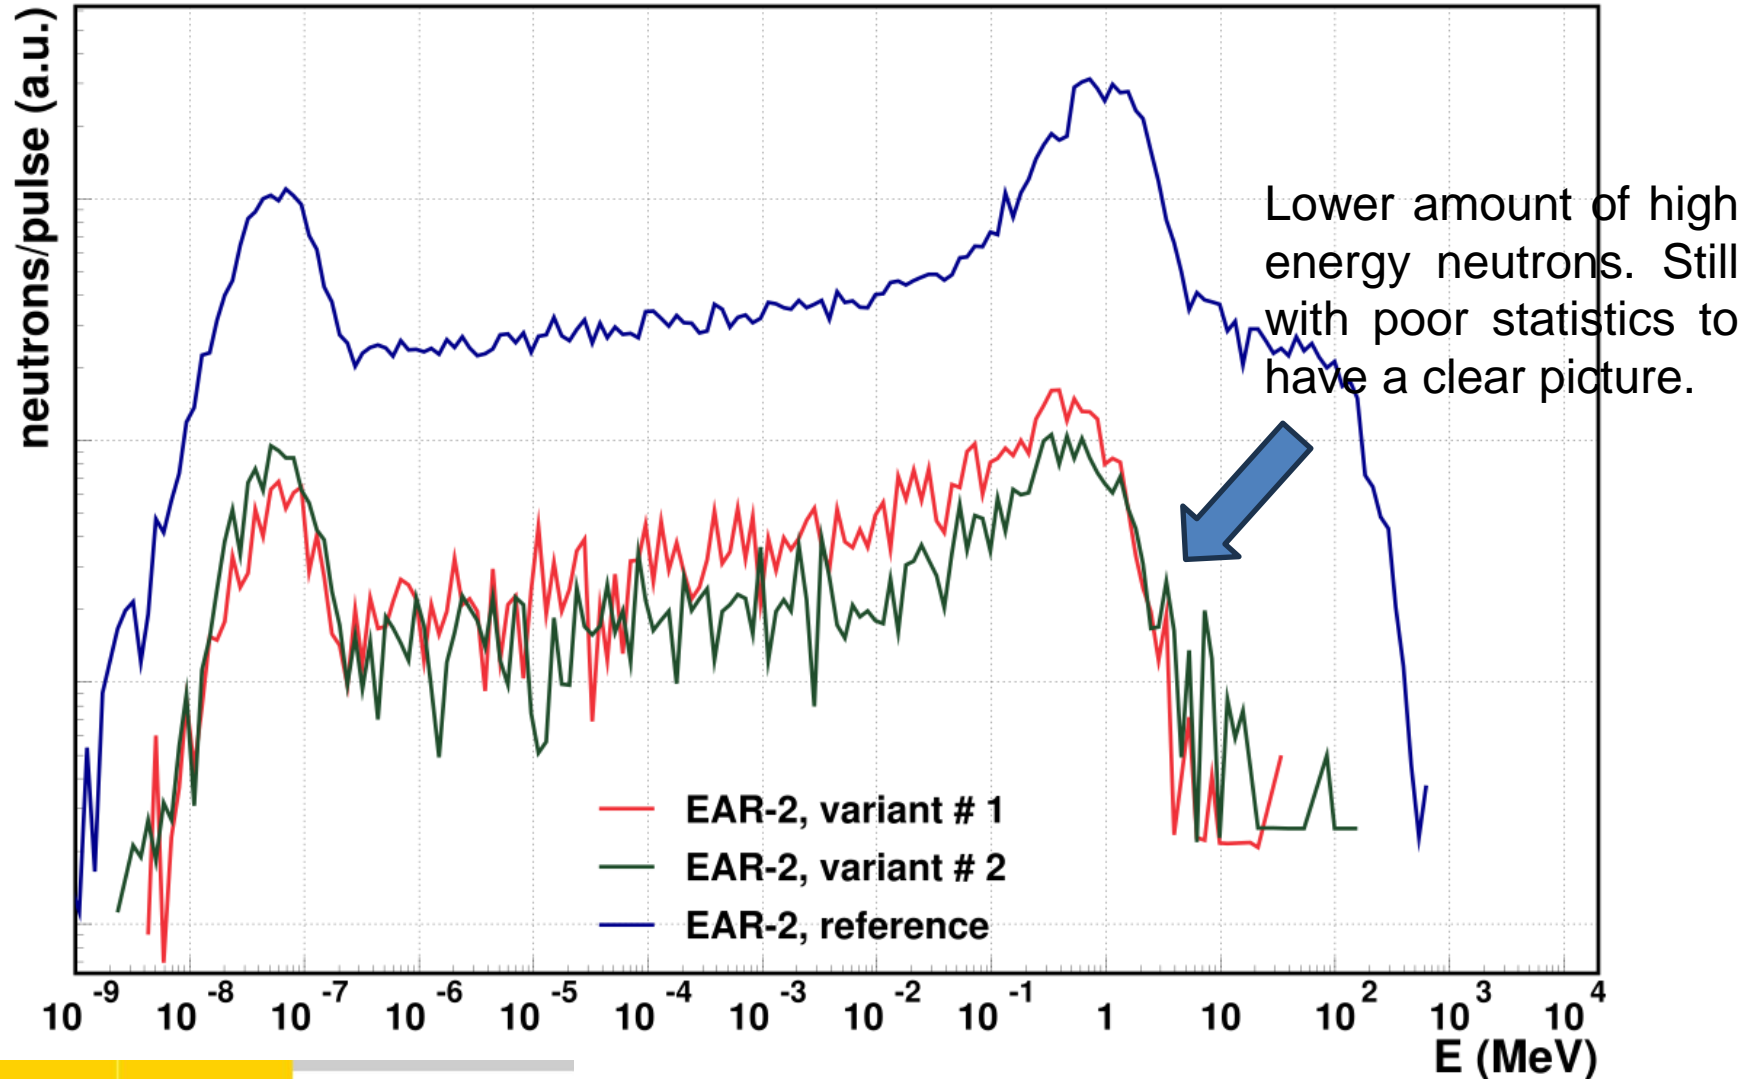





# Comparison of the EAR-2 fluences

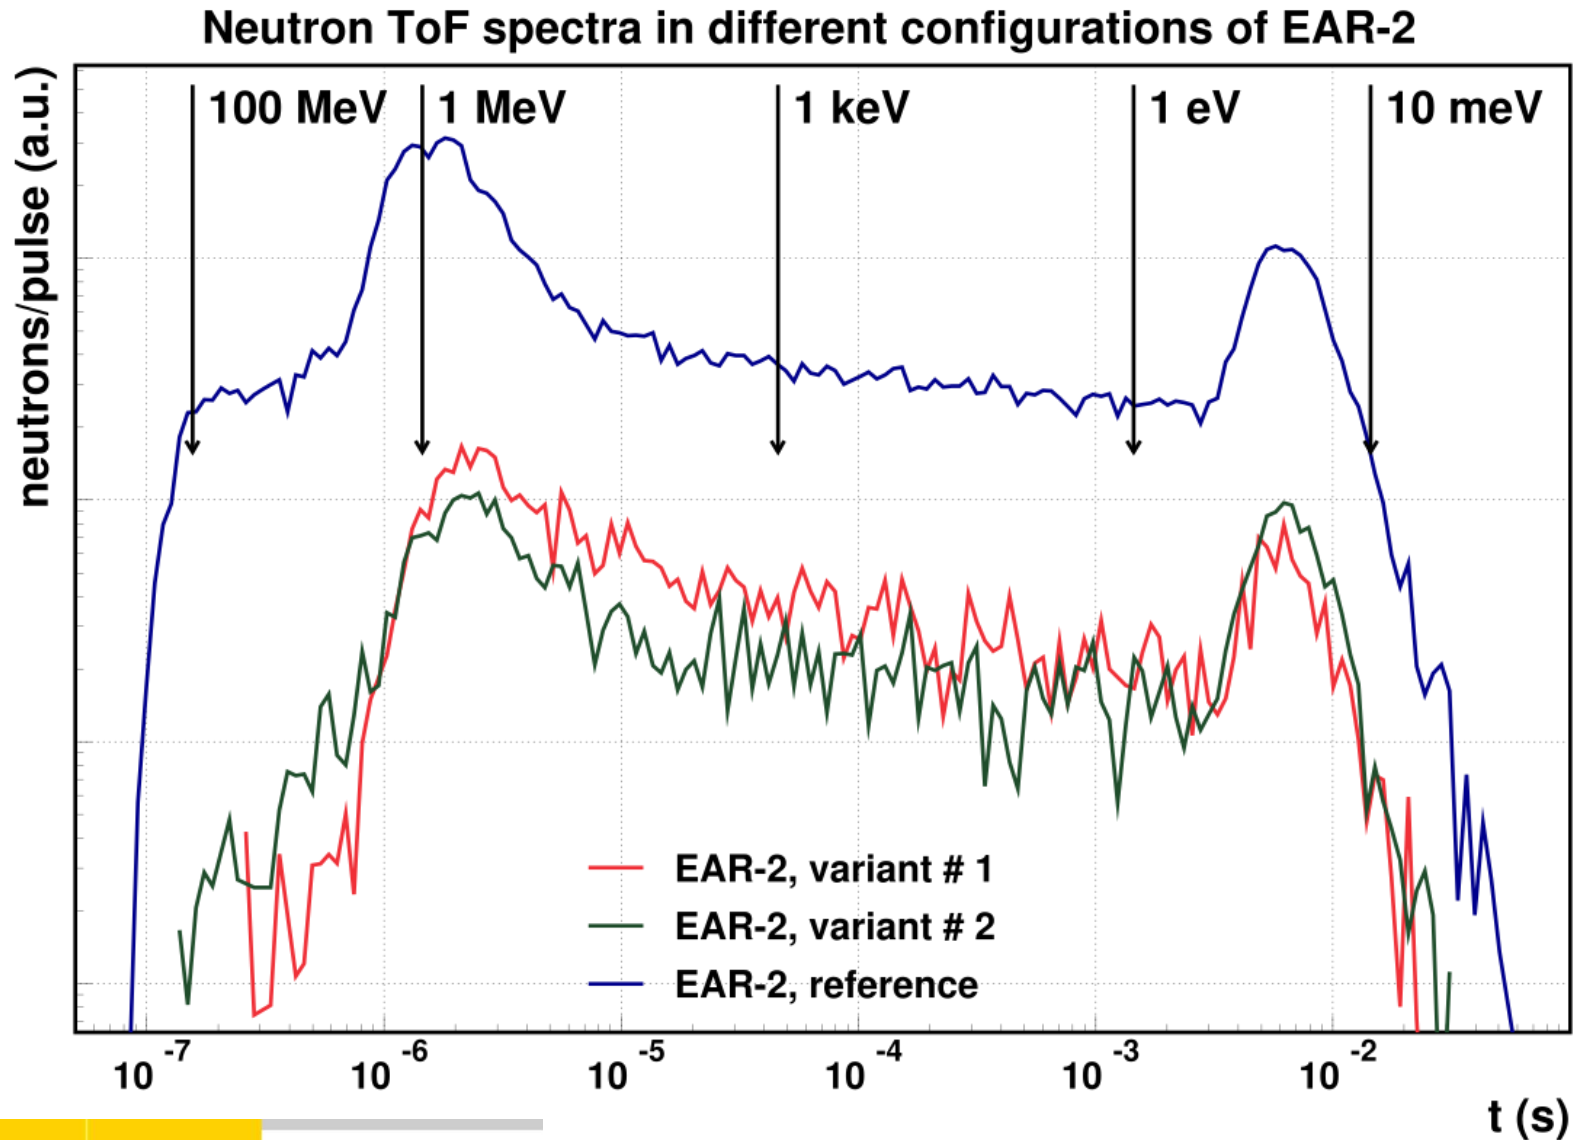

# REAR vs EAR-1 and EAR-2

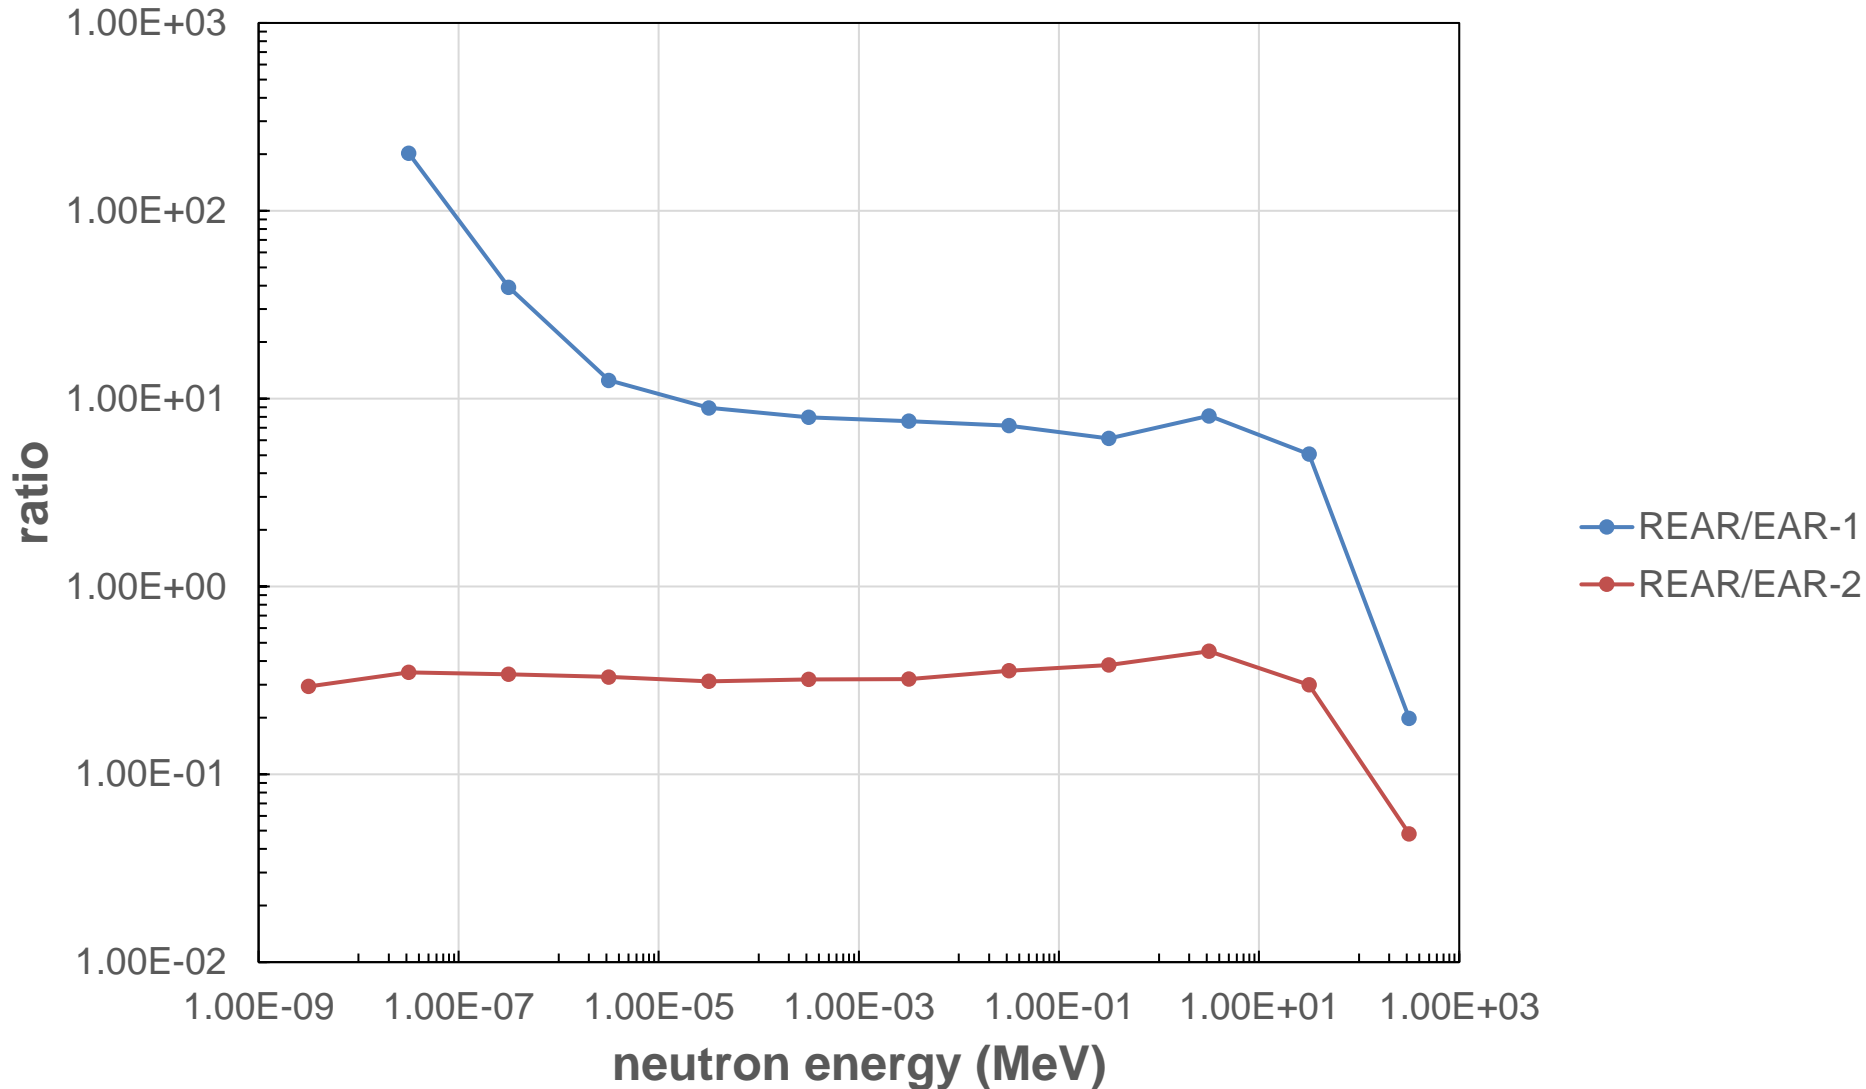

# DEAR beam lines v1 and v2 vs EAR-2

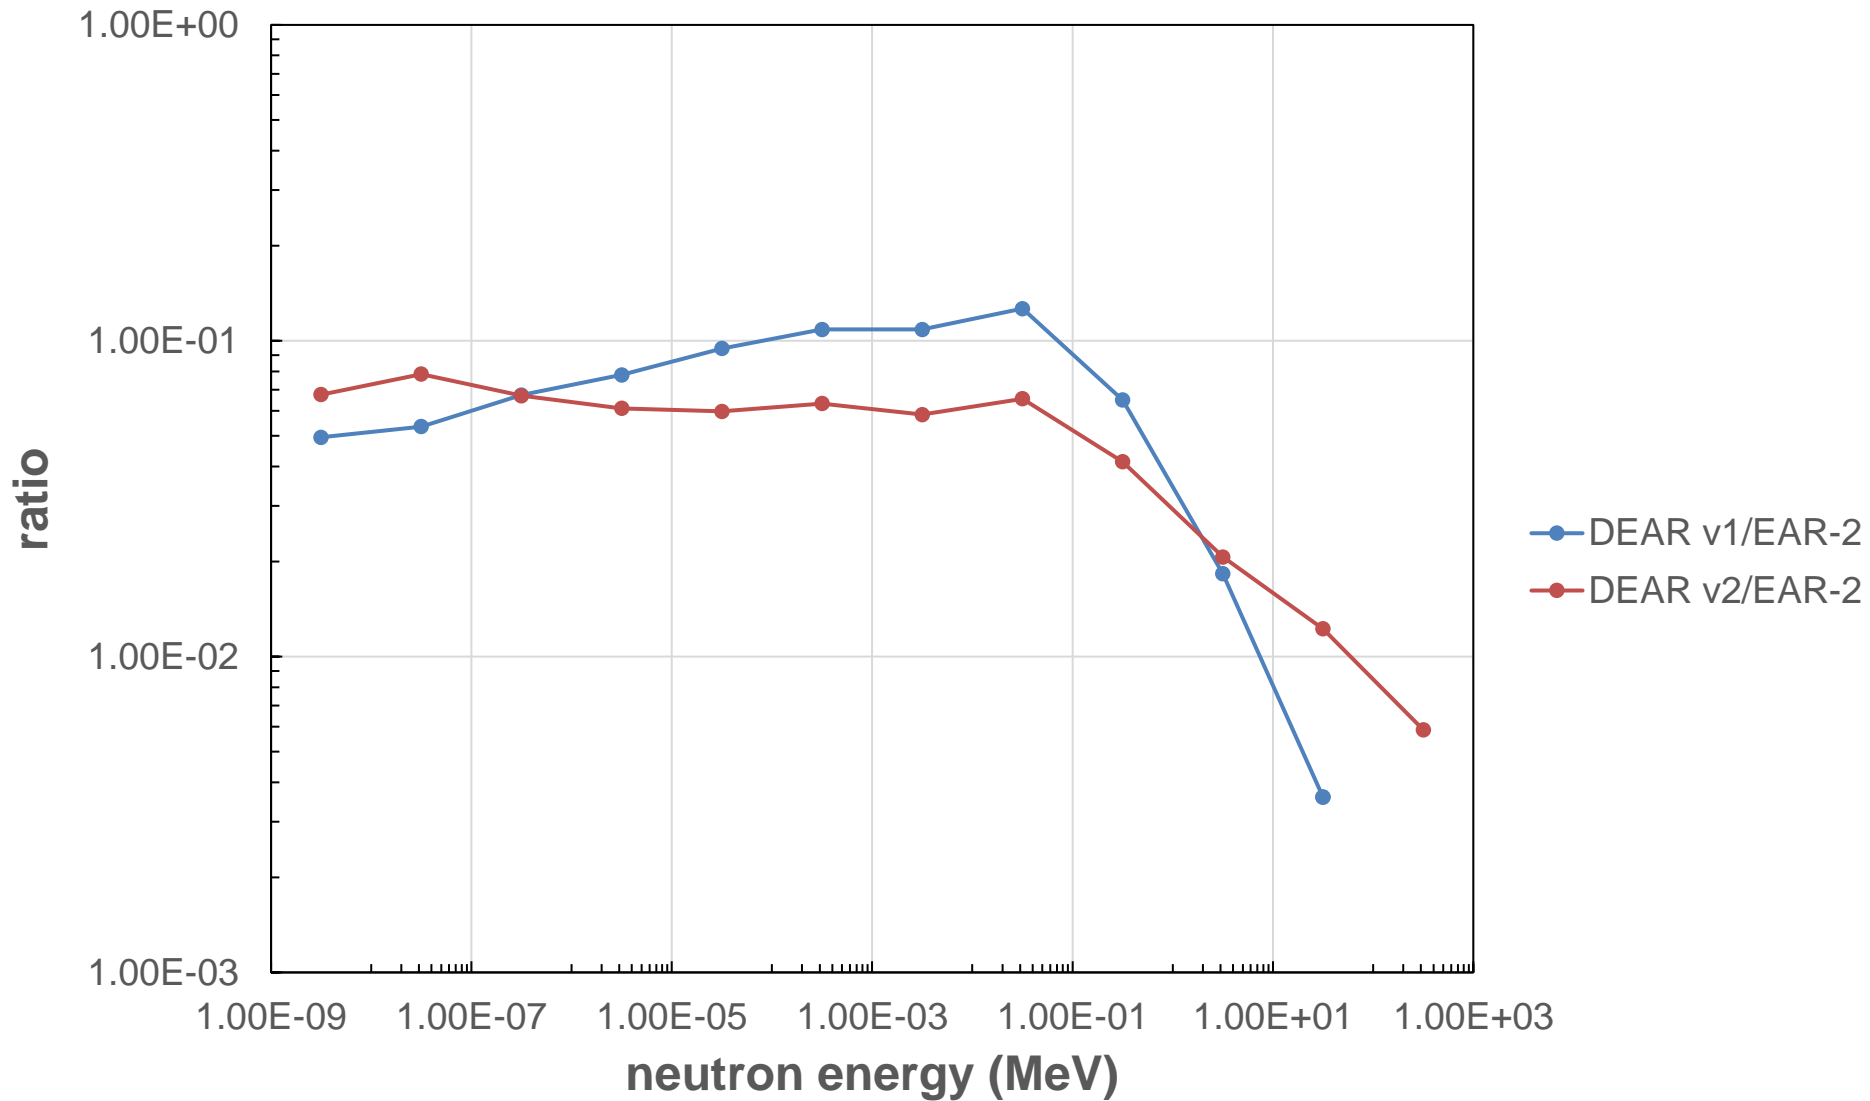

# Summary and conclusions

---

First simulations have been done for investigating:

- The performance of a REAR station at 80 m from the spallation target.
- The idea of having a second beam line in EAR-2 looking at a moderator and not at the spallation target.

Preliminary conclusions about REAR:

- There is a reduction in the high energy neutron component, but it is not evident that it will be enough for having better background conditions.
- There is also not a big change in the in-beam gamma-ray background with respect to EAR-2.

Maybe some good idea / further shaping of the beam in the backward direction may help. More simulations are required.

# Summary and conclusions

---

Preliminary conclusions about the DEAR neutron beam line (in EAR-2) looking at a moderator.

- A reduction of the flux in a factor of 10 is expected. This may be acceptable for some experiments if a better signal to background ratio is achieved.
- The reduction of neutron fluence could be compensated if the flight path is shorter. ¿Useful for a 10 m flight path?
- More statistics are necessary for having a more accurate picture on the energy distribution of the neutrons and gamma-rays (not yet calculated) and for having some clue about the time-energy relation.

We will keep exploring some ideas for a while and additional help/proposals are of course welcome!

# Comparison of the fluences

Energy (min-max) (MeV)		EAR-1	EAR-2	REAR	EAR-2 v1	EAR-2 v2
		n/pulse	n/pulse	n/pulse	n/pulse	n/pulse
1.00E-09	1.00E-08	0.00E+00	4.42E+04	1.30E+04	2.19E+03	2.99E+03
1.00E-08	1.00E-07	1.75E+03	1.02E+06	3.55E+05	5.43E+04	7.97E+04
1.00E-07	1.00E-06	4.20E+03	4.83E+05	1.64E+05	3.25E+04	3.23E+04
1.00E-06	1.00E-05	9.82E+03	3.73E+05	1.23E+05	2.91E+04	2.28E+04
1.00E-05	1.00E-04	1.48E+04	4.23E+05	1.32E+05	4.00E+04	2.53E+04
1.00E-04	1.00E-03	1.91E+04	4.76E+05	1.52E+05	5.16E+04	3.01E+04
1.00E-03	1.00E-02	2.34E+04	5.51E+05	1.77E+05	5.98E+04	3.22E+04
1.00E-02	1.00E-01	3.77E+04	7.60E+05	2.71E+05	9.61E+04	4.98E+04
1.00E-01	1.00E+00	1.70E+05	2.74E+06	1.04E+06	1.78E+05	1.13E+05
1.00E+00	1.00E+01	1.13E+05	2.03E+06	9.16E+05	3.71E+04	4.20E+04
1.00E+01	1.00E+02	2.23E+04	3.78E+05	1.13E+05	1.36E+03	4.62E+03
1.00E+02	1.00E+03	2.06E+04	8.48E+04	4.09E+03	0.00E+00	4.97E+02

