

ALICE

CARLSBERG FOUNDATION



SiPM Readout with VMM3 at FoCal testbeam Data Analysis

Valentin Buchakchiev
Sofia University "St. Kliment Ohridski"

SOFIA
UNIVERSITY



ST. KLIMENT
OHRIDSKI
EST. 1888



РЕПУБЛИКА БЪЛГАРИЯ
МИНИСТЕРСТВО НА ОБРАЗОВАНИЕТО
И НАУКАТА

** partially supported by
National Roadmap for Research
Infrastructures – CERN
D01-374/18.12.2020 г.*

RD51 WG5 Meeting
05.12.2023

UNIVERSITY OF
COPENHAGEN



Data Reconstruction



- Data is sent in packets consisting of “hits” – 38 bit strings, holding information about a single channel activation (shown in table to the right);
- The VMM is self-triggering and data is sent in a stream, resulting in no clear distinction of events;
- Events are defined based on time windows. Current method counts out 8 us from the first hit in a potential event;
- There is also filtration by number of hits in an event, meaning that after the time window passes, events with too few hits are considered fake/noise;
- After reconstruction, in order to deal with saturation effects, a calibration of the charges recorded is performed, allowing for the low gain channels to be used instead of saturated high-gain ones.

Name	Length (bit)	Values
Data flag	1	always 1
Over-threshold flag	1	Over threshold: 1 Below threshold (requires NL on): 0
Channel number	6	0 to 63
ADC (PDO)	10	0 to 1023
TDC (TDO)	8	0 to 255
BCID (clock counter)	12	0 to 4095

<https://doi.org/10.1016/j.nima.2022.166548>


Noise estimation

- Mainly, noise reduction is done by cutting out events with hit numbers beneath a threshold;
- Reading through the events, there are cases of “activation repetition” - one channel activating multiple times in the scope of a single event;
- Repetitions have been attributed to noise attached to the events and as of now are simply being removed;
- Worth noting that the “repetition” is affected by change of power supply and some fiddling with the cables/connections.
- Note: Conditions are different between runs – comparison can hardly be considered proper.

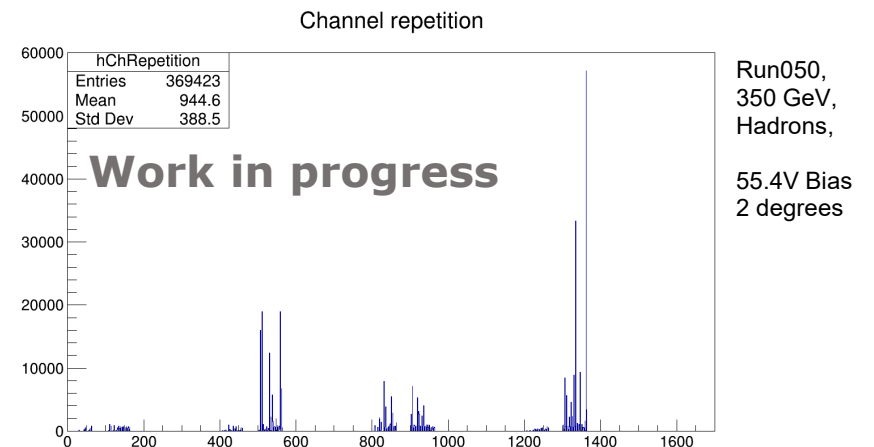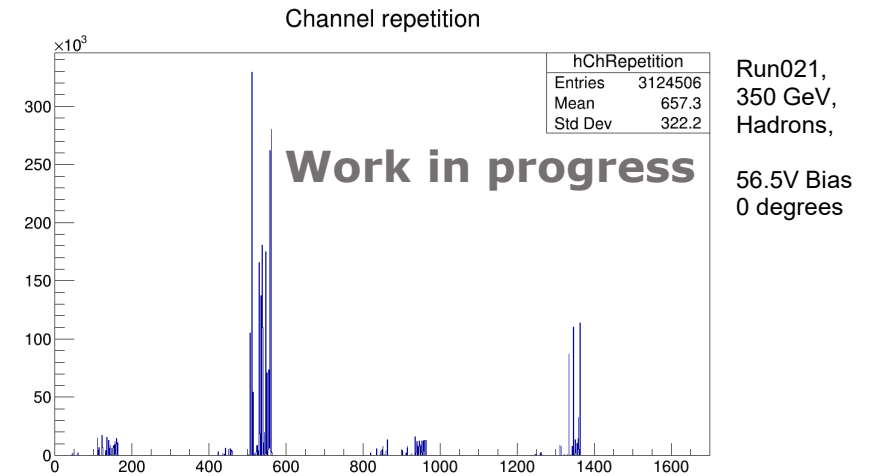


Charge Reconstruction – HG only

Energy distributions using HG data


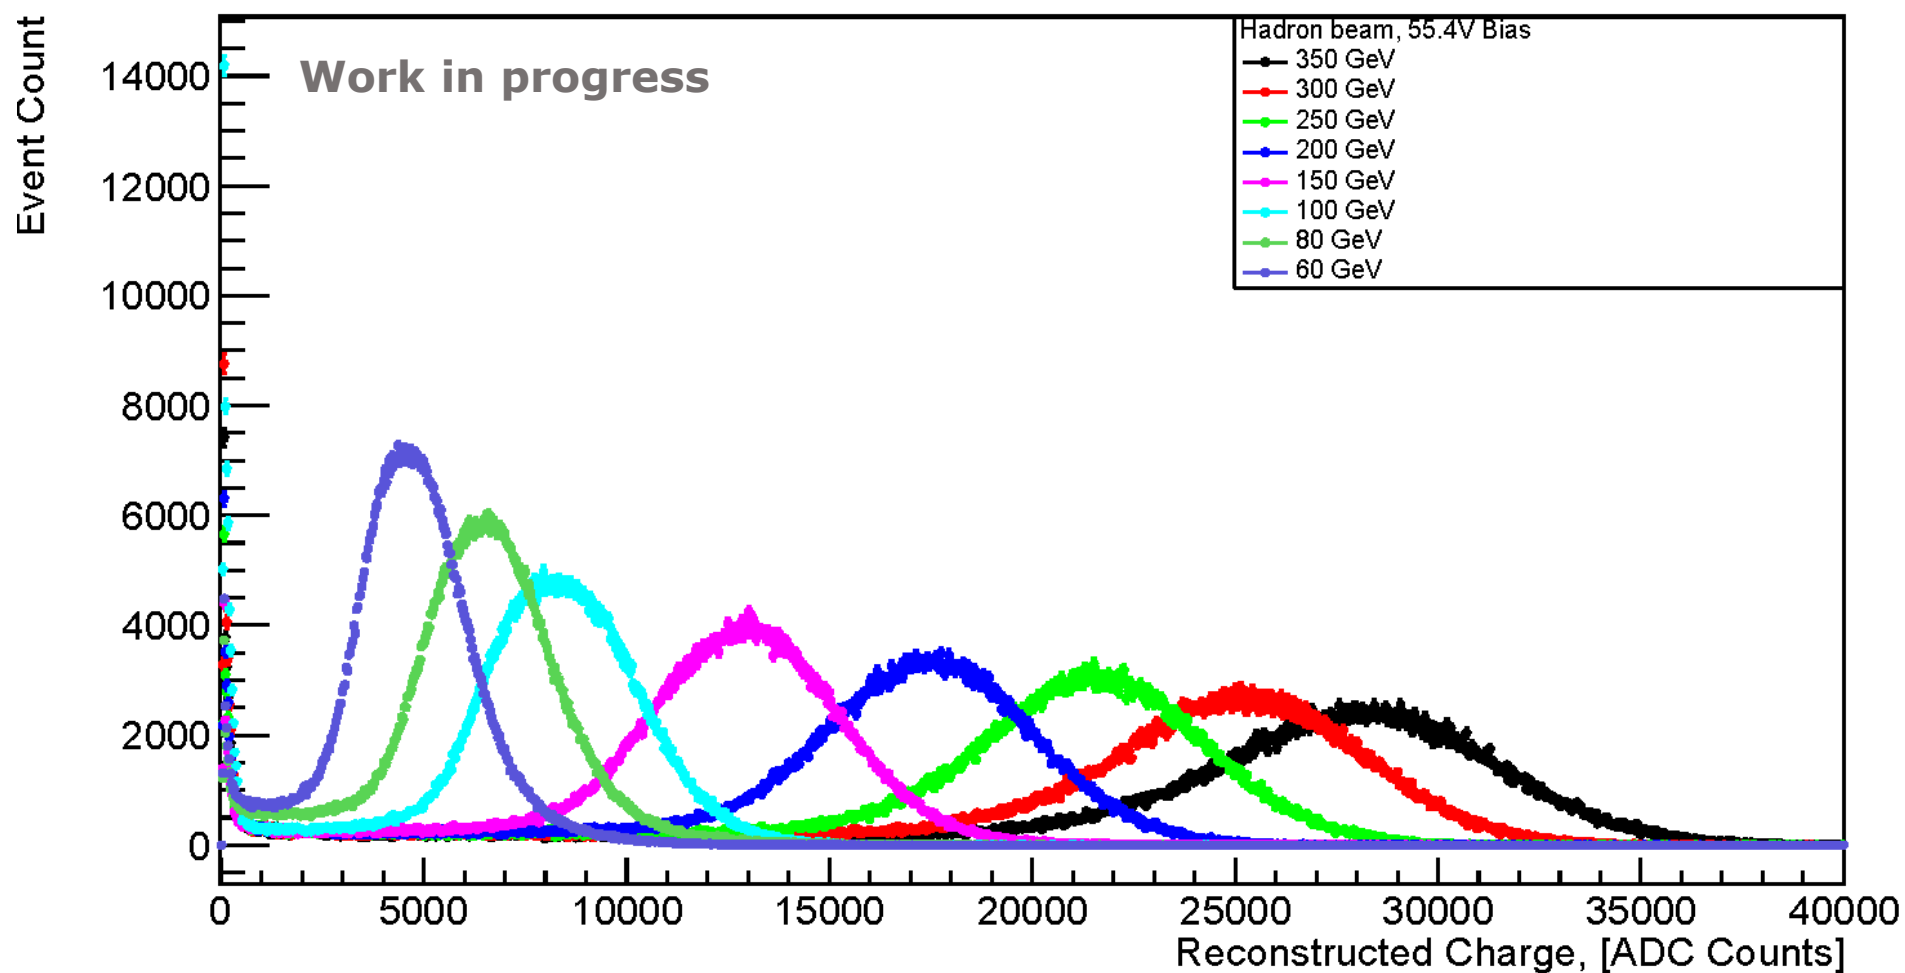


Charge Reconstruction – LG only

Reconstructed charge distributions - LG only

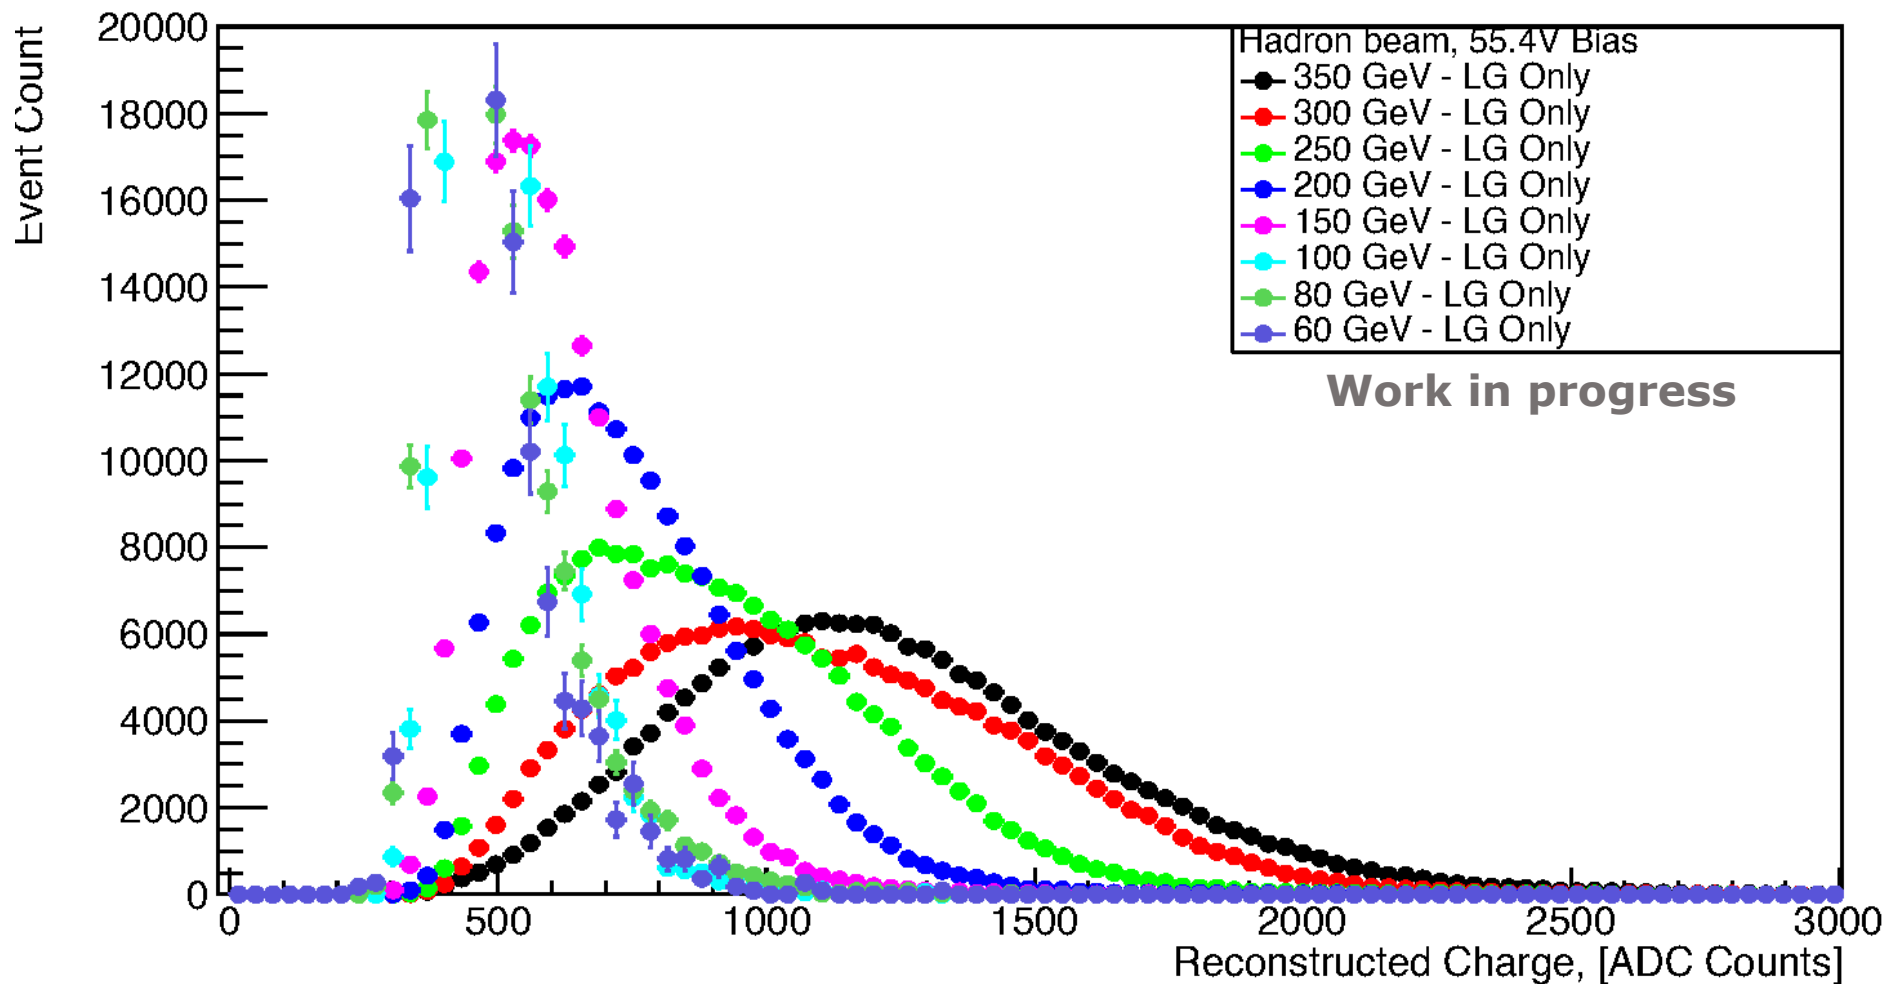

Detector properties – HG only

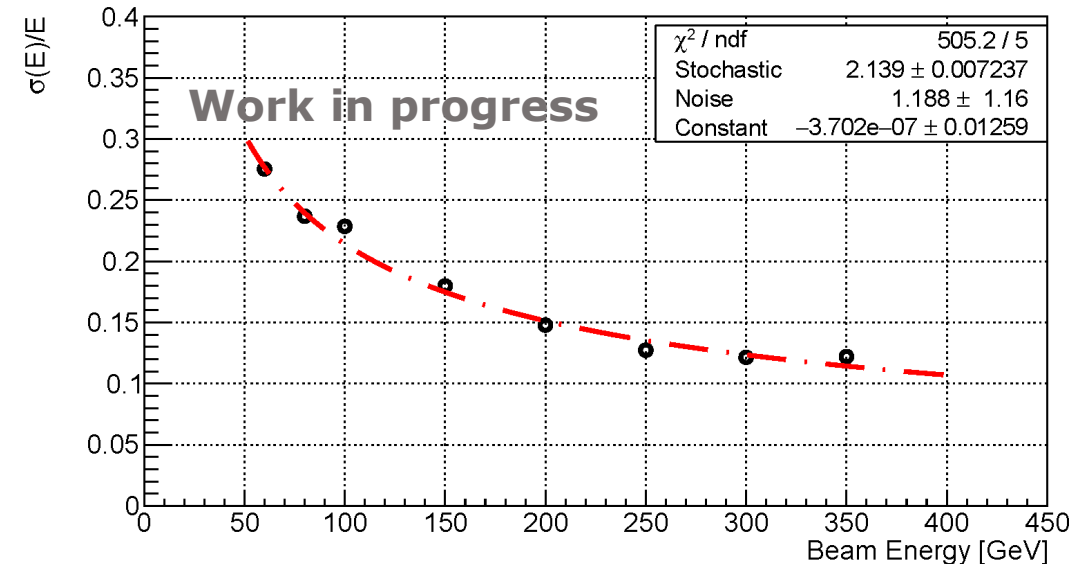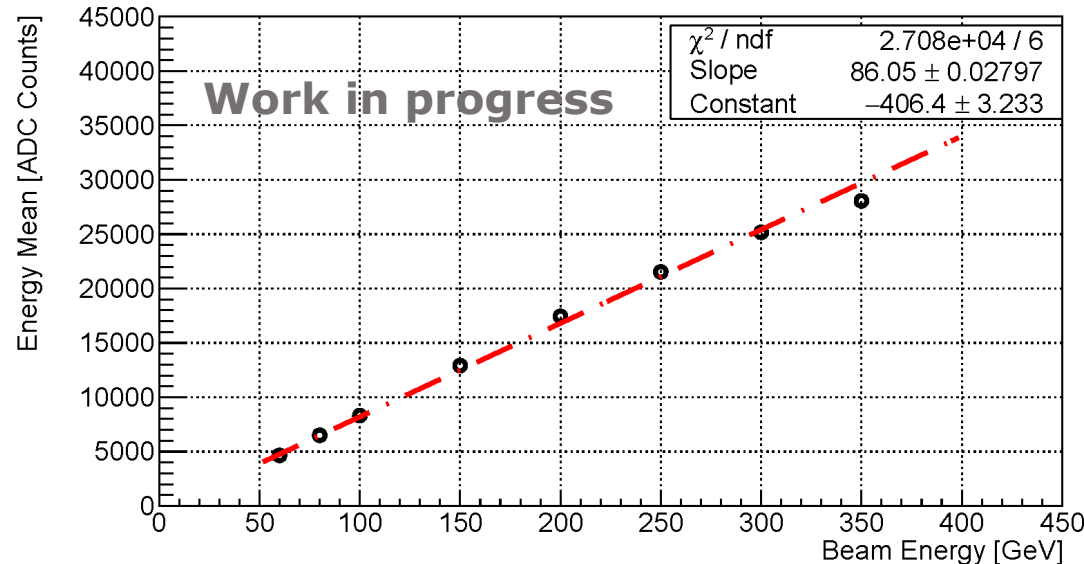


- It is possible to construct and fit the detector linearity and resolution plots;
- Loss of linearity is visible
 - Most probably due to **saturation**;
 - Maybe also affected by some **lost charge** (dead channels);
- Resolution coefficients make little sense unless we zero the Noise component forcefully.


Saturation handling

- In order to deal with saturation, we utilize the LG channels and reconstruct the charge using a combination of LG and HG data;
- A type of “calibration” is made through fitting a “versus” graph, in order to find the matching between LG and HG data
 - It would be better to calibrate both independently and then equalize – not possible in the present case;
- The slopes of the fits should correspond to the ratio of the input capacitors $C_{HG}/C_{LG} \sim 18$;
- The calibration is performed separately for each channel and fitting is only done for graphs with sufficient statistics
 - Else, an average is used.

Low Gain vs High Gain

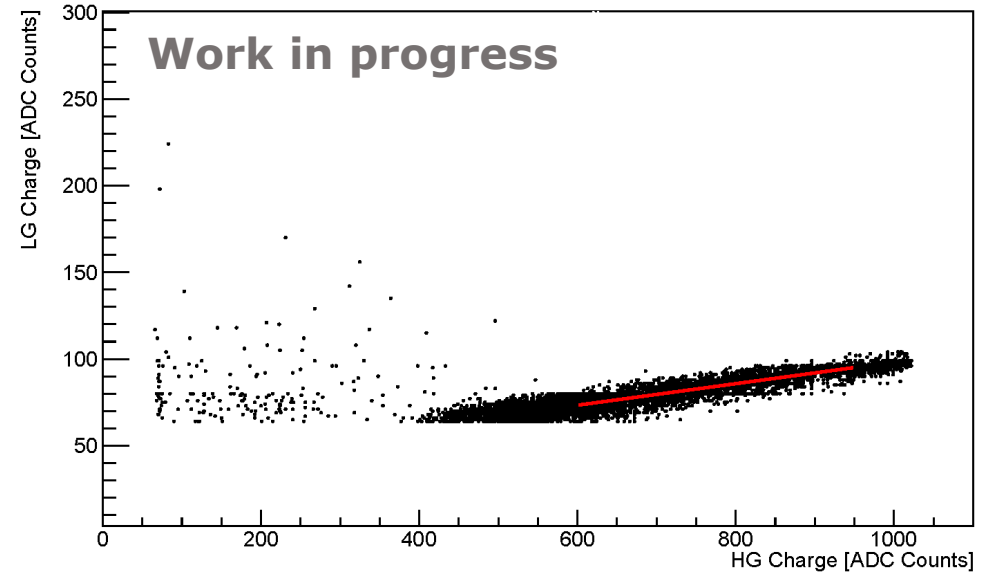


HG/LG ratios distribution

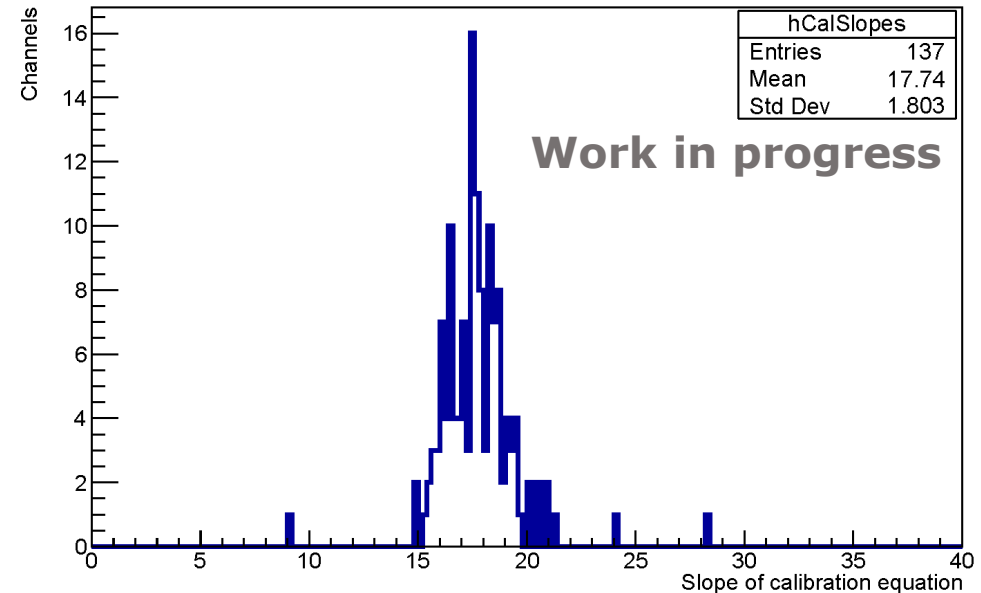


Single channel charge comparison

- Using a single channel's charge distribution, we can see the calibration's workings;
- The scaled (calibrated) LG distribution starts to follow the trend of the HG one after 600 ADC Counts;
- After saturation at 1023 ADC Counts, the calibrated distribution follows the trend of the HG;
- There are some peaks in the calibrated distribution;
- The calibration (HG-LG matching) is performing acceptably;

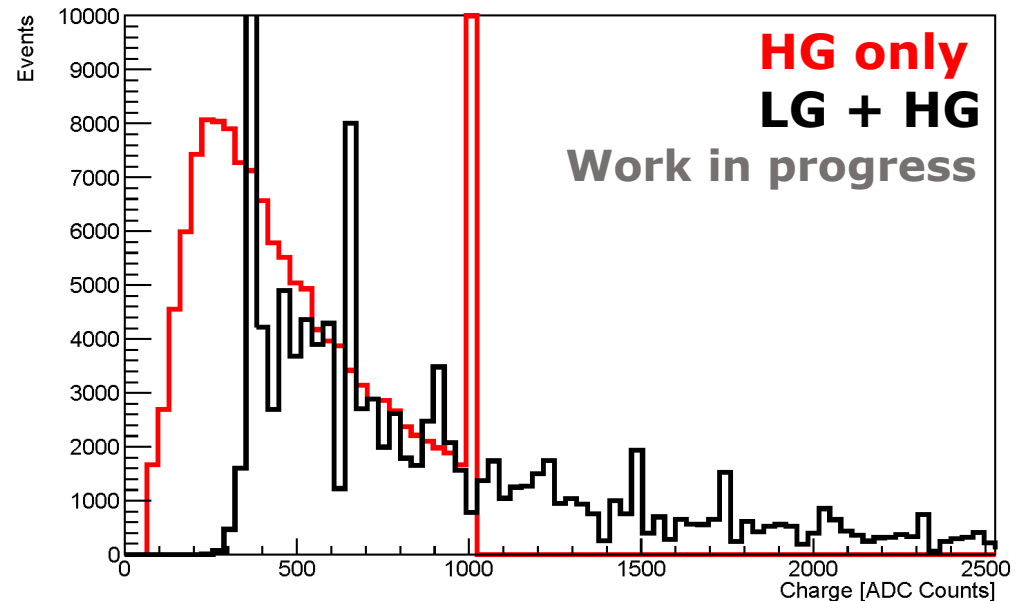


Charge reconstruction comparison

Non-calibrated vs Calibrated reconstruction charge

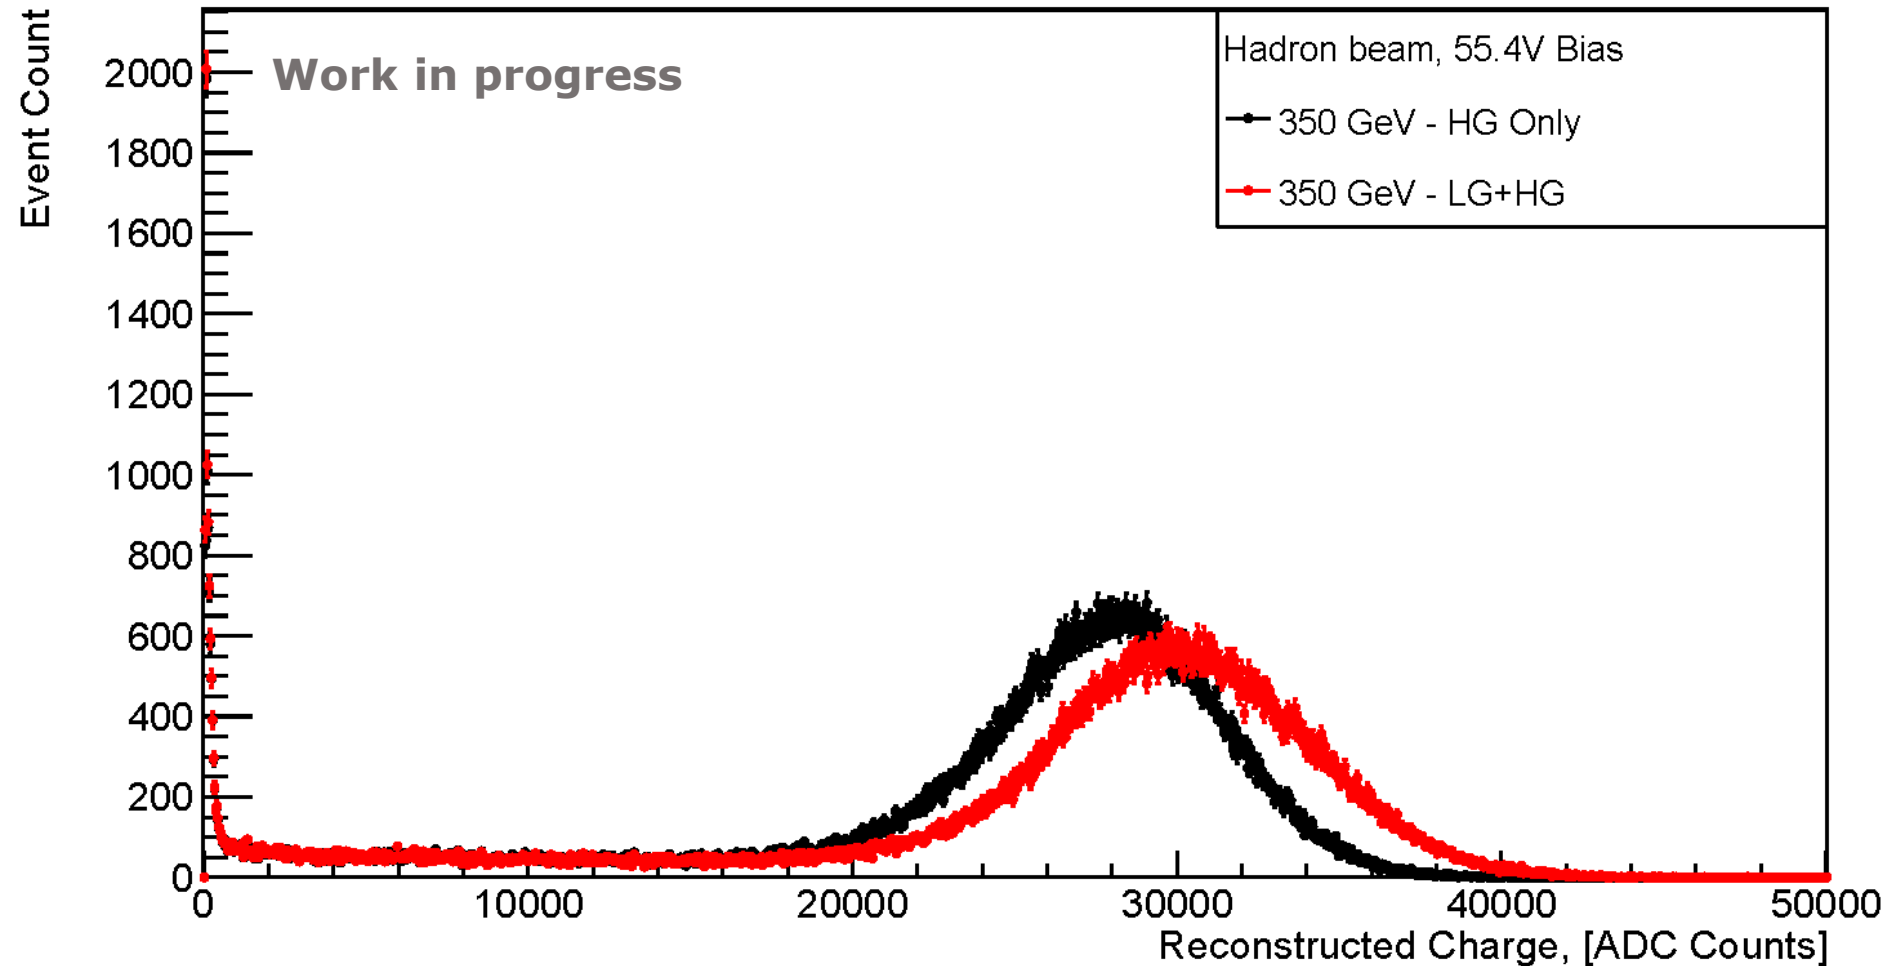


Charge reconstruction comparison


Energy distributions using HG data

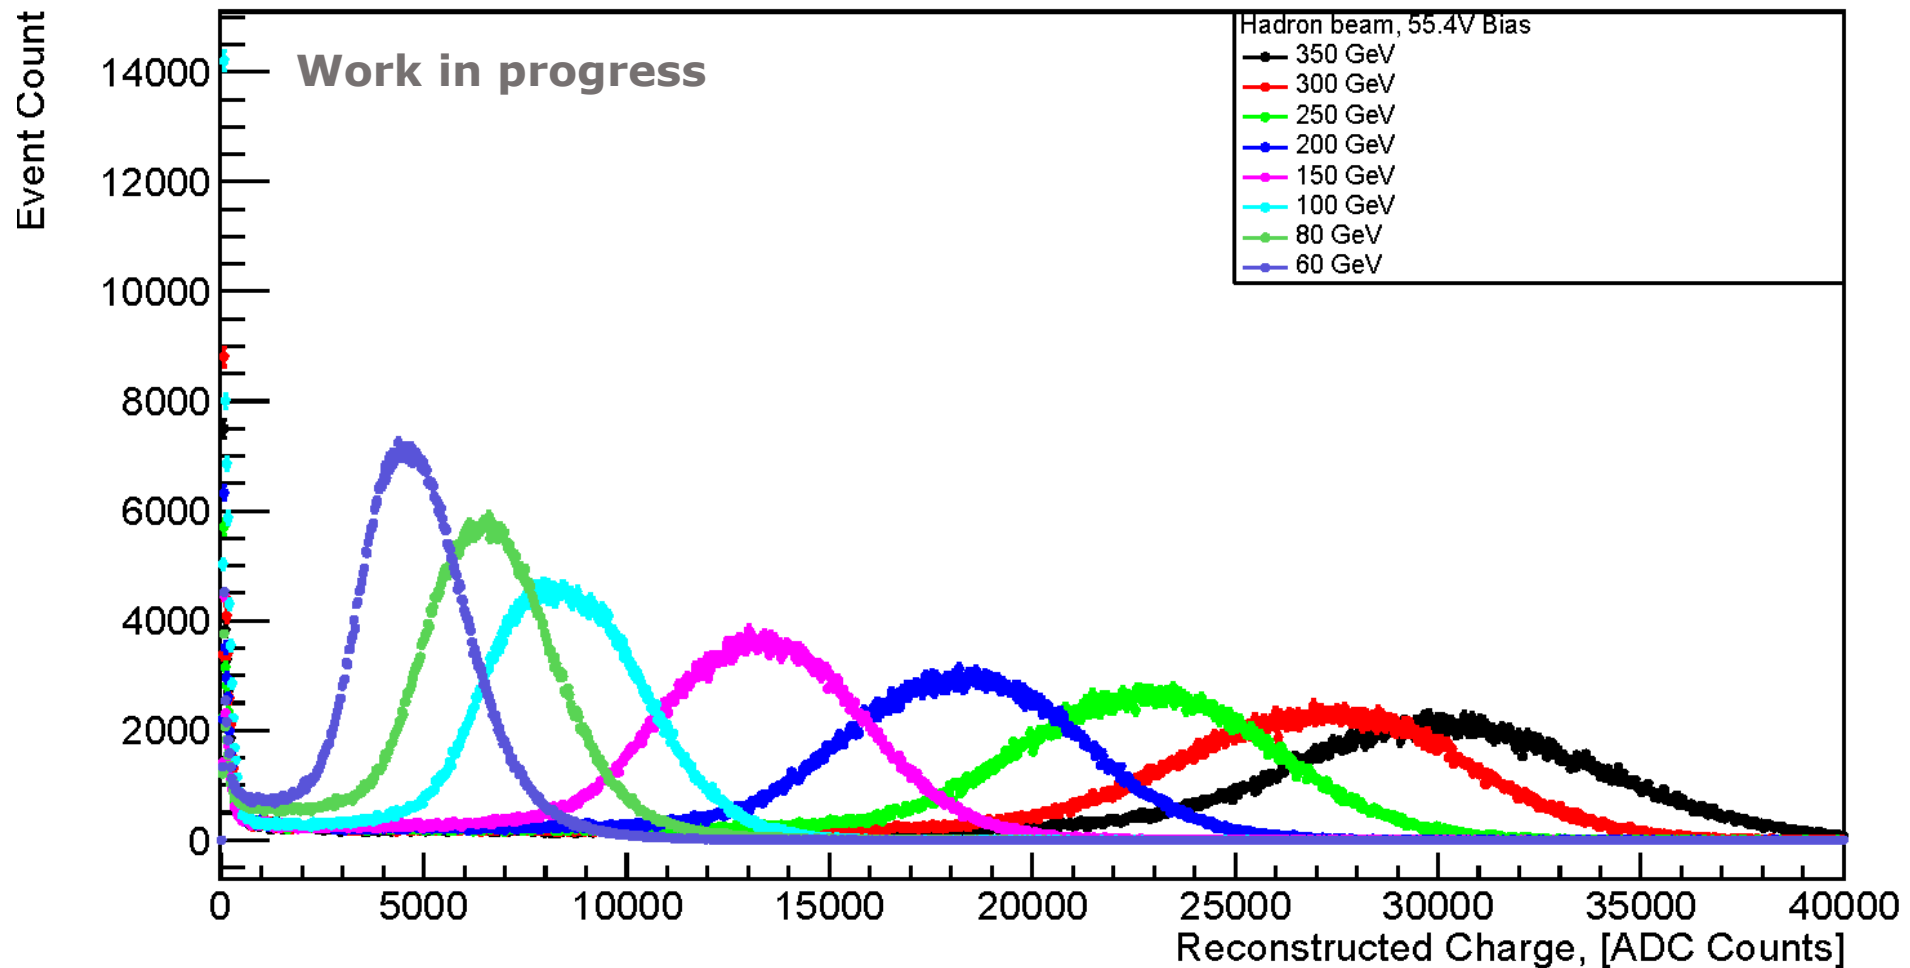

Linearity comparison

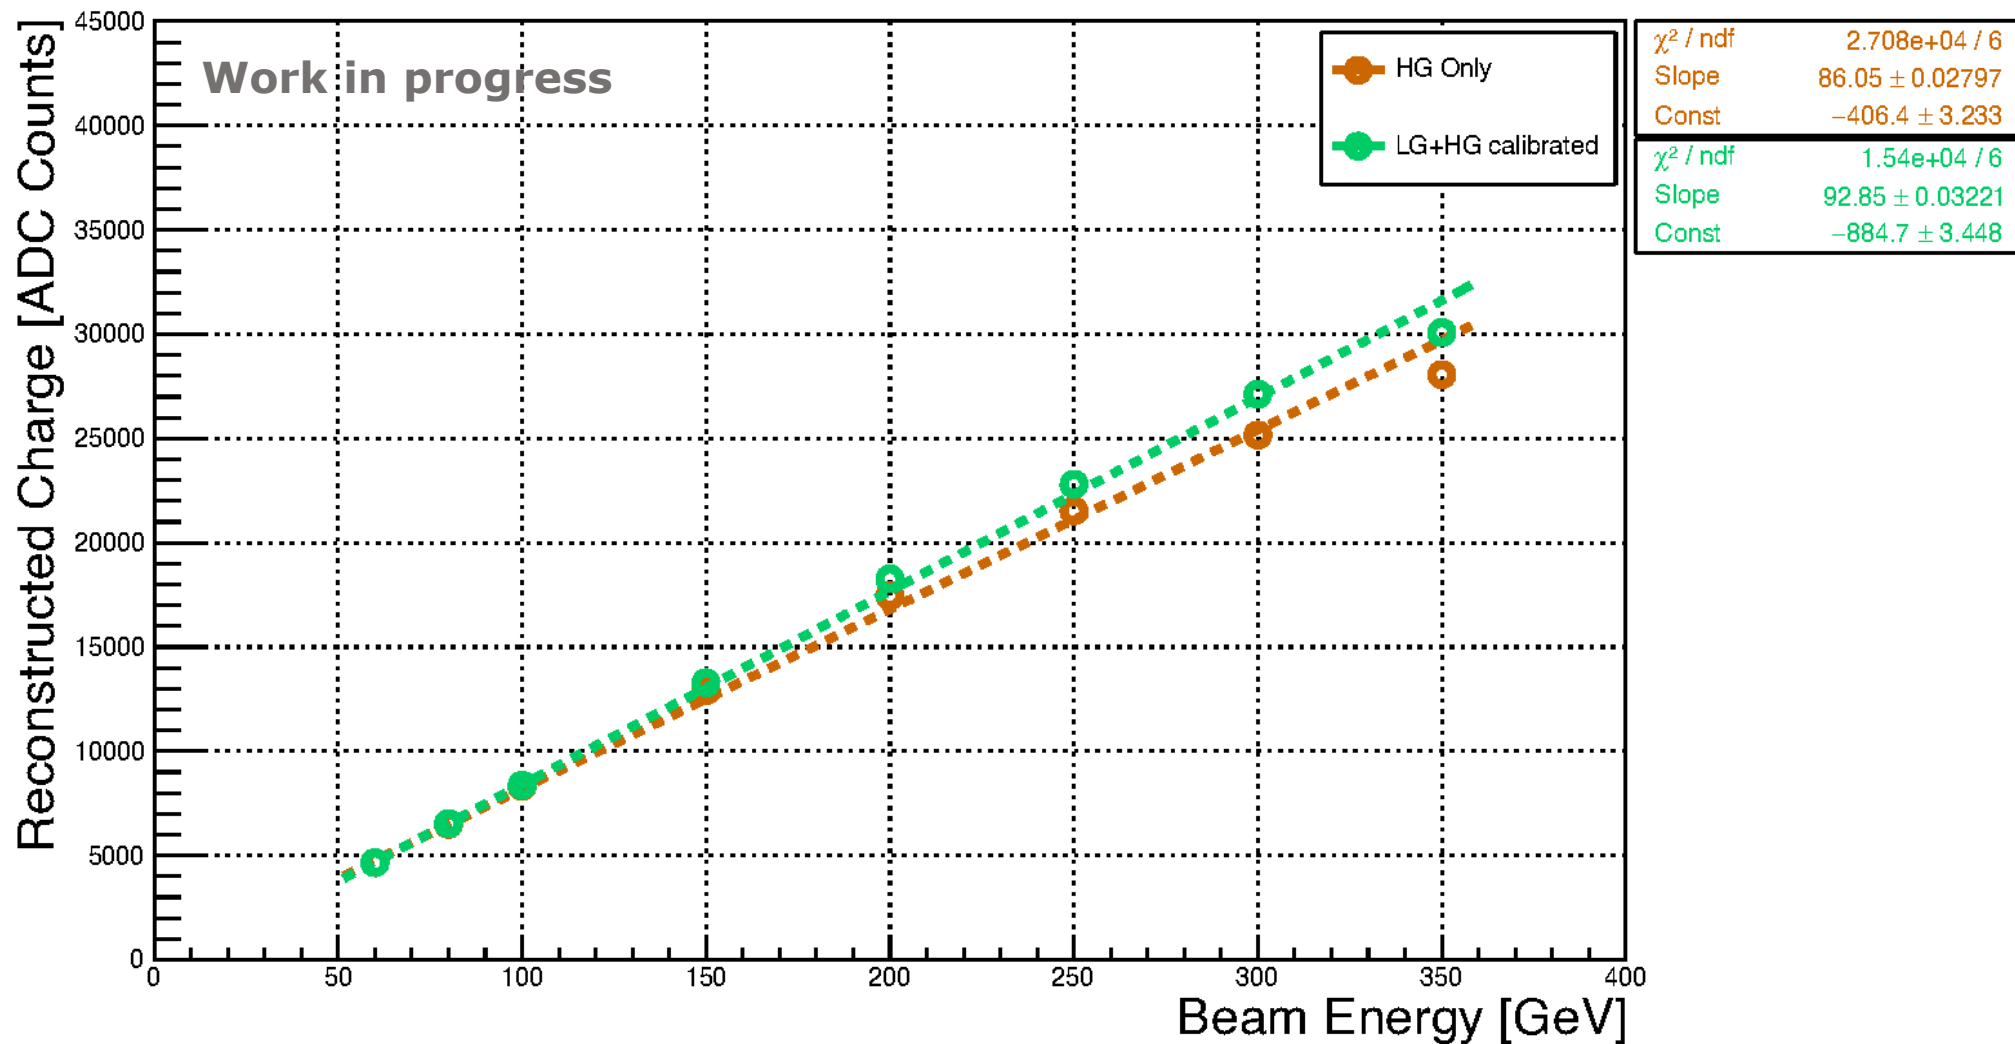

Resolution comparison

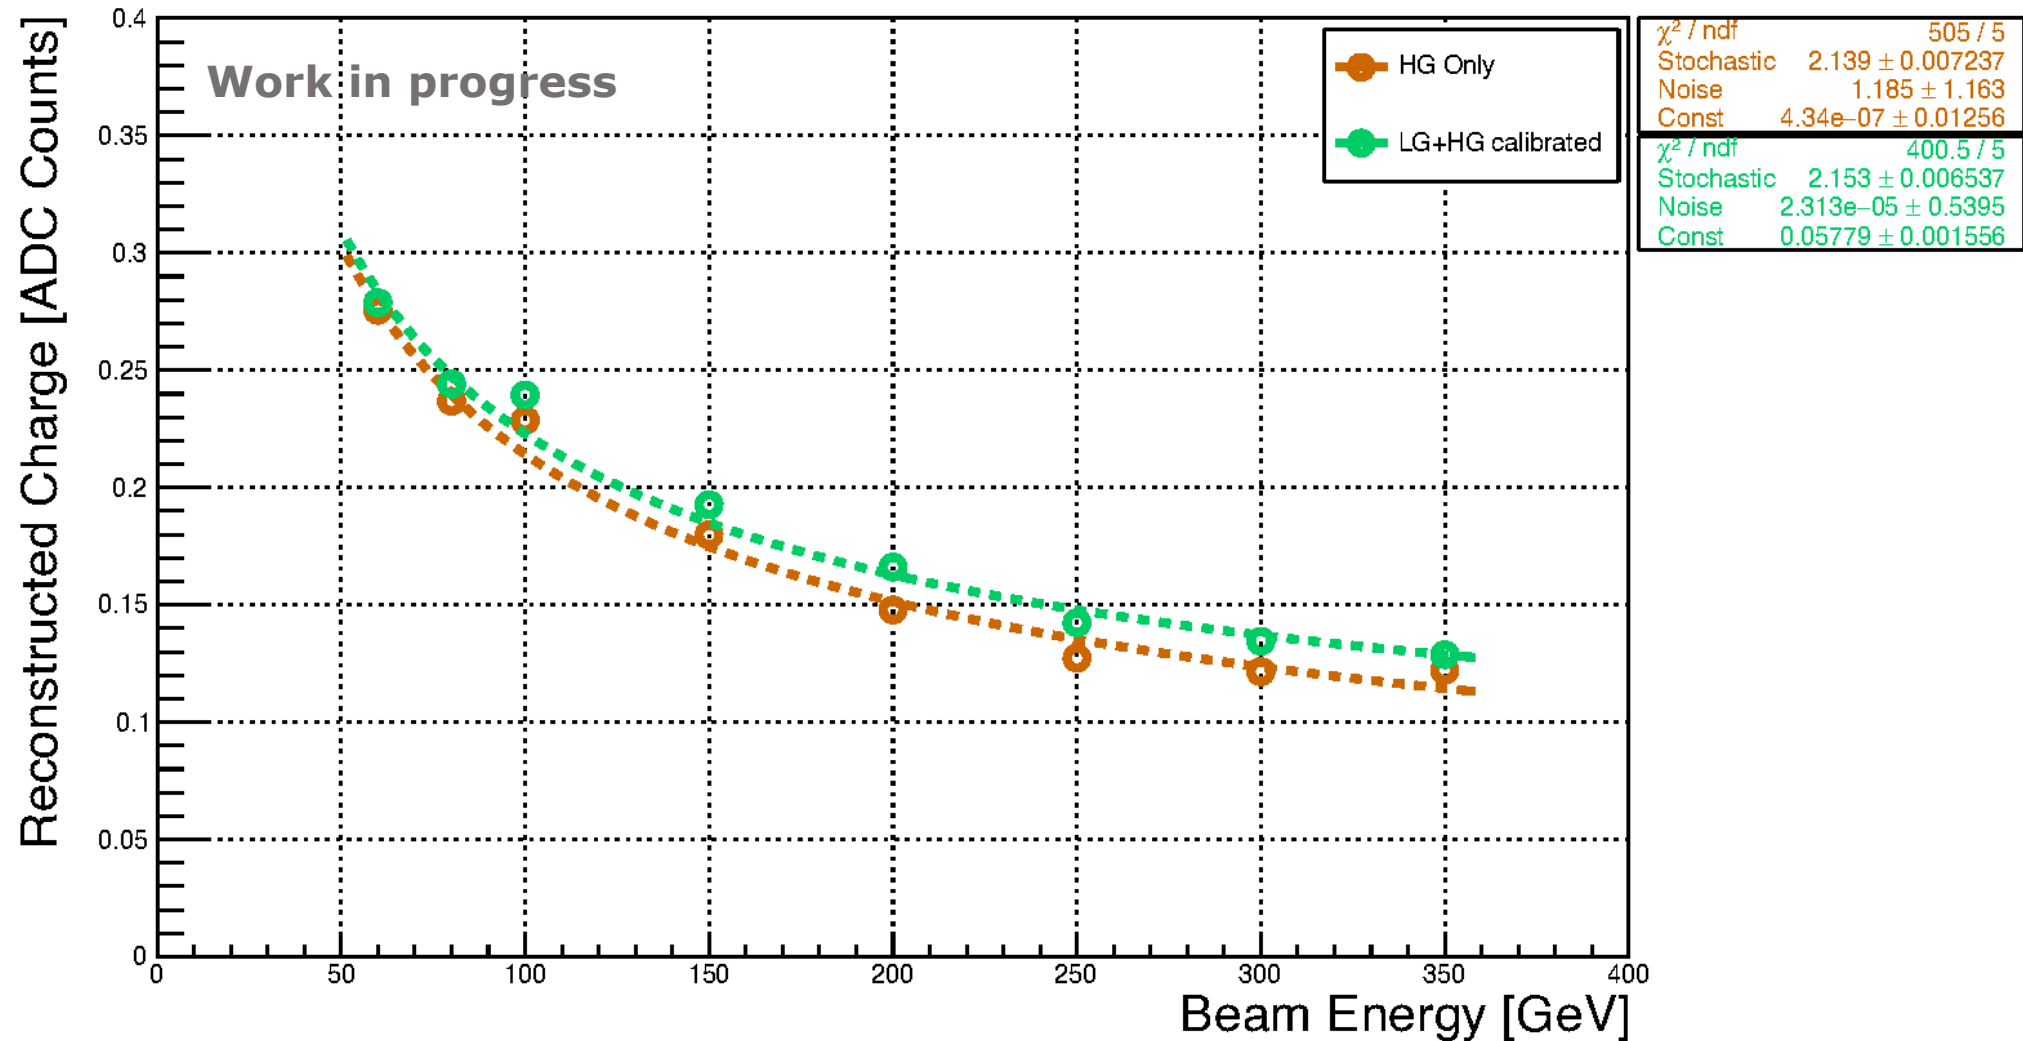

Conclusions

- While not originally intended for SiPM detector readout, the VMM seems to be mostly successful at the task, at least as far as Hadron data is concerned;
- The attempt at extending the dynamic range of the VMM is successful with the “calibrated” data from the “Low Gain” doing well at extending the saturated signals
 - There are improvements in Resolution and Linearity;
 - There is good agreement between the trend of the calibrated charge distribution and the original HG distribution in single channels;
- Further analysis work is needed in order to solve the current conundrums.

**Thank you for your
attention 😊**