



CERN Beamlines for Fixed Target Experiments

Prof. Alexander Gerbershagen

Head of PARTREC
UMCG, Groningen, Netherlands
a.gerbershagen@umcg.nl

partrec




 university of
 groningen



University Medical Center Groningen

Overview

- Introduction: Purpose and users
- Targets and particle production
- Design of secondary/tertiary beamlines
- Experiments at CERN

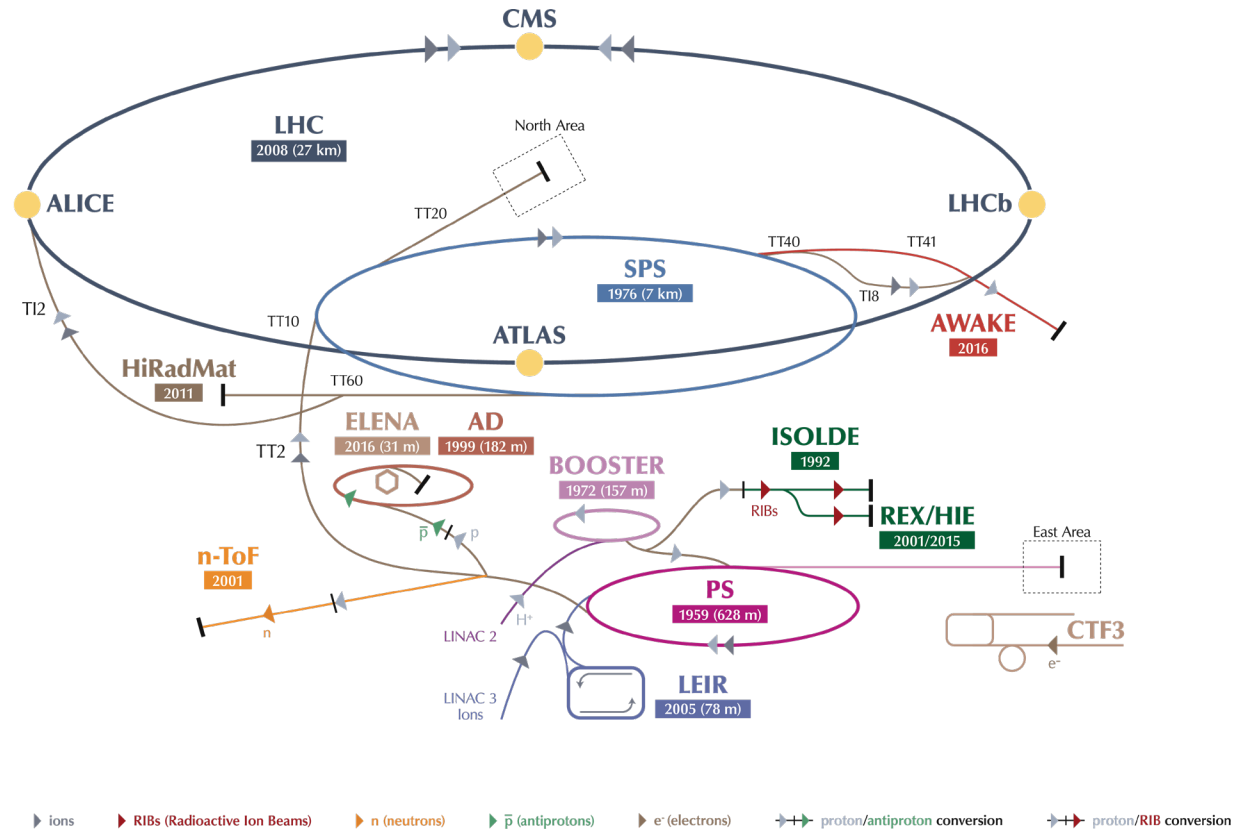

LHC Large Hadron Collider SPS Super Proton Synchrotron PS Proton Synchrotron AD Antiproton Decelerator CTF3 Clic Test Facility

AWAKE Advanced WAKEfield Experiment ISOLDE Isotope Separator OnLine REX/HIE Radioactive Experiment/High Intensity and Energy ISOLDE

LEIR Low Energy Ion Ring LINAC LINear ACcelerator n-ToF Neutrons Time Of Flight HiRadMat High-Radiation to Materials


Introduction

Fixed Target (FT) setup

- Higher event rates
- Easier installation, access
- Less space restrictions
- Large momentum range
- Flexible particle types


But only fraction of beam energy available for physics:

$$E_{\text{CM}} \approx \sqrt{(2 m_0 E_{\text{beam}})}$$



Collider

- All beam energy available for producing new particles/physics
- $E_{\text{CM}} \approx 2 E_{\text{beam}}$

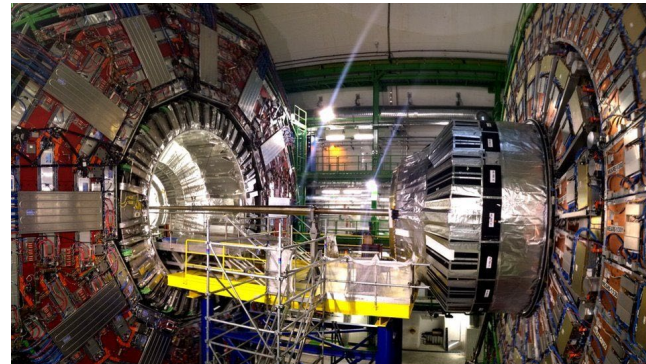

Physics at FT and collider are both useful and needed


Purpose and Users

Secondary Beam Areas (SBA) are hosting:

- **FT experiments:** COMPASS, NA61, NA62, NA63, NA64, CLOUD, ...
 - Precision studies (QCD, standard model, BSM physics)
 - Stable beam conditions for weeks and weeks
- **Radiation facilities:** HiRadMat, Charm, Irrad, GIF++
- **Test beams:**
 - Detector prototype tests
 - Detector calibration
 - e.g. for LHC, linear colliders, space & balloon experiments
 - Outreach
 - Usually require a large spectrum of beam conditions within few days

Targets and particle production

- Principle taken from cosmic radiation
 - Primary proton beam initiating hadronic cascade
 - Always followed by an electro-magnetic cascade

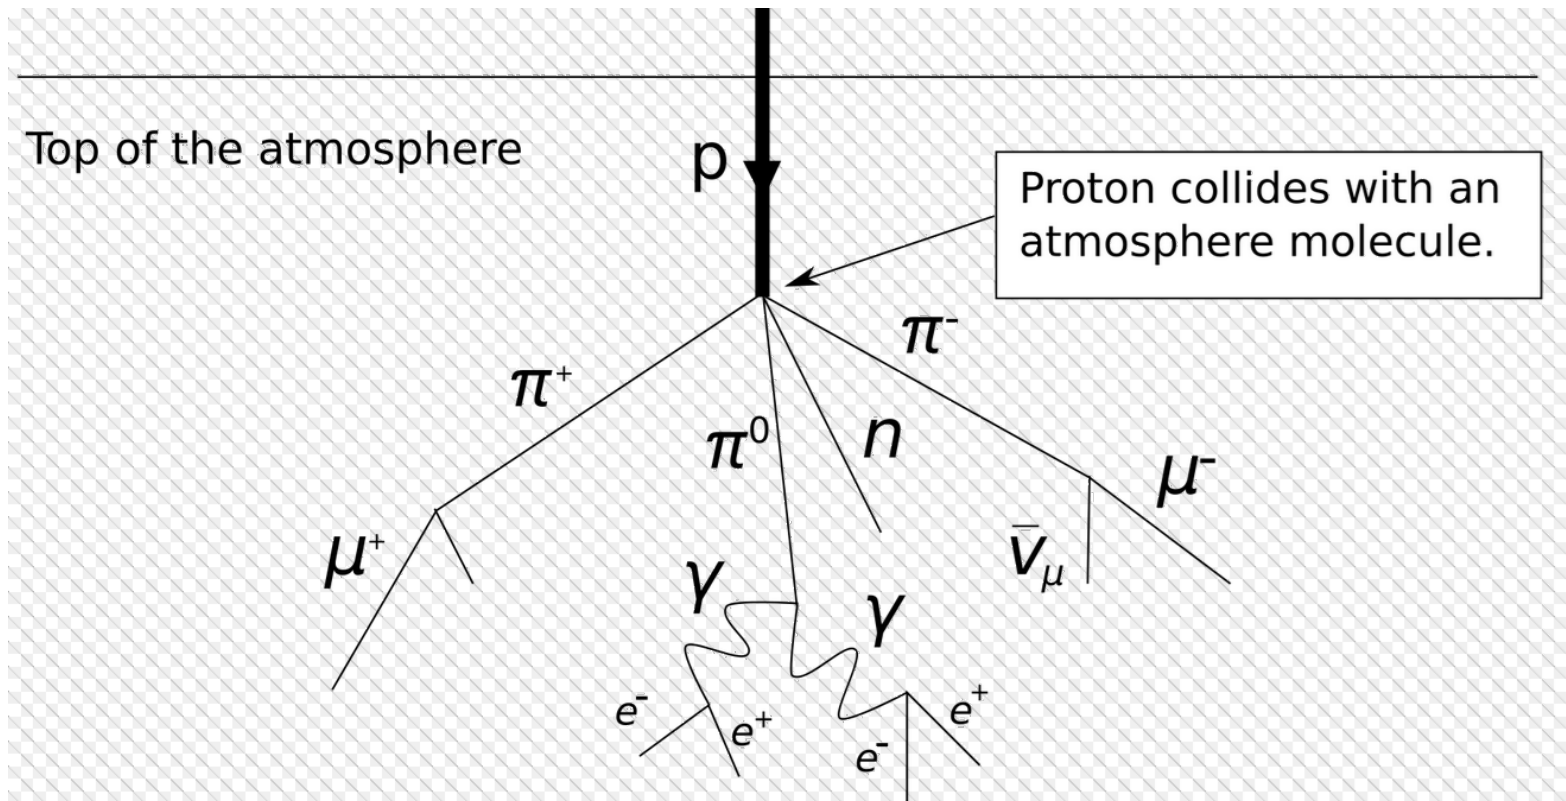



Targets and particle production

- Principle taken from cosmic radiation
- Particles are produced in a large momentum range



Target length and production rates

- Beryllium has
 - radiation length $X_0 = 35.3$ cm,
 - nuclear interaction length $\lambda_1 = 42.1$ cm,
=> high X_0/λ_1 ratio
 - low density (1.848 g/cm³)
 - high melting point (1560 K)
- The e/π ratio increases approx. linearly with the target length
- Hadrons
 - are produced via $p + N \rightarrow \text{hadron}$ (rate $\sim L$)
 - reabsorbed (rate $\sim e^{-L}$)
 - => Overall rate $\sim Le^{-L}$ (maximum at $L \approx \lambda_1$)
- Electrons are mainly produced via
 - $p + N \rightarrow \pi^0 \rightarrow \gamma \gamma$ (rate $\sim L$)
 - γ converts to $e^+ + e^-$ (rate also $\sim L$)
 - reabsorbed (rate $\sim e^{-L}$)
 - => Overall rate $\sim L^2 e^{-L}$ (maximum at $L \approx 2\lambda_1$)

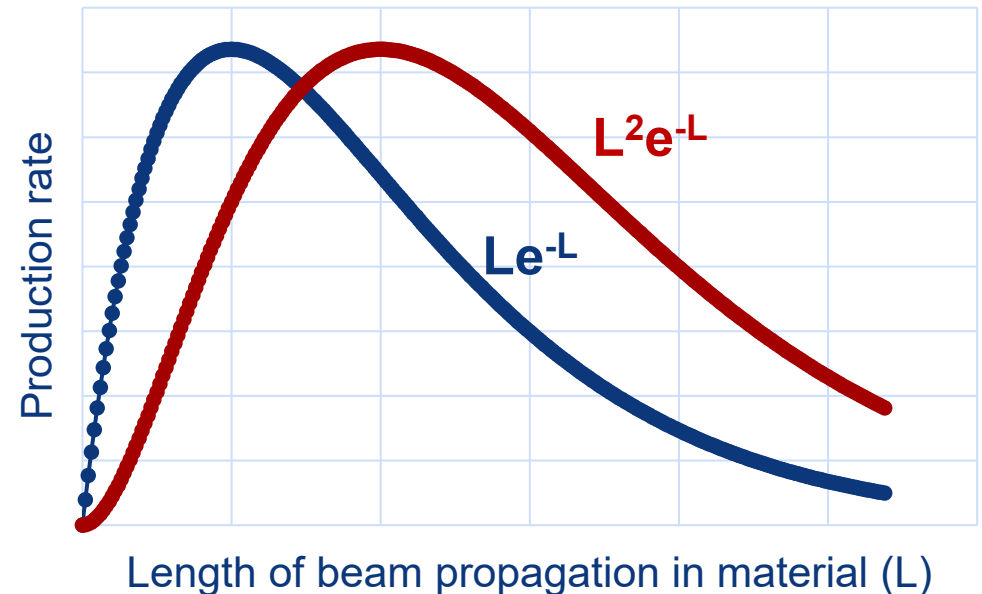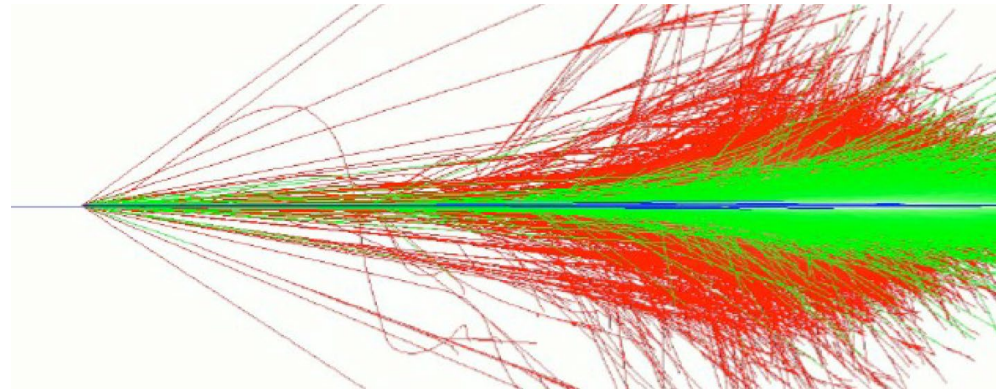

Targets and hadron production


Atherton parameterisation (CERN 80-07):

$$\frac{d^2N}{dpd\Omega} = A \left[\frac{B}{p_0} e^{-Bp/p_0} \right] \left[\frac{2Cp^2}{2\pi} e^{-C(p\theta)^2} \right]$$

$$\frac{d^2N}{dpd\Omega} = A \left[\frac{(B+1)}{p_0} \left(\frac{p}{p_0} \right)^B \right] \left[\frac{2Cp^2}{2\pi} e^{-C(p\theta)^2} \right]$$

with primary momentum p_0 and production angle θ

Flux per solid angle [steradian], per interacting proton, and per dp [GeV/c]

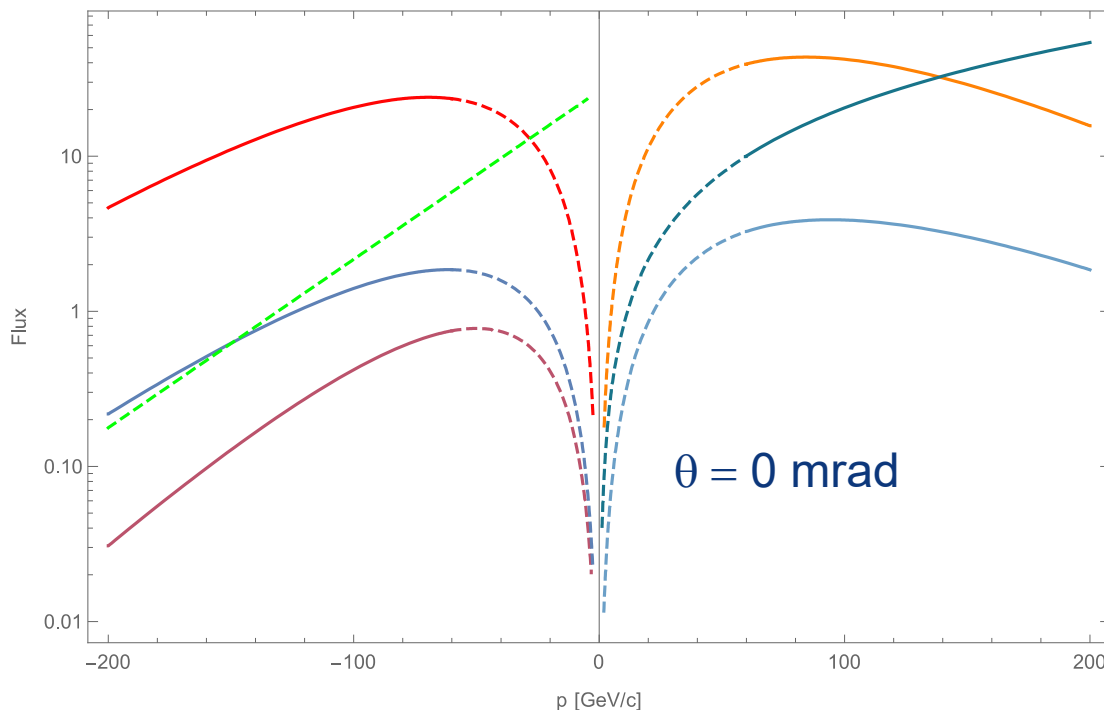

	A	B	C
p	0.8	-0.6	3.5

	A	B	C
π^+	1.2	9.5	5.0
π^-	0.8	11.5	5.0
\bar{p}	0.16	8.5	3.0
p	0.10	13.0	3.5
K^+	0.06	16.0	3.0
K^-			
e^-			

Note: Valid for primary interactions only!
Extrapolation for momenta below 60 GeV/c

Targets and particle production

		Name	Q	Mass	Mean life (τ)	c τ	Mean decay distance	Decays	
				[MeV/c ²]	[s]	[m]	[m/GeV/c]		
Leptons		Electron	e	$\pm e$	0.511	stable			
		Muon	μ	$\pm e$	105.6	2.2×10^{-6}	659.6	6.3×10^3	$\mu^+ \rightarrow e^+ \bar{\nu}_e \nu_\mu$ (100%)
Hadrons	Mesons	Pion	π	$\pm e$	139.6	2.6×10^{-8}	7.8	56.4	$\pi^+ \rightarrow \mu^+ \nu_\mu$ (100%)
		Kaon	K	$\pm e$	493.6	1.23×10^{-8}	3.7	8.38	$K^+ \rightarrow \mu^+ \nu_\mu$ (63%) $\pi^0 e^+ \nu_e$ (5%) $\pi^0 \mu^+ \nu_\mu$ (3%) $\pi^+ \pi^0$ (...) (28.9%)
	K^0		K^0_s	0	497.6	8.9×10^{-11}	0.02	0.060	$K^0_s \rightarrow \pi^0 \pi^0$ (30.7%) $\pi^+ \pi^-$ (69.2%)
			K^0_L			5.12×10^{-8}	15.34	34.4	$K^0_L \rightarrow \pi^+ e^- \nu_e$ (40.5%) $\pi^+ \mu^- \nu_\mu$ (27.0%) $3\pi^0$ (19.5%) $\pi^+ \pi^- \pi^0$ (12.5%)
	Baryons	Proton	p	$\pm e$	938	stable			
Lambda		Λ	0	1115.6	2.63×10^{-10}	0.079	0.237*	$\Lambda^0 \rightarrow p \pi^-$ (63.9%)	
Sigma Hyperons		Σ^+	+e	1189.3	8.02×10^{-11}	0.024	0.068*	$\Sigma^+ \rightarrow p \pi^0$ (51.57%)	
	Σ^-	-e	1197.4	1.48×10^{-10}	0.044	0.125*	$\Sigma^- \rightarrow n \pi^-$ (99.84%)		


(*) for 10 GeV/c

Beamlines

- Experiments and test beams require “clean” beams with high purity (one particle type) and small momentum spread
- Beam lines design (“optics”)
 1. Collect produced particles from target
 2. Select momentum
 3. Select particle type
 4. Transport beam to experiment
 5. Select transverse beam parameters for experiment

NA beamline design considerations

- NA beams were originally (end of 1970's) designed for the fixed target experiments. Design considerations were
 - Muon range (absorb underground)
 - Charged pion lifetime
 - Momentum selection ($2 \cdot 10^{-4}$)

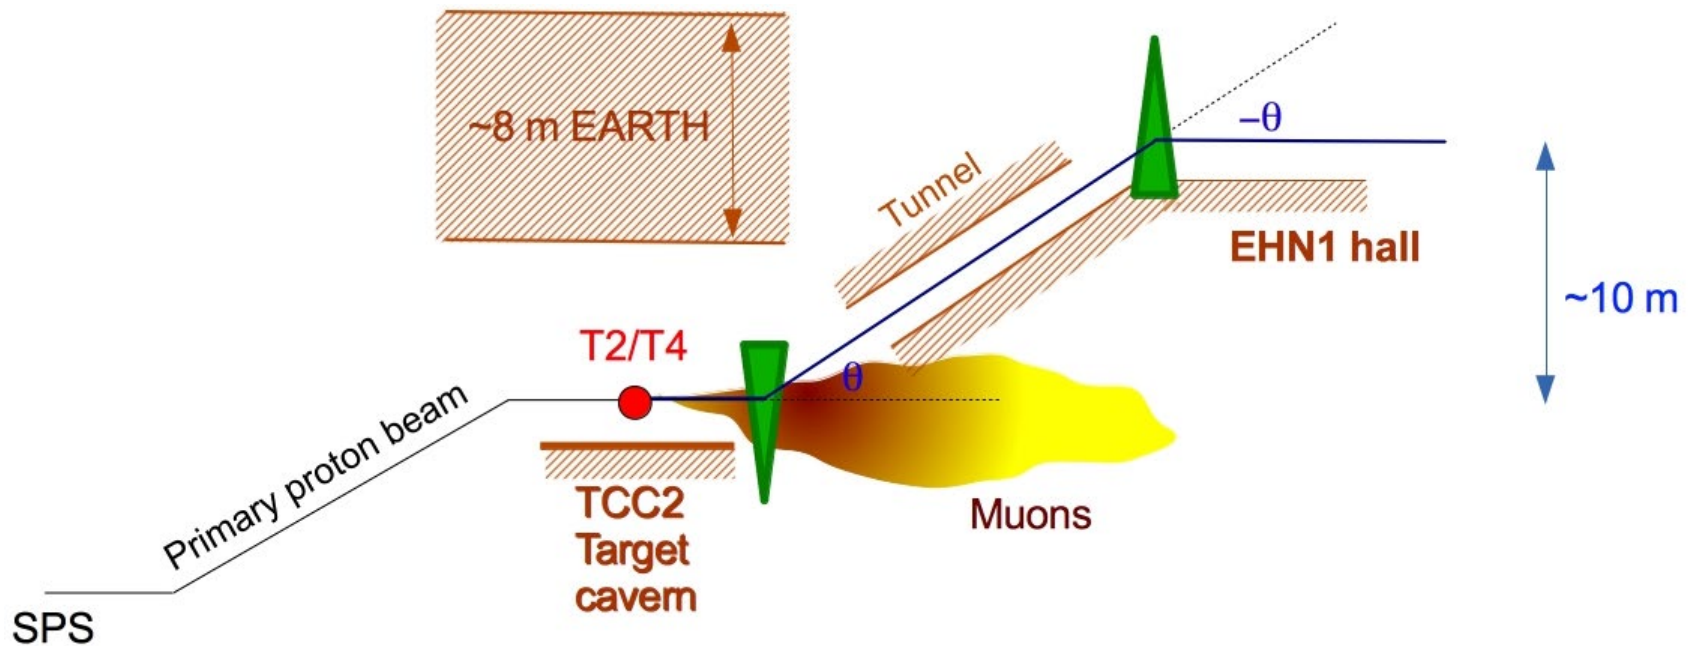

Dipoles


Basic beam design

- Transport and momentum (p) selection: bending magnets




Dipole electro-magnets:


$$\vec{F} = q \cdot \vec{v} \times \vec{B}$$

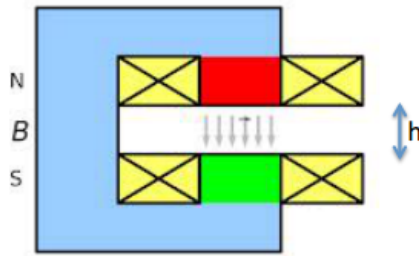

$$B = \frac{\mu_0 n I}{h}$$

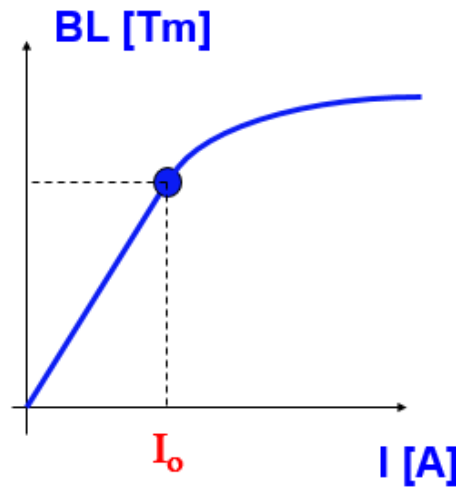



$$\theta [\text{mrad}] = \frac{299.79 B l [T \cdot m]}{p [\text{GeV}]}$$

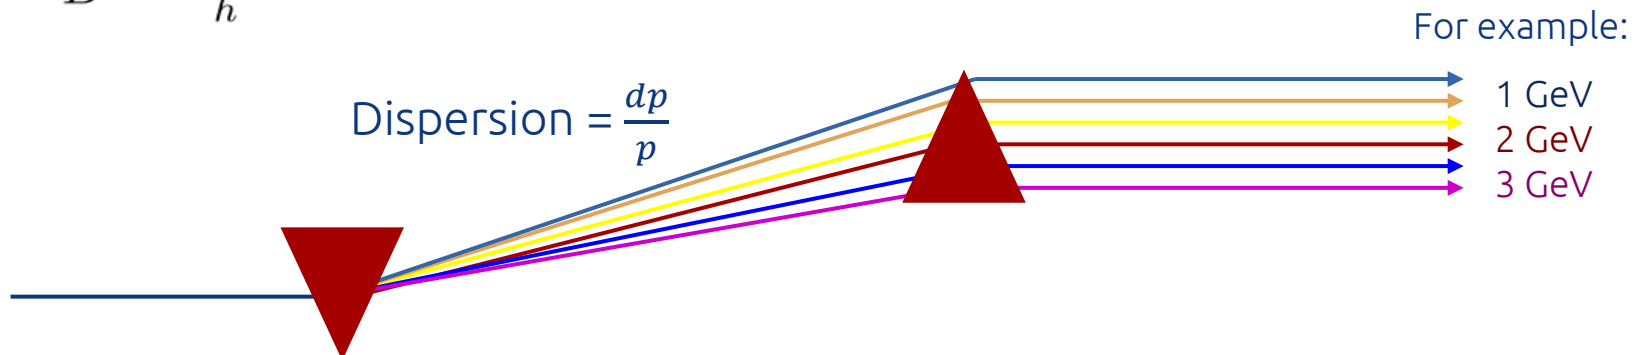

Momentum selection

Basic beam design

- momentum selection in the vertical plane
- two sets of bending magnets
 - Upstream BENDS
 - Between the primary target and the momentum slit
 - Vertical focus of monochromatic beam at the momentum slit
 - Downstream BENDS
 - the main spectrometer for the beam momentum definition

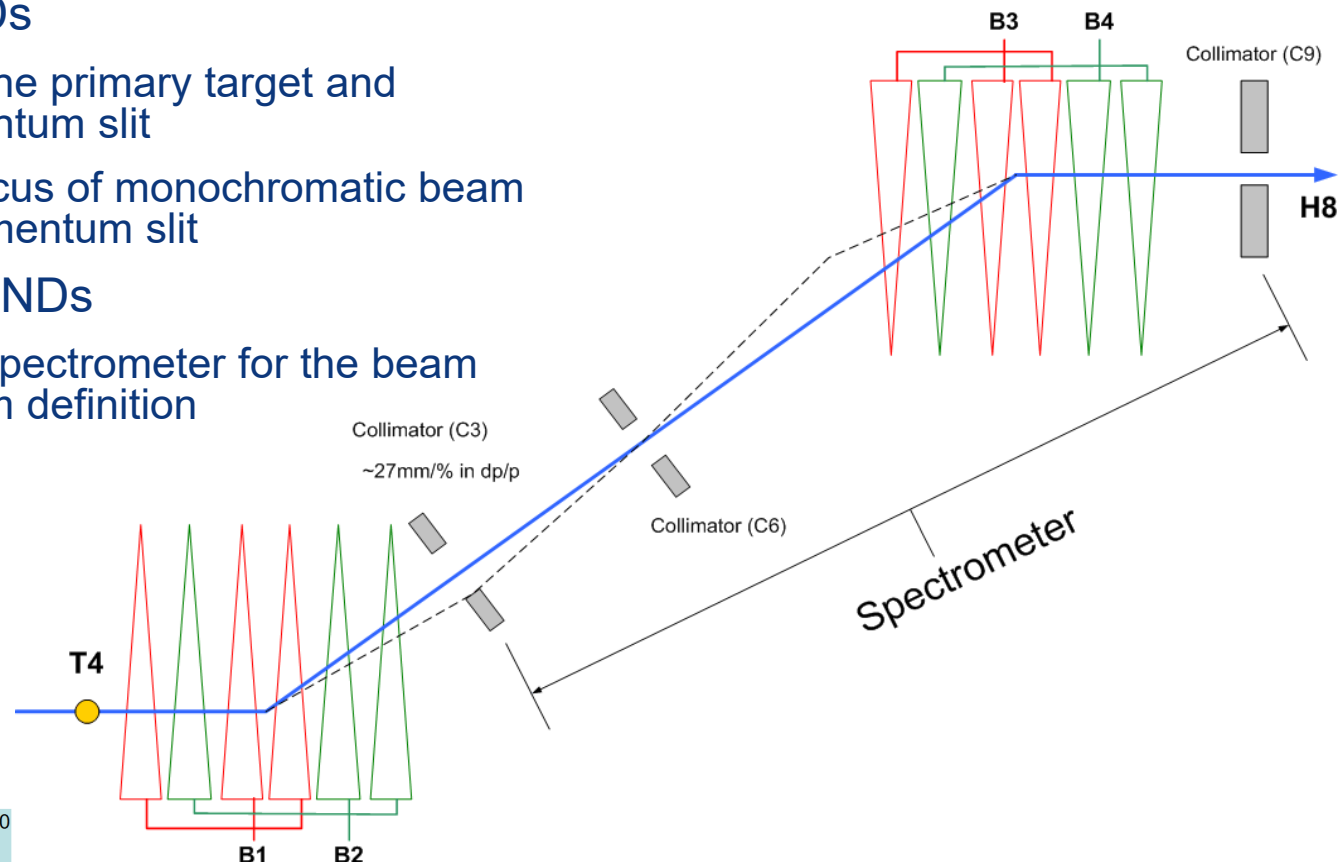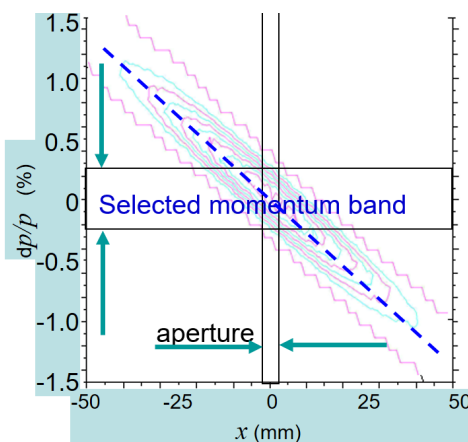


Secondary beamlines - collimators

- TAX (Target attenuator)
 - Define initial acceptance of the beam line




- Acceptance collimators
- Cleaning collimators
 - Absorb secondary particles produced on the jaws of acceptance collimators

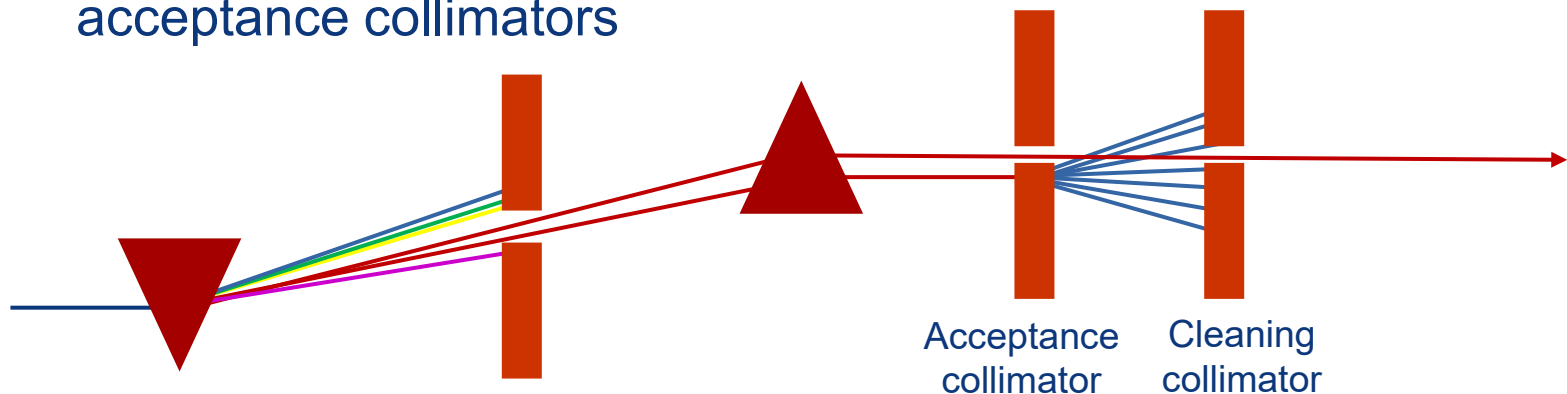


Secondary beamlines – muon scrapers

SCRAPERS (Magnetic Collimators)

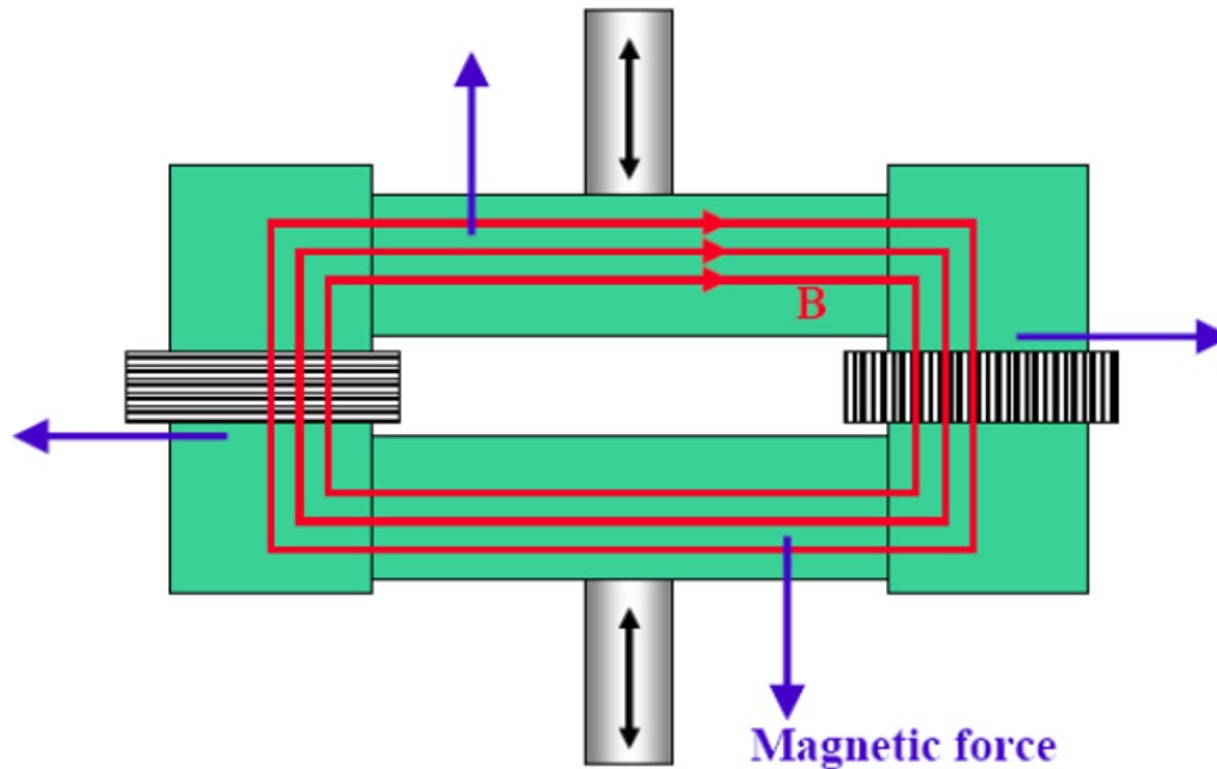


Secondary beamlines – muon sweepers

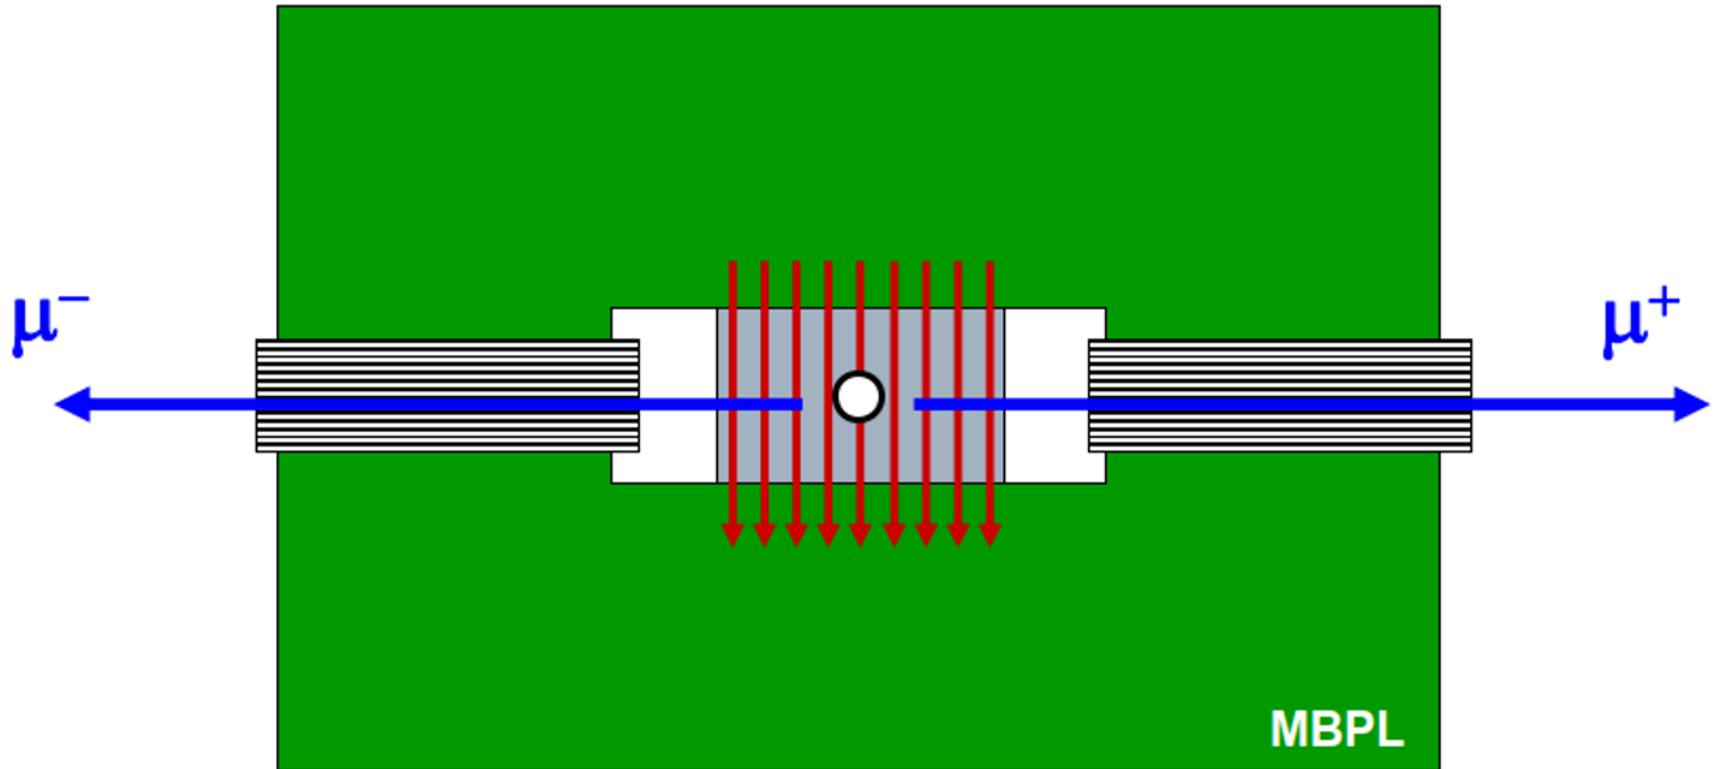


Secondary beamlines - intensities

Basic beam design


- Selection of particle types

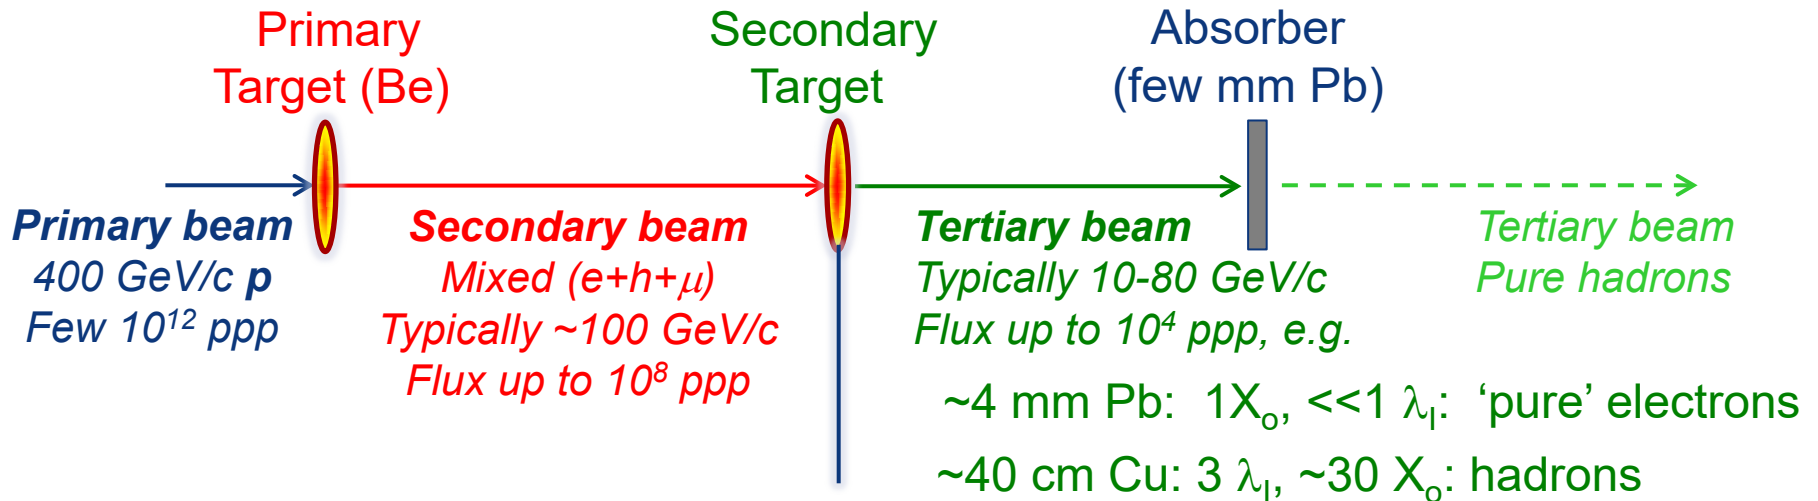

- Intensities

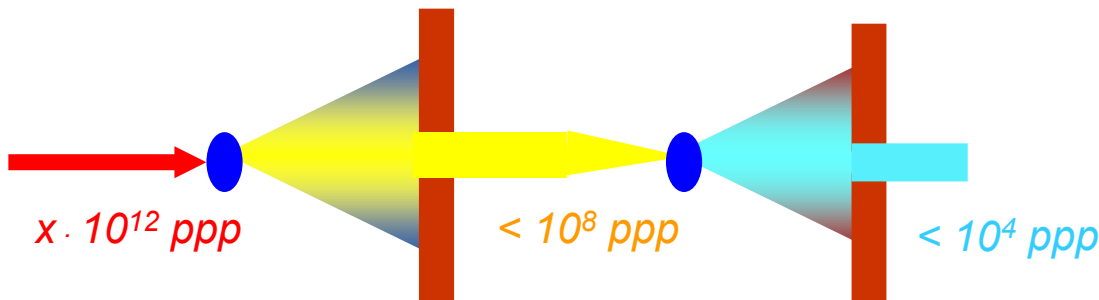

Selection of particle type - Converter

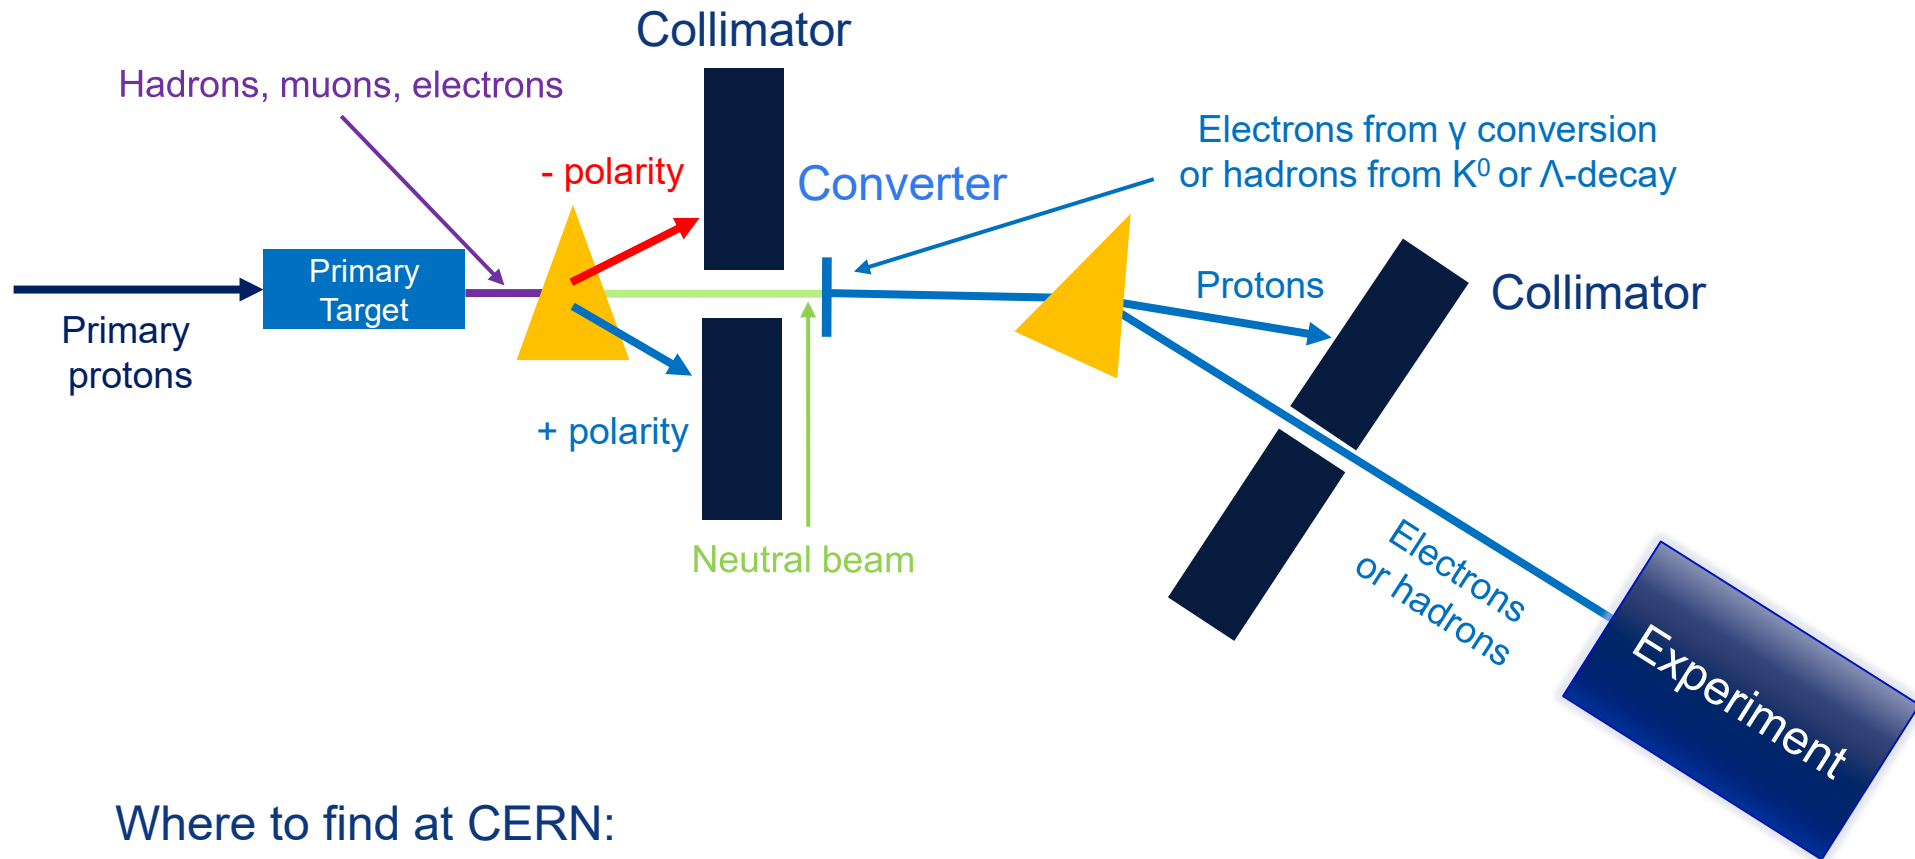


Where to find at CERN:
North Area: H2, H4
East Area: T9

Selection of particle type - Synch. rad.

- Synchrotron radiation

(for one full revolution)


$$P_s = \frac{e^2 c}{6\pi\epsilon_0 (m_0 c^2)^4} \frac{E^4}{\rho^2}$$

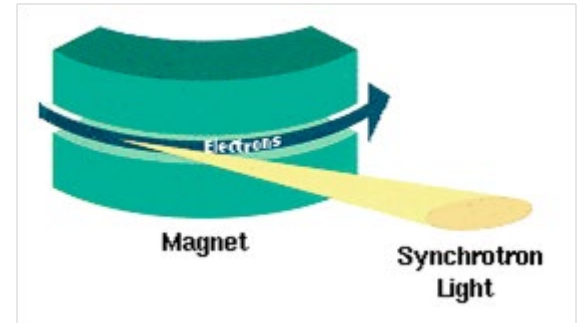

- E.g. e^\pm at 200 GeV lose in 1° bending magnet of 1 T field 590 MeV
 - => With beamline momentum acceptance of $\Delta p/p < 0.3\%$ it is possible to separate them from (heavier) hadrons and muons. So set up the following bends either
 - at the constant energy to select heavier particles or
 - scale it with energy loss of electrons.


Works only for $p_e > 120\text{-}150$ GeV/c

Selection of particle type - Absorber

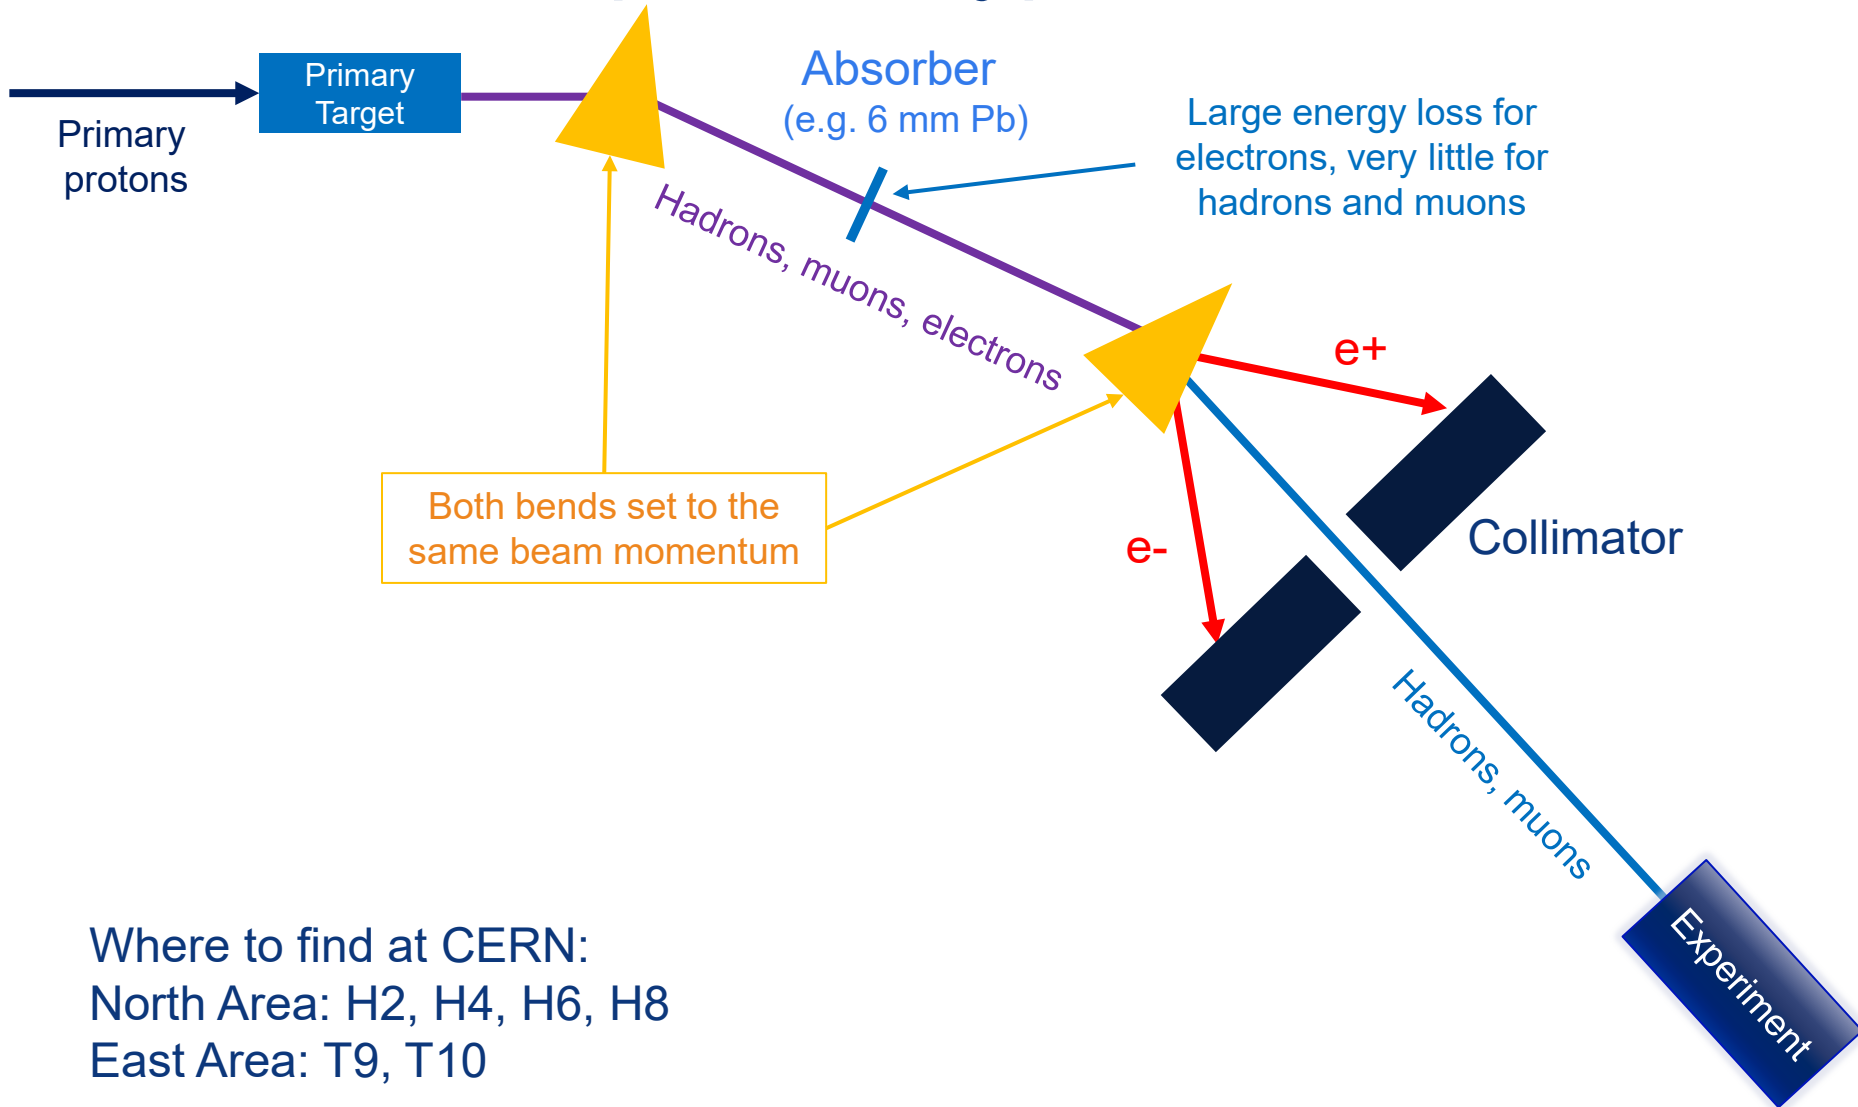

Where to find at CERN:
North Area: H2, H4, H6, H8
East Area: T9, T10

Selection of particle type - Radiator

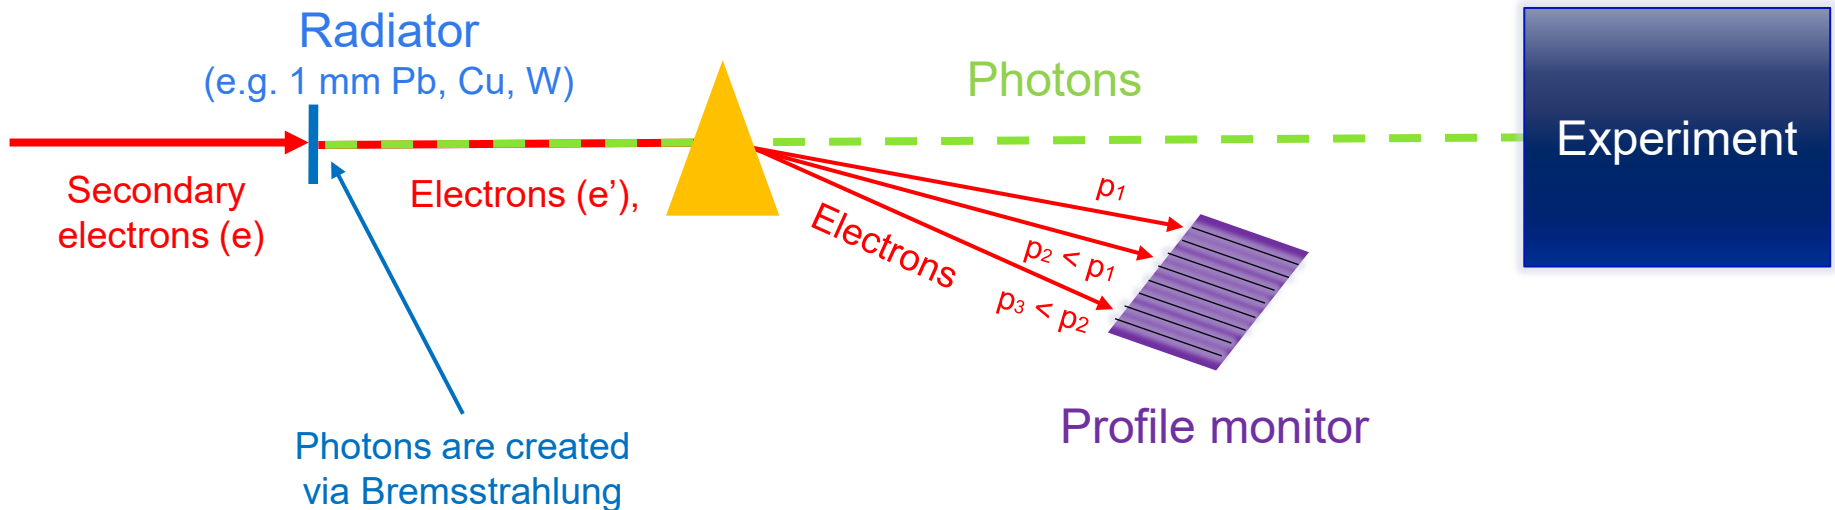

- Time resolution - electron by electron
- Transverse position gives information on e- momentum
- $p_\gamma = p_e - p_{e'}$
- Result : tagged photon beam


Where to find at CERN:

(Ad hoc installation, but usually used at)

North Area: H2, H4

East Area: T9

Beams from PS

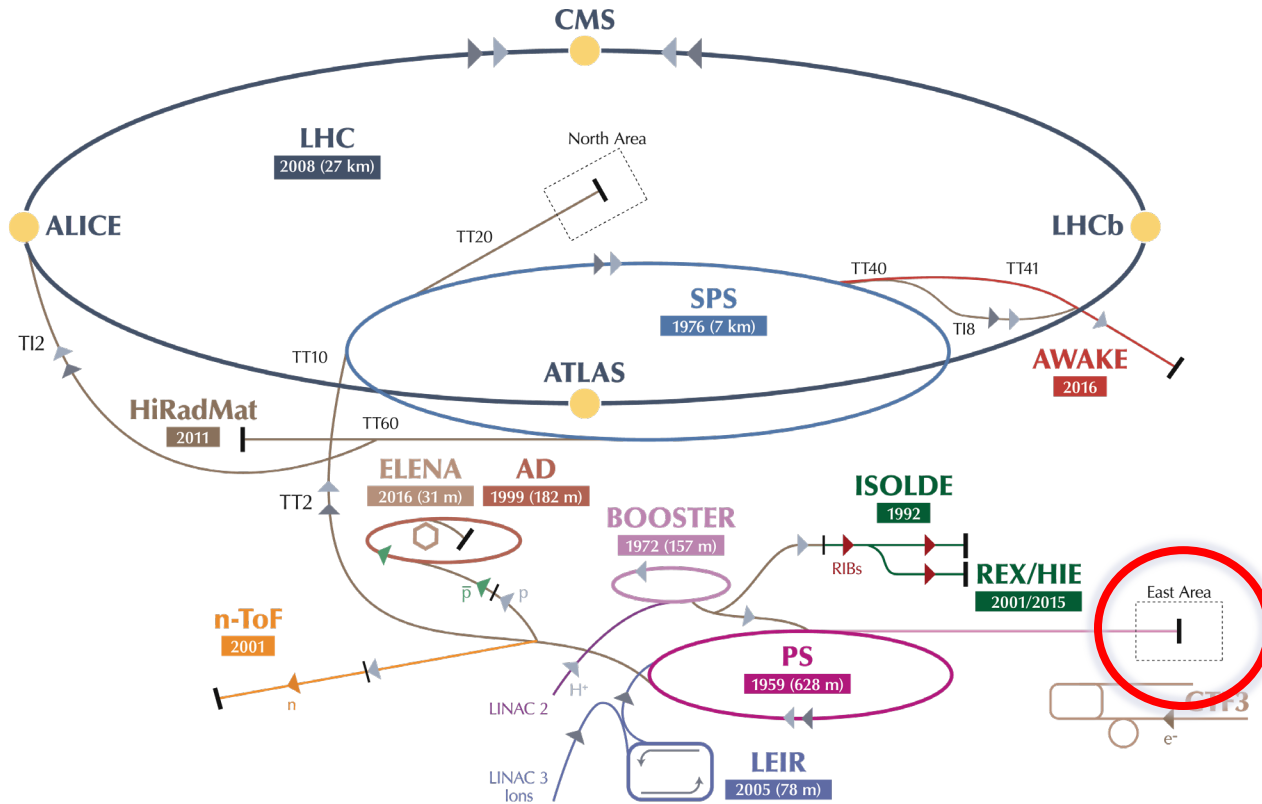

▶ p (protons) ▶ ions ▶ RIBs (Radioactive Ion Beams) ▶ n (neutrons) ▶ \bar{p} (antiprotons) ▶ e^- (electrons) ↔↔ proton/antiproton conversion ↔↔ proton/RIB conversion

LHC Large Hadron Collider SPS Super Proton Synchrotron PS Proton Synchrotron AD Antiproton Decelerator CTF3 Clic Test Facility
 AWAKE Advanced WAKEfield Experiment ISOLDE Isotope Separator OnLine REX/HIE Radioactive Experiment/High Intensity and Energy ISOLDE
 LEIR Low Energy Ion Ring LINAC LINear ACcelerator n-ToF Neutrons Time Of Flight HiRadMat High-Radiation to Materials



© 2015 CERN. All rights reserved.

East Area

Area under renovation

After LS2


- Secondary beams:
 - Momentum < 15 GeV/c
 - Irradiation facilities CHARM and IRRAD
 - Test beamlines T9 and T10
 - T11 beamline for CLOUD experiment
 - Horizontal momentum selection
- Particle types and intensity
 - Pure electrons, hadrons, muons
 - Max. $\sim 5 \cdot 10^6$ particles per spill
- Spill structure from PS
 - 400ms spill length
 - Typically 1 spill every 18s (15bp), more on request
- Quick access from control room to experimental area (< 1 minute)
- Short cables

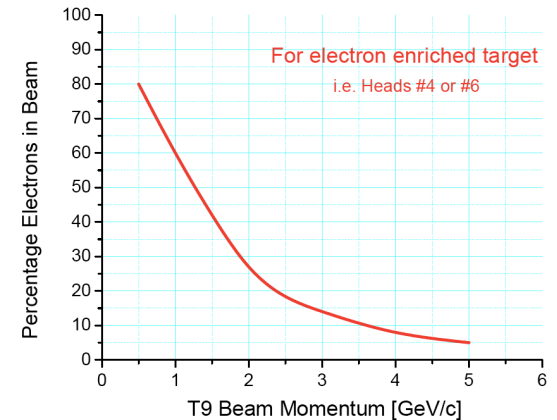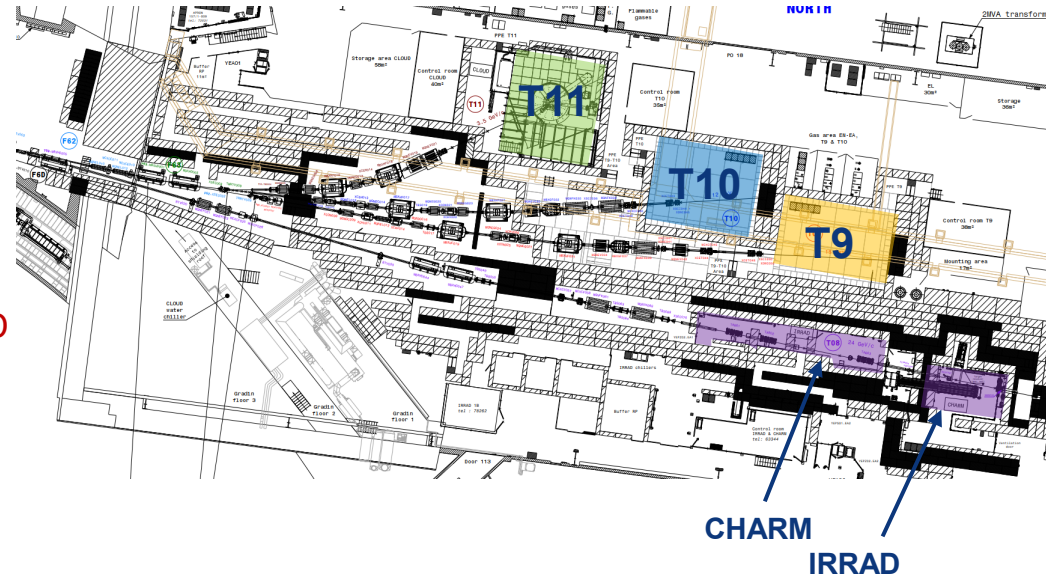


The CLOUD Experiment in T11 Beam



The Beam Line for CLOUD

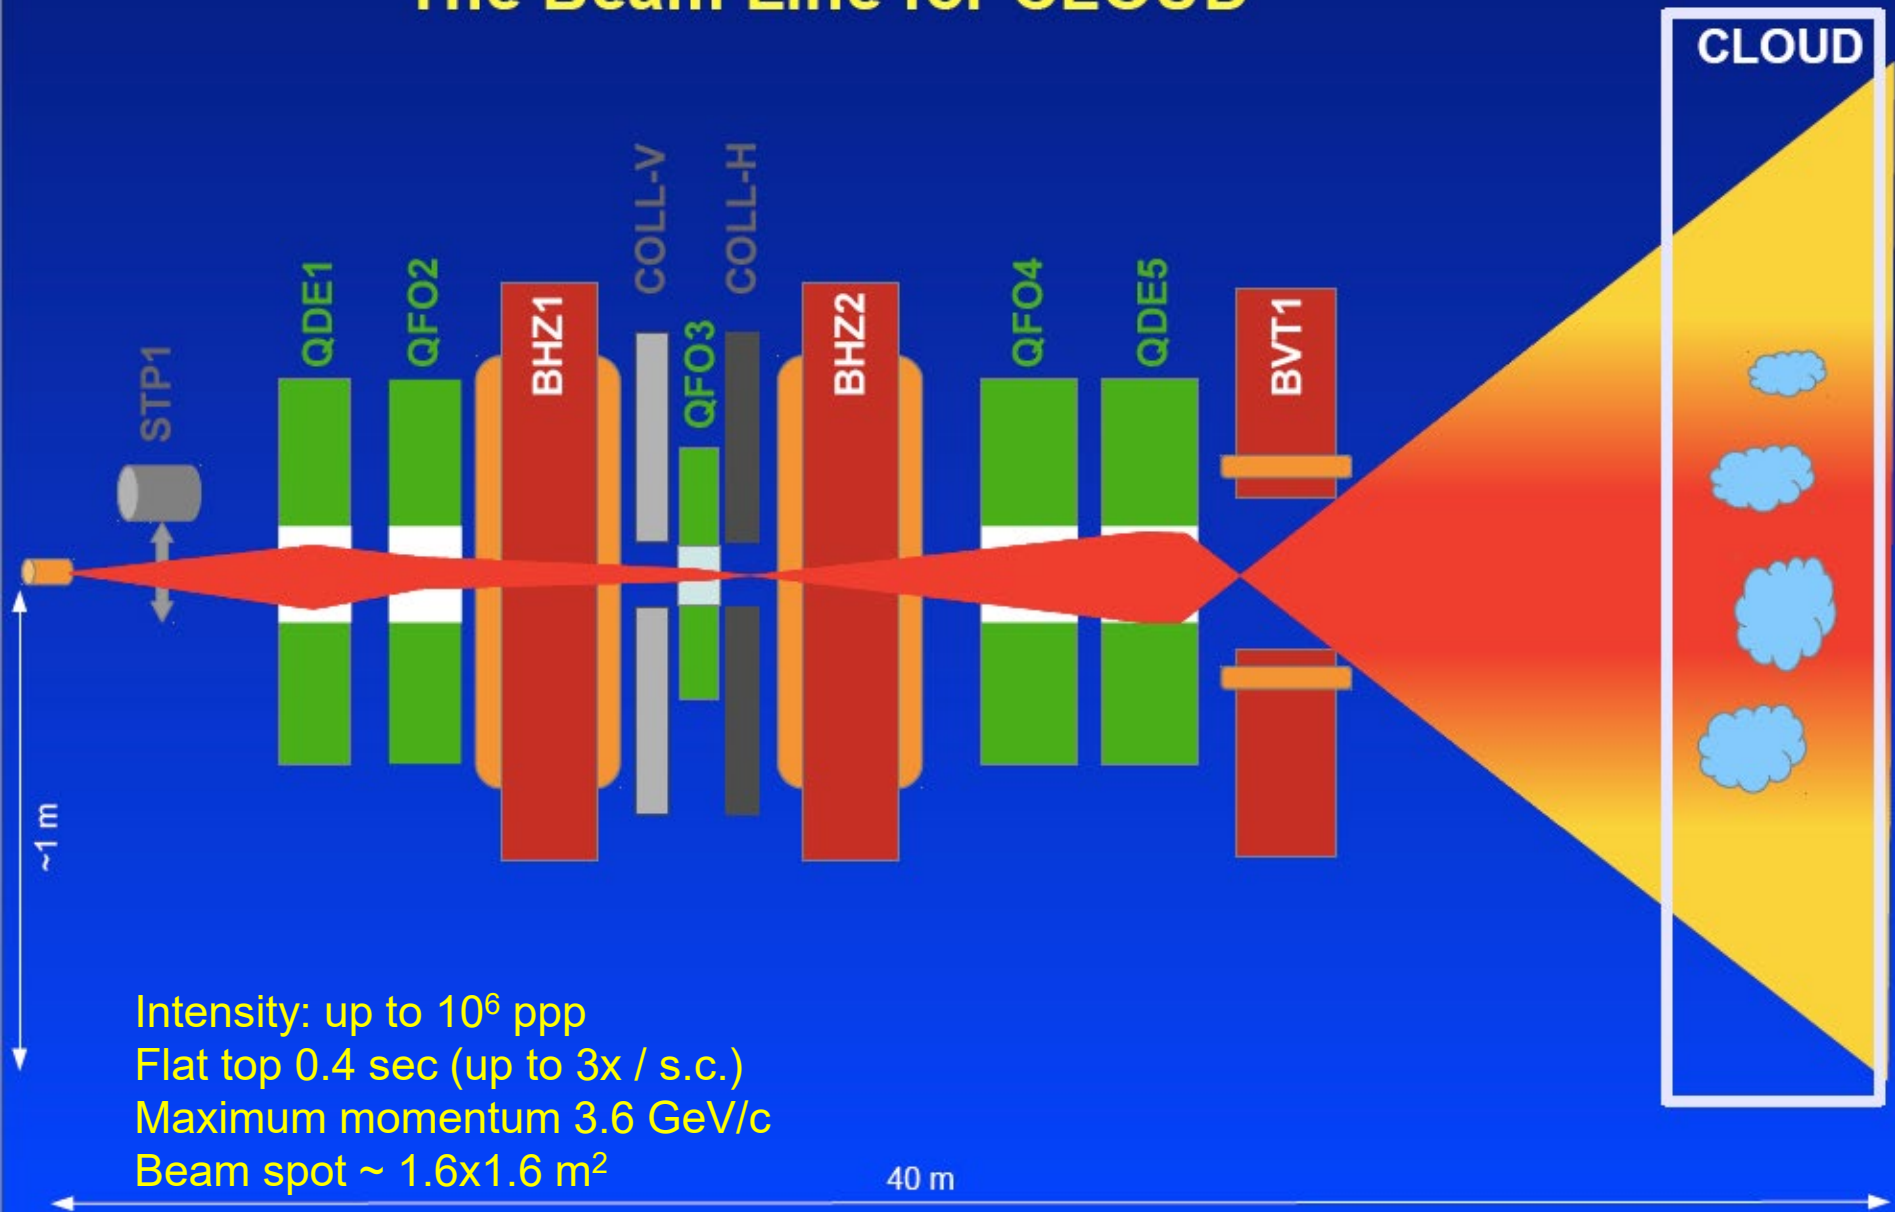

Beams from SPS

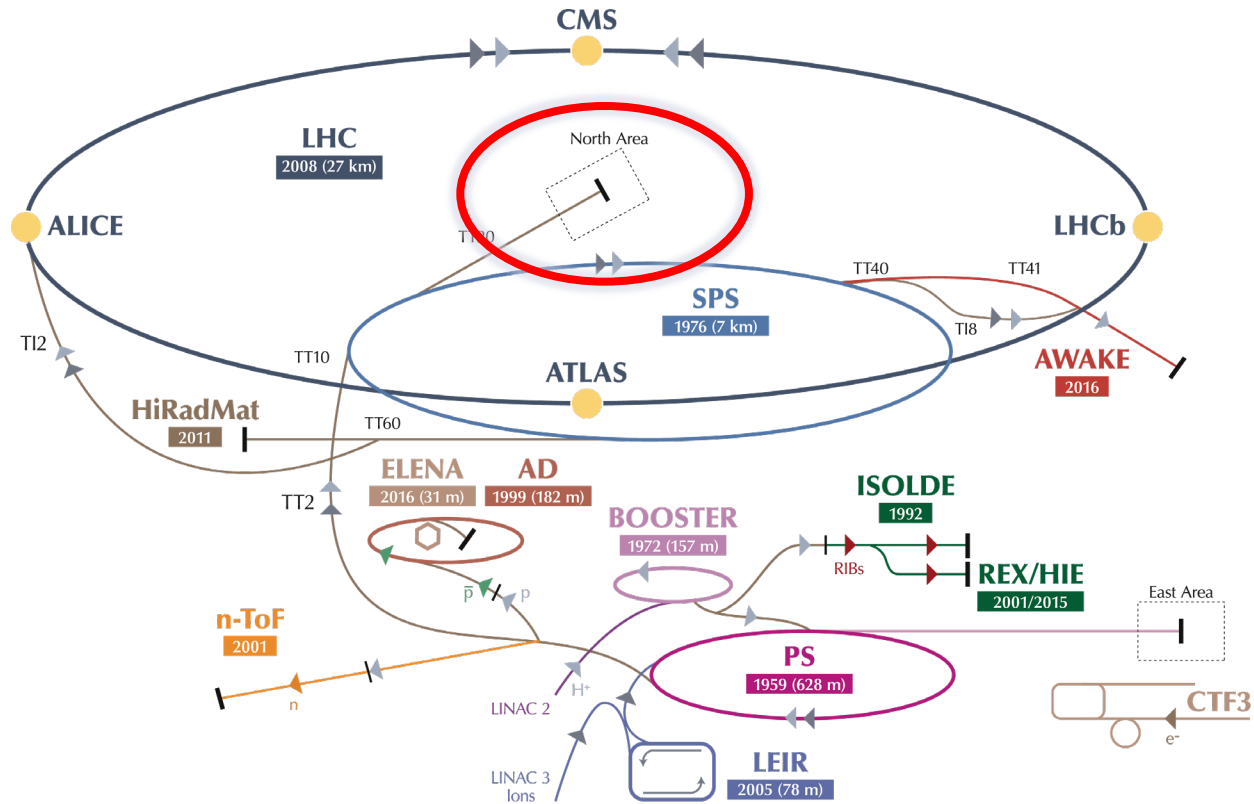


▶ p (protons) ▶ ions ▶ RIBs (Radioactive Ion Beams) ▶ n (neutrons) ▶ \bar{p} (antiprotons) ▶ e^- (electrons) ↔↔ proton/antiproton conversion ↔↔ proton/RIB conversion


LHC Large Hadron Collider SPS Super Proton Synchrotron PS Proton Synchrotron AD Antiproton Decelerator CTF3 Clic Test Facility
 AWAKE Advanced WAKEfield Experiment ISOLDE Isotope Separator OnLine REX/HIE Radioactive Experiment/High Intensity and Energy ISOLDE
 LEIR Low Energy Ion Ring LINAC LiNear ACcelerator n-ToF Neutrons Time Of Flight HiRadMat High-Radiation to Materials

© 2015 CERN. All rights reserved.

North Area beamlines - schematic

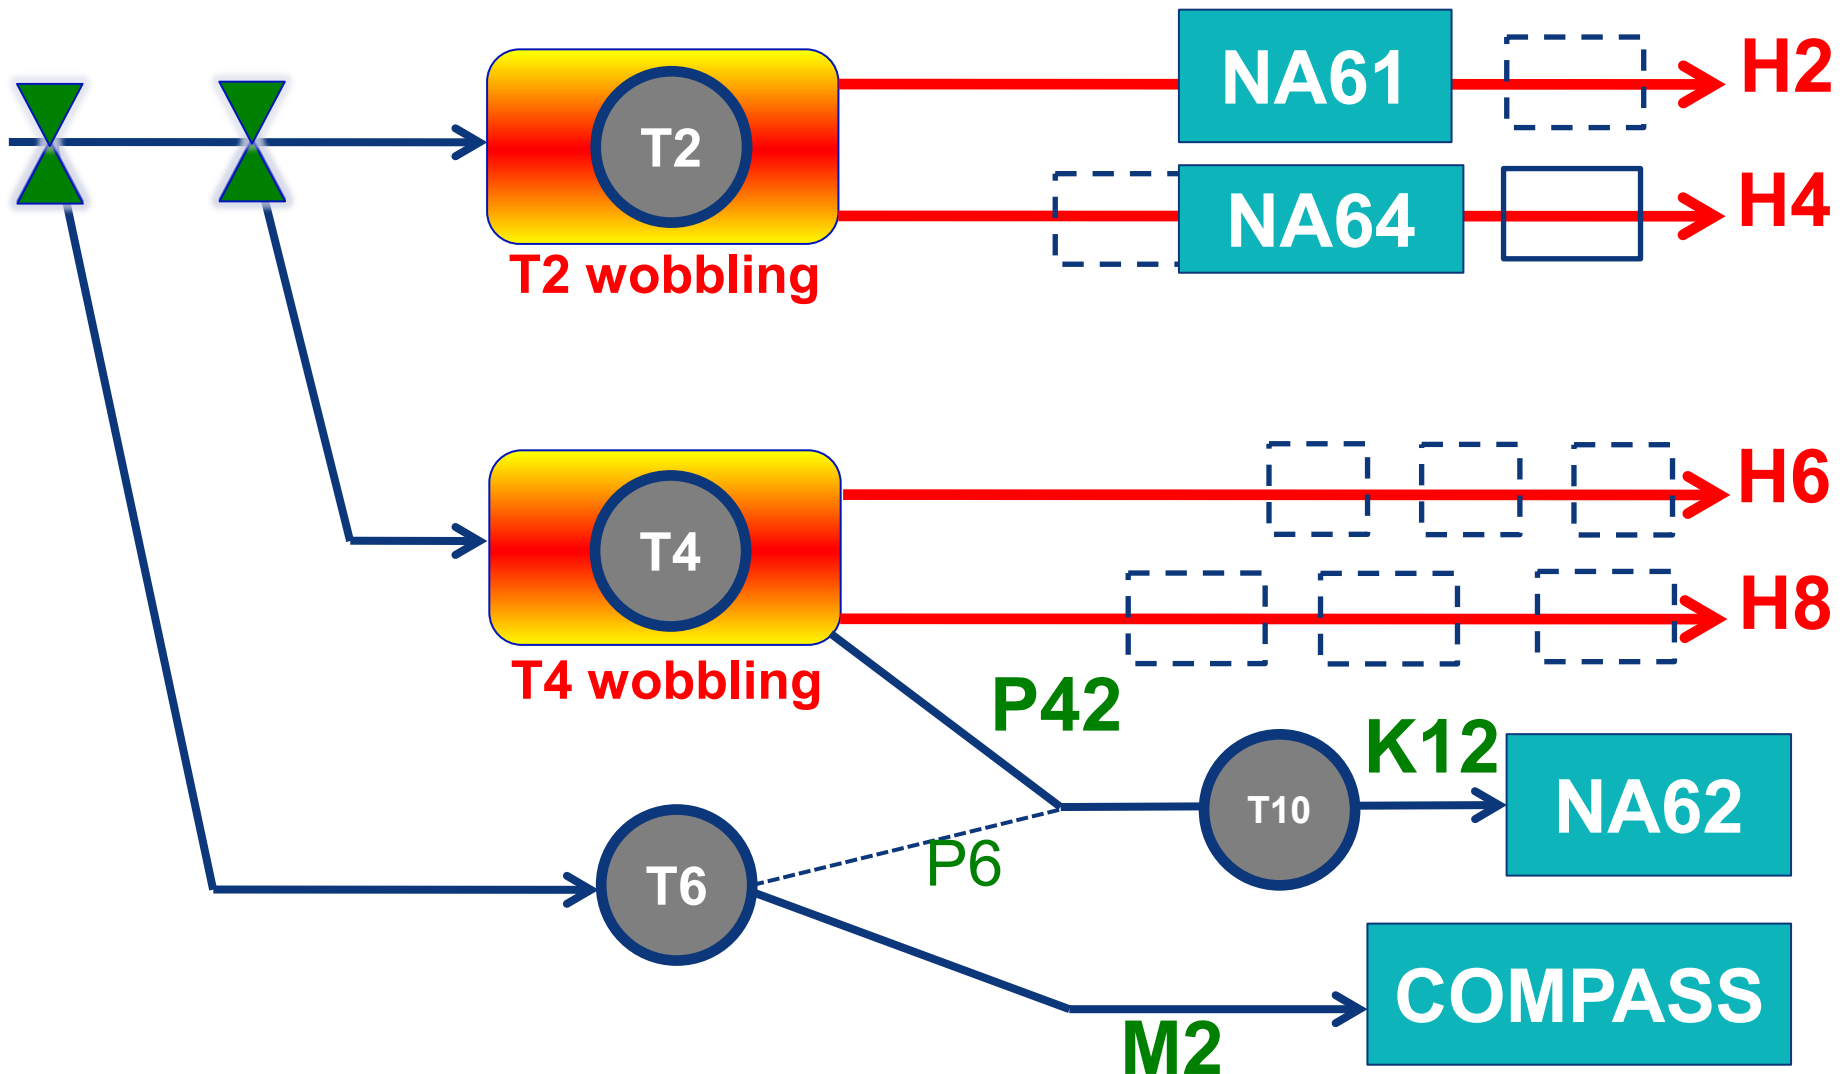


EHN2: COMPASS

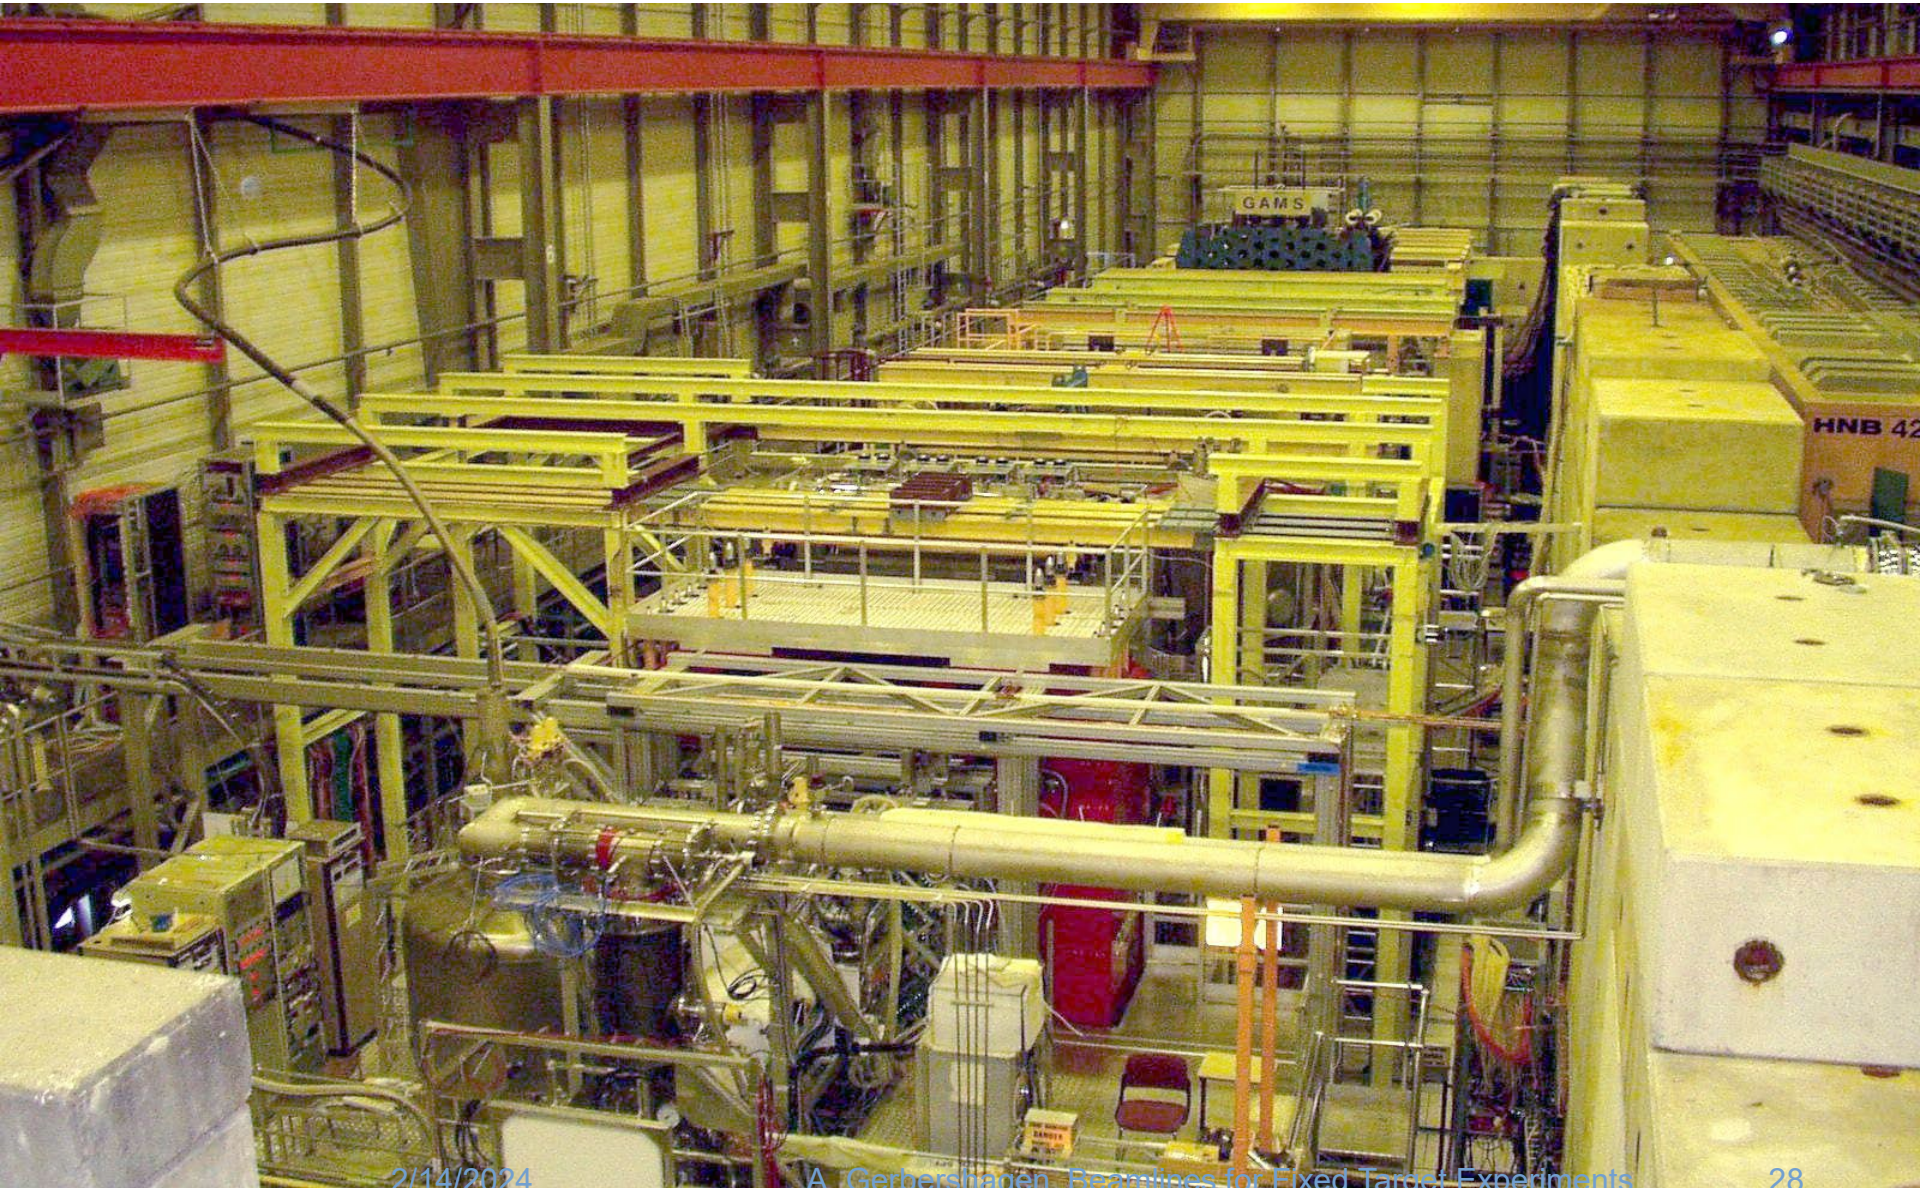

THE M2 MUON BEAM

FOR COMPASS / NA58

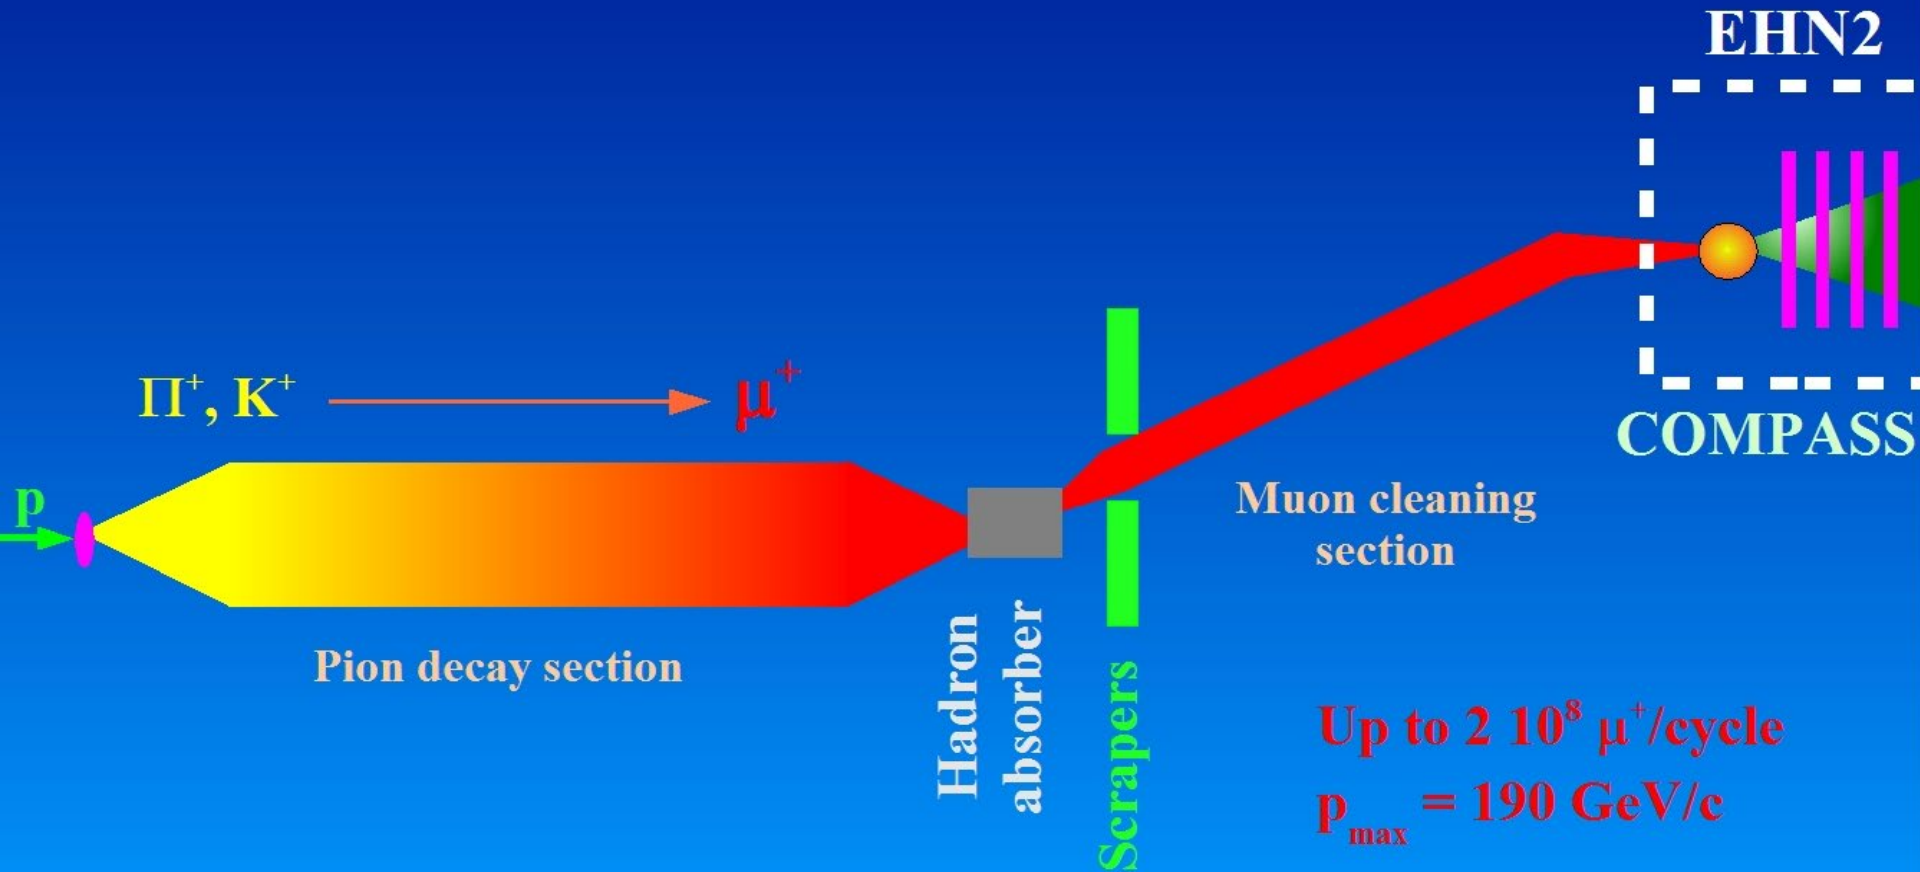


Muons from pion decay

- Pion decay in π center of mass:


$$p^* = \frac{m_\pi^2 - m_\mu^2}{2 m_\pi} = 30 \text{ MeV}/c$$

$$E^* = \frac{m_\pi^2 + m_\mu^2}{2 m_\pi} = 110 \text{ MeV}$$

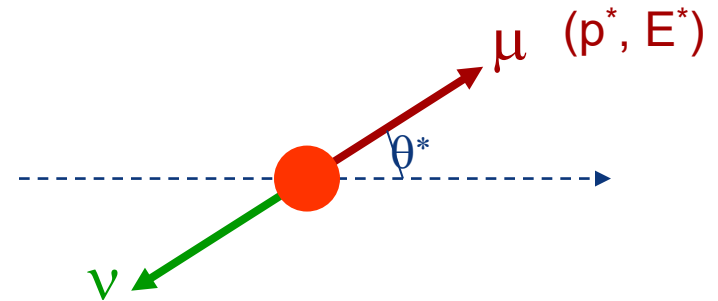

- Boost to laboratory frame:

$$E_\mu = \gamma_\pi (E^* + \beta_\pi p^* \cos \theta^*) \text{ with } \beta_\pi \approx 1$$

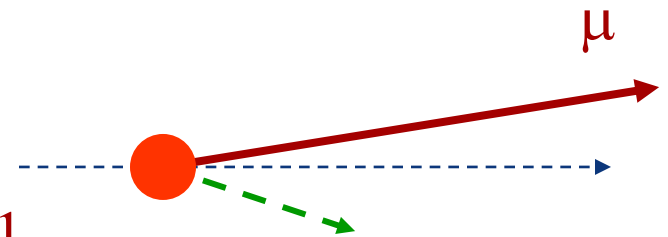

- Limiting cases:


$$\cos \theta = +1 \rightarrow E_{\max} = 1.0 E_\pi$$

$$\cos \theta = -1 \rightarrow E_{\min} = 0.57 E_\pi$$




$$0.57 < E_\mu / E_\pi < 1$$

Momentum acceptance of FODO cells


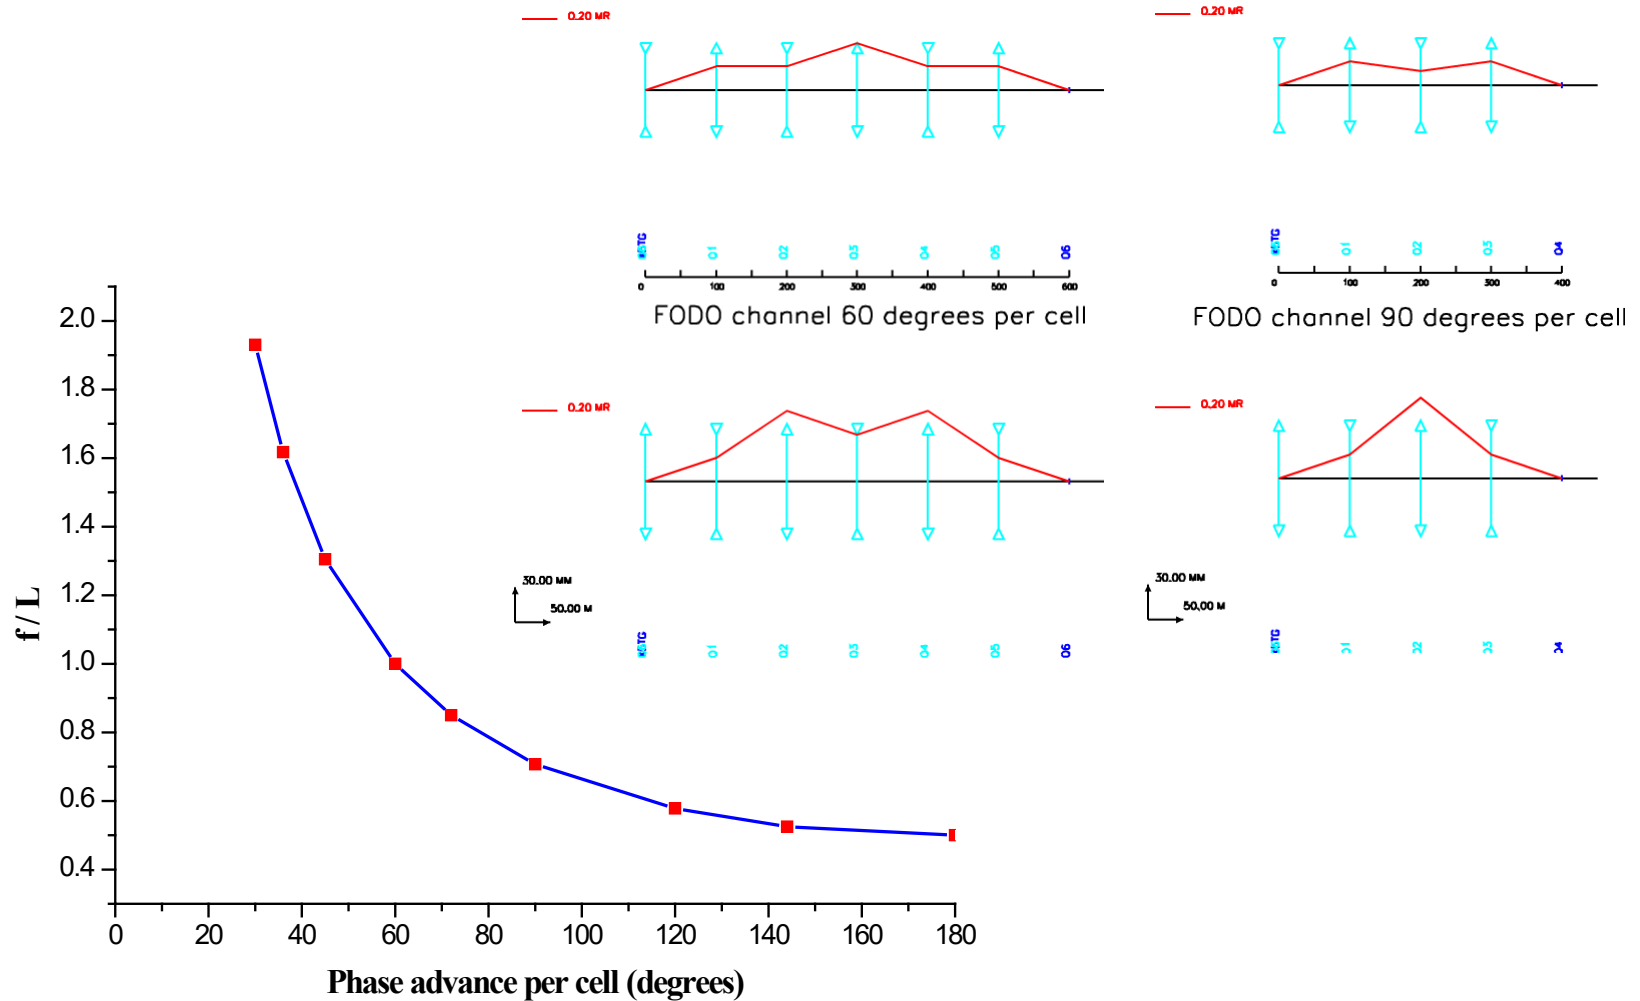


Phase advance for M2 beam

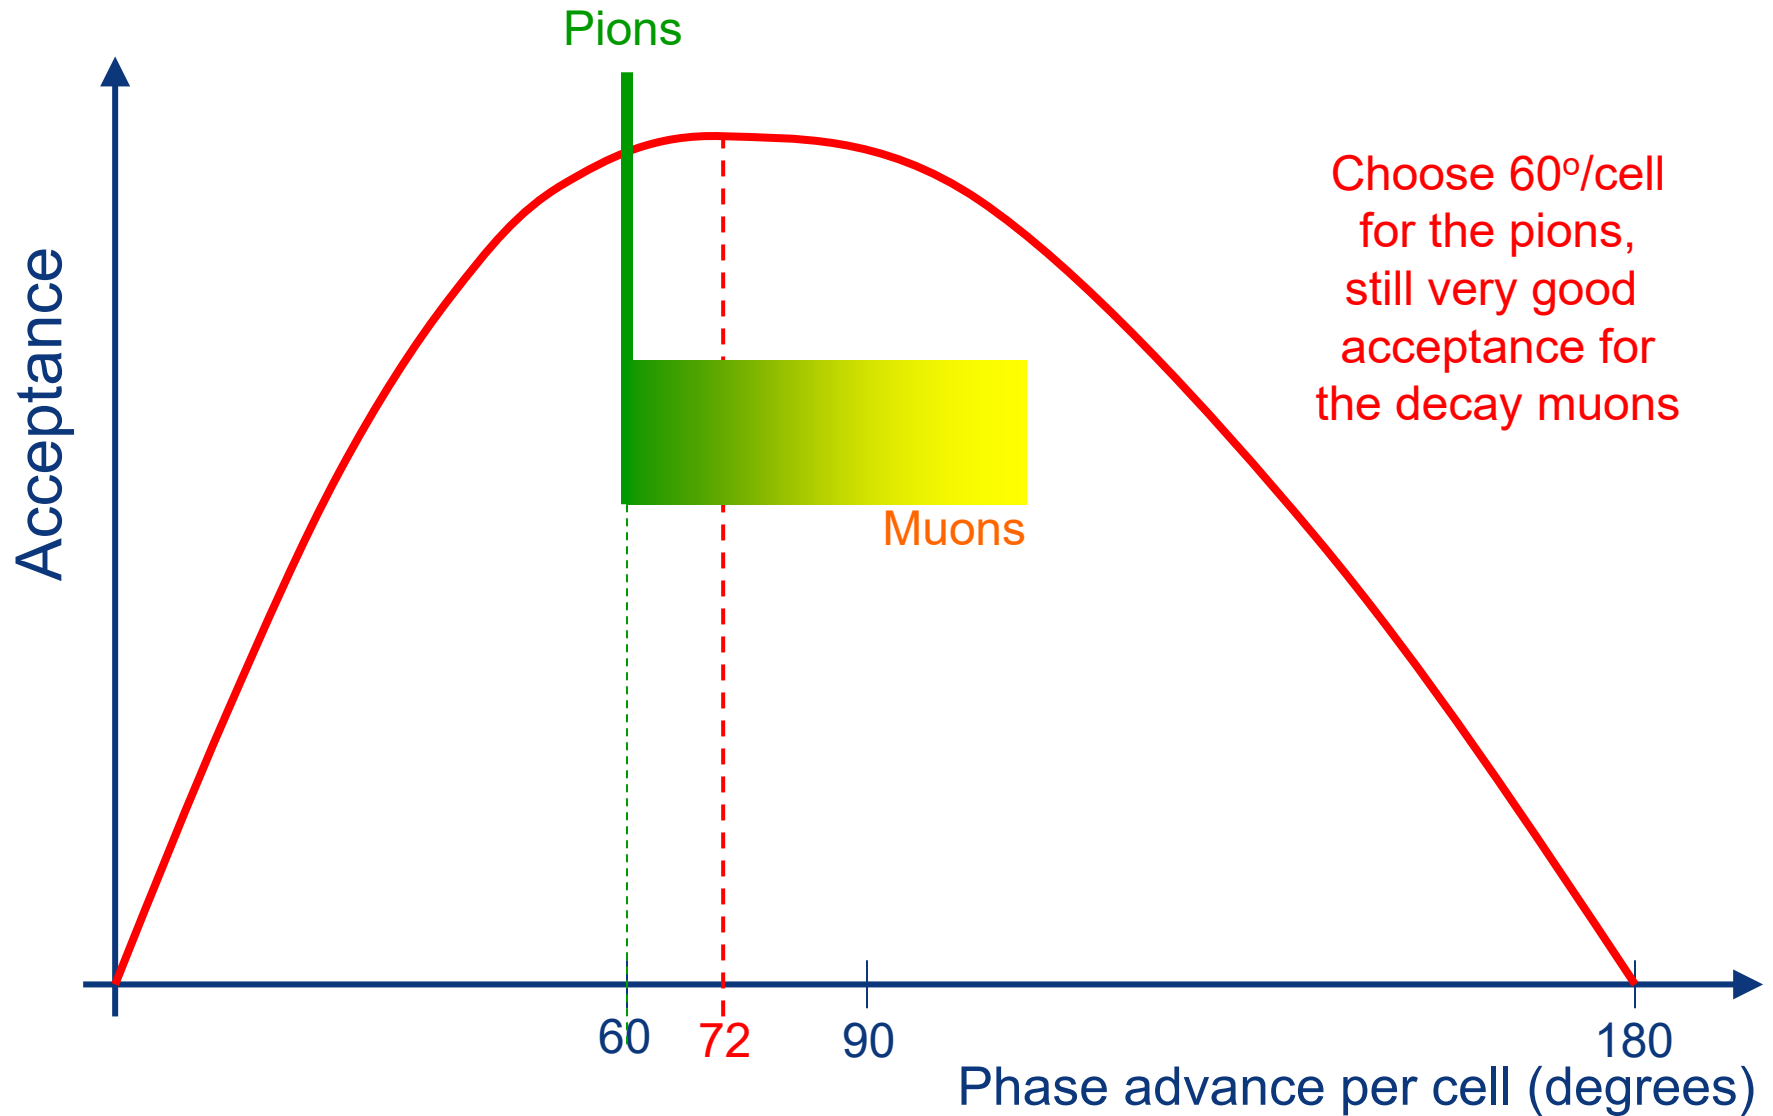


Muon Polarisation

- Pions and kaons have spin zero
- Neutrinos are left-handed
=> Muons from pion decay are naturally polarised

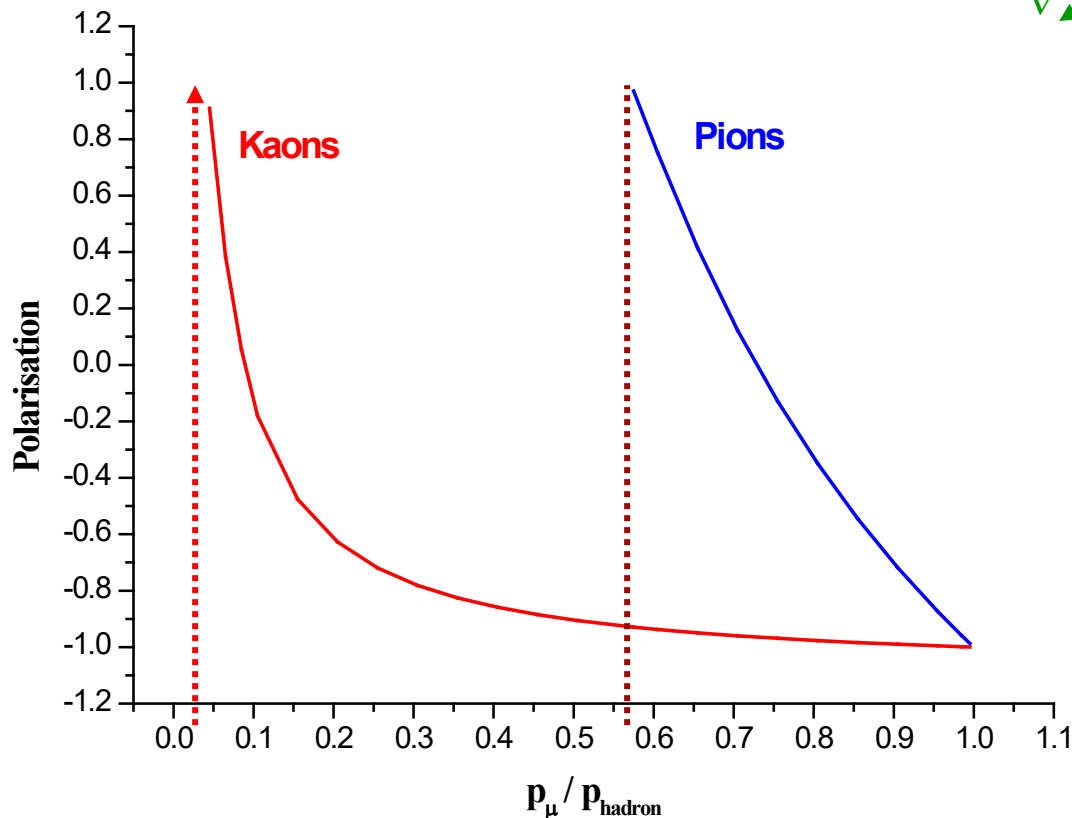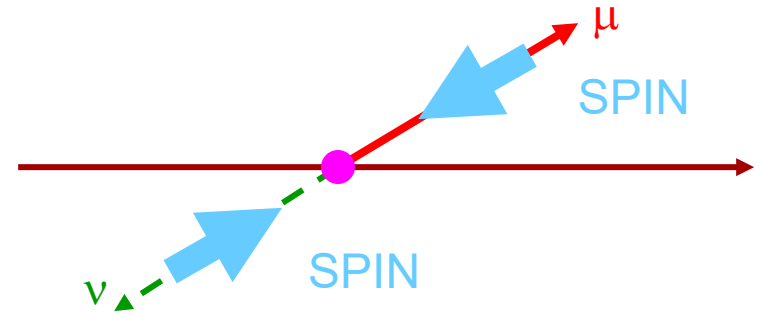


For the typical COMPASS conditions, $p_\mu / p_\pi = 0.92$ and the measured muon polarisation is about -80%

NA62 Beam and Detectors






SPS primary p: 400 GeV/c
 Unseparated beam:
 • 75 GeV/c
 • 750 MHz
 • $\pi/K/p$ (~6% K^+)

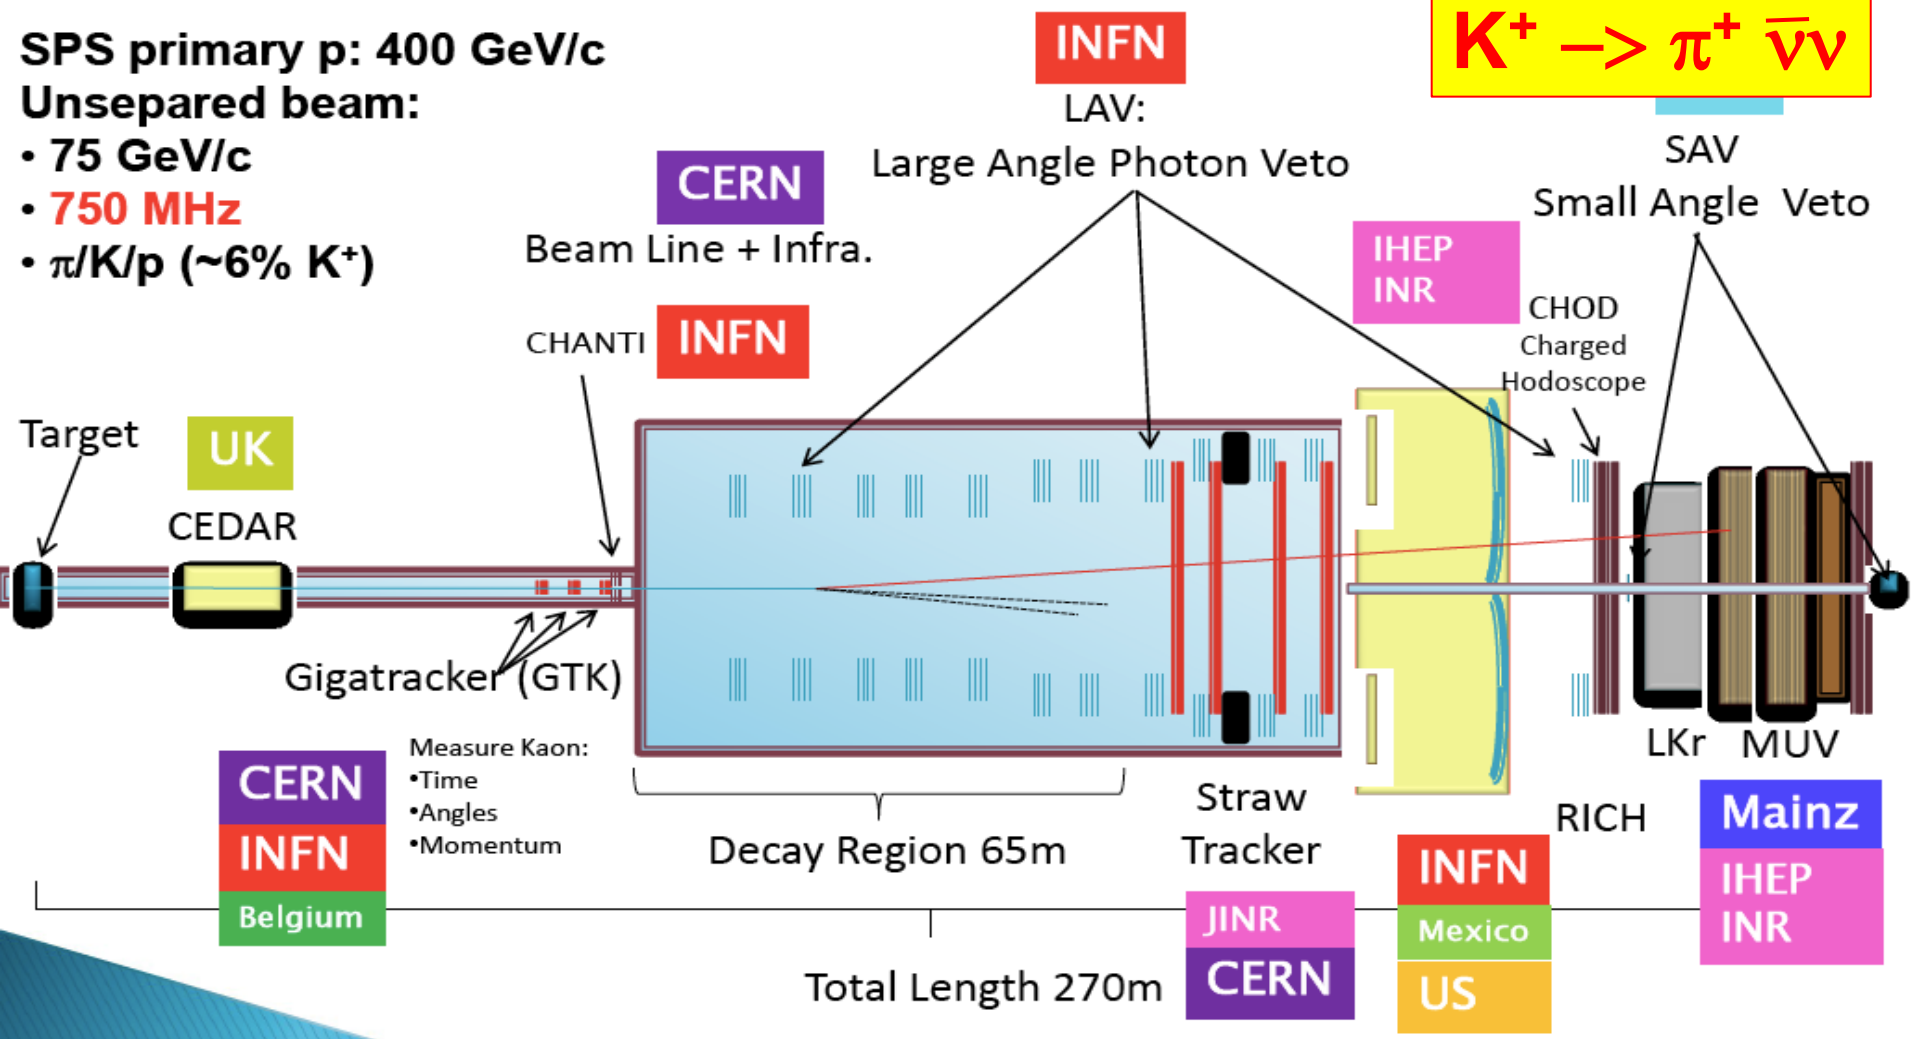


NA62@SPSC99 16/11/2010

4

Other experiments with fixed-target beams

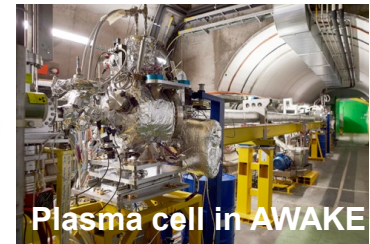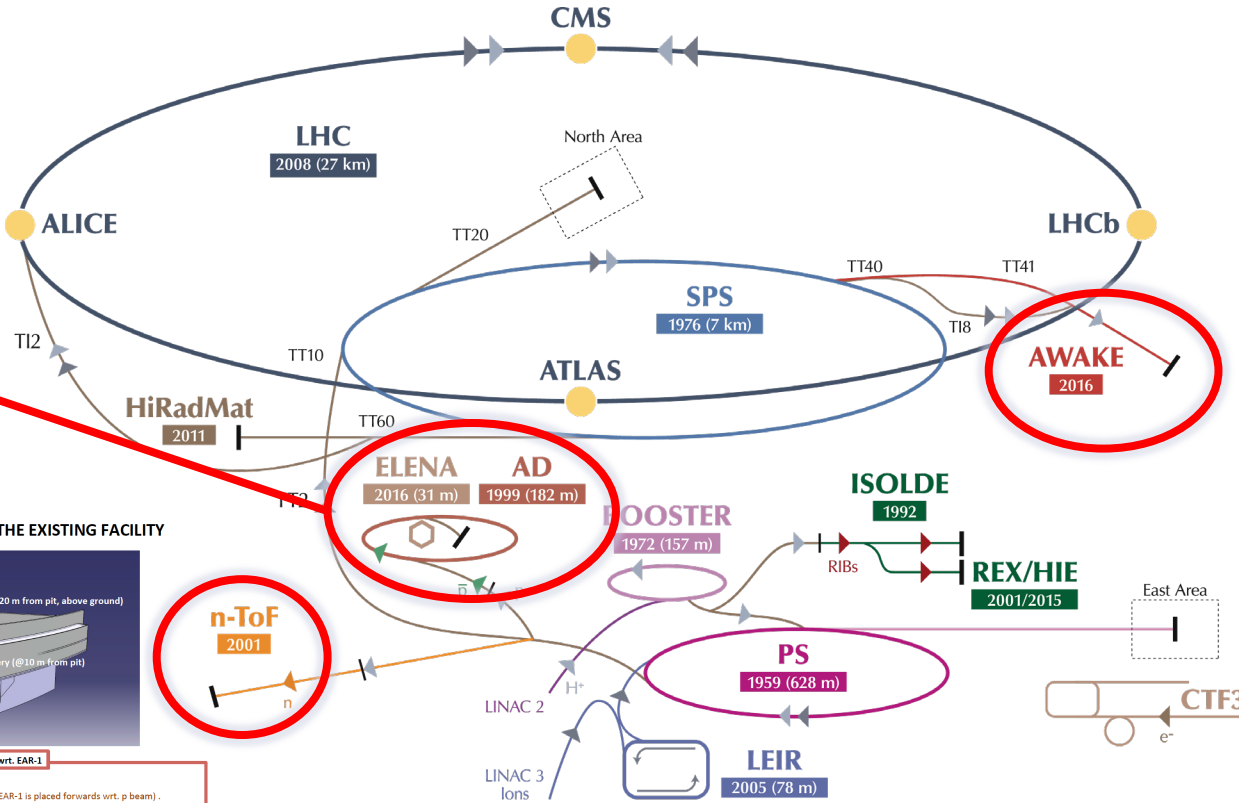

nTOF EAR2 : AN UPGRADE OF THE EXISTING FACILITY

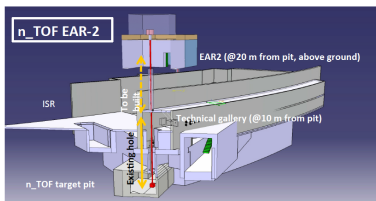

Main advantages of EAR-2 wrt. EAR-1

- * Neutron fluence increase in a factor 18-25 w.r.t. EAR-1.
 - * Strong reduction of the g-flash because of vertical flight path (EAR-1 is placed forwards wrt. p beam).
 - * Complete neutron beam width reduced by a factor of 10: increase S/B ratio for radioactive samples.
- Together, these improvements will result in more accurate and faster cross-section measurements, and open the door to new physics cases at even higher neutron energies.

► p (protons) ► ions ► RIBs (Radioactive Ion Beams) ► n (neutrons) ► \bar{p} (antiprotons) ► e^- (electrons) ►► proton/antiproton conversion ►► proton/RIB conversion

LHC Large Hadron Collider SPS Super Proton Synchrotron PS Proton Synchrotron AD Antiproton Decelerator CTF3 Clic Test Facility

AWAKE Advanced WAKEfield Experiment ISOLDE Isotope Separator OnLine REX/HIE Radioactive Experiment/High Intensity and Energy ISOLDE

LEIR Low Energy Ion Ring LINAC LiNear ACcelerator n-ToF Neutrons Time Of Flight HiRadMat High-Radiation to Materials

Summary

- Many physics experiments can be performed (only) with fixed targets
- CERN has a rich fixed target complex
 - Beams from PSB, PS or SPS
 - Momenta : $<1.4 \text{ GeV}/c$, $<15 \text{ GeV}/c$, $<400 \text{ GeV}/c$
 - Capable to provide:
 - Protons, electrons, hadrons, pions, tagged kaons, muons, tagged photons
 - Beamlines designed for high flexibility in:
 - Particle type, beam size, divergence, momentum, intensity, polarization etc.

