

Development of calibration method and performance evaluation for KamLAND2 prototype detector

NuDM-2024

Research Center for Neutrino Science, Tohoku University

Jun Nakane

CONTENTS

1. Motivation
2. KamLAND2 Prototype Detector
3. Evaluation of Light Collection Performance of Mirrors
4. Evaluation of Prototype Detector Total Observed Phototns
5. Summary

CONTENTS

1. Motivation
2. KamLAND2 Prototype Detector
3. Evaluation of Light Collection Performance of Mirrors
4. Evaluation of Prototype Detector Total Observed Photons
5. Summary

Neutrino-less double beta decay ($0\nu\beta\beta$)

Majorana nature of neutrinos

Majorana particle


$$\nu = \bar{\nu}$$

Key component of
small neutrino mass
matter dominant universe

Neutrino-less double beta decay ($0\nu\beta\beta$)

- $0\nu\beta\beta$ happens only if ν is Majorana particle.
= **verifying the Majorana neutrino**
- Requirements for detector: peak search around the Q-value
High light emission & light yield
background reduction


→ **KamLAND is a suitable detector**

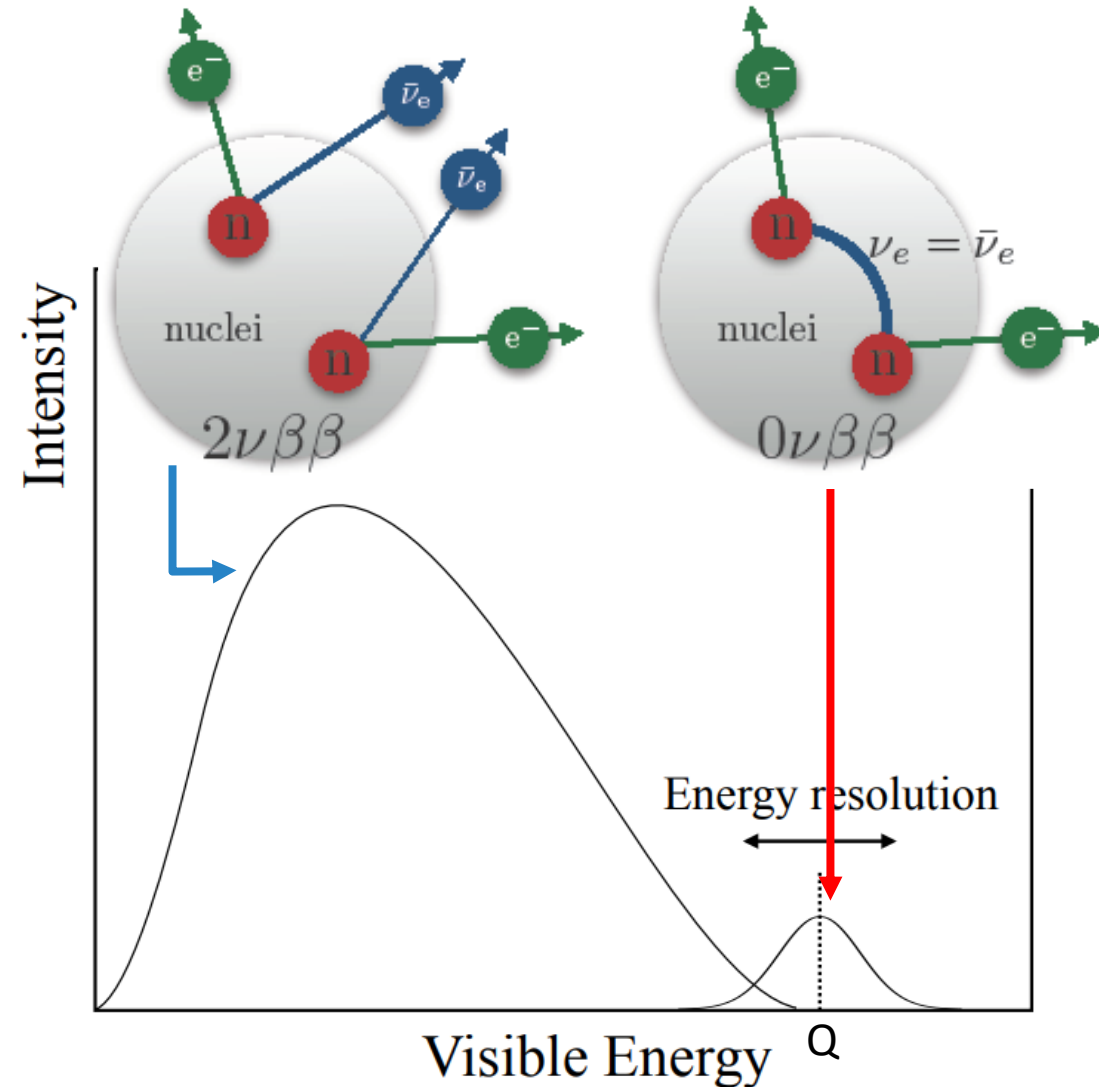

KamLAND

KamLAND: The **Kamioka Liquid-scintillator Anti-Neutrino Detector**

Advantage: Extremely low-radioactivity + Large & high-sensitivity
→ **Ideal detector for rare decay search!**

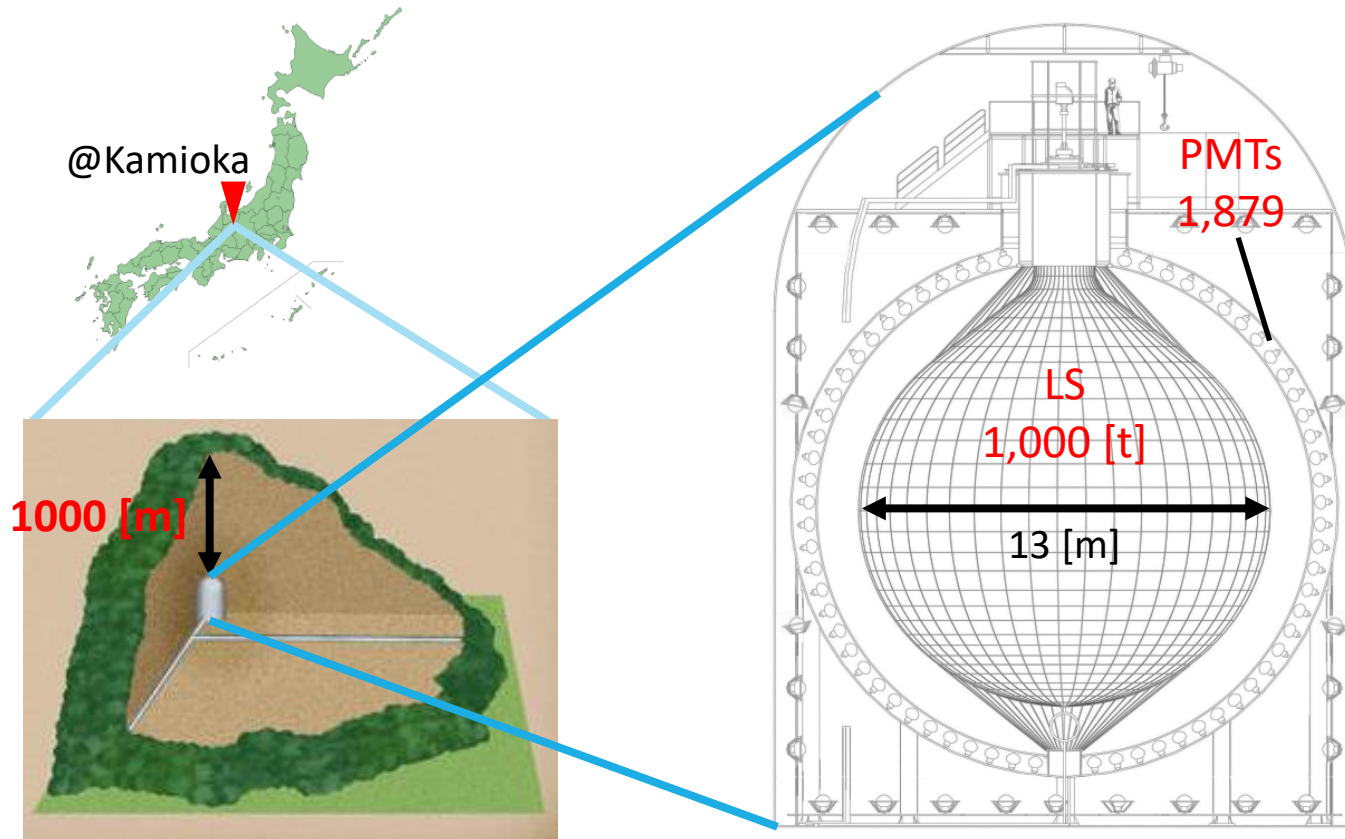

Results:

- Neutrino oscillations of reactor neutrinos observed (world first)
→ Precision measurement of neutrino oscillations
- Antielectron neutrinos originating from Earth observed (world first)
→ Leading neutrino geophysics

Other scientific objectives:

- Solar neutrinos
- Atmospheric neutrinos
- Astrophysical neutrinos
- Proton decay
- $0\nu\beta\beta$ ← **KamLAND-Zen experiment**

KamLAND-Zen Experiment




KamLAND-Zen = ^{136}Xe + KamLAND
 Zero-neutrino double-beta decay search

- ^{136}Xe : Double-beta decay source**
- $0\nu\beta\beta$ Q-Value: 2.46MeV (below ^{208}Tl γ BG)
 - Long $2\nu\beta\beta$ half life
 - (Relatively) easy to enrich/purify by distillation
 - Dissolved into liquid scintillator (LS) at 3%

- Calculate **the lower limit of the half-life of $0\nu\beta\beta$** from the observation time and the amount of Xe
- Calculate **the upper limit of the effective Majorana mass** from the half-life

$$(T_{1/2}^{0\nu})^{-1} = G^{0\nu} |M^{0\nu}|^2 \langle m_{\beta\beta} \rangle^2$$

$G^{0\nu}$: Phase space factor
 $|M^{0\nu}|^2$: Nuclear matrix element (NME)

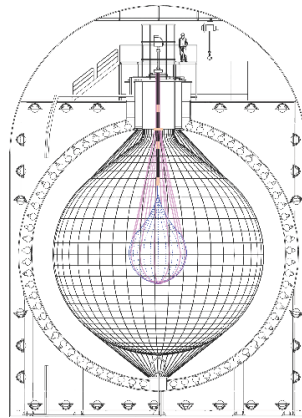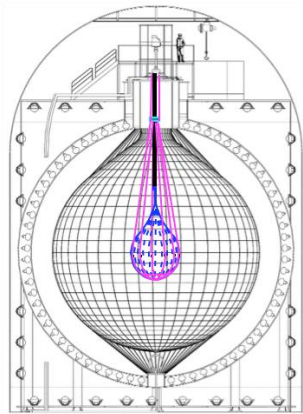

KamLAND-Zen 400 (Xe: 320~380 [kg])

$$T_{1/2}^{0\nu} > 0.9 \times 10^{26} \text{ [yesrs]}$$

$$\langle m_{\beta\beta} \rangle < 61 - 165 \text{ meV}$$

Phys. Rev. Lett. 117, 082503 (2016)

KamLAND-Zen 800 (Xe: 745 ± 3 [kg])

$$T_{1/2}^{0\nu} > 3.8 \times 10^{26} \text{ [yesrs]}$$

$$\langle m_{\beta\beta} \rangle < 28 - 122 \text{ meV}$$

Phys. Rev. Lett. 130, 051801 (2023)

KamLAND2-Zen (Xe: ~1,000 [kg])

$$\text{Toward } T_{1/2}^{0\nu} = 2.0 \times 10^{27} \text{ [yesrs]}$$

$$\text{Toward } \langle m_{\beta\beta} \rangle = 20 \text{ meV}$$

KamLAND-Zen Experiment

KamLAND-Zen 400 + 800

- **Current results:** First in the world to reach **IO** band $\left(\begin{array}{l} T_{1/2}^{0\nu} > 2.3 \times 10^{26} \text{ year (90\%C.L.)} \\ \langle m_{\beta\beta} \rangle < 36-156 \text{ meV} \end{array} \right)$

KamLAND2-Zen (Future plan)

- **Target sensitivity:** Covering most of IO $\left(T_{1/2}^{0\nu} > 2.0 \times 10^{27} \text{ year } (\langle m_{\beta\beta} \rangle \sim 20 \text{ meV}) \right)$
- Main backgrounds of $0\nu\beta\beta$

$2\nu\beta\beta$



- Can only be separated by **improving energy resolution**
- Reduction target: 1/100

Long-lived spallation products

- Can be reduced by improving energy & vertex resolution

⇒ Aiming to **increase the number of observed photons!**

to improve energy resolution

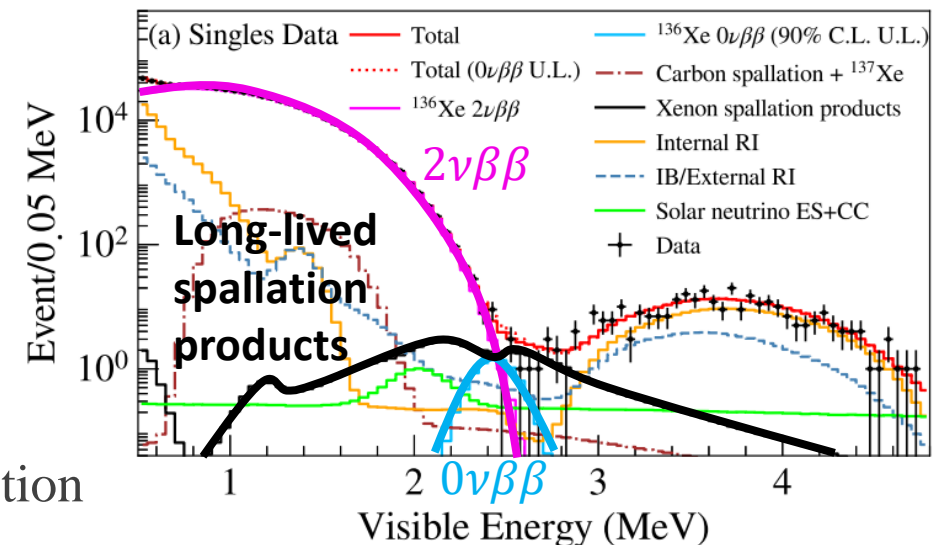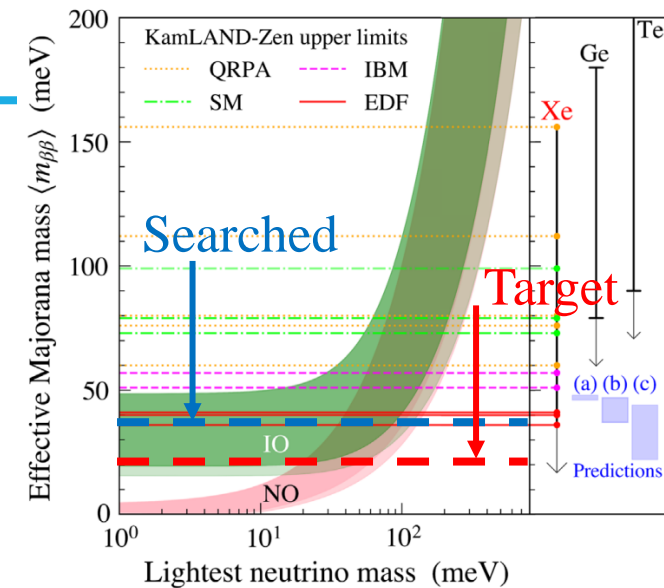

Upgrade KamLAND2-Zen

Upgrade contents

- **Increase in light yield**



High quantum efficiency PMT (HQE-PMT) (x1.9)

Light-collecting Winston cone mirror (x1.8)

High light-yield liquid scintillator (New-LS) (x1.4)

- State-of-the-art read-out electronics: **MoGURA2**

RFSoc powered data acquisition

Huge buffer for SN-burst detection

- Increase in ^{136}Xe : 745kg \rightarrow \sim 1,000kg

Target of KamLAND2-Zen

- **5x** increased effective light yield

\rightarrow energy resolution σ : 4% \rightarrow $<$ 2.5%
($E = 2.5$ MeV)


$2\nu\beta\beta$ BG reduction by the order of 2

\rightarrow **Test with prototype detector**

- \sim 100% spallation neutron detection

- More efficient L.L. tagging

- More exposure

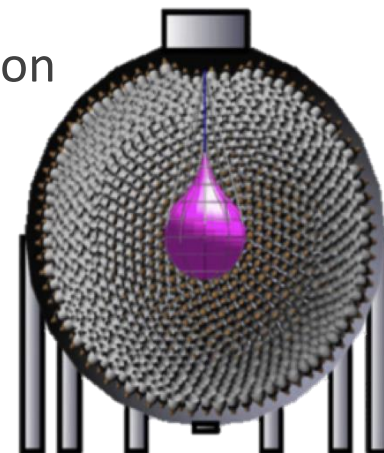

Upgrade contents

Optical properties registered in **the simulation**

(: Emission wavelength of New-LS)

- New-LS (candidate)

Light yield: **x1.365** (Compared to conventional)


Composition:

Components	Formula	Density [g/cm ³]	Volume ratio
LAB	C _n H _{2n-6}	0.86	80%
PC	C ₉ H ₁₂	0.875	20%
PPO	C ₁₅ H ₁₁ NO	—	2.00 g/L
Bis-MSB	C ₂₄ H ₂₂	—	5 mg/L
LAB-LS	—	0.865	—

Emission time constant


i	A_i [%]	τ_i [ns]
1	91.5	7.37
2	8.5	44.7

Emission spectrum:


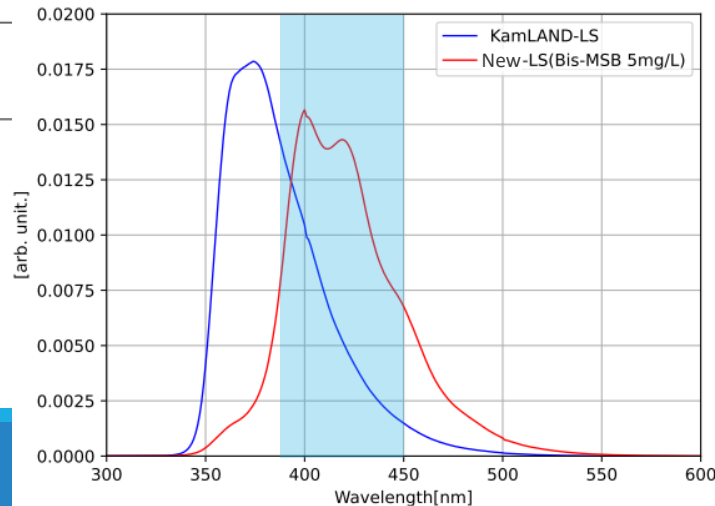


- HQE-PMT

Quantum efficiency:

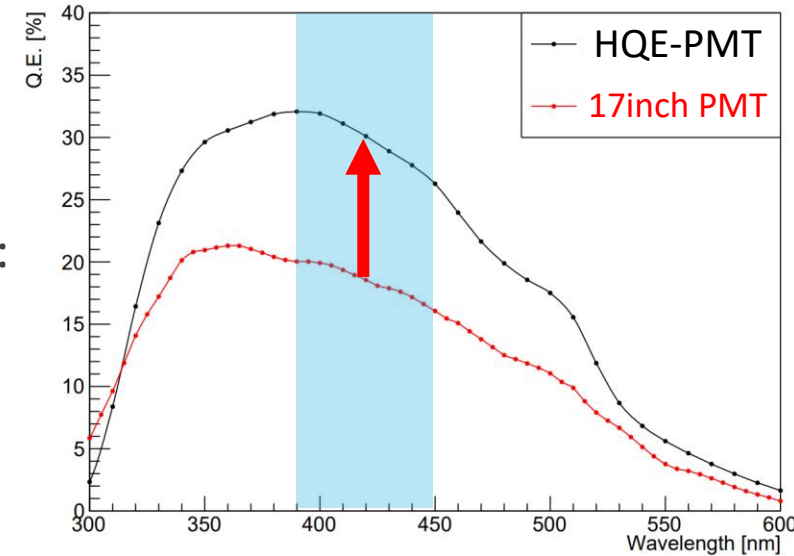



Incident position and angle dependency:

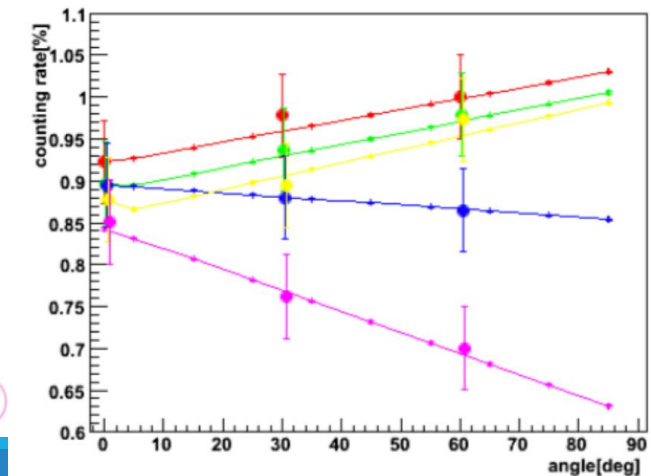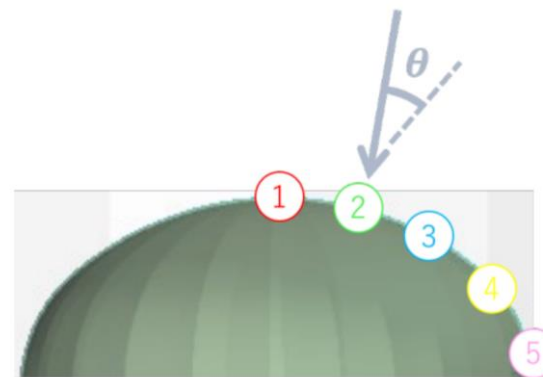

Upgrade contents

Optical properties registered in **the simulation** (■: Emission wavelength of New-LS)

- Light-collecting mirror

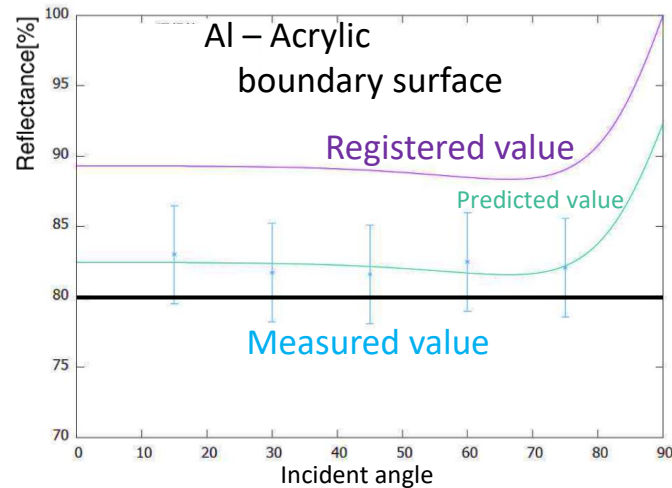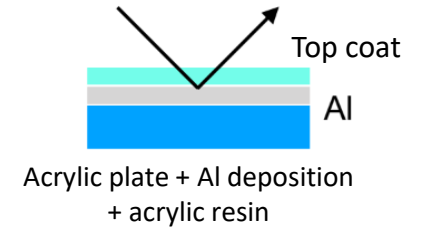


Long-term stability:

20 days at 41°C


(≒ 6 months at 10°C (usage environment))

In pure water : Reduction in reflectance

In LS : Stable



Reflectance:

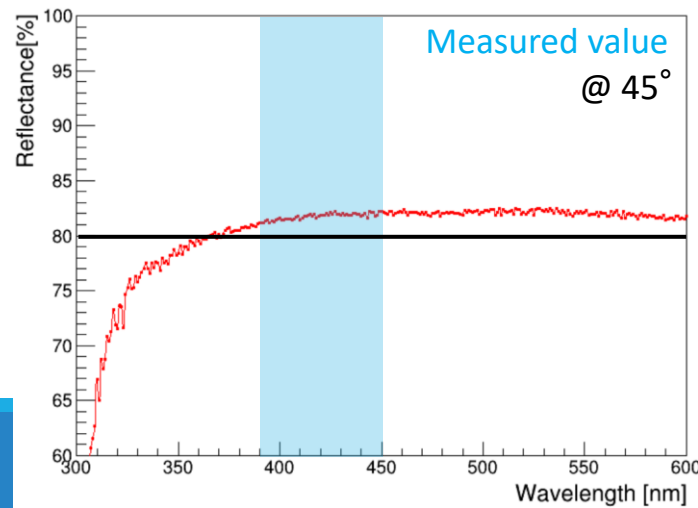

3 months at 20°C

(≒ 6 months at 10°C, by contractor)


In pure water : Stable



CONTENTS

1. Motivation
2. KamLAND2 Prototype Detector
3. Evaluation of Light Collection Performance of Mirrors
4. Evaluation of Prototype Detector Total Observed Photons
5. Summary

Flow of performance evaluation

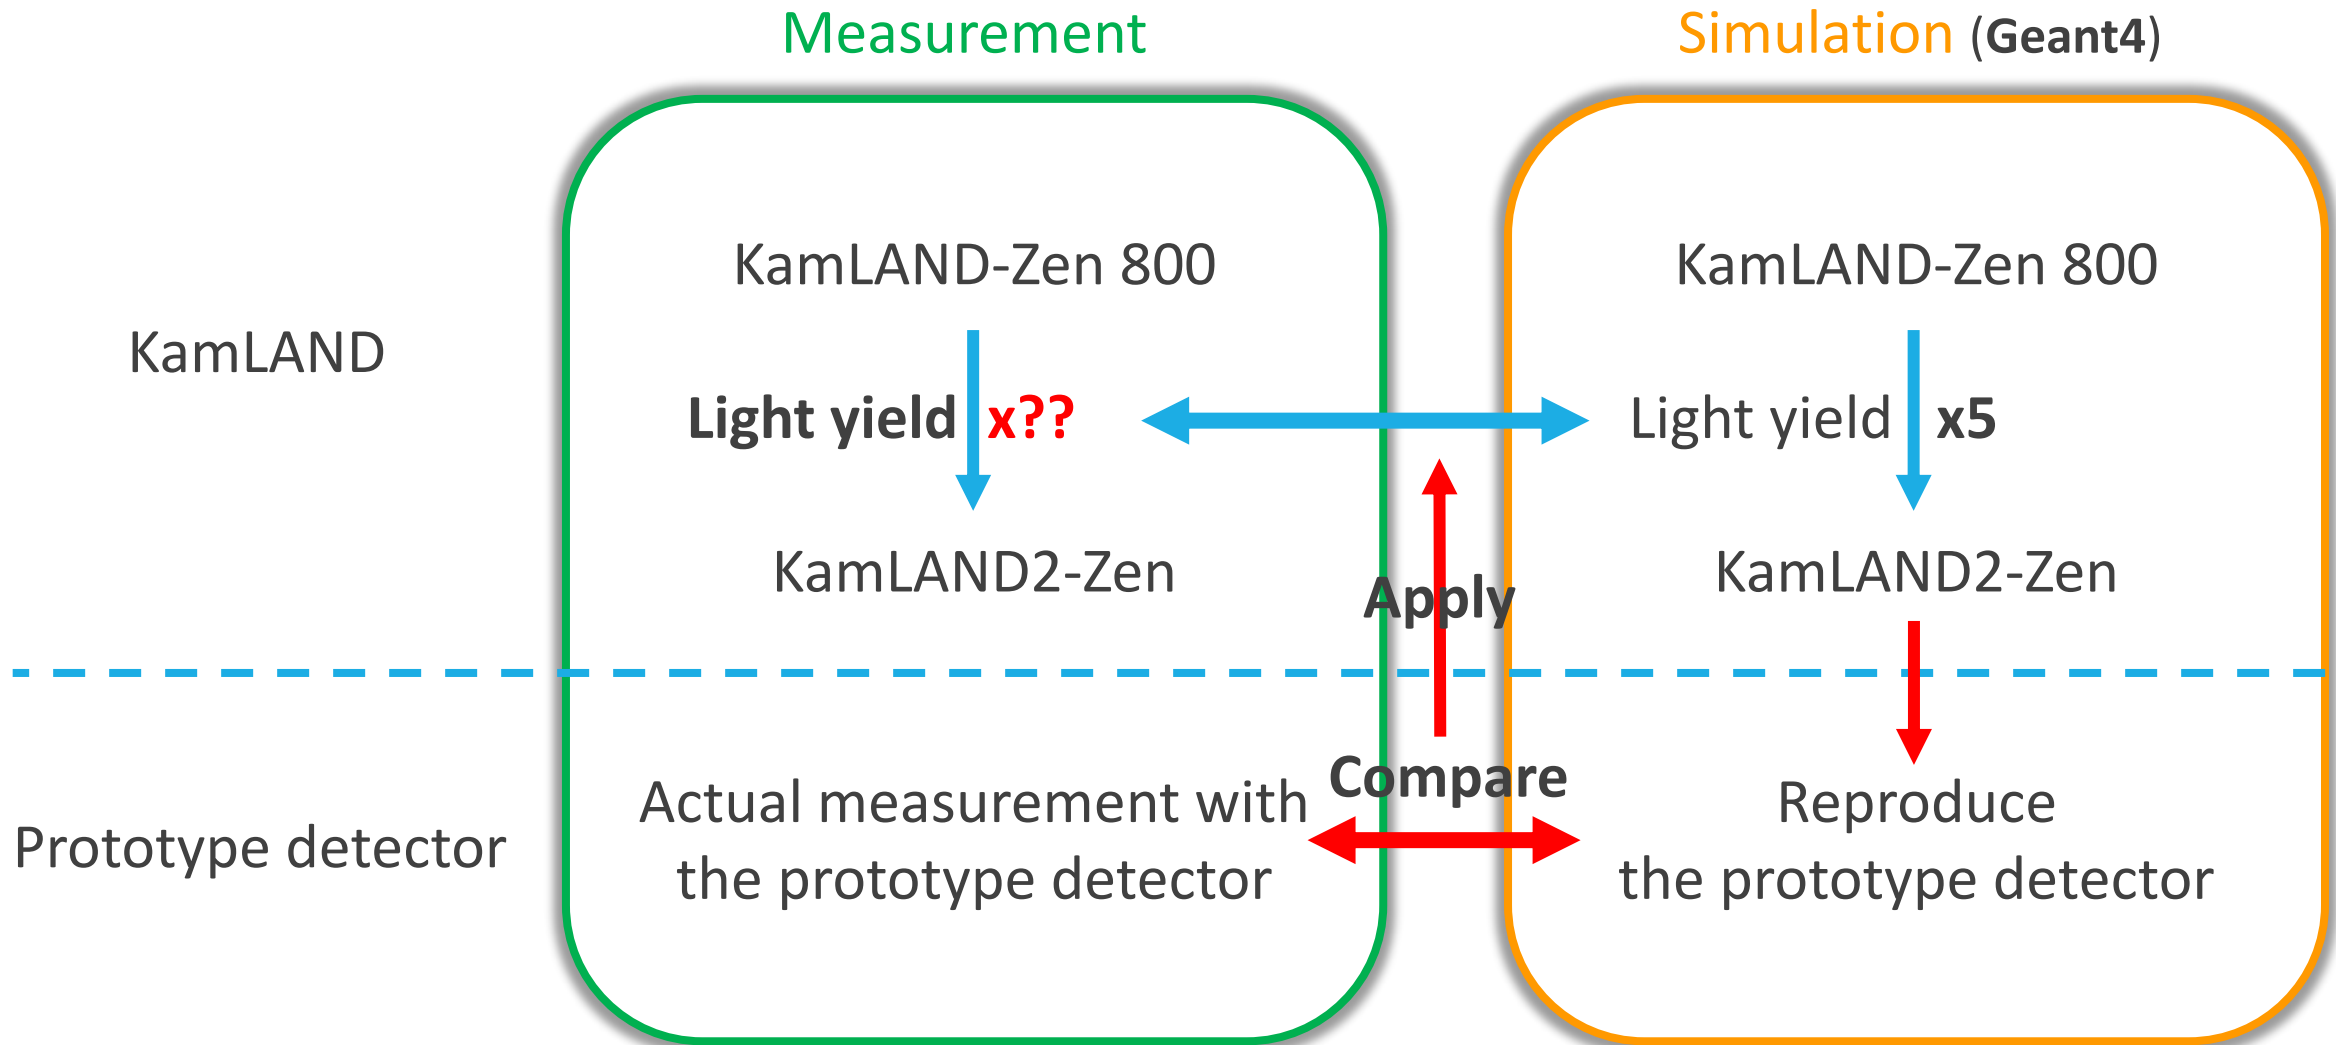

Flow of performance evaluation

Measurement

Compare

Simulation

Actual measurement with the prototype detector


Scintillation ball
measurement

1. Light yield w/ or w/o mirrors
→ Evaluate the collecting performance

Radiation source
measurement

3. Measure Compton edge by ^{137}Cs & ^{60}Co
→ Evaluate the observed photons

Reproduce the prototype detector
with Geant4

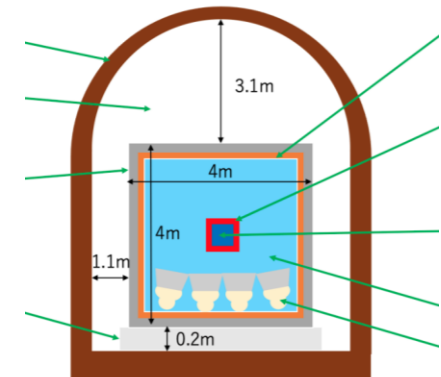


Register the values measured
in individual studies for the composition
and optical properties of the materials


Simulation to reproduce
the actual measurement

Construction: timeline

2021/11	Construct stainless steel tank
2021/12	Clean inside of the detector Install: Tyvek sheet, 7 HQE-PMTs Construct measurement hut
2022/2	manufacture light-collecting mirrors
2022/7	Install: 7 mirrors
2022/8	Replace defective PMT Install: 5 HQE-PMTs, 5 mirrors
2022/10	Install: 2 HQE-PMTs, 2 mirrors
2022/11	Inject pure water
2022/12	Prepare New-LS Install: New-LS
2024/1	Dismantle

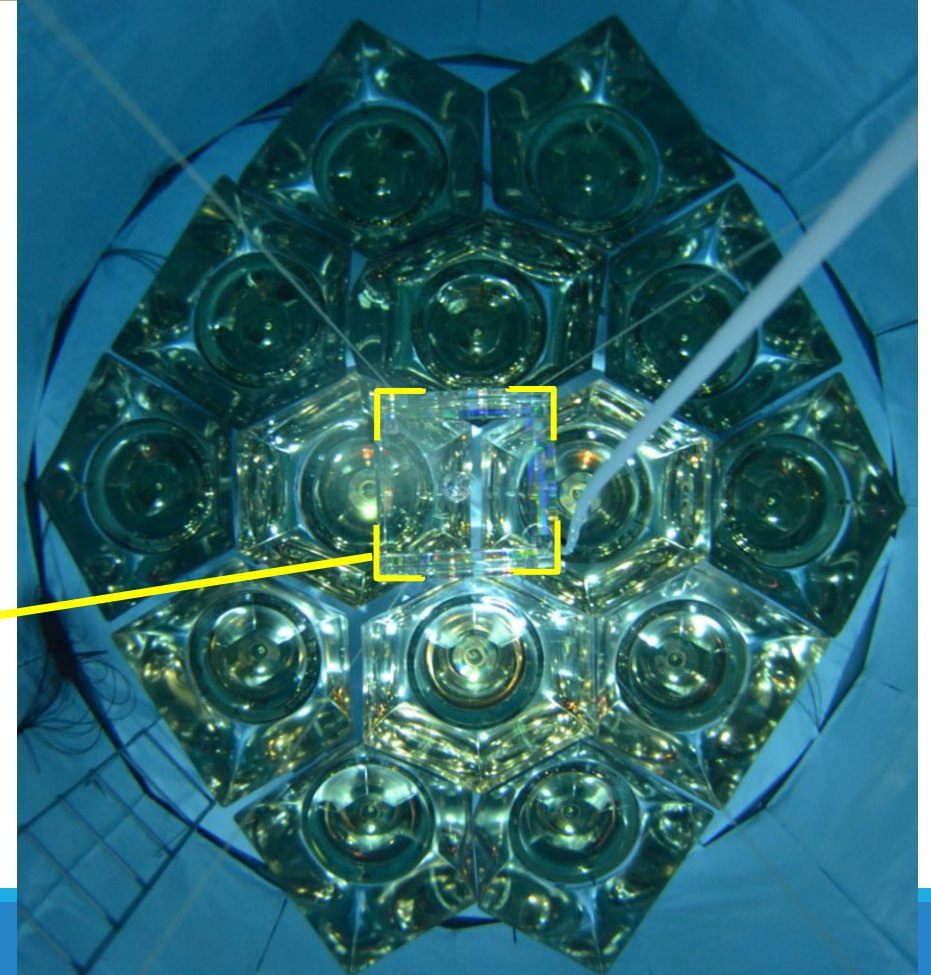

KamLAND2-Zen vs Prototype detector

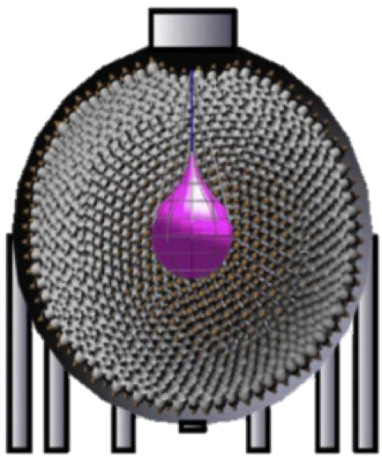

KamLAND2-Zen

Spherical

18 [m] in diameter

Black sheet

1879

7~11 [m]

Buffer oil (BO)

Nylon balloon

1×10^6 [kg]

Shape

Size

Inside

PMTs, Mirrors

Emission point
↔ **PMT**

Buffer

LS container

LS volume

Prototype detector

Cylindrical

4 [m] in diameter & 4 [m] in height

Tyvek sheet


14

1~2 [m]

Pure water

Acrylic vessel

23 [kg]

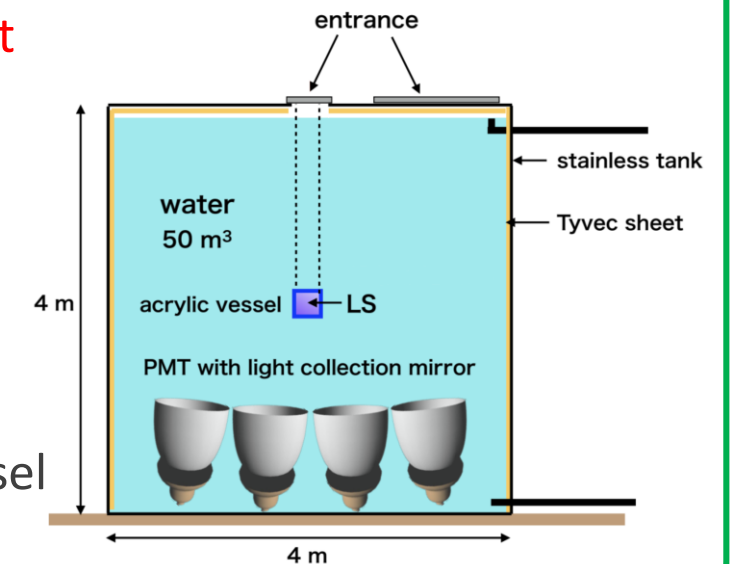

CONTENTS



1. Motivation
2. KamLAND2 Prototype Detector
3. Evaluation of Light Collection Performance of Mirrors
4. Evaluation of Prototype Detector Total Observed Photons
5. Summary

Light collection performance

Light collection performance: $\frac{\text{Effective light yield w/ mirror: } \lambda_{w/}}{\text{Effective light yield w/o mirror: } \lambda_{w/o}}$

*Evaluate only the central 4 PMTs (No.4,5,8,9)

Reproduce the angle of incidence of 2-Zen

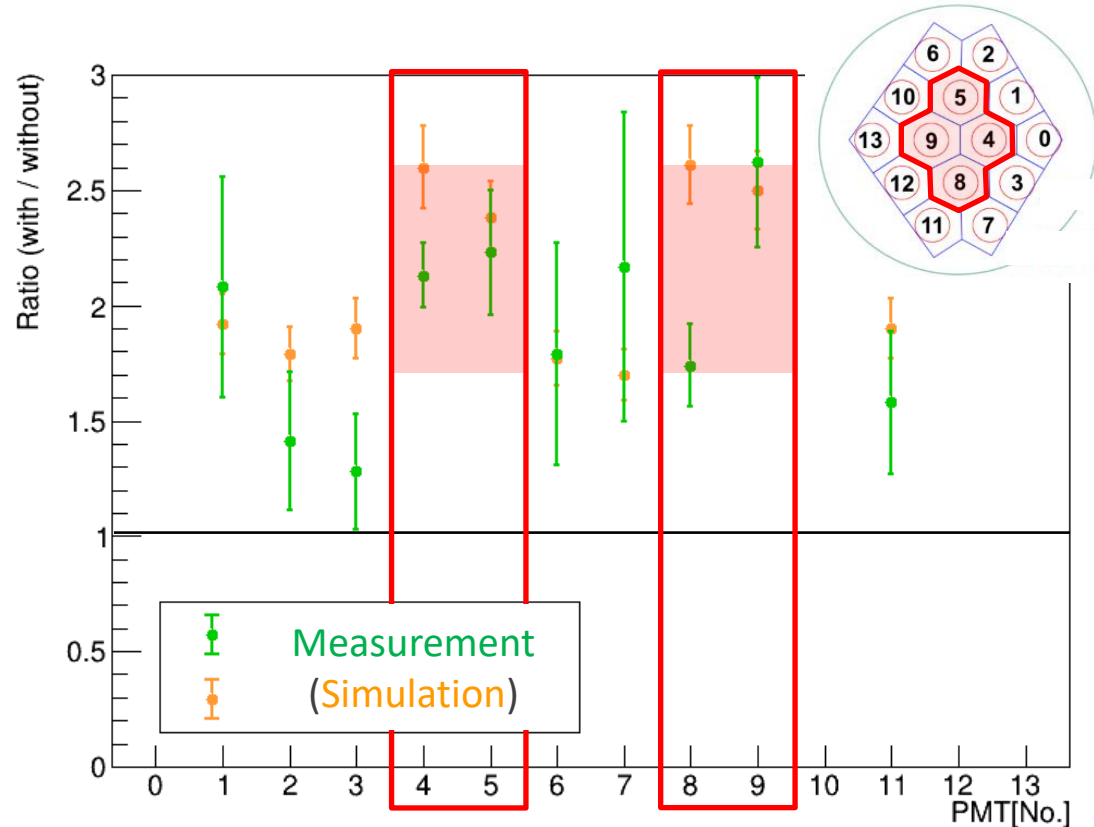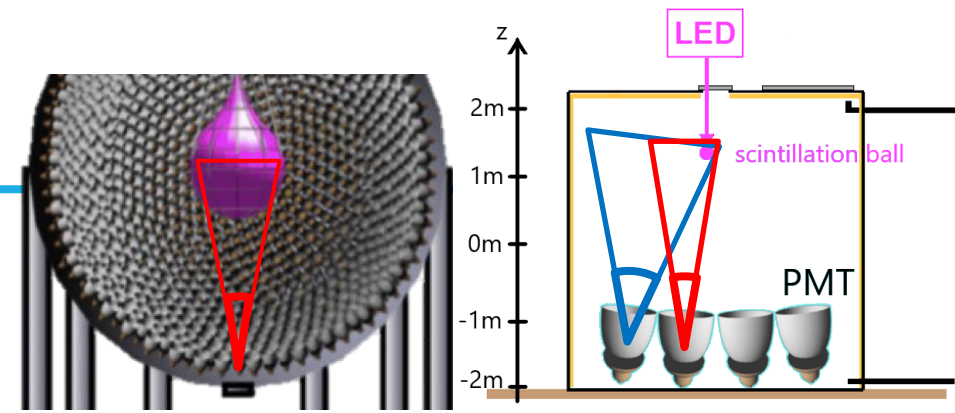

Performance results: x1.7~2.6

➔ **Introducing collecting mirrors to the KamLAND2-Zen increases the effective light yield!!**

*Evaluate the ratio with simulation

$$\left(\begin{array}{l} \text{Average of measurement} = x2.06 \pm 0.10 \\ \text{Average of simulation} = x2.52 \pm 0.09 \\ \rightarrow \text{Ratio} = \mathbf{0.82 \pm 0.07} \end{array} \right)$$

➔ The performance did not reach the expected level


CONTENTS

1. Motivation
2. KamLAND2 Prototype Detector
3. Evaluation of Light Collection Performance of Mirrors
- 4. Evaluation of Prototype Detector Total Observed Photons**
5. Summary


Total observed photons of the prototype detector

Radiation source measurement


Light emitter: New LS (By Radiation source)
Position: On the central axis, $z = 20$ [cm]
Intensity: ~ 1000 [p.e.]
Frequency: 100 [Hz]

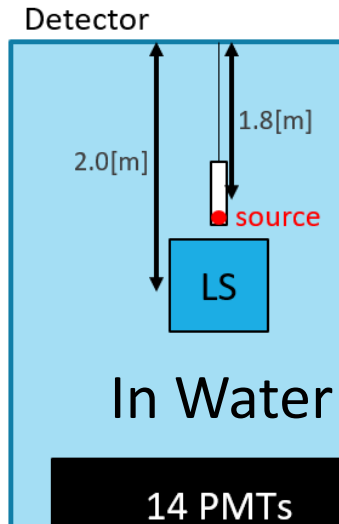

Control Room




PMT signal (self trigger) x14
 t : Elapsed time
amp: x5
threshold : 16ch (≈ 4 [p.e.]

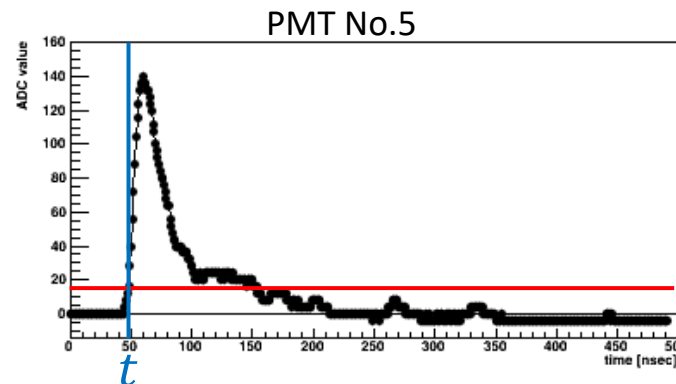


Selection of direct light signal

Reproduce the waveform

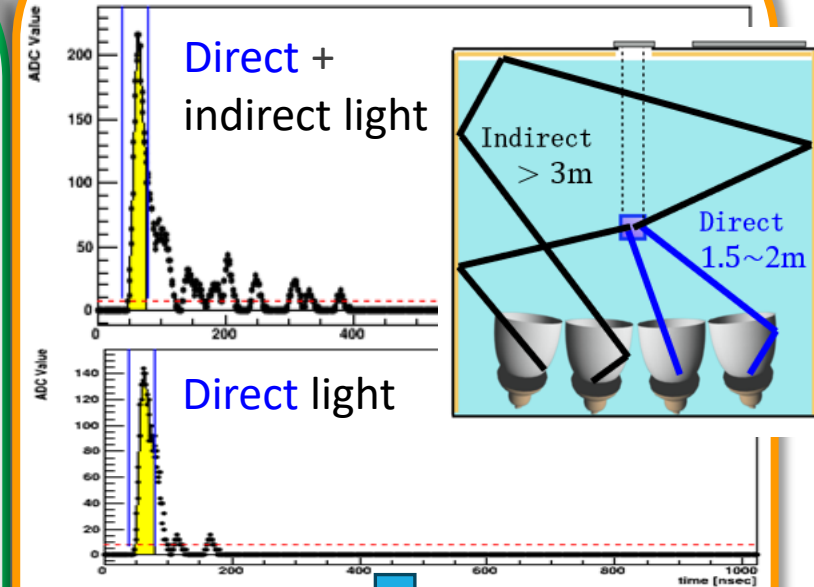


Interval of integration:
 $t - 10$ [ns] $\sim t + 25$ [ns]
(Contamination
of indirect signal: 8.2%)

Total observed photons of the prototype detector





Radiation source measurement

Interval of integration

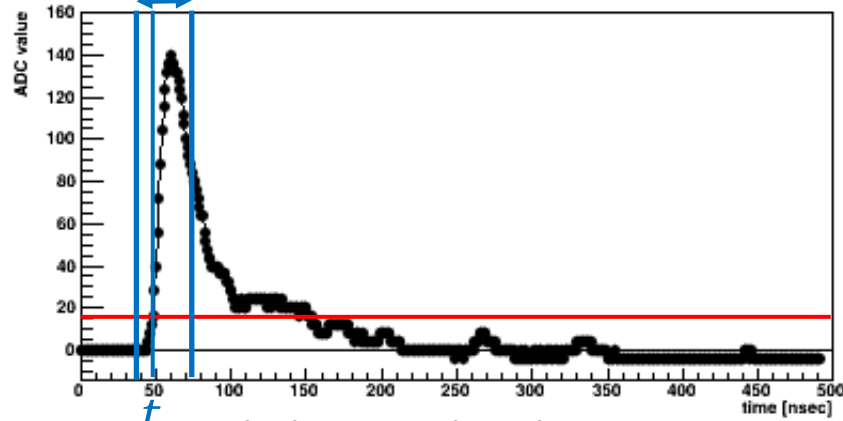

Total photons distribution

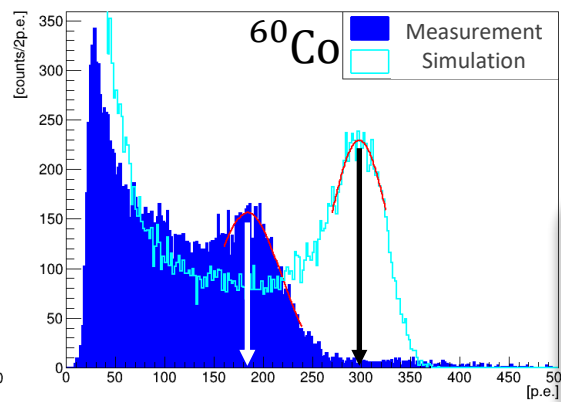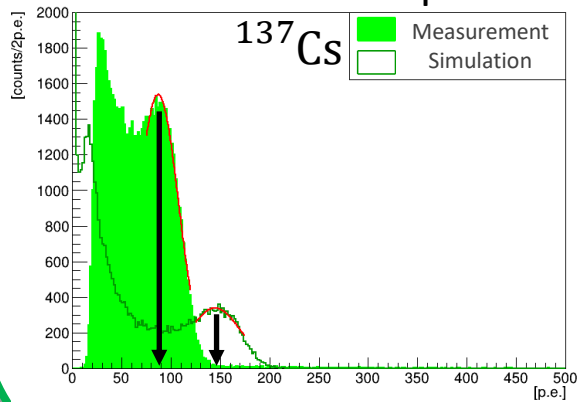

Each event of each PMT signal

$$(I \text{ [ch]}) = \sum_{t_{\text{PMT}} - 10 \text{ [ns]}}^{t_{\text{PMT}} + 25 \text{ [ns]}} (\text{ADC [ch]})$$

Number of photons of each PMT:

$$q \text{ [p. e.]} = (I \text{ [ch]}) / (1 \text{ p. e. gain value [ch]})$$

Total photons of all PMT:

$$Q \text{ [p. e.]} = \sum_0^{13} q \text{ [p. e.]}$$

Total observed photons:


Mean value of the peak
of the total photon distribution

Compare measurement and simulation

+

Evaluate stability for one year (six measurements)

Total observed photons of the prototype detector




Compare the measured and simulated **total observed photons**

Result: Measured results were about **40% lower** (both ^{137}Cs & ^{60}Co)

Cause of the lower result:

- The actual performance of the mirrors is lower than the simulation ($\sim -20\%$)
- Indirect light signal is contaminate into the selected direct light signal ($\sim 8\%$)
- Uncertain Q.E. of HQE-PMT ($\sim 10\%$)
- Detector problems during construction & operation (\rightarrow Next page)

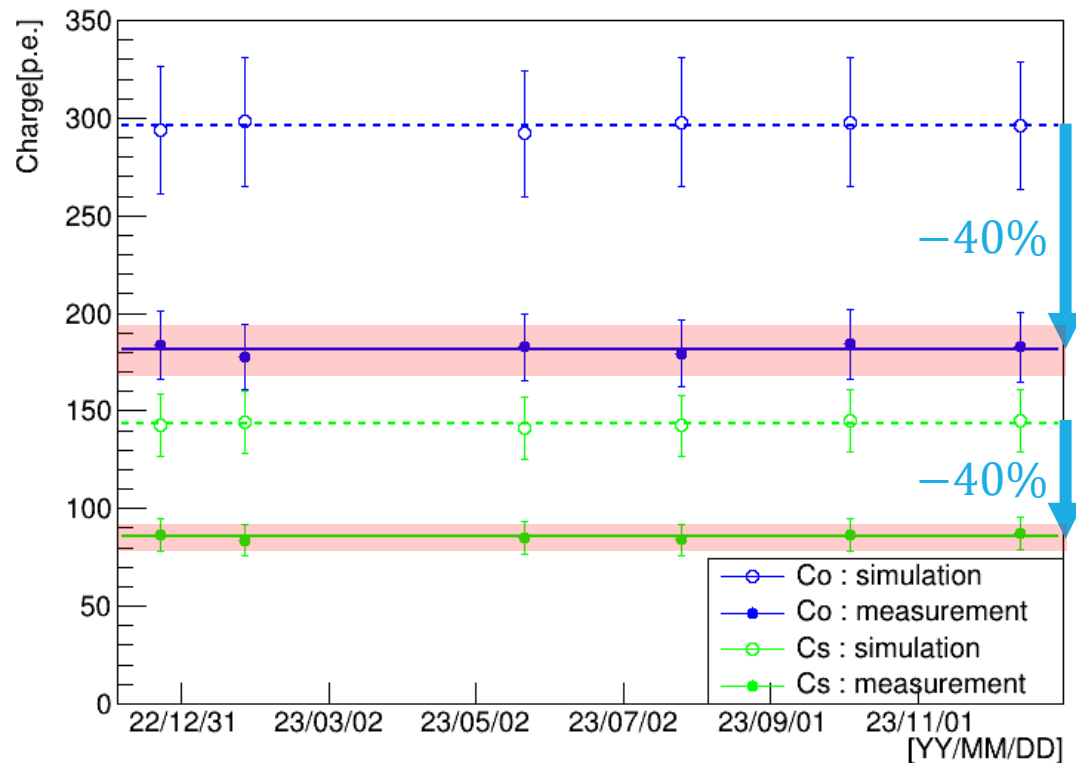

Evaluate **the long-term stability**

Result: Very stable for one year within error


\Rightarrow The observed photons will be maintained
with KamLAND2-Zen!!

Detector problems during construction & operation

Initial defects or failures of 3 HQE-PMTs

Causes: Peeling of the photocathode,
Resistance value decrease

→ The root cause is under investigation

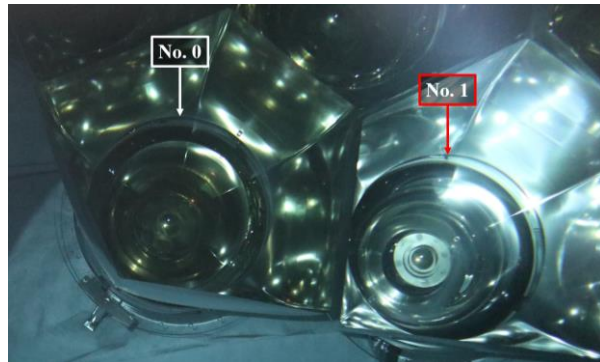


by the manufacturer

PMTs floating due to buoyancy (After water injection)

Effect: **Contact with acrylic base**

→ May damage the surrounding PMTs
and become a fatal problem

Need to **review the method** of fixing the PMT


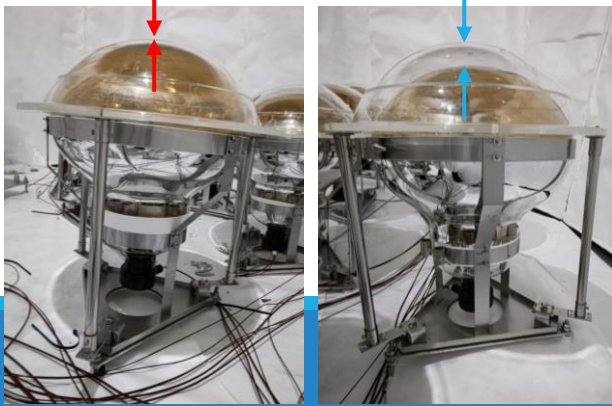


Contact and deformation of the mirrors

(After water injection)

Causes: **Distortion** of tank bottom plate

→ Need to **change the material** of the opening

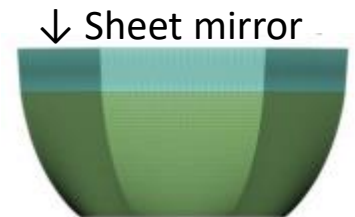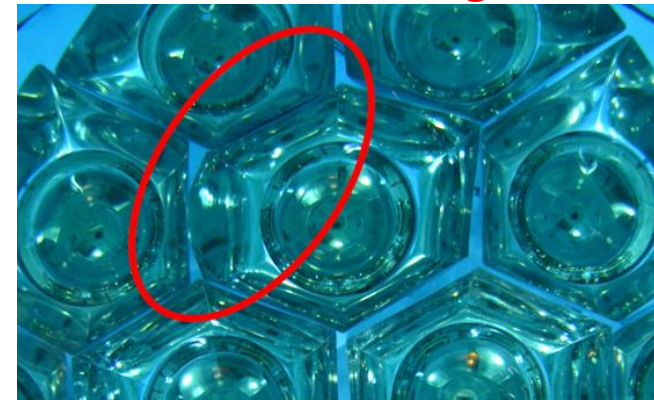

Peeling of Al from the mirrors (After water injection)

Causes: Erosion by **pure water**

(↔ **LS resistance test passed**)

→ May deteriorate further with long-term use

Need for **careful LS resistance test**



CONTENTS

1. Motivation
2. KamLAND2 Prototype Detector
3. Evaluation of Light Collection Performance of Mirrors
4. Evaluation of Prototype Detector Total Observed Photons
5. Summary

Summary

- KamLAND2-Zen : Aiming for **5x the observed photons**
by HQE-PMT(x1.9)、Light collecting mirror(x1.8)、New-LS(x1.4)

Test with prototype detector

Construction &
1 year operation maintenance

The performance of the collecting mirror: **x1.7~2.6**

The performance of the prototype detector (HQE-PMT + mirror + LAB-LS): **Very stable for one year**

⇒ The observed photons **will increase & be maintained** with KamLAND2-Zen

- Now...

We are **investigating and studying problems** with the prototype detector
and **making improvements** for KamLAND2-Zen