

Neuromorphic Readout for Homogeneous Hadron Calorimeters



Enrico Lupi^{1 2}, Tommaso Dorigo^{1 3}, Abhijit Das⁴, Abhishek⁵, Alexander Schilling⁶, Anders Mikkelsen⁴, Andrea De Vita^{1 2}, Fredrik Sandin³, Jan Kieseler⁷, Joseph Willmore¹, Max Aehle⁶, Muhammad Awais^{1 3}, Nicholas R. Gauger⁶, Ralf Keidel⁶, Tobias Kortus⁶, Xuan-Tung Nguyen^{1 6}

¹ Istituto Nazionale Fisica Nucleare, Sezione di Padova, Italy - ² University of Padova, Italy

³ Luleå University of Technology, Sweden - ⁴ Lund University, Sweden - ⁵ National Institute of Science and Research, India

⁶ University of Kaiserslautern-Landau, Germany - ⁷ Karlsruhe Institute of Technology, Germany

Objective

Investigating the **readout of light signals** from hadronic showers in a homogeneous calorimeter by a network of nanowires.

We aim to offer:

- fast, energy-efficient **local computation**
- generation of **informative high-level primitives** using neuromorphic computing.

Neuromorphic Computing

Computing approach that mimics the structure and function of the **human brain** using artificial neurons and synapses. [1]

Studies new **software** and **hardware** solutions to achieve:

- higher speed
- significantly lower energy consumption compared to traditional methods. [2]

Detector Configuration

The detector is divided into blocks called “cubelets”:

- Arranged in a 10 x 10 x 10 matrix
- Size: 3 cm x 3 cm x 12 cm


Here is a schematic view of one cubelet...

Segmented readout: **10 x 10 light sensors grid** on the upper face of each cubelet. Sensors are blind to the light coming from other cubelets (all other sides are reflective)

Material of choice: **PWO**

- Light Yield ≈ 220 ph/MeV
- Refraction index = 2.2

Incoming particle: **p, π or k** at 100 GeV

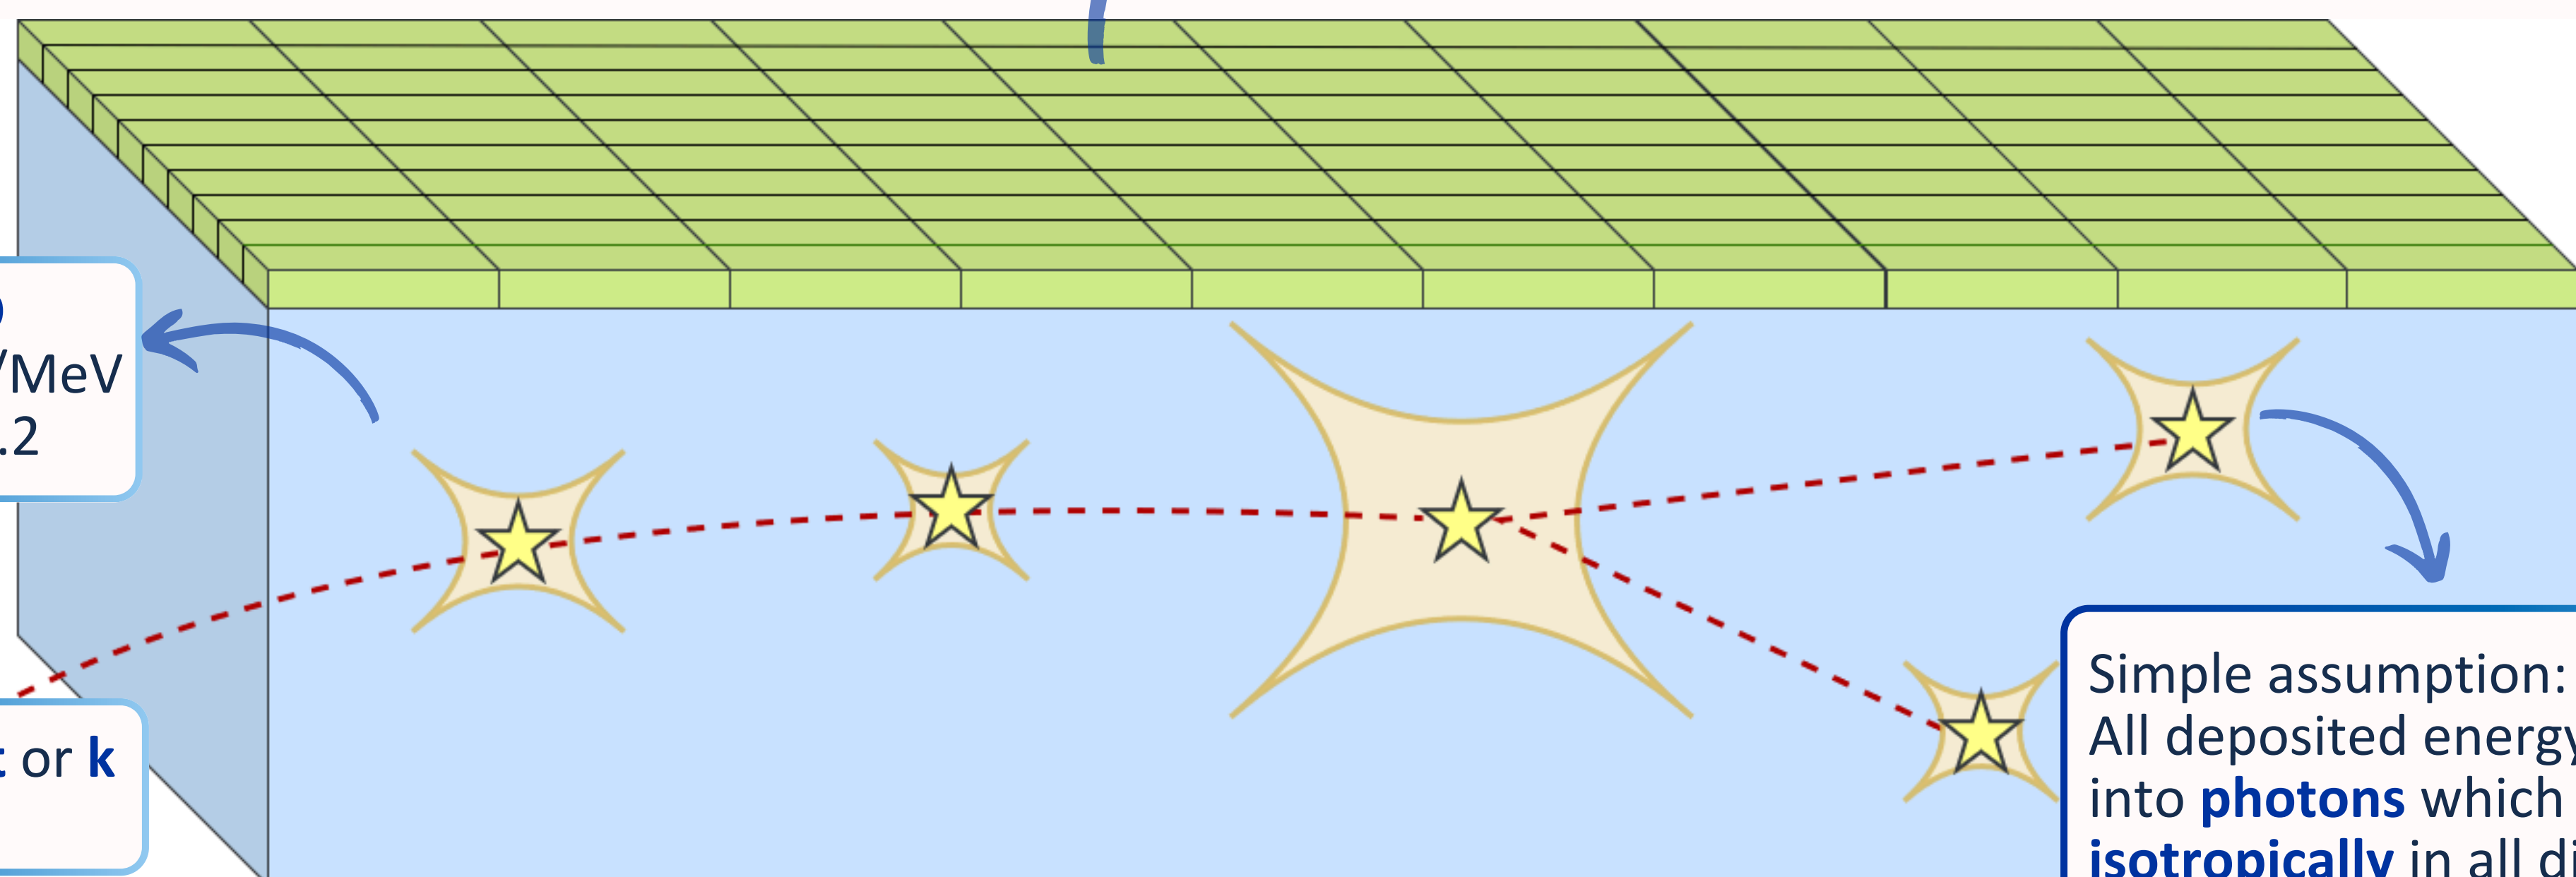


Simple assumption: All deposited energy is converted into **photons** which travel **isotropically** in all directions

Please also look at Andrea De Vita's poster for more information on the detector simulation.

Light Signals

Photons are collected for a total of 20 ns and the signal is discretized into 100 bins. Here is how one example event looks like:

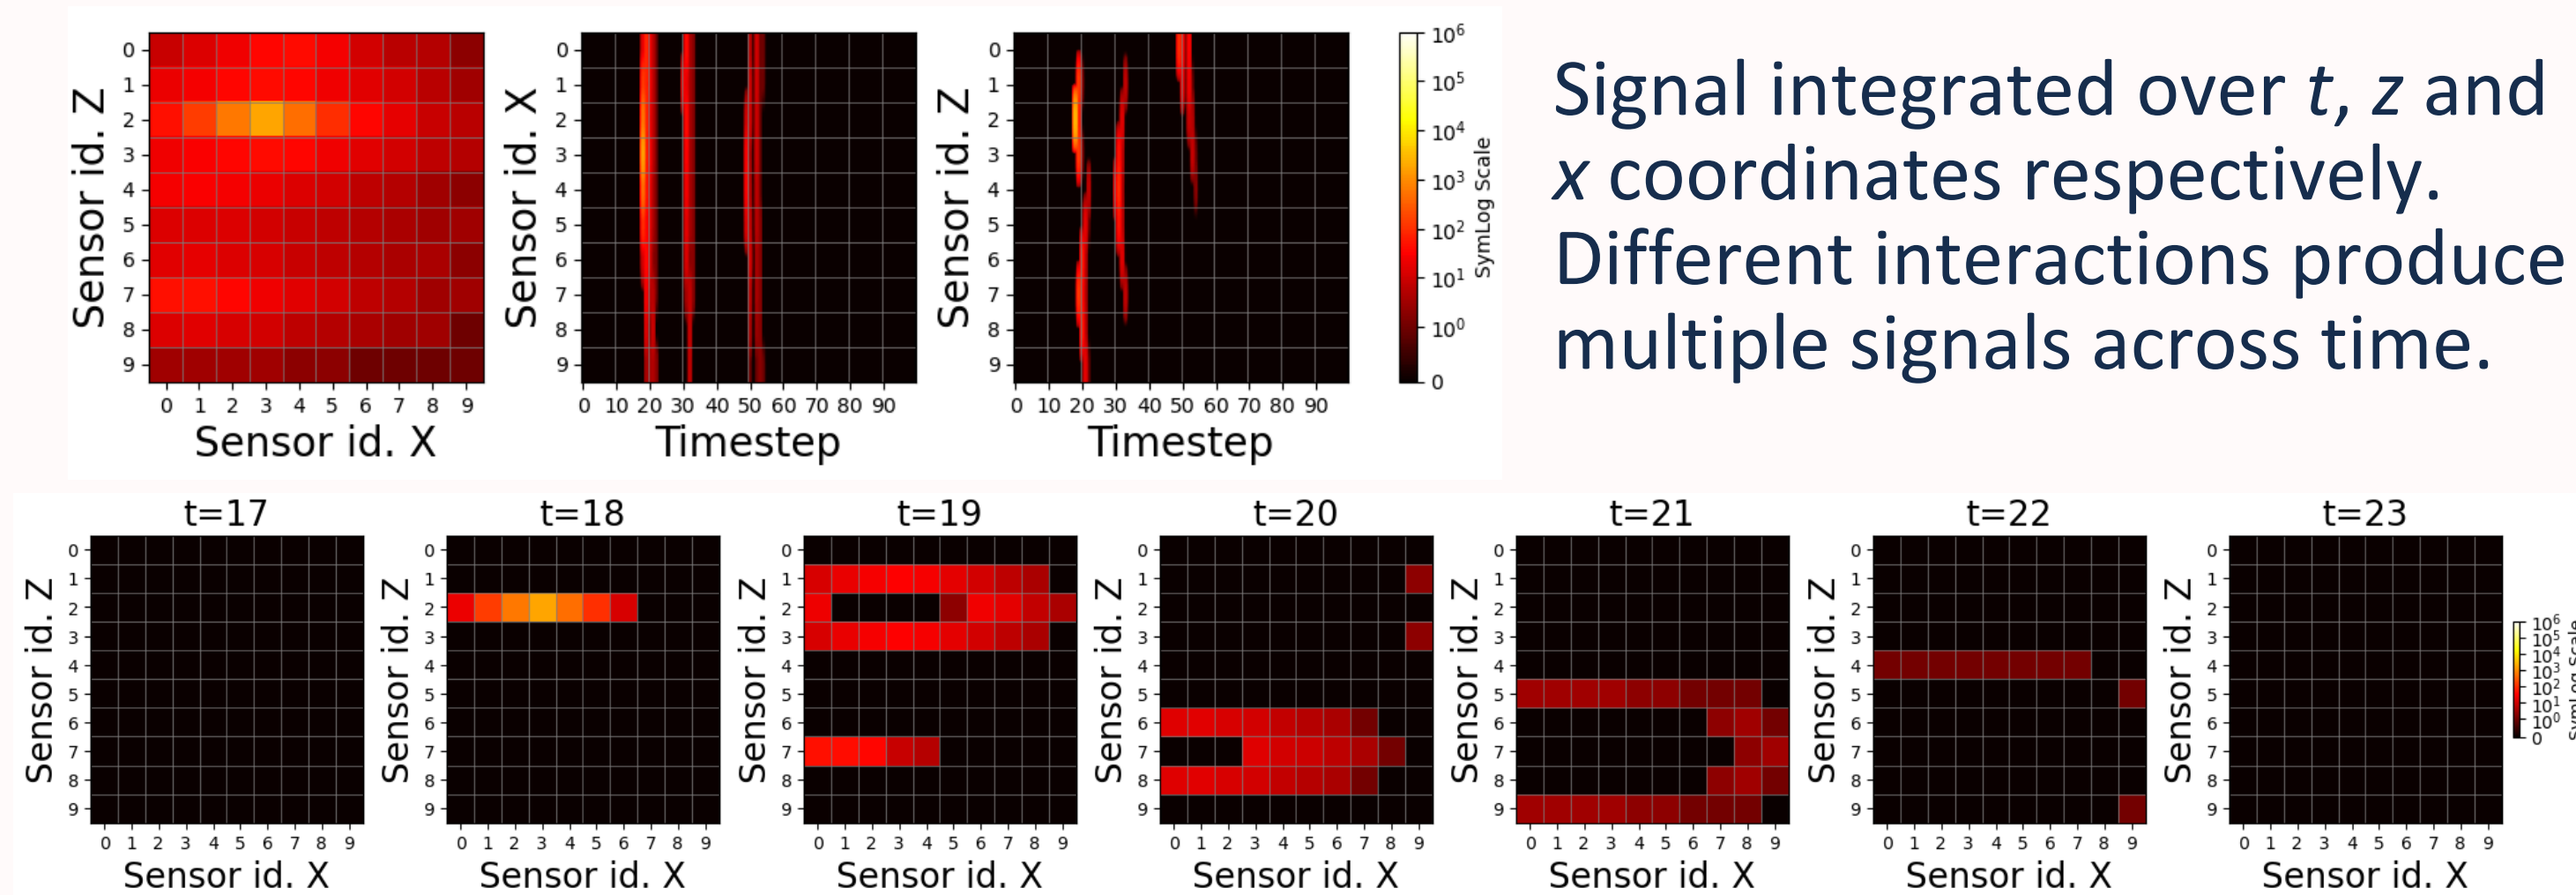


Signal integrated over t , z and x coordinates respectively. Different interactions produce multiple signals across time.

Successive frames that show how the photons produced in the first two interactions in the event above propagate inside the detector.

Outlook

- **First ever attempt** to use neuromorphic solutions for calorimetry readout!
- Development of **multi-nanowire photodetector** for physical readout [3]

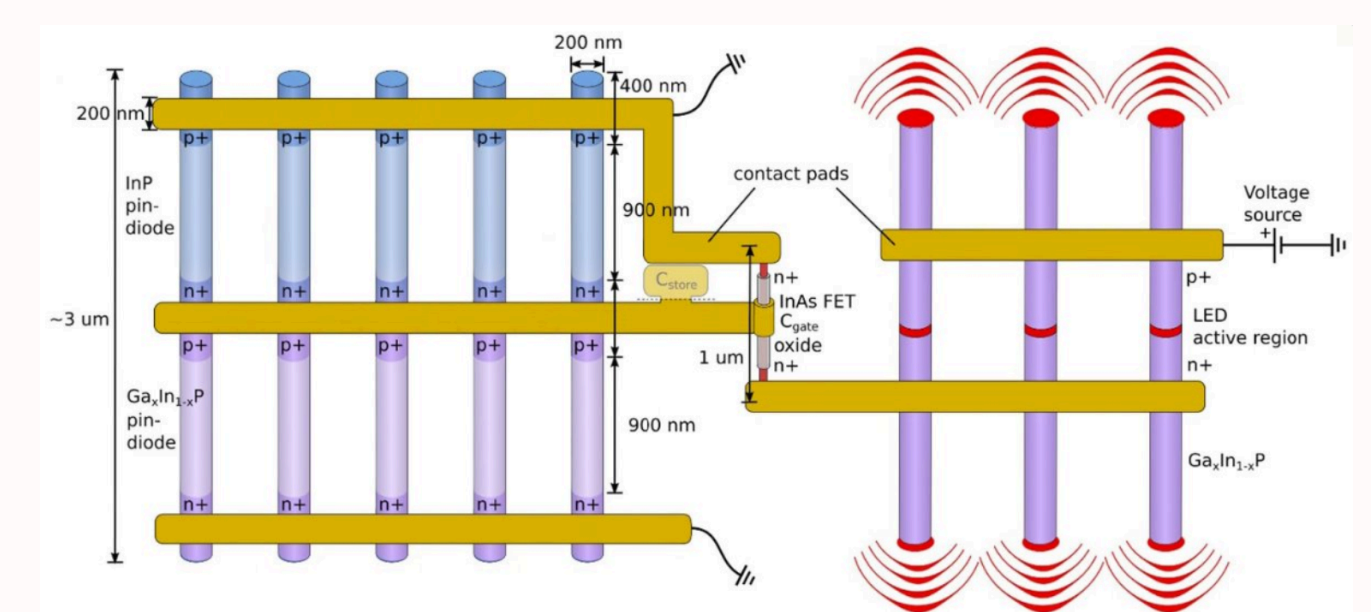

- Employ **Spiking Neural Network** for:
 - precise measurement of shower energy
 - particle species identification

References: [1] C. Mead. (1990). “Neuromorphic electronic systems.” *Proceedings of the IEEE*, doi:10.1109/5.58356
[2] “Neuromorphic computing” available at www.humanbrainproject.eu. URL consulted on Sept.19, 2024
[3] David Winge et al. (2023). “Artificial nanophotonic neuron with internal memory for biologically inspired and reservoir network computing.” *Neuromorph. Comput. Eng.* **3** 034011, doi:10.1088/2634-4386/acf684

Conference Indico Page

