



Radiation load on final focusing magnets with schemes version 0.7 and 0.8


27 June 2024, CERN

*Daniele Calzolari,
On behalf of the IMCC*



**Funded by
the European Union**



Outline

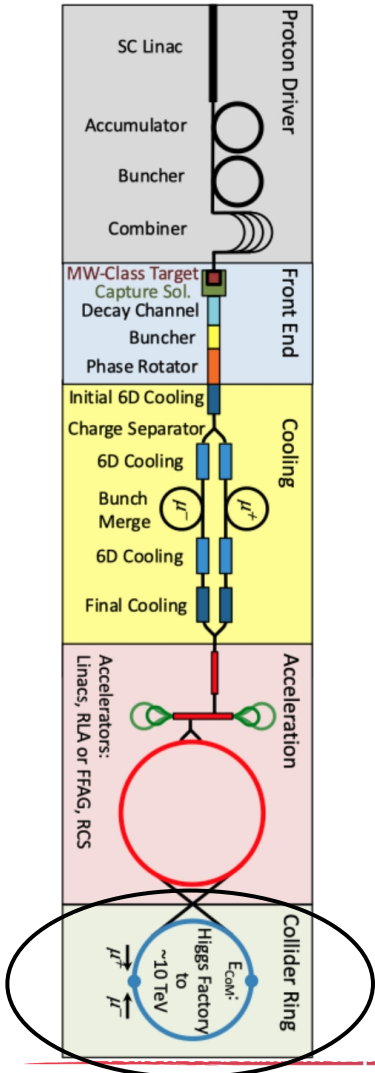


- **Current existing lattices**
- **Lattice options evolution:**
 - v 0.4: chromatic correction without drift
 - v 0.6: long drift before final focusing quadrupoles
 - v 0.7: chicane with a residual angle
 - v 0.8: no residual angle, lower dipole strength
- **Radial build of the magnets**
- **Current radiation load**
- **Conclusions**

Final focus optics

Overview of the lattice version 0.8.
The novel approach does not leave
a residual angle and does not
require combined function magnets

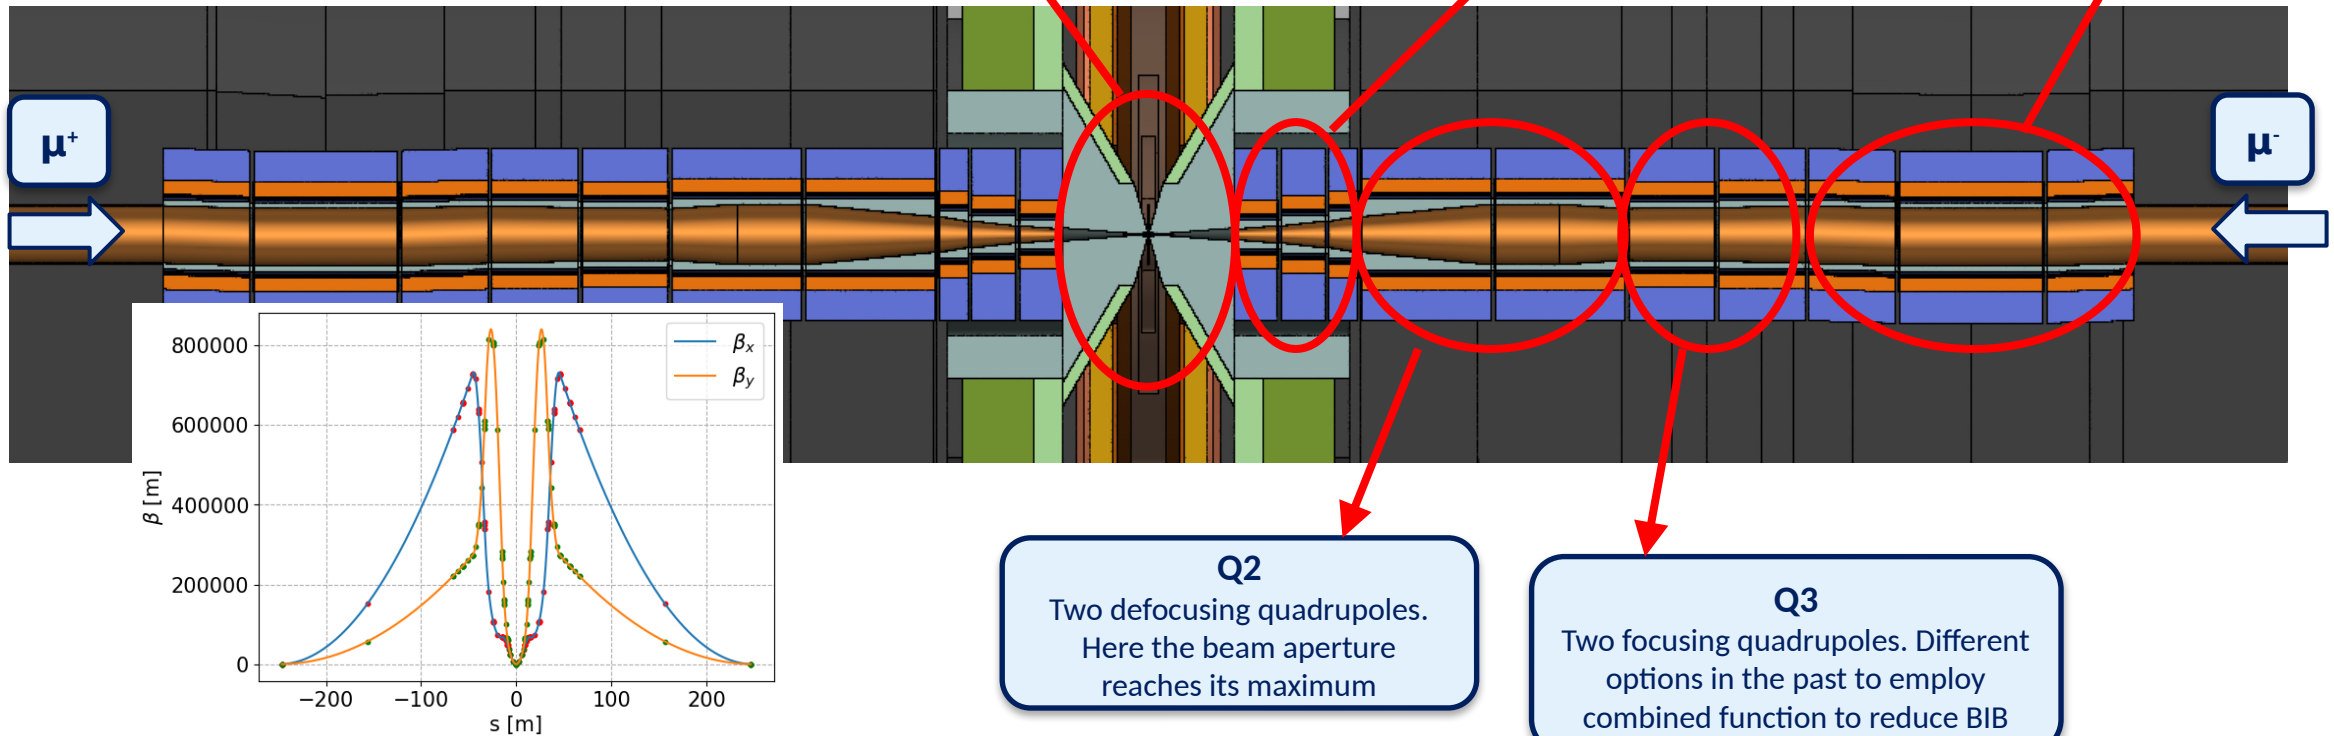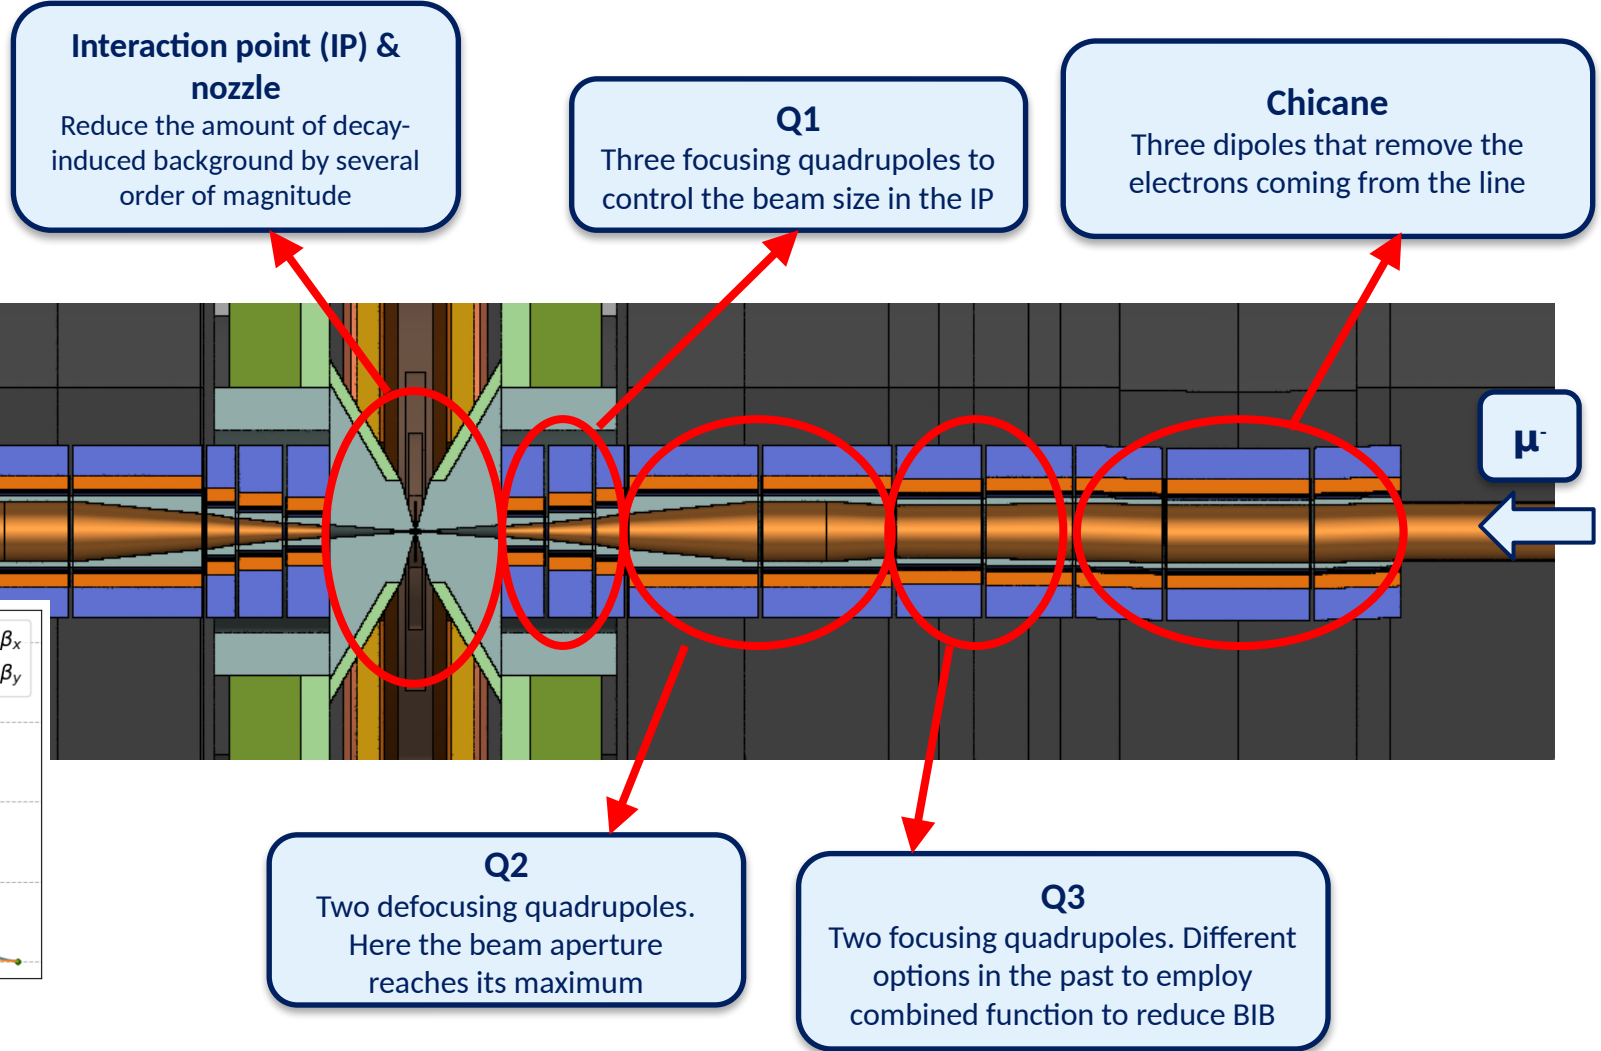

Evolution of the optics

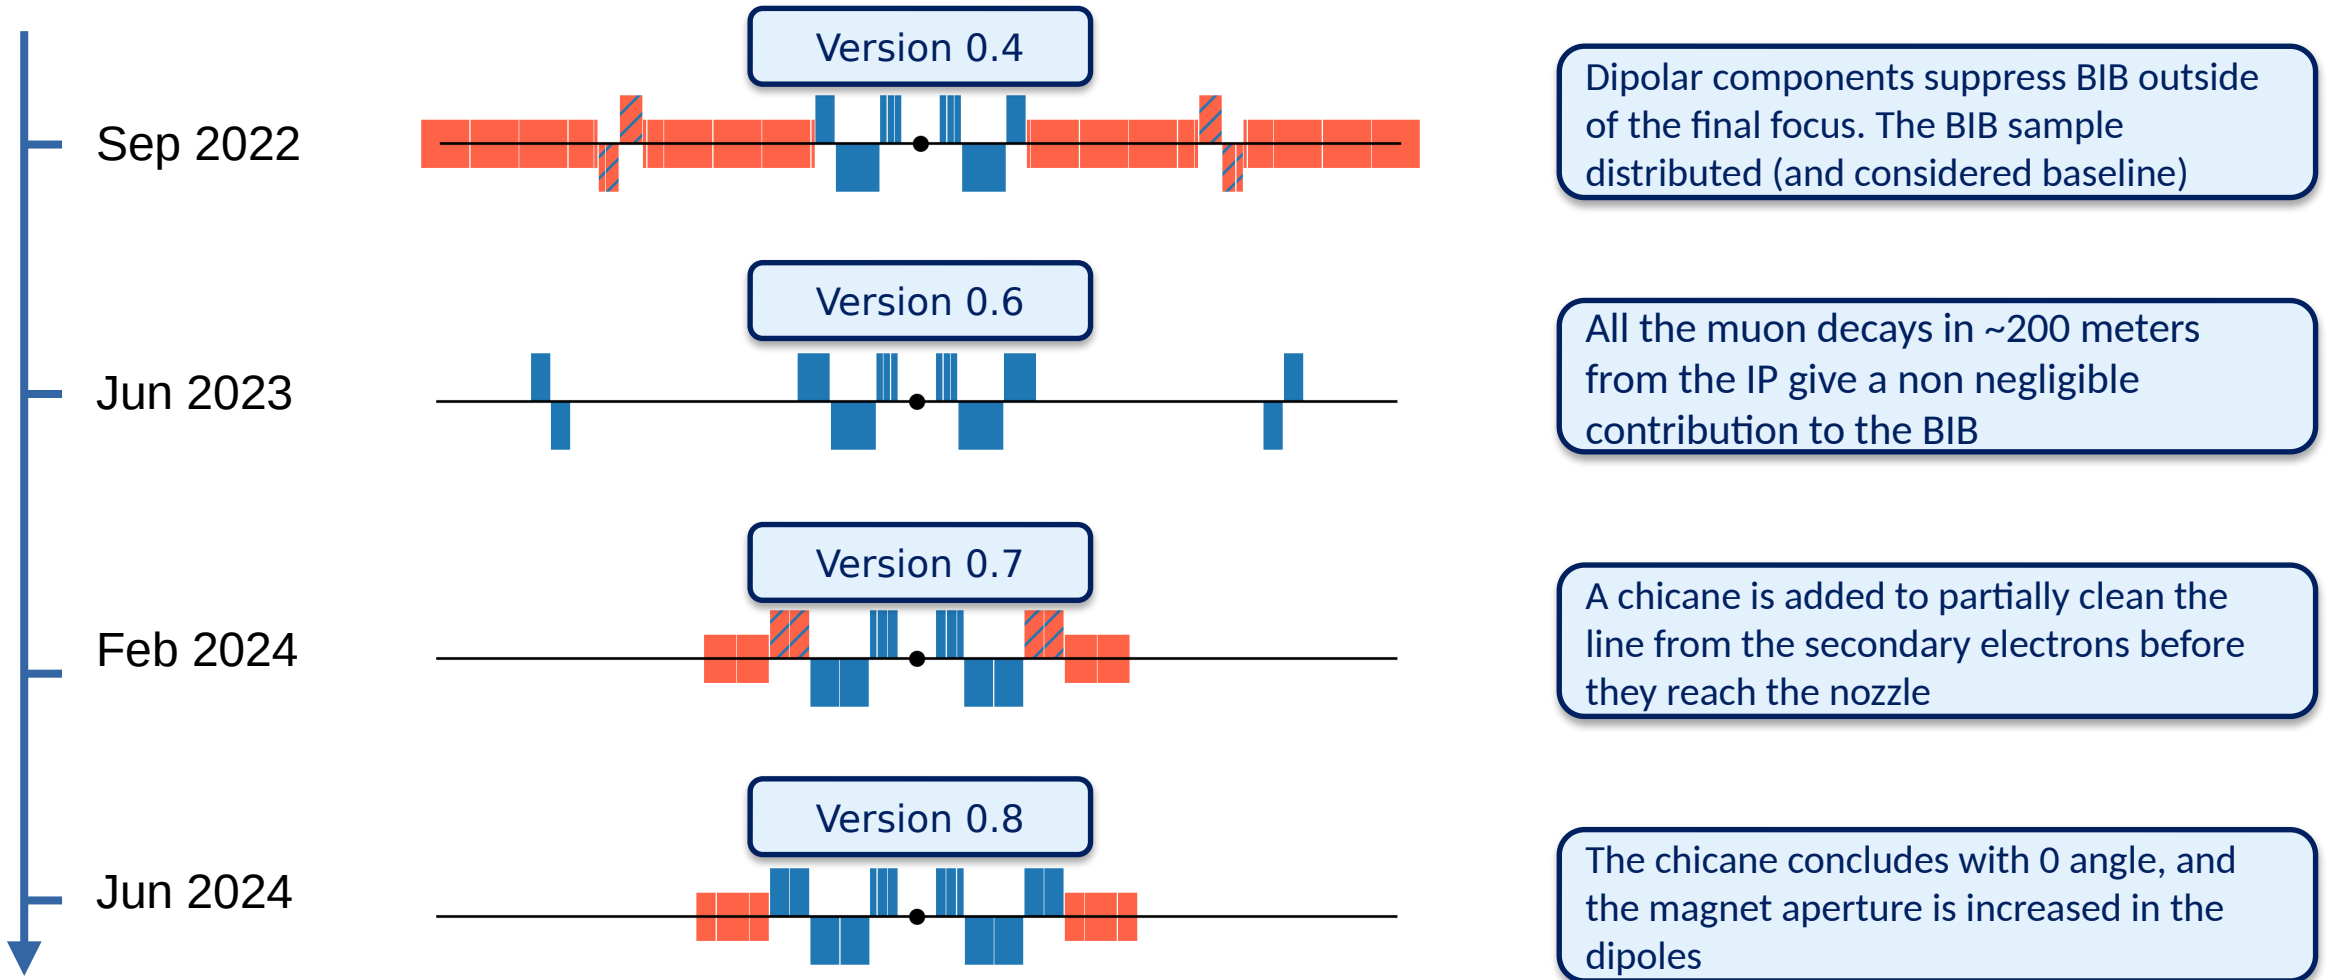

Radial build of the magnets

- The radial build of the magnets for the version 0.8 is listed in table
- Still conflicting requirements in terms of field strengths and magnet apertures

Radial build	Thickness (mm)
beam screen	0.01
shield	2.53
shield support +thermal insulation	1.1
cold bore	0.3
insulation (kapton)	0.05
clearance + liquid helium	0.01
Sum	4


Increased to 4.53 for the dipoles

Name	L	Magnet aperture radius [cm]
IB2	6	16
IB1	10	16
IB3	6	16
IQF2	6	14
IQF2_1	6	13.3
IQD1	9	14.5
IQD1_1	9	14.5
IQF1B	2	10.2
IQF1A	3	8.6
IQF1	3	7

Dipole requirements

Name	L	Dynamic beam aperture [cm]		Magnet aperture radius [cm]	B field [T]
		Upstream	Downstream		
IB2	6	8.71	9.00	16	8.1
IB1	10	9.02	9.49	16	-9.7
IB3	6	9.51	9.79	16	8.1


- A quite large aperture requirement is needed to restrict the TID below 10 MGy/y
- The field has to be large enough to significantly induce dispersion on the decay electrons

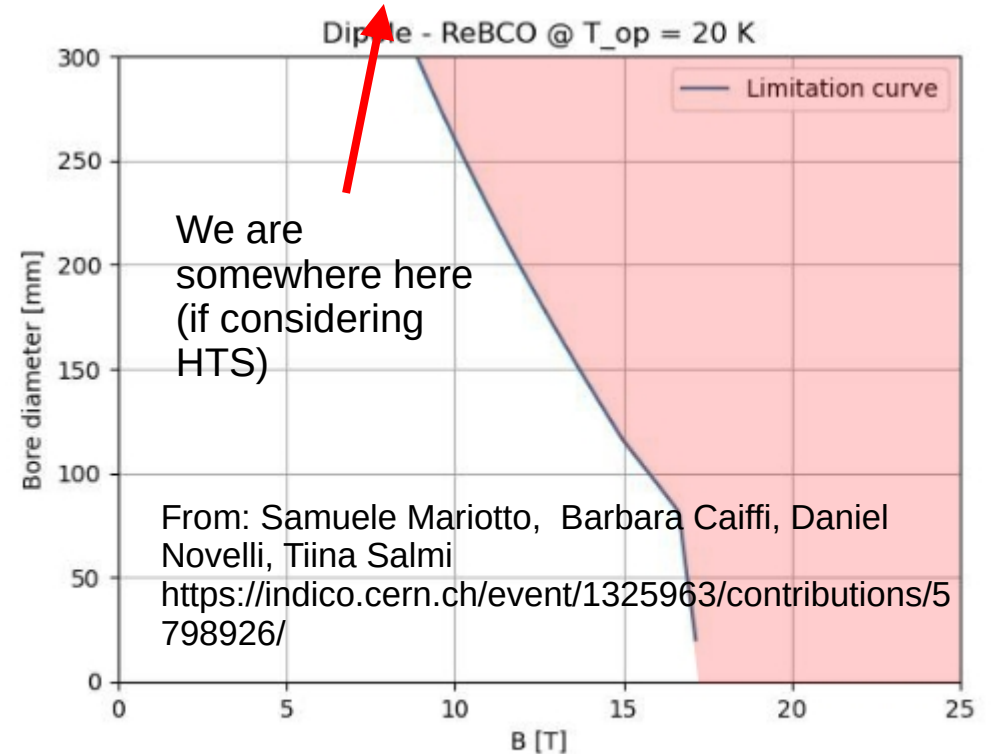

- HTS is mainly limited by cost production

Quadrupole requirements


Name	L	Dynamic beam aperture [cm]		Magnet aperture radius [cm]	dB_y/dx [T]
		Upstream	Downstream		
IQF2	6	9.81	9.20	14	85.2
IQF2_1	6	9.12	8.84	13.3	85.2
IQD1	9	8.98	10.33	14.5	-115.4
IQD1_1	9	10.28	6.12	14.5	-115.4
IQF1B	2	5.91	4.62	10.2	205.1
IQF1A	3	4.45	2.97	8.6	241.8
IQF1	3	2.84	1.78	7	300.2

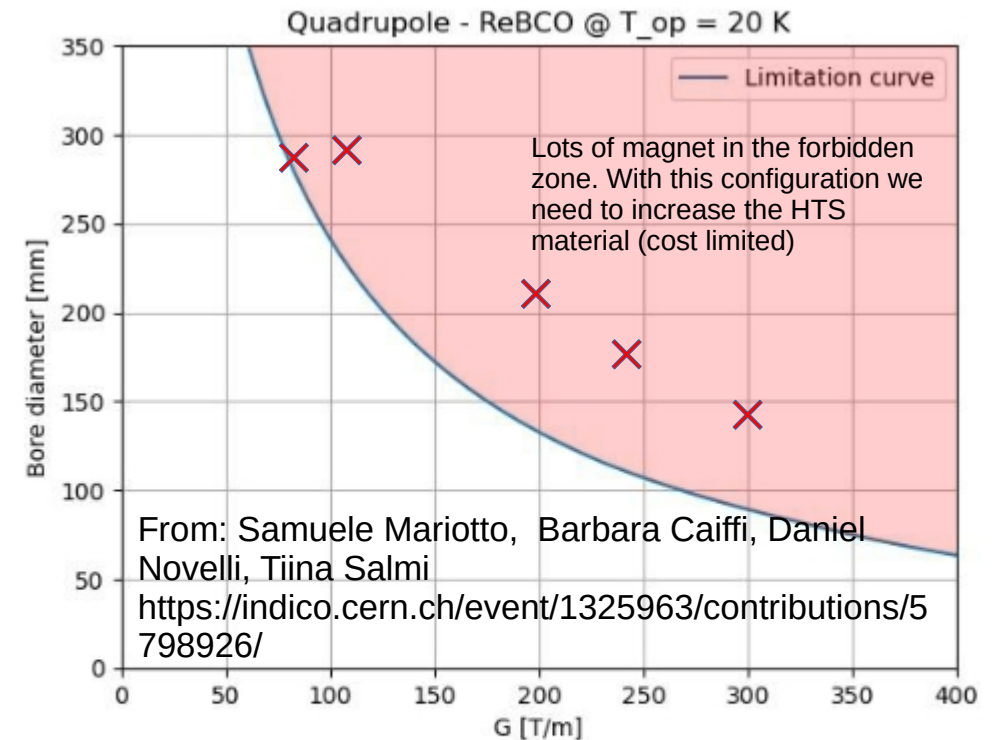

- In the current scheme, the magnets do not satisfy the requirements
- We can still use the current scheme, but with higher costs, or we need to reduce the field intensity (more complicated focusing scheme)

- HTS is mainly limited by cost production and protection. Working @20K the margin curve is also a limiting factor.


Conflicting requirements for magnets

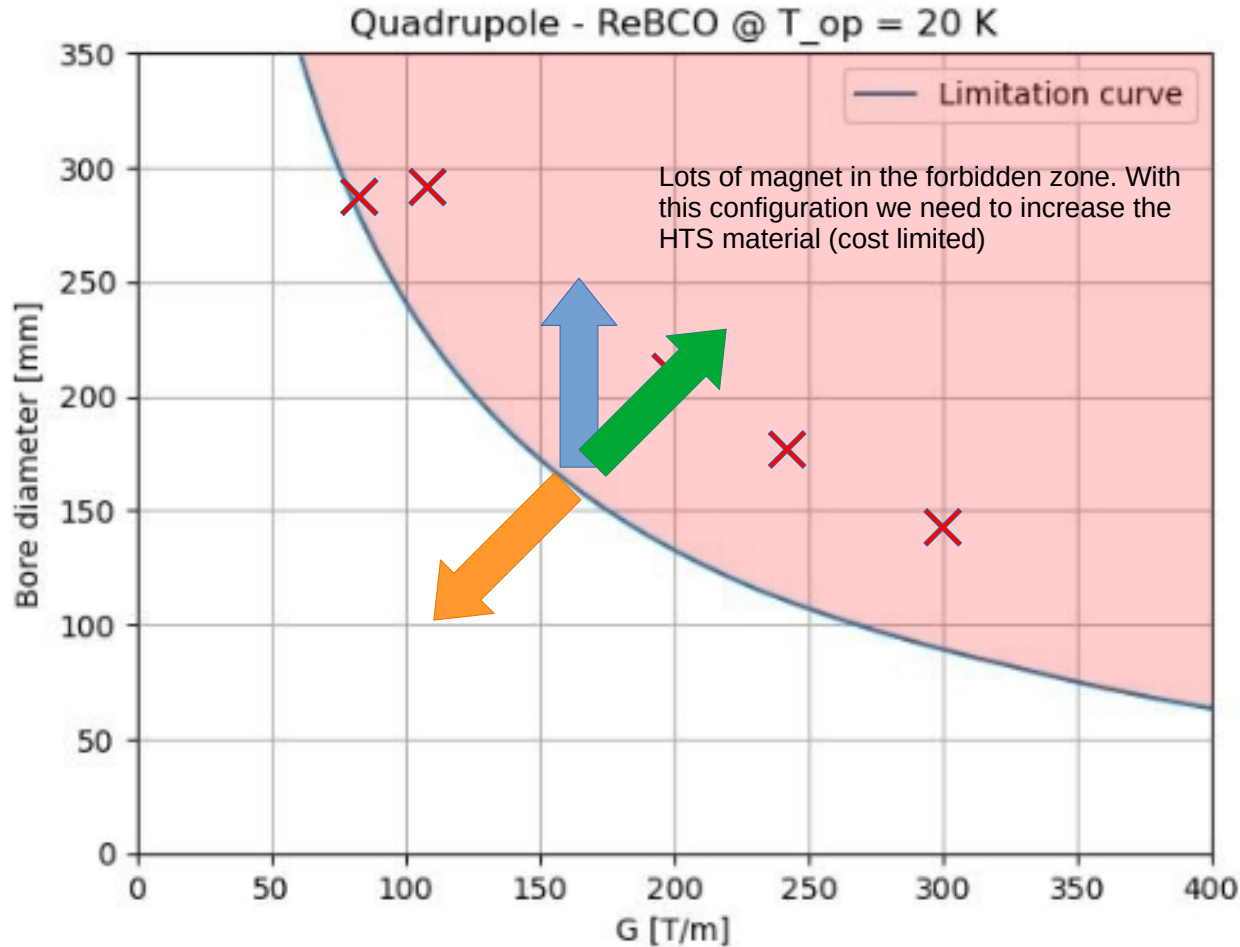


From: Samuele Mariotto, Barbara Caiffi, Daniel Novelli, Tiina Salmi
<https://indico.cern.ch/event/1325963/contributions/5798926/>

- **Radiation load requirement:** larger aperture allows for more shielding
- **Magnets requirements:** small aperture and field intensities. Depending on the technology there are different limitation.
- **Beam dynamics requirement:** larger apertures and field strengths allows for easier control on the beam shape in the final focus

FLUKA magnetic field

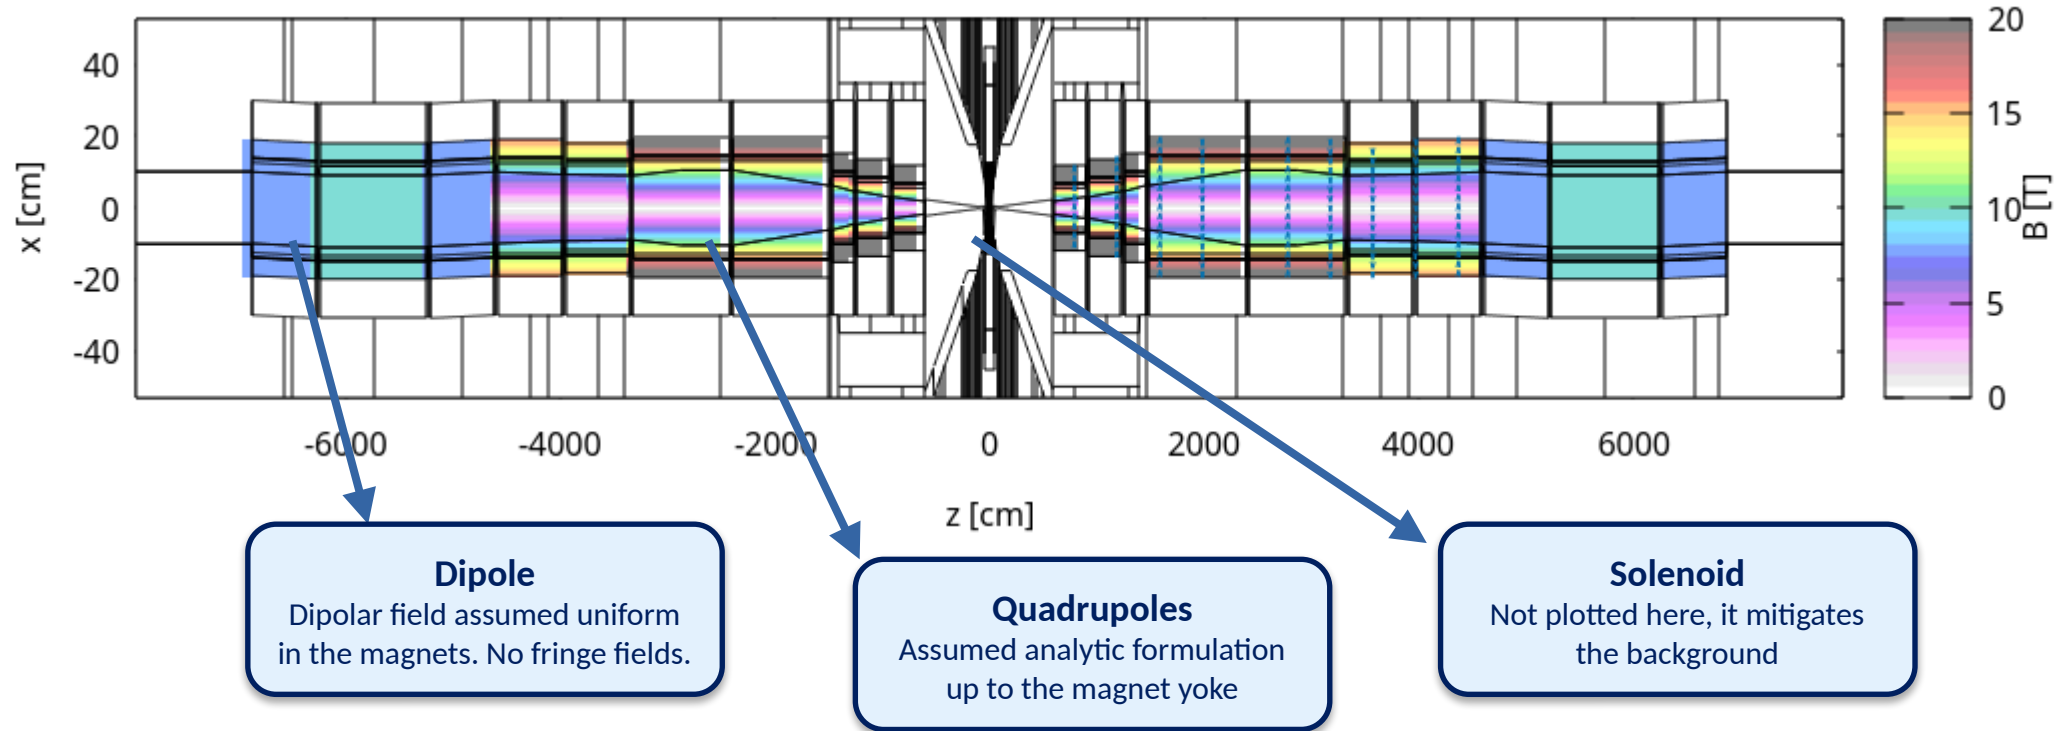


Particle trajectories

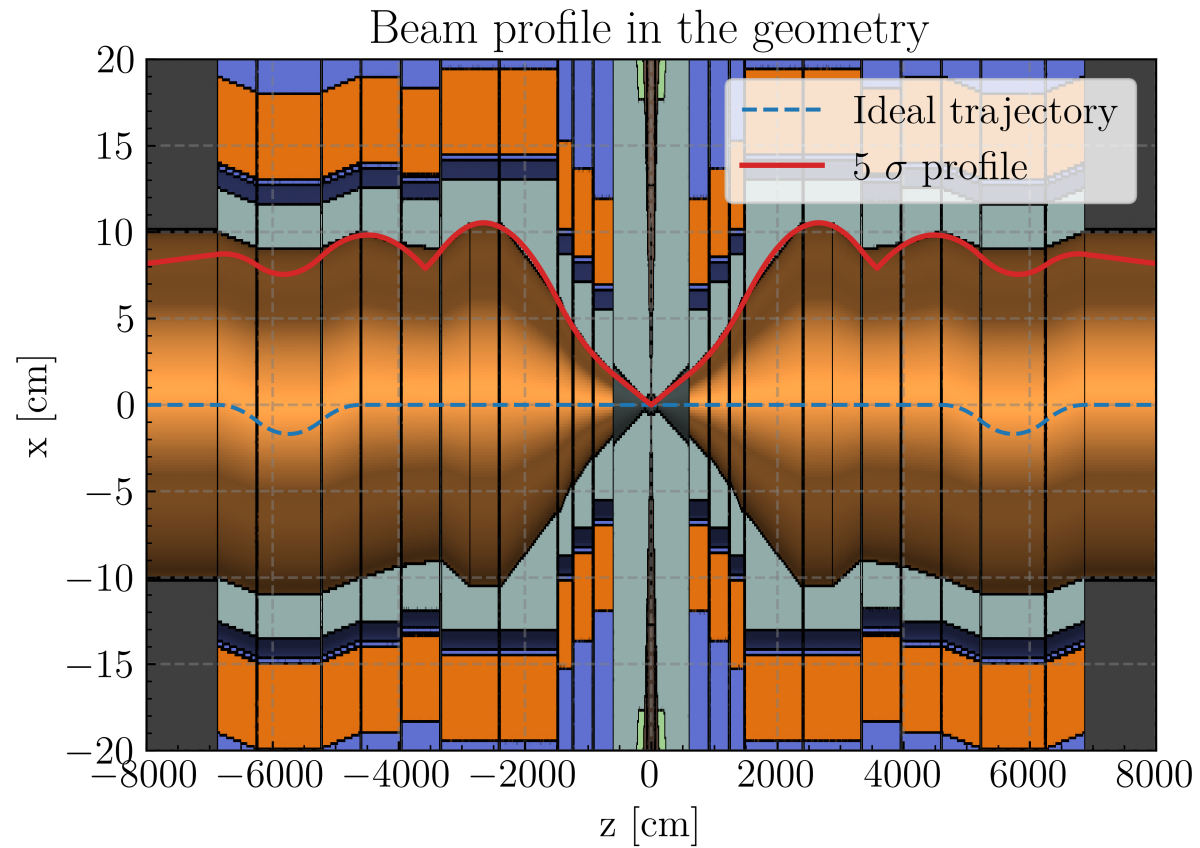

Simulation parameters

Bunch intensity	Frequency	Time in a year [s]	GeV/g → J/g	GeV/g → J/kg	Len collider [m]	Primaries per second [p/s]	Primaries per year [p/y]	Total power factor [mW/cm ³]	Total ionizing dose factor [MGy/y]	DPA factor [DPA/y]
1.80E+12	5.00E+00	1.20E+07	1.60E-10	1.6E-07	1.00E+04	9.0E+12	1.1E+20	1.4E+06	1.7E+07	1.1E+20

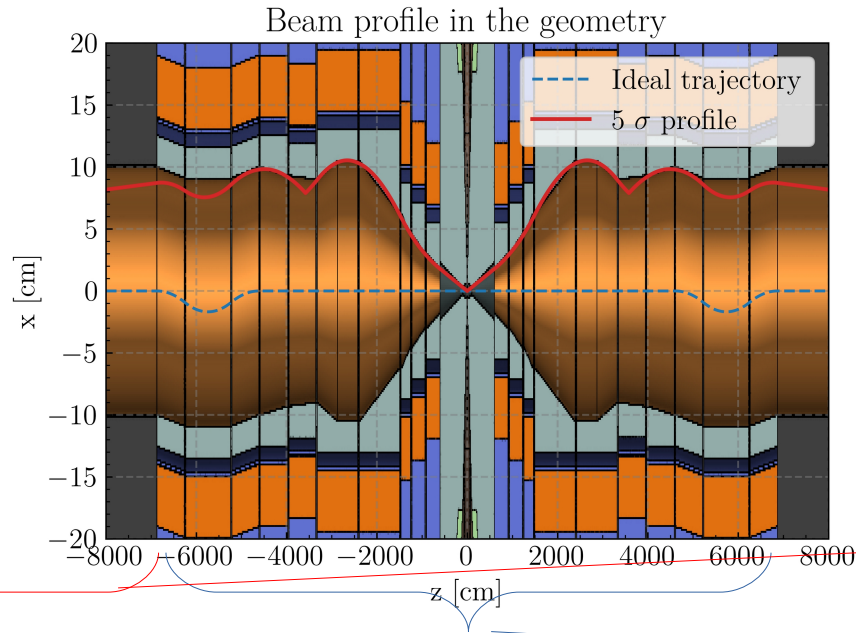


Simulations performed for this study. The background coming from the straight section is decoupled from the one coming from the final focus.

Electron/photon threshold: 1.25 MeV (~1 mm in copper)

Name	Decays per cycle	Length of the trajectory [m]	Decay per unit length	Total number of decays	Dose factor
vp08_out_FF	5.0E+02	1.8E+02	5.8E+04	1.0E+07	3.1E+05
vp08_in_FF	5.0E+02	1.4E+02	5.8E+04	7.9E+06	2.4E+05


Radiation load: dipoles (4 cm)

- The limiting factor for the shielding requirements is always the TID cumulated during the lifetime of the collider
- Approximately 50 MGy can be tolerated.

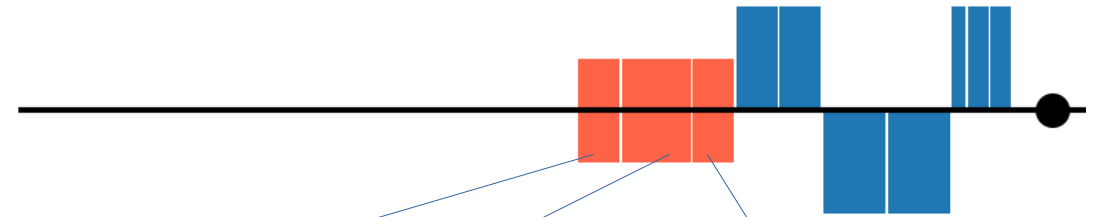


IB2 can potentially survive with 5sigma + 4 cm


Dose to IB2

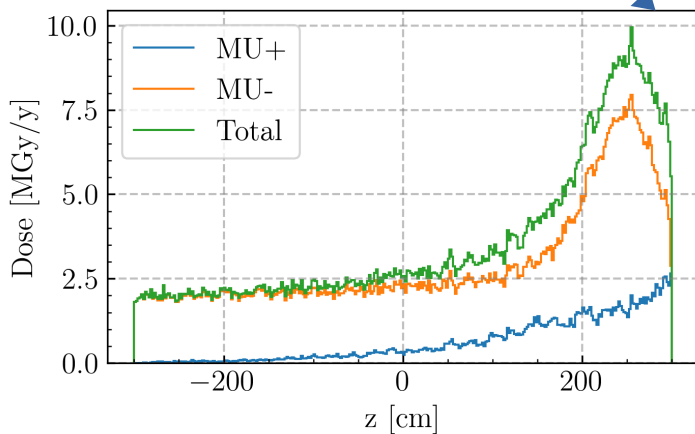

Dose to IB1

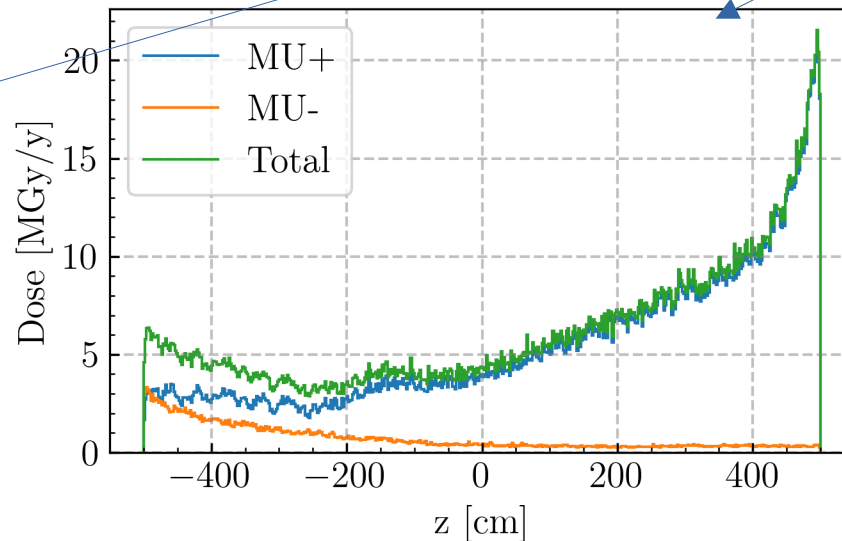


Dose to IB3

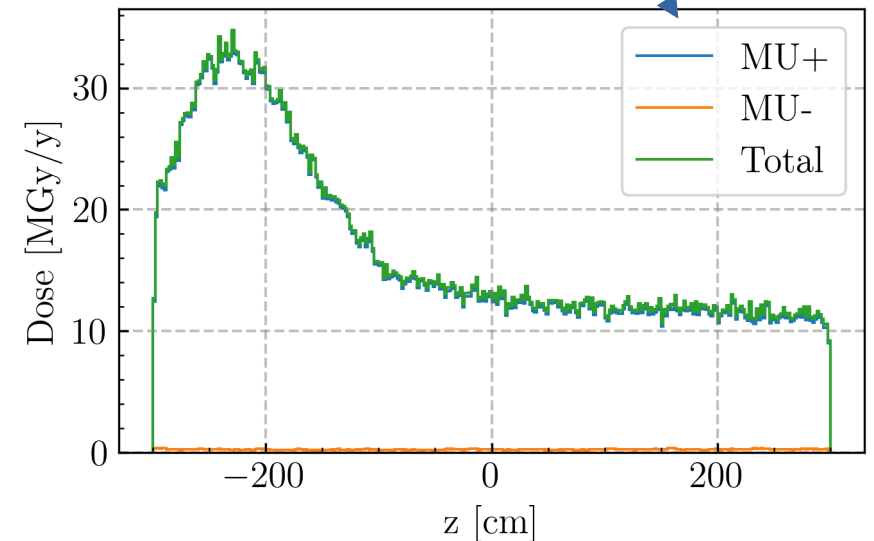


Radiation load: dipoles (6 cm)


- Two additional cm of tungsten reduce the TID of a factor 10 (typically it follows an exponential behaviour).
- The dipoles can be operated safely up to 10 years

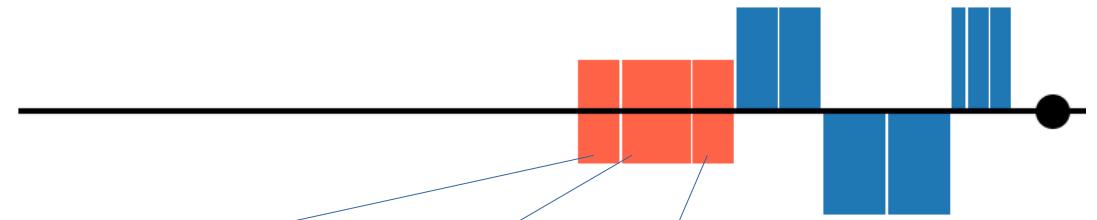


Dose to IB2

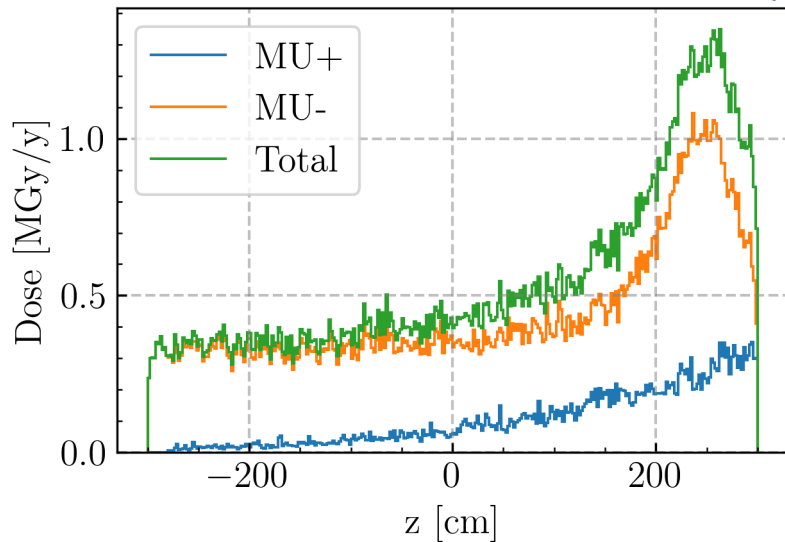

Dose to IB1



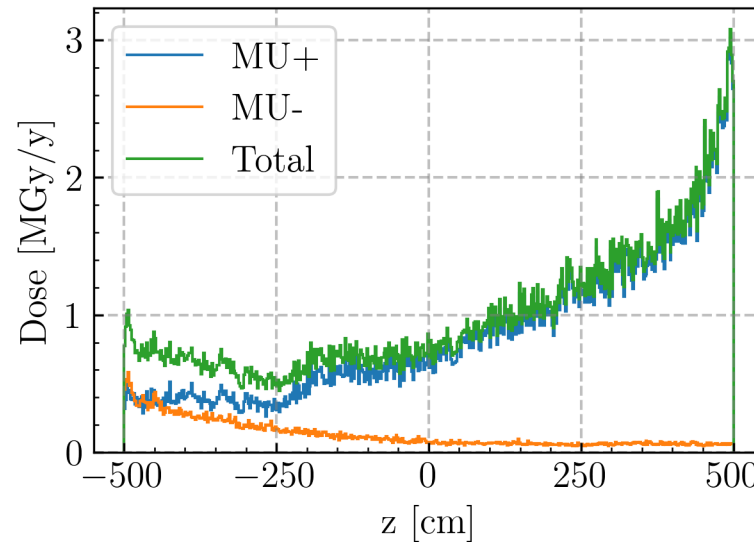


Dose to IB3

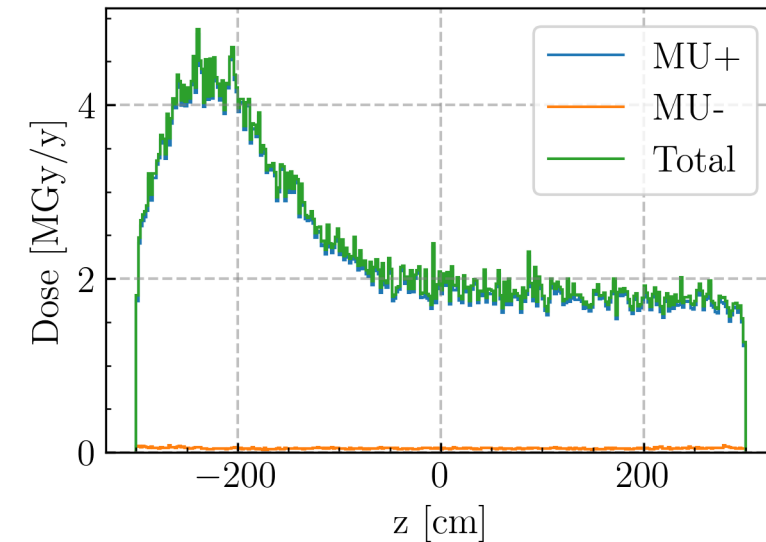




Quadrupole radiation load: Q3

- Already with $5\sigma + 4$ cm magnet aperture, all the quadrupoles suffer from less than 10 MGy/y of TID

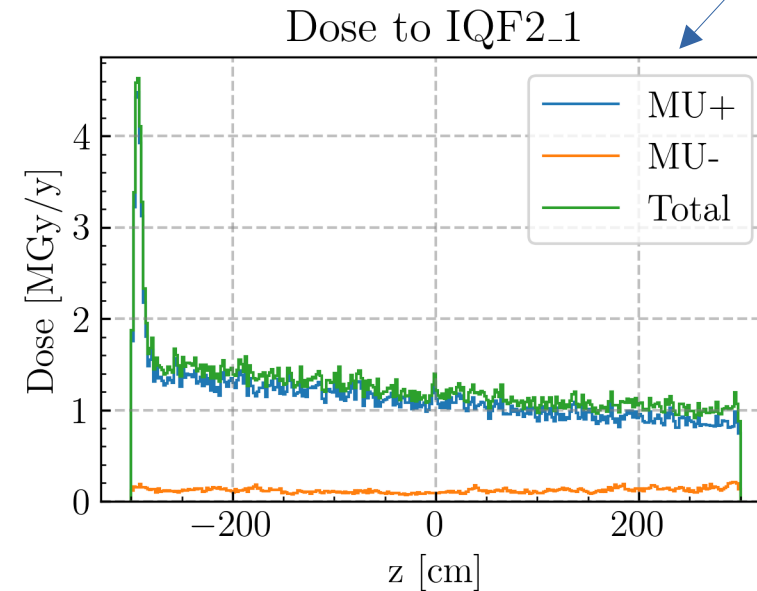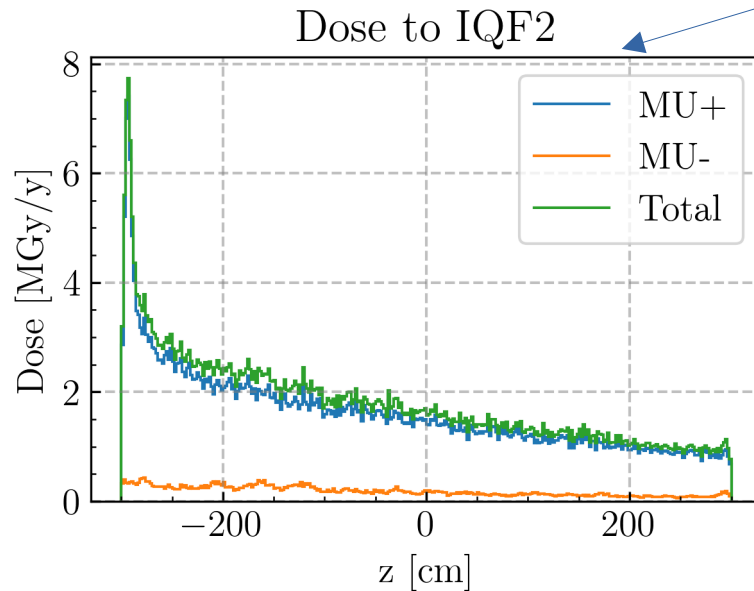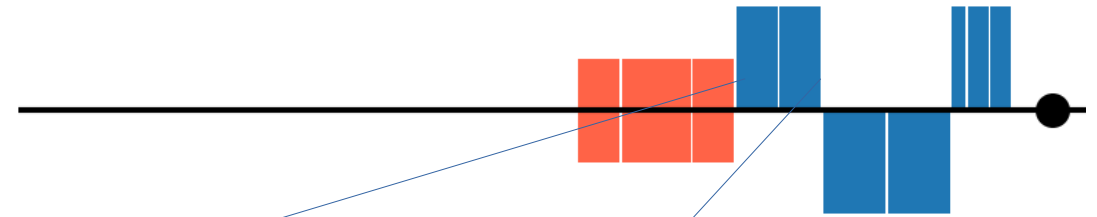





Quadrupole radiation load: Q2

- Already with $5\sigma + 4$ cm magnet aperture, all the quadrupoles suffer from less than 10 MGy/y of TID

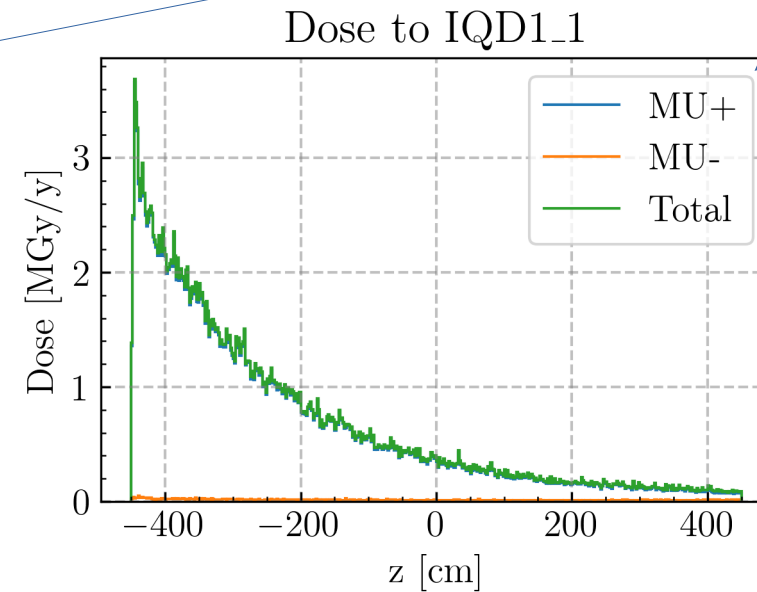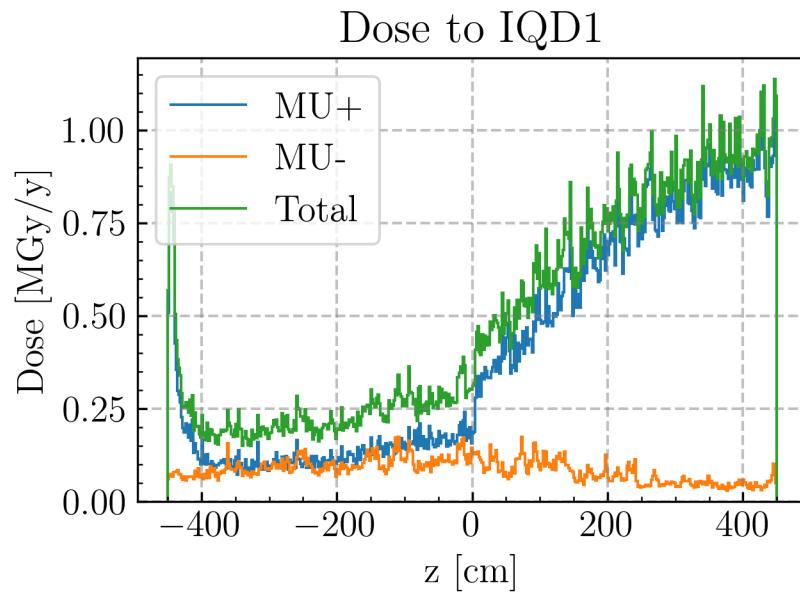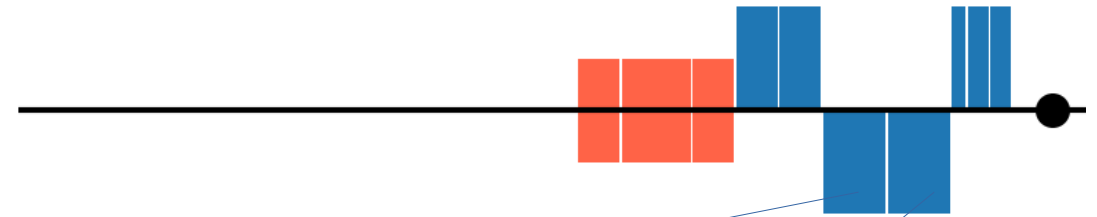

Quadrupole radiation load: Q1

- Already with $5\sigma + 4$ cm magnet aperture, all the quadrupoles suffer from less than 10 MGy/y of TID

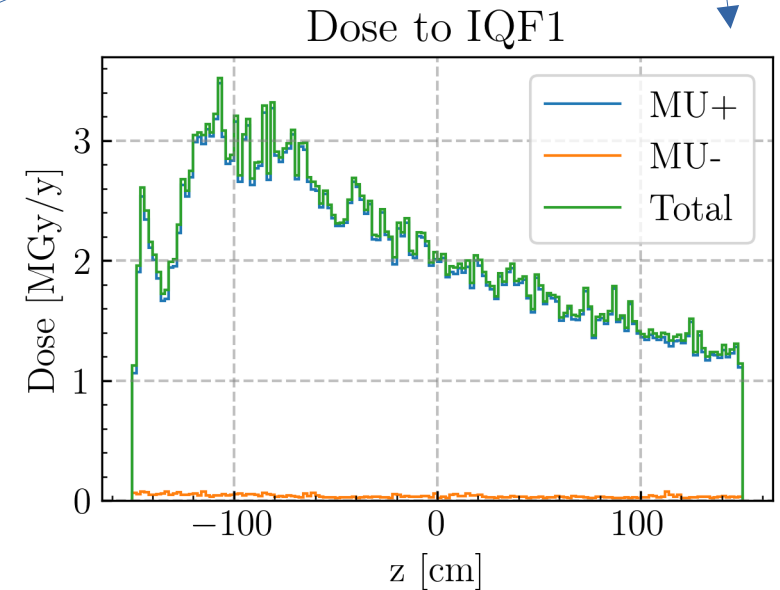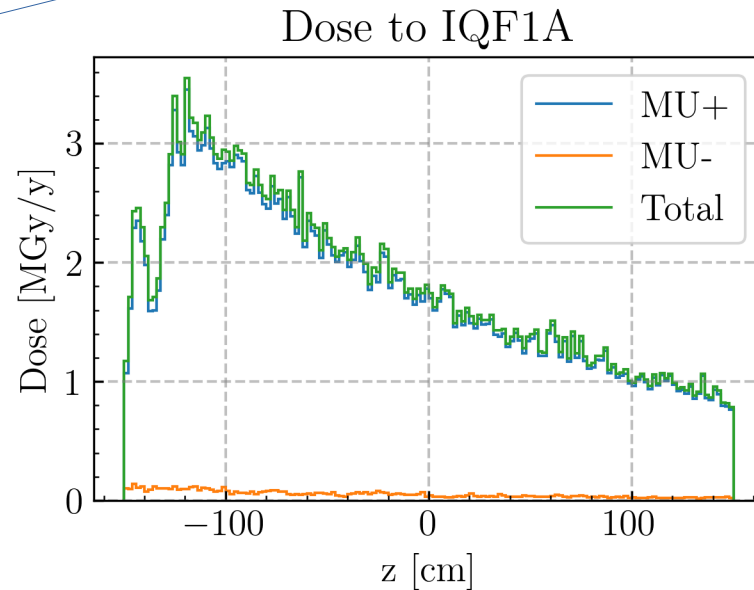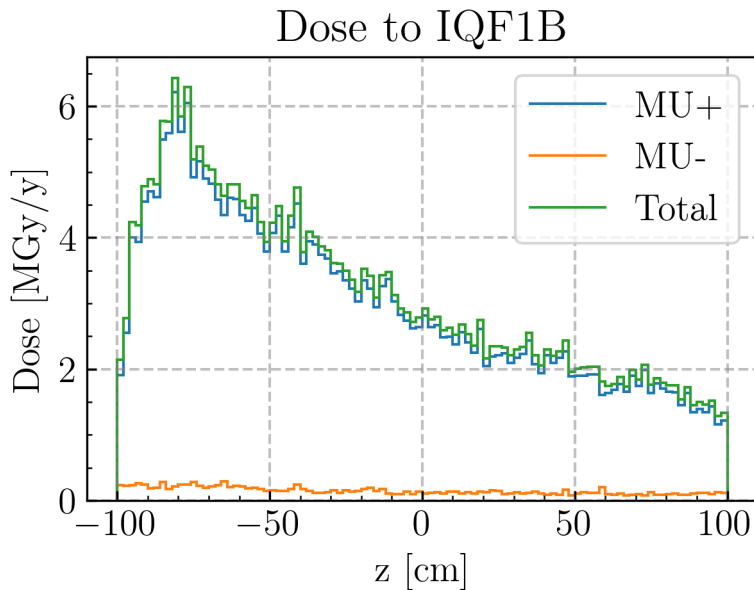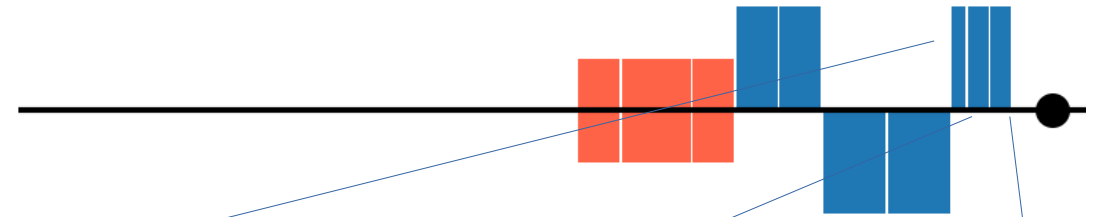

Conclusions

- A novel lattice configuration has been tested for the long term survivability.
- A chicane would require $\sim(6 \text{ cm} + 5\sigma)$ magnet aperture for the dipoles and $\sim(4 \text{ cm} + 5\sigma)$ for quadrupoles
- Neither of the two options are affordable with the current magnet concepts. Three possible solutions:
 - 1) Increase β^* to simplify the focusing scheme?
 - 2) Reduce the insulation thickness to increase the space for the tungsten layer
 - 3) Increase the material budget for the HTS components.

*Less luminosity

*Higher costs

Thank you



**Funded by
the European Union**

Funded by the European Union (EU). Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the EU or European Research Executive Agency (REA). Neither the EU nor the REA can be held responsible for them.

Comment on simulation parameters

- The mesh is around 1 mm in radial dimension.
- In the CSDA the corresponding energy is around 1.2 MeV. This energy is set as threshold for photons and electrons

