
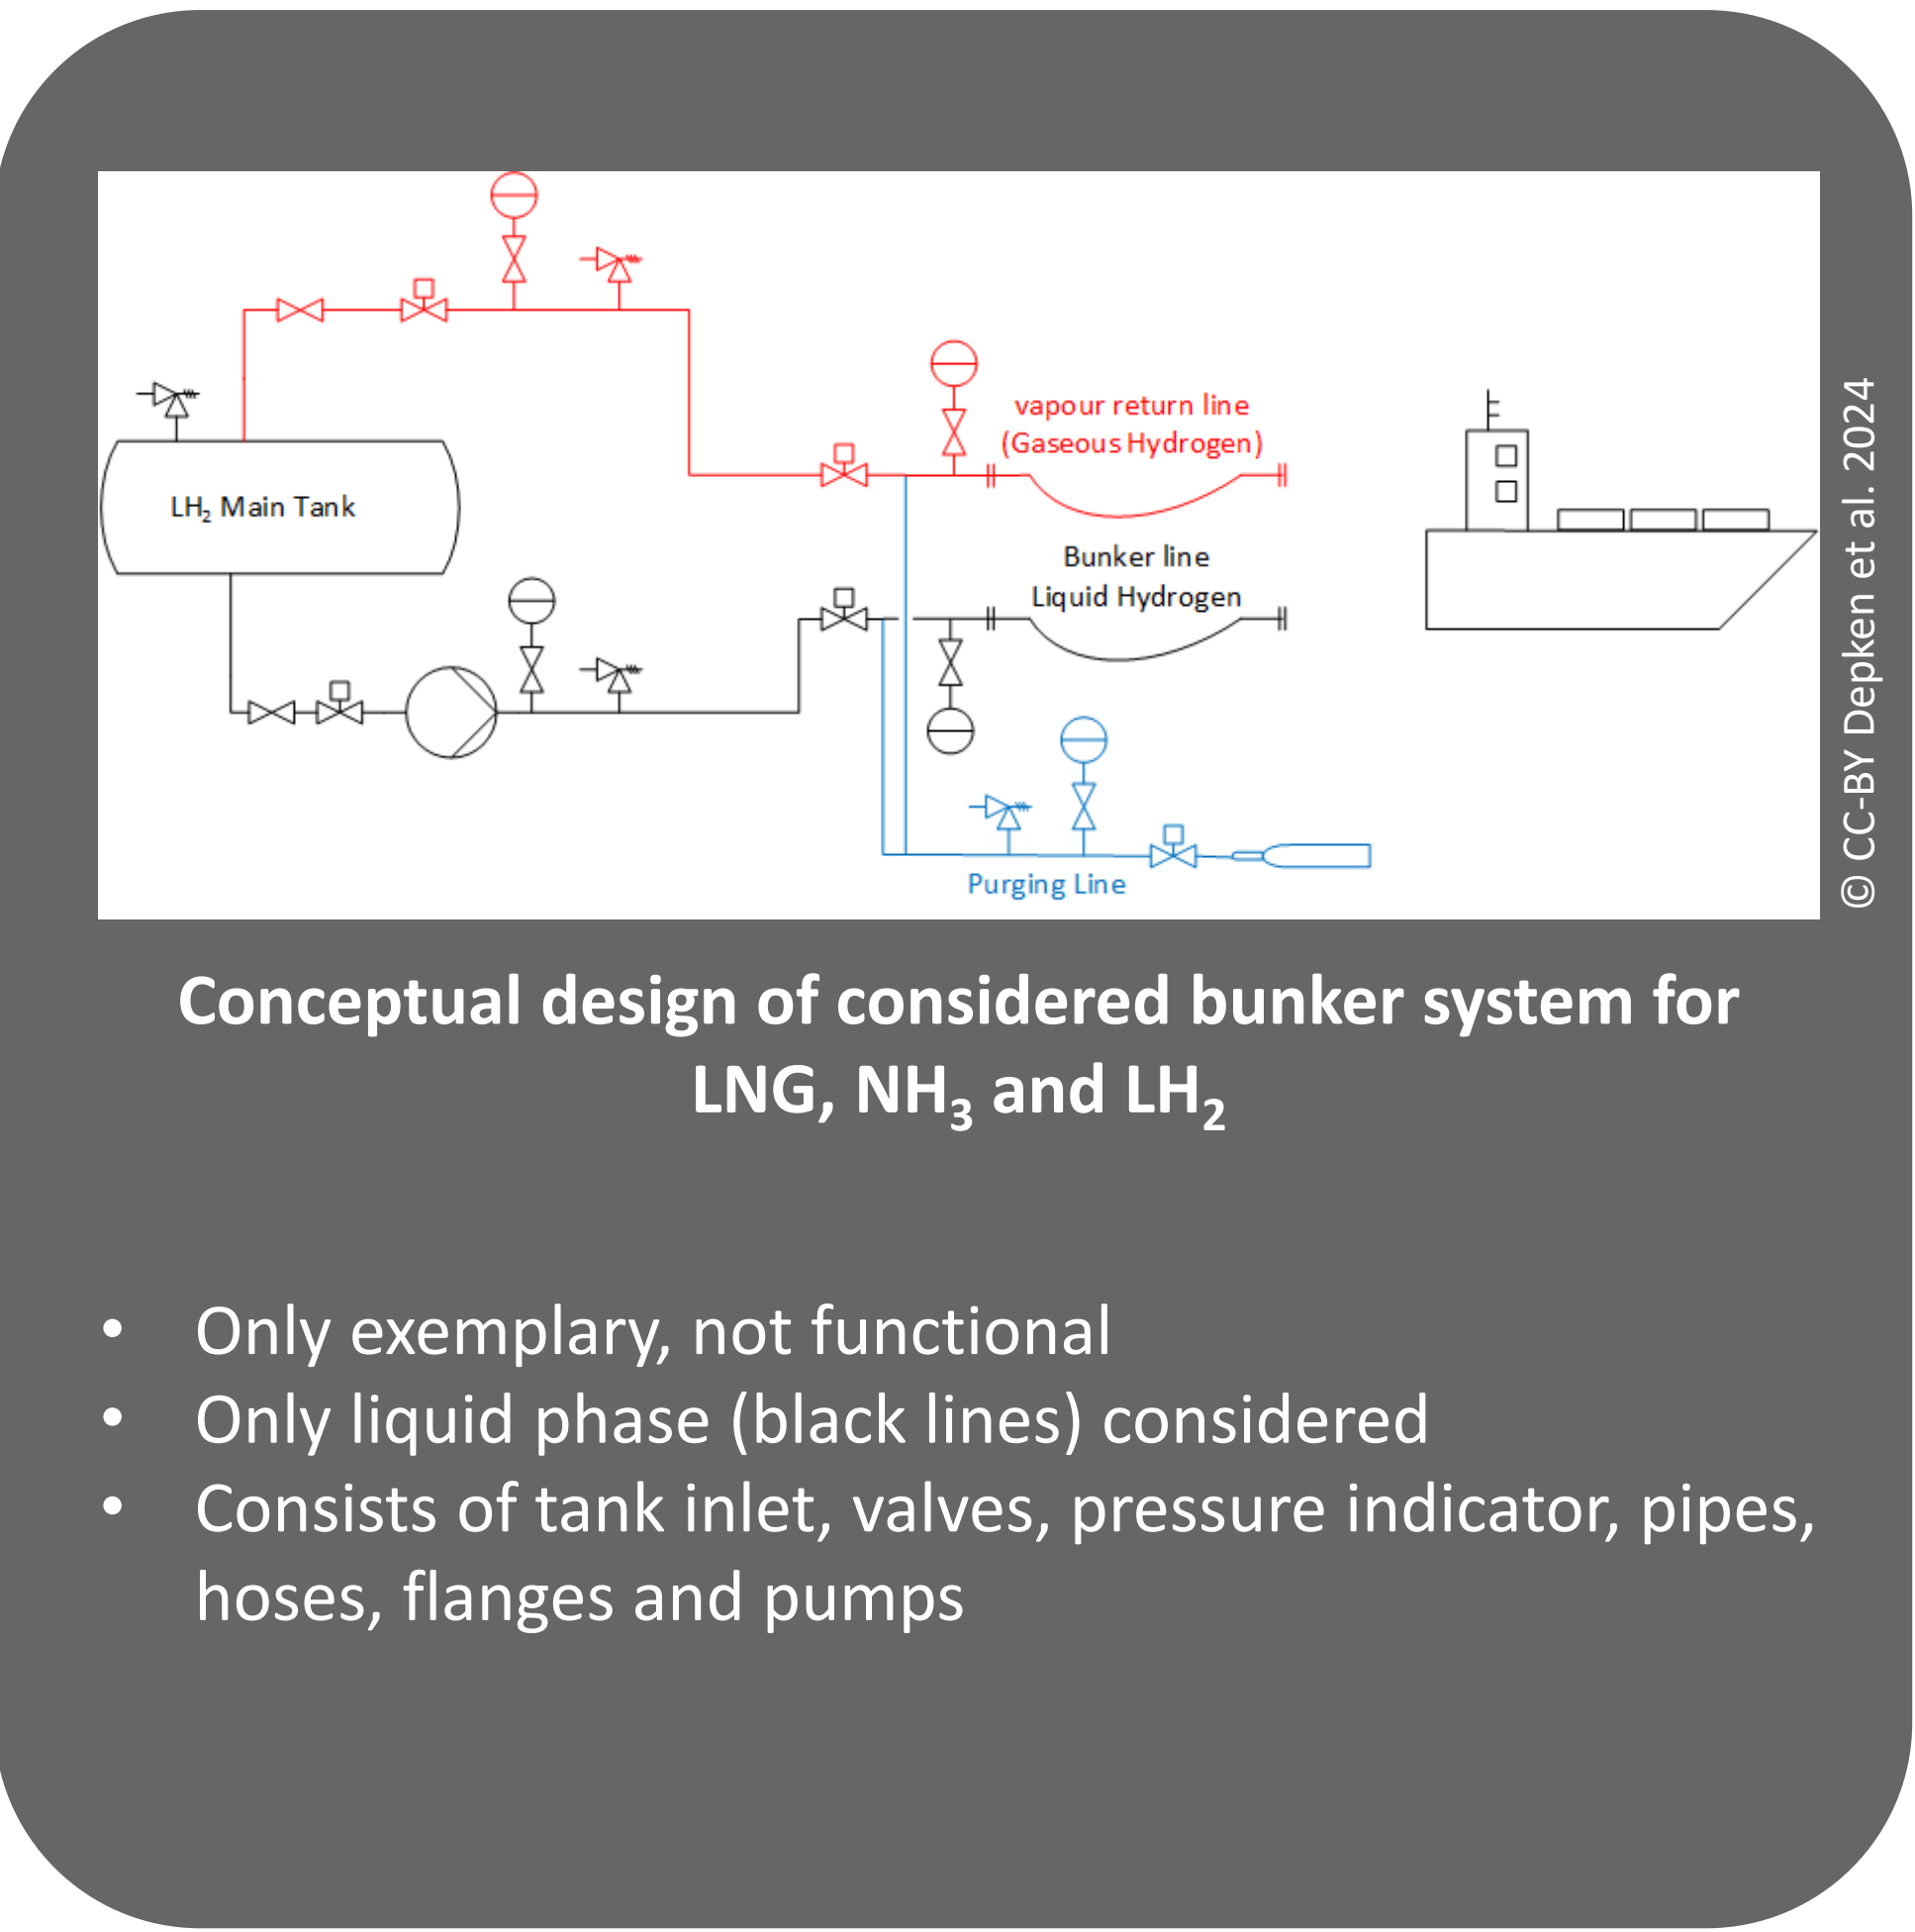




# A comparison of the toxicity and asphyxiation risk during bunkering of LH2, LNG and NH3 by means of a quantitative risk assessment

Jorgen Depken\*<sup>1</sup>, Lars Baetcke<sup>1</sup>, Martin Kaltschmitt<sup>2</sup>, Sören Ehlers<sup>1</sup>



<sup>1</sup> Institute for Maritime Energy Systems, German Aerospace Center (DLR), Dünebergerstraße 108, Geesthacht, 21502, Schleswig-Holstein, Germany  
<sup>2</sup> Institute of Environmental Technology and Energy Economics (IUE), Hamburg University of Technology (TUHH), Eissendorfer Strasse 40, Hamburg, 21073, Hamburg, Germany  
\*jorgen.depken@dlr.de

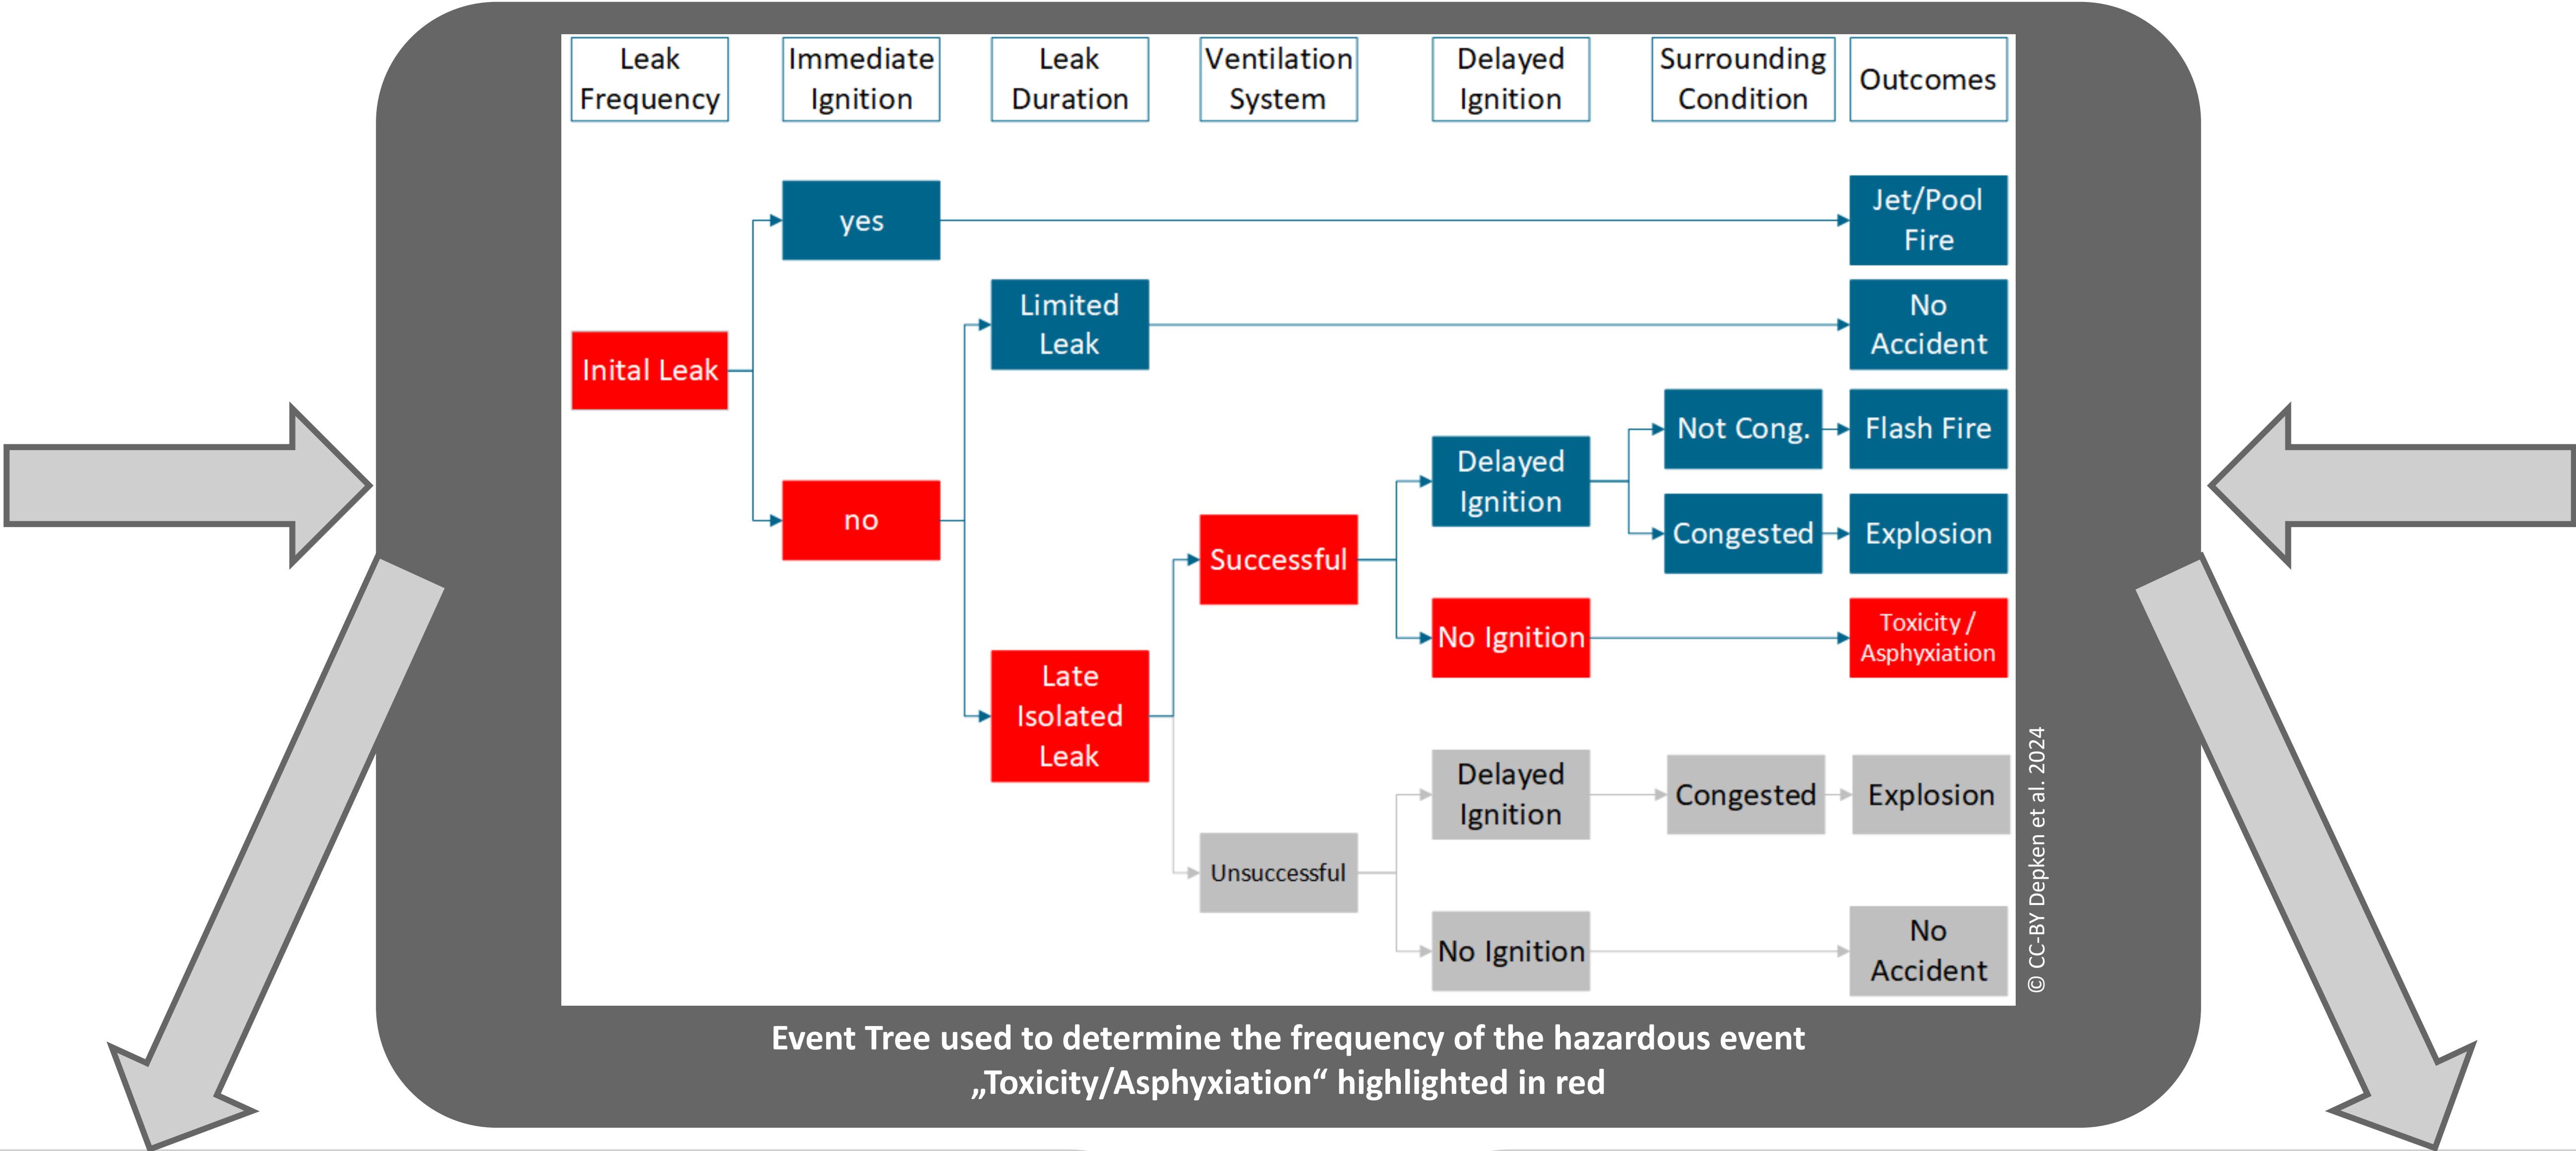

## Frequency Analysis

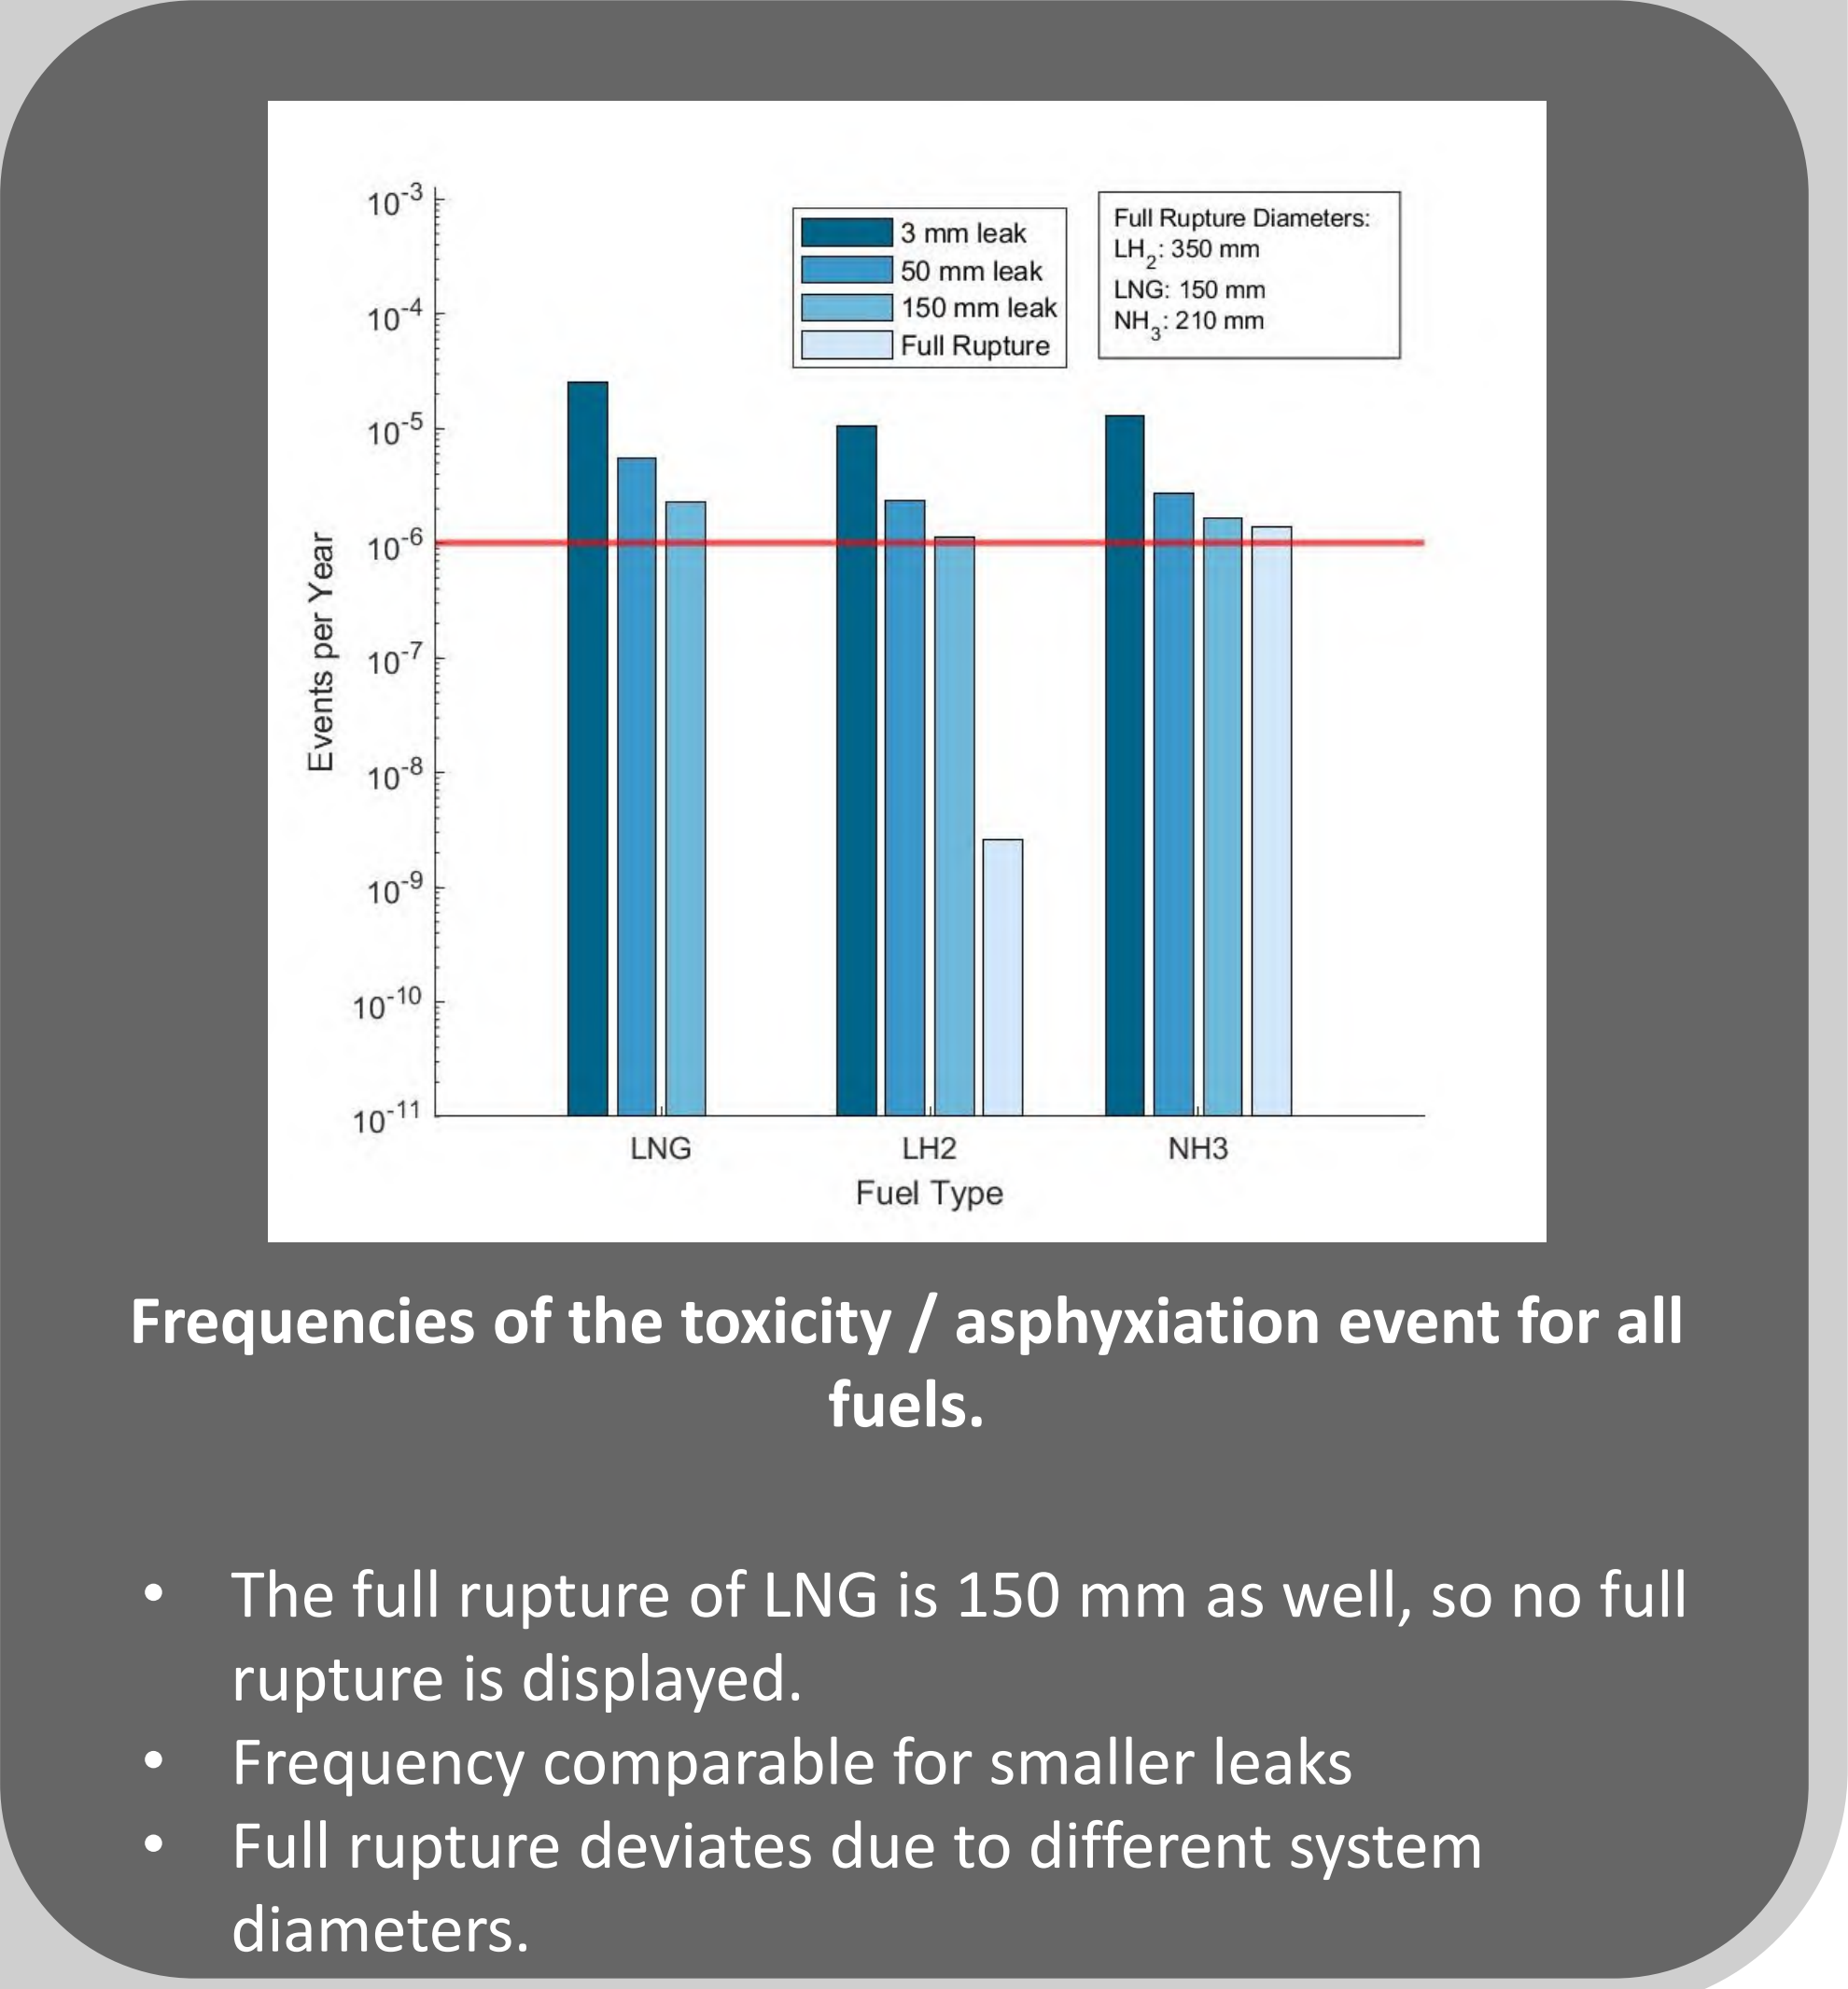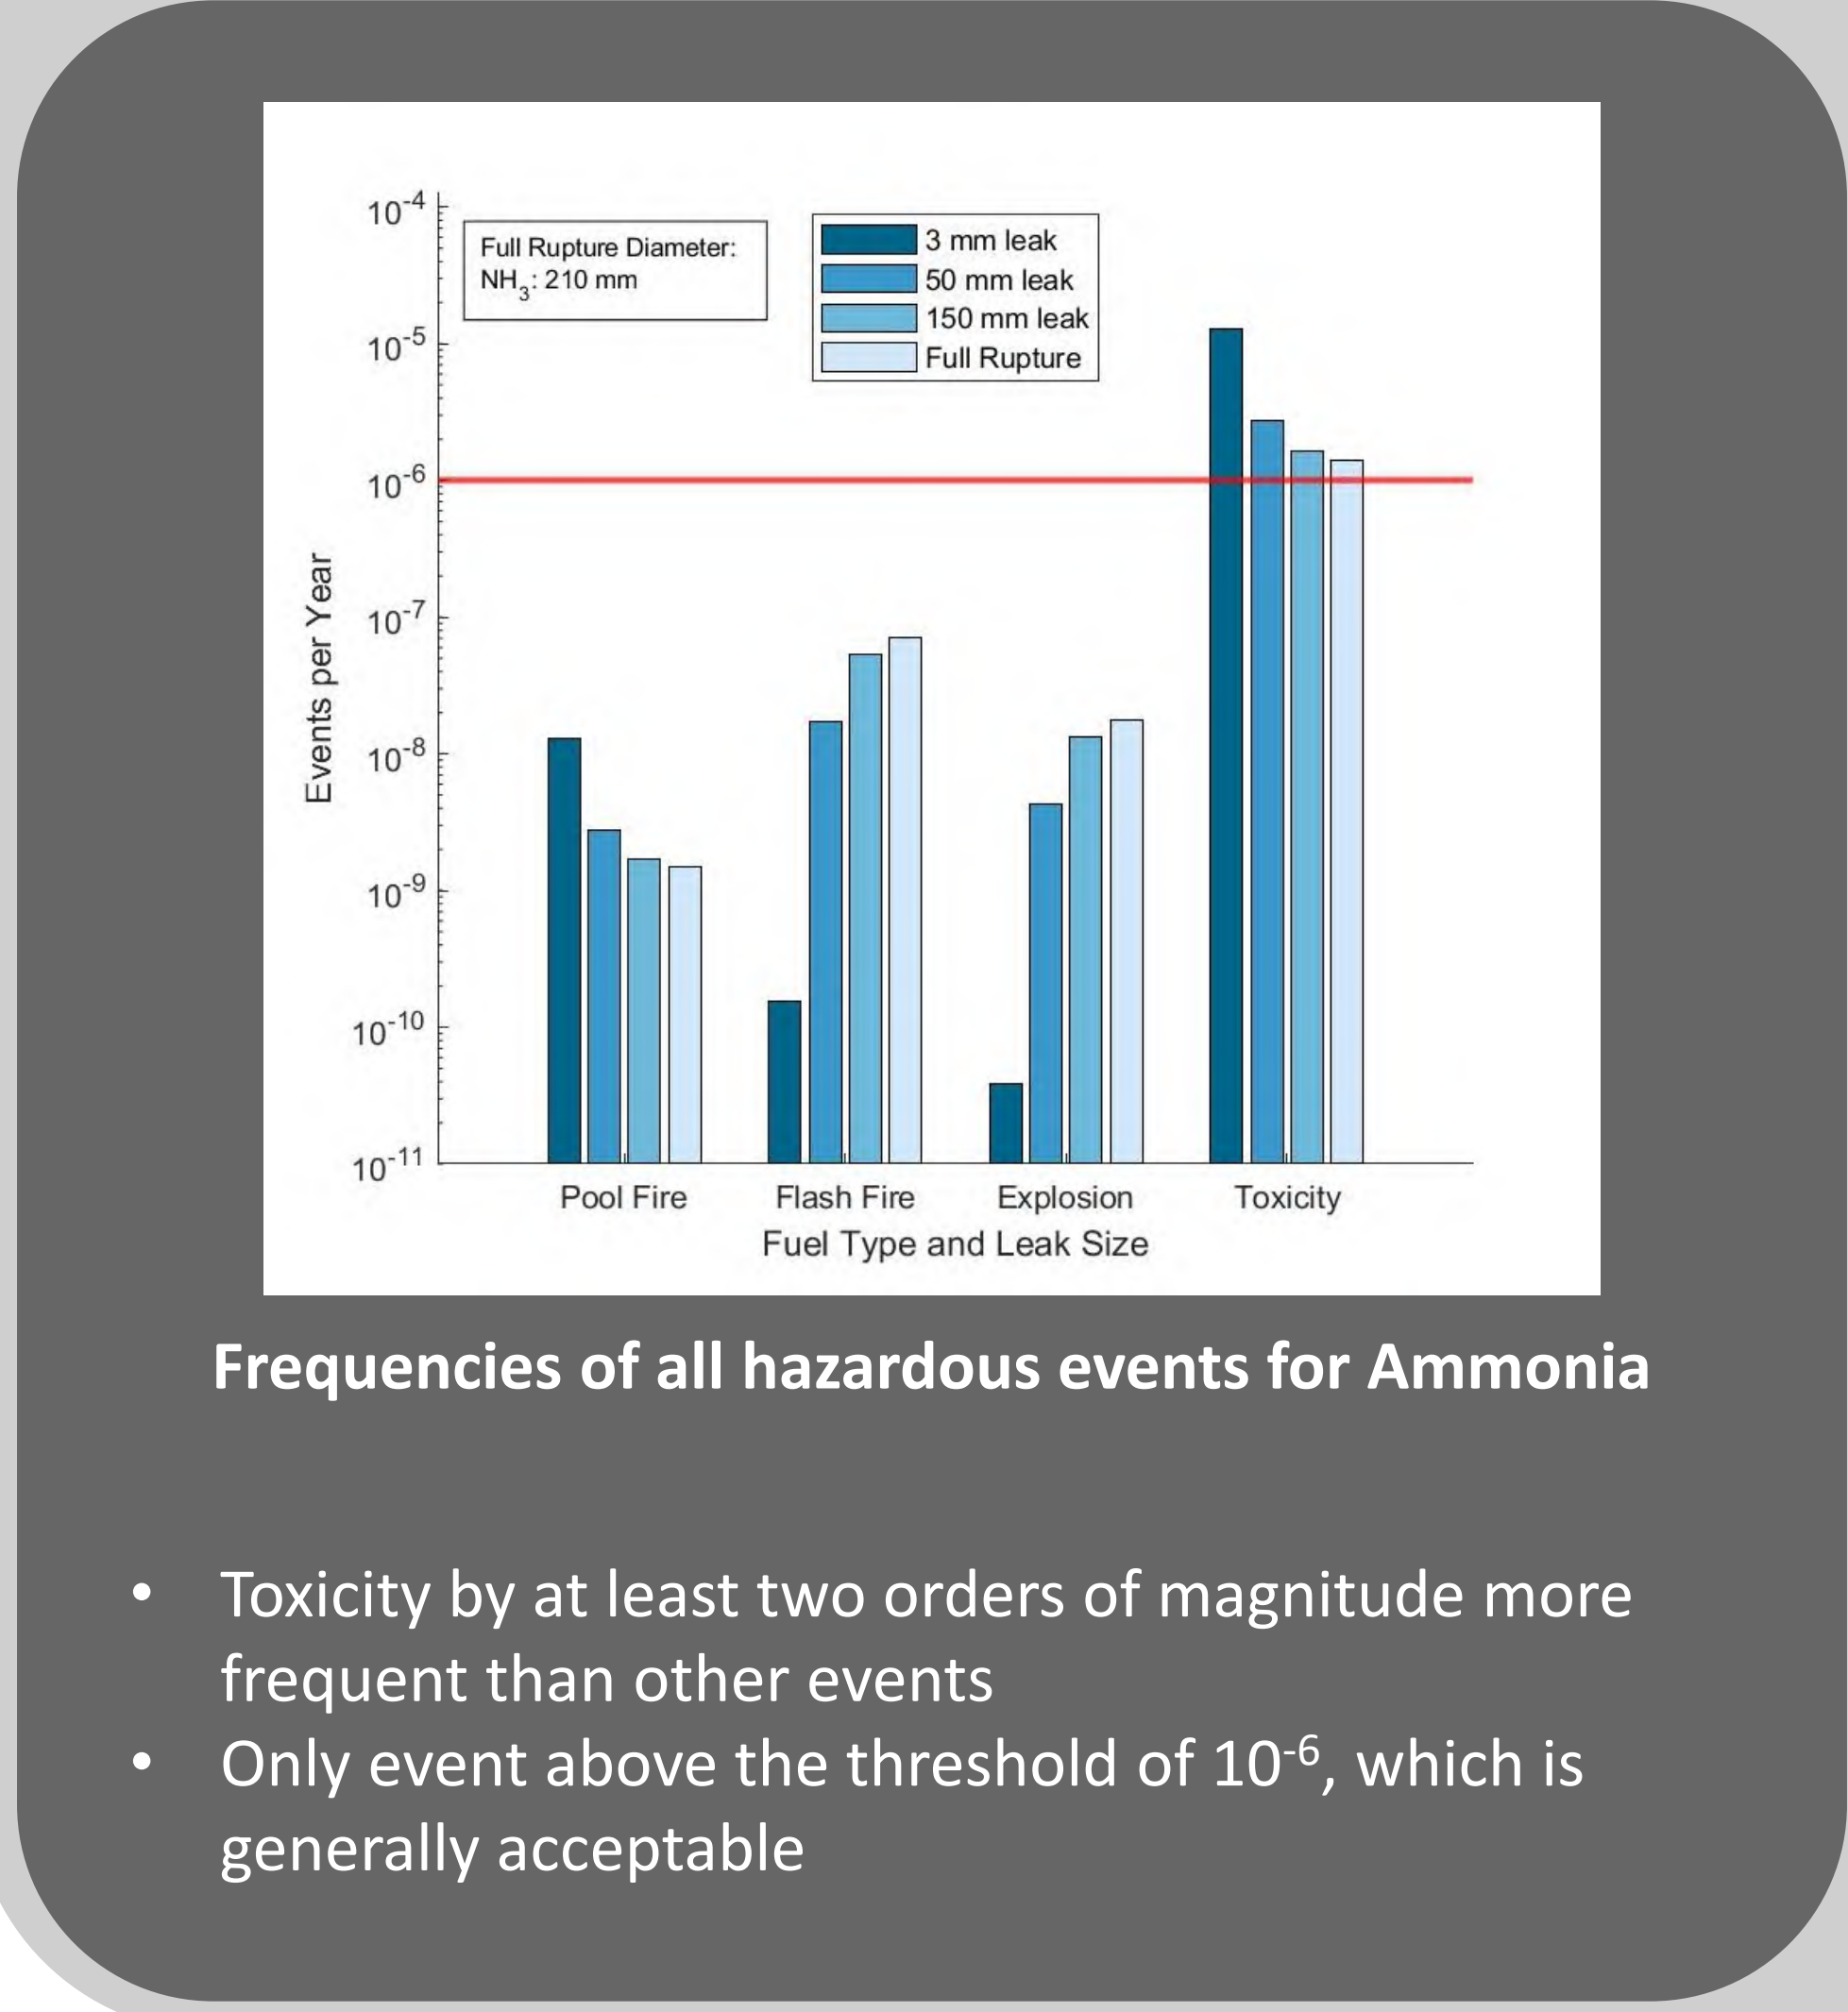

## Consequence Analysis

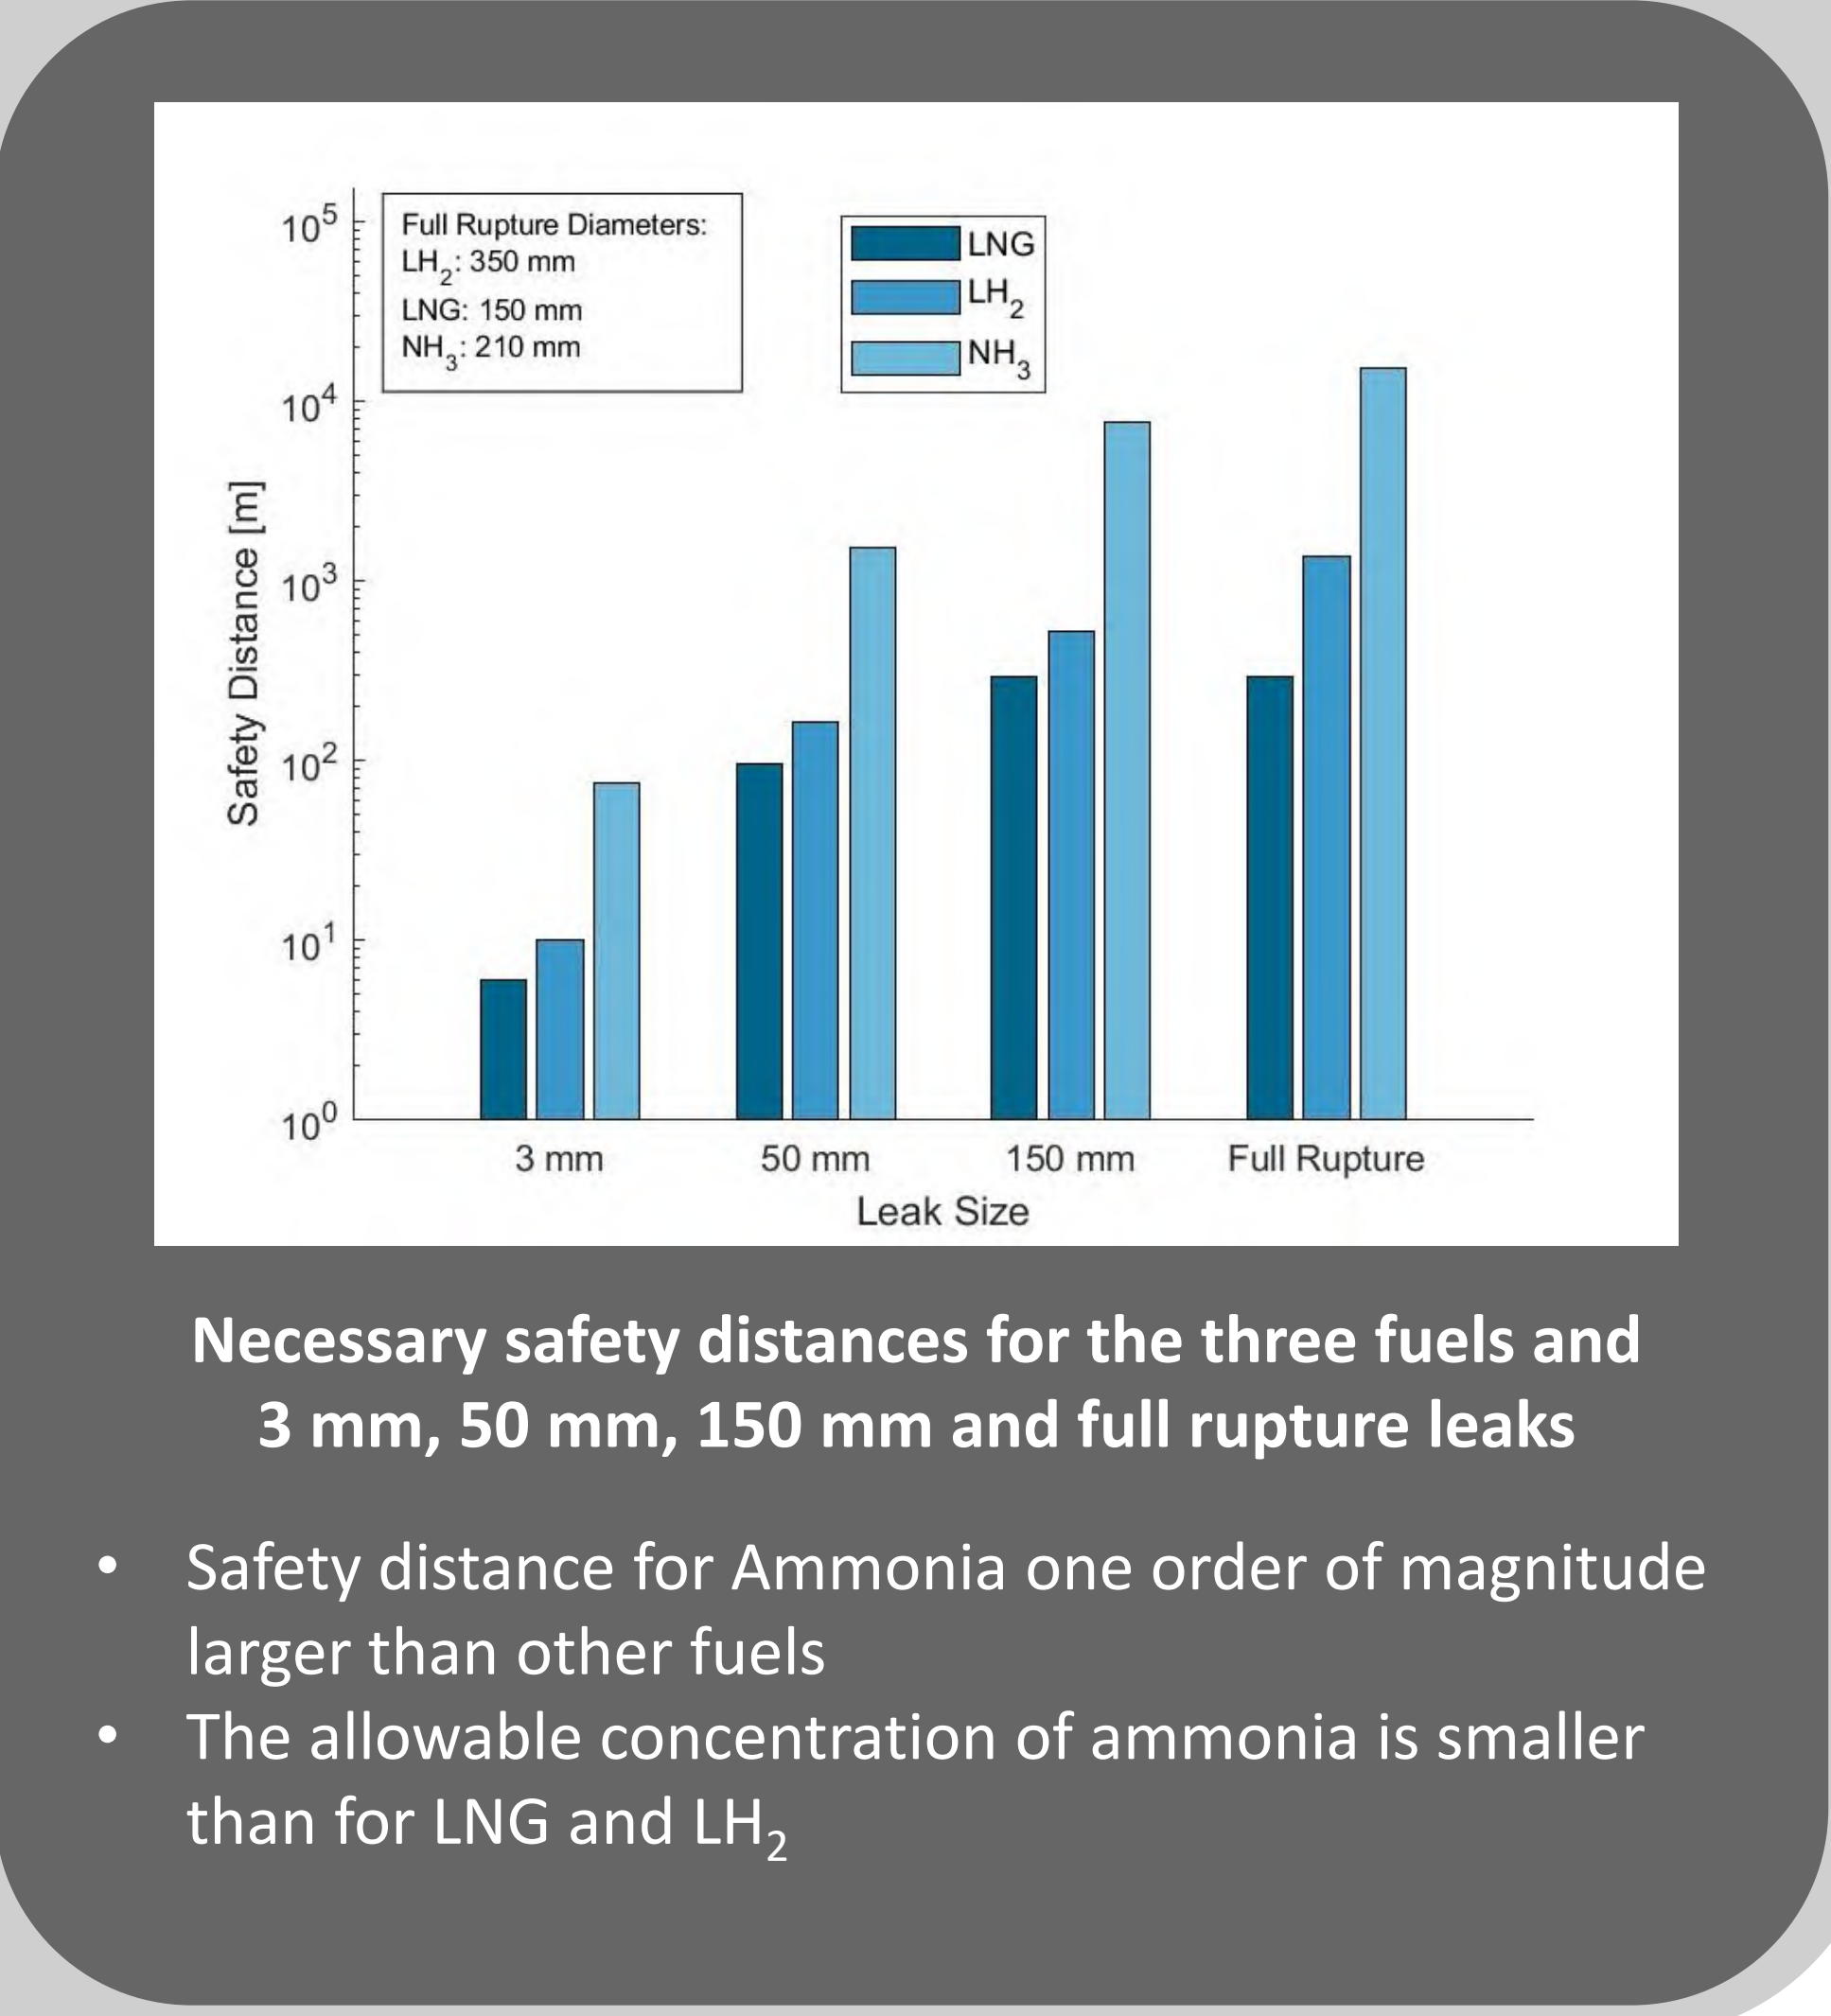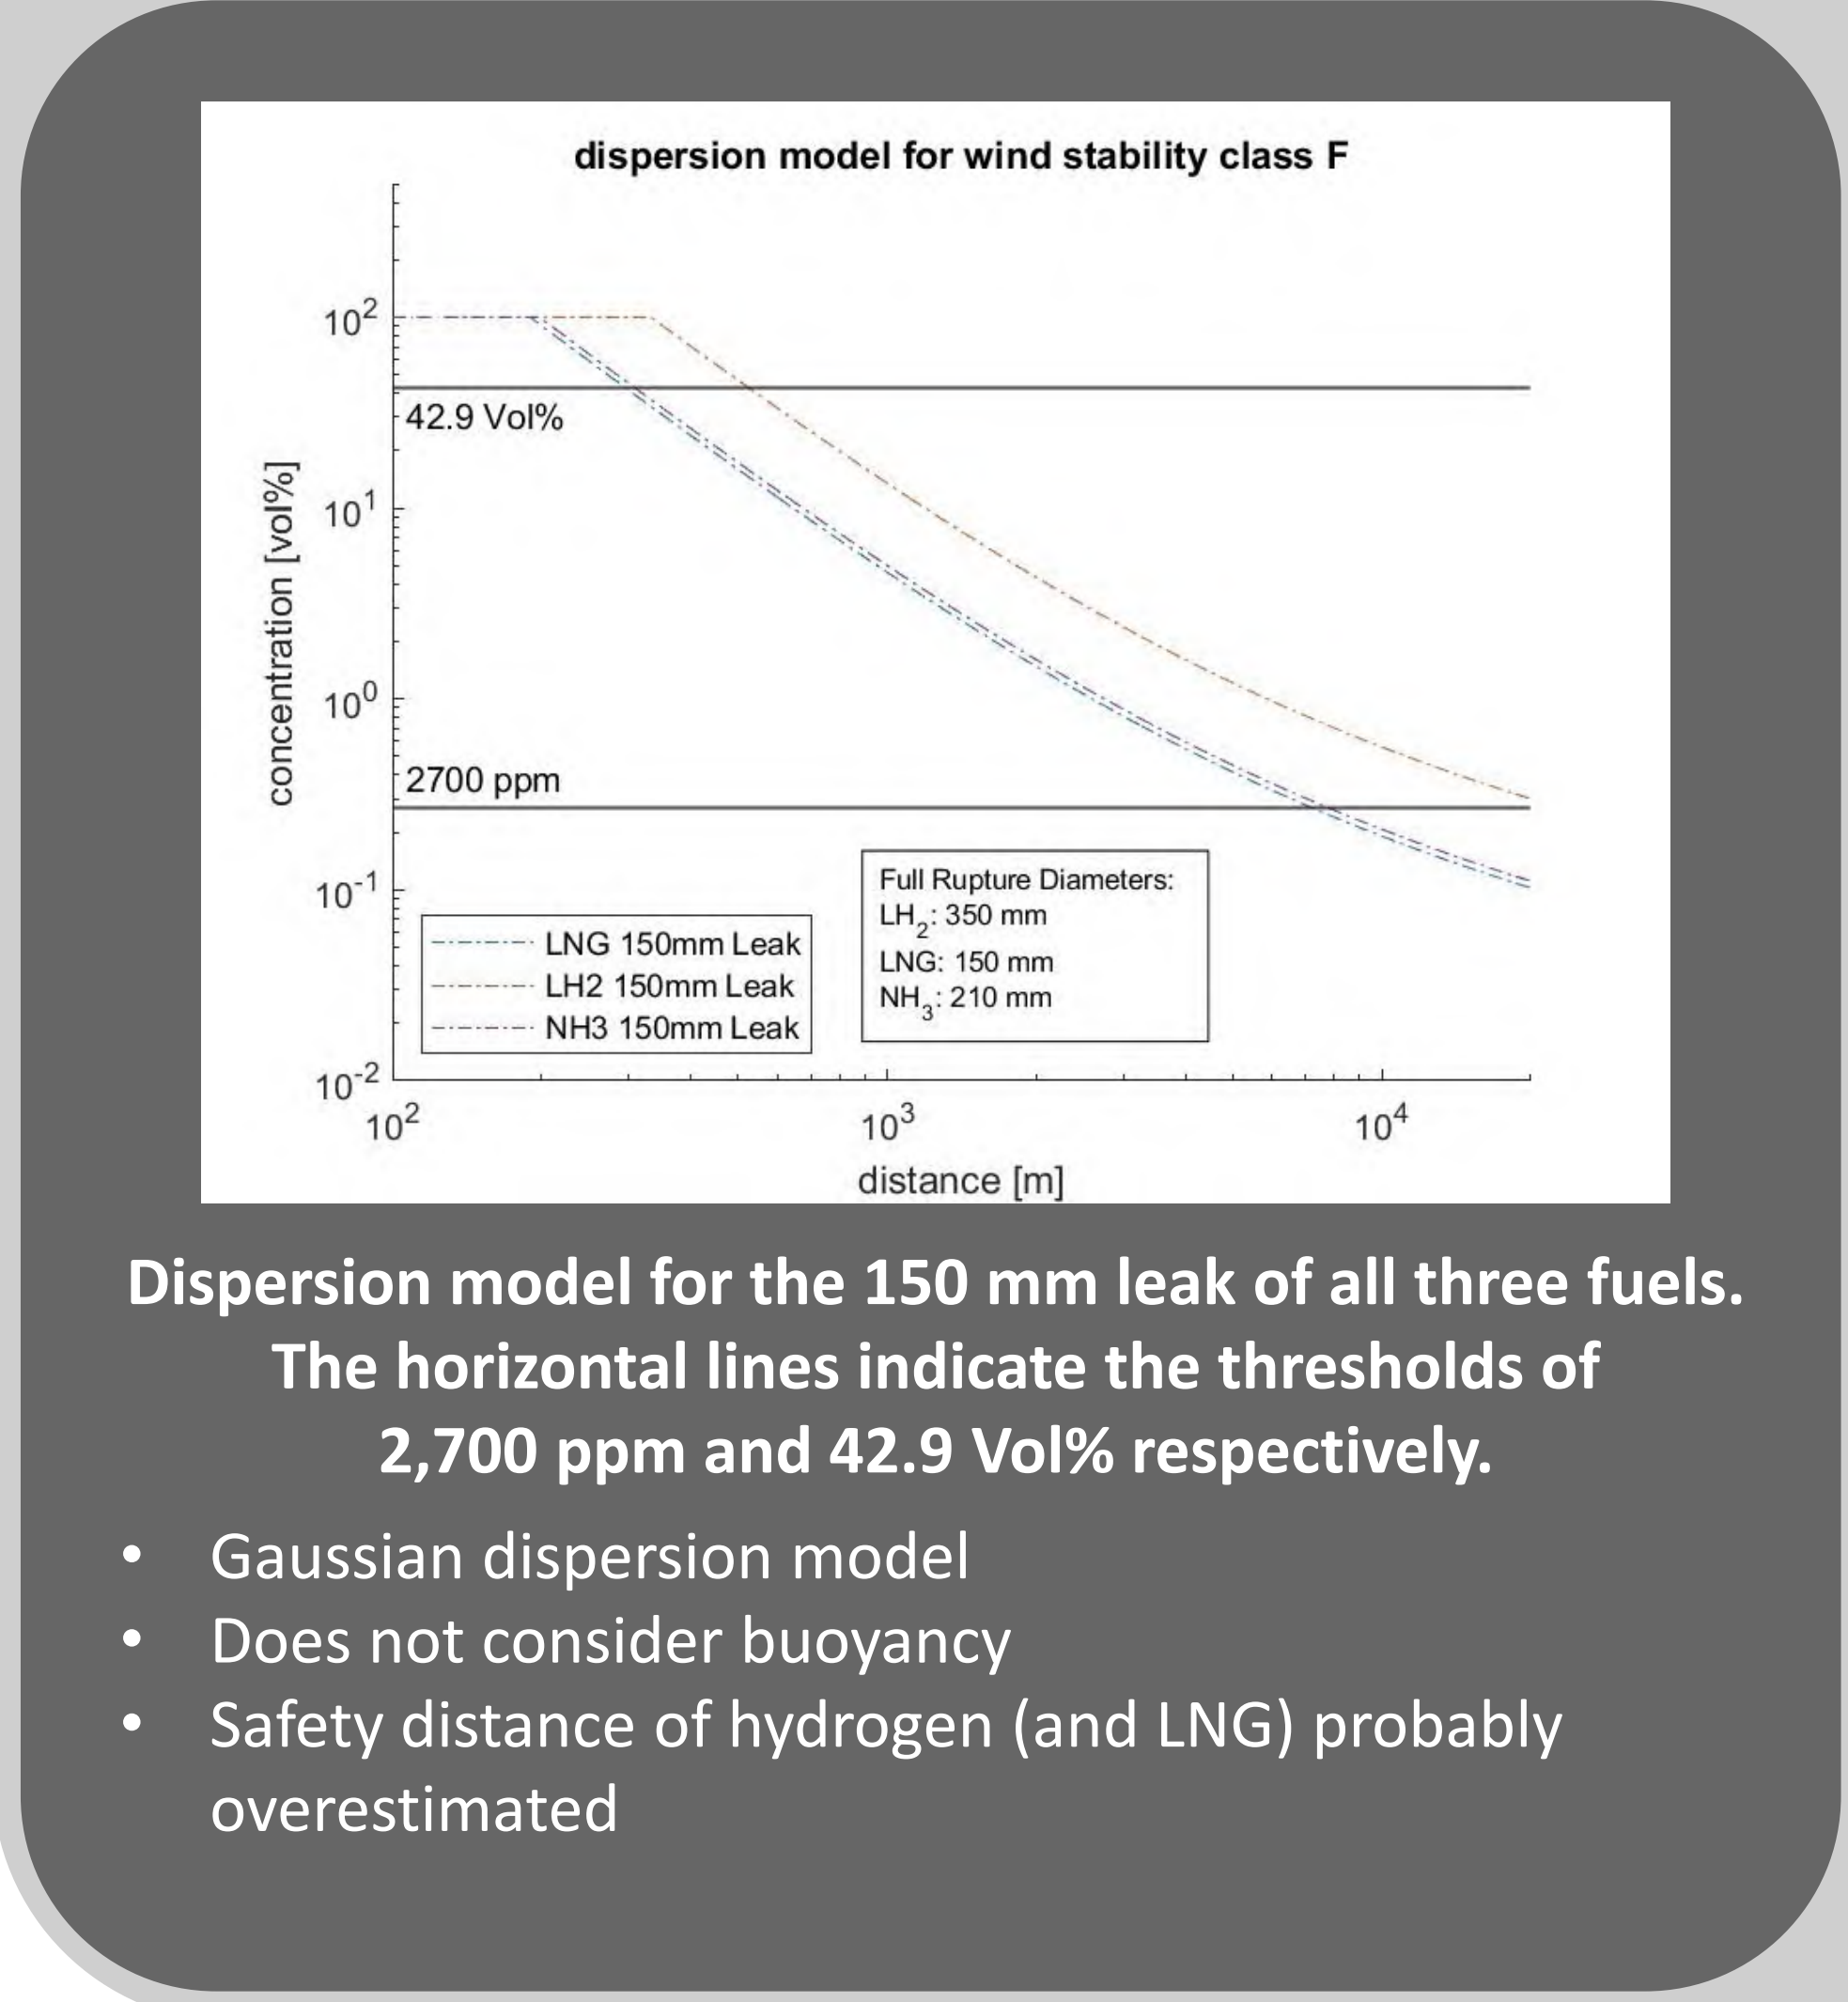

**Acknowledgments**  
The research leading to these results has been carried out under the framework of the project “FuturePorts”. The project started in January 2022 and is led by the Program Directorate Transport within the German Aerospace Center (DLR), whose support we greatly appreciate.

