


Asked to be built by Rui

(1600 Euro two pieces)

Do we need INSERTS???
WILL THERE BE ANY
PROBLEM WITH THE
ALIGNMENT: detector-
frame-cathode?

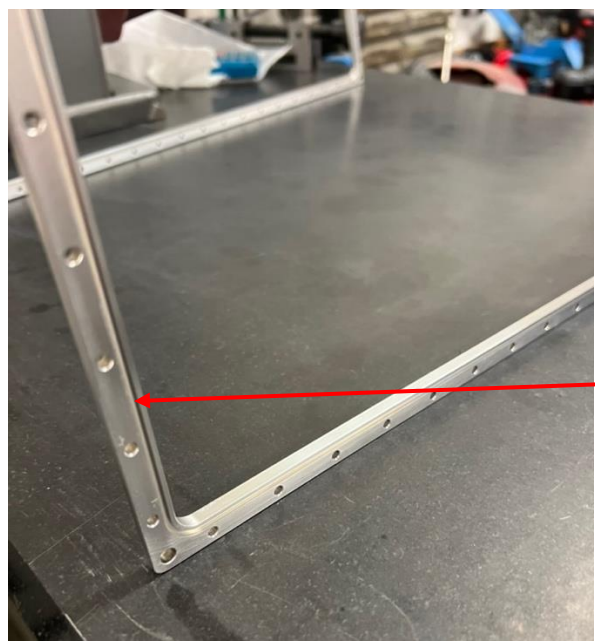

Oring groove 2 mm wide
1.7 mm deep
for 2 mm orings

(different from drawing on the right)

