


Workshop on Materials for Collimators and Beam Absorbers

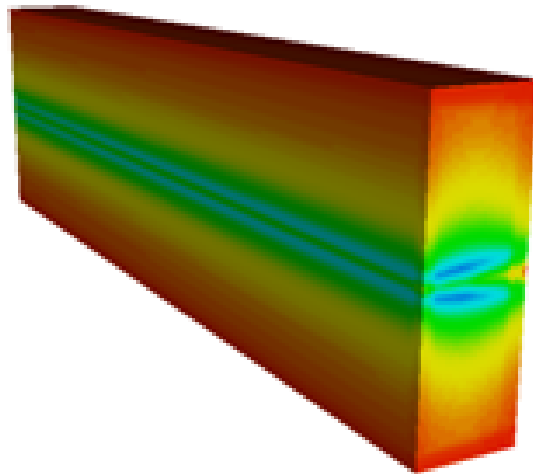

Report of Contributions

Contribution ID: 0

Type: **not specified**

Welcome and introduction to the workshop

Monday 3 September 2007 14:00 (10 minutes)

Presenter: EVANS, Lyn (CERN)

Session Classification: Session 1: Introduction –collimators and beam absorbers for different accelerators

Contribution ID: **12**

Type: **not specified**

Discussion

Tuesday 4 September 2007 11:55 (30 minutes)

Session Classification: Session 2: New Ideas / New Materials

Contribution ID: **13**

Type: **not specified**

Measurement of shock waves and vibrations

Tuesday 4 September 2007 14:00 (20 minutes)

Co-author: LETTRY, Jacques (CERN)

Presenter: RICHTER, Herta (CERN)

Session Classification: Session 3: Experimental results and future tests / test station

Track Classification: Measurement of shock waves and vibrations

Contribution ID: **18**

Type: **not specified**

Introduction

Tuesday 4 September 2007 16:55 (20 minutes)

Presenter: ASSMANN, Ralph Wolfgang (CERN)

Session Classification: Discussion session 4: Plans and opportunities for studies and tests at CERN and elsewhere

Contribution ID: **19**

Type: **not specified**

Round table discussion session

Tuesday 4 September 2007 17:25 (1 hour)

Session Classification: Discussion session 4: Plans and opportunities for studies and tests at CERN and elsewhere

Contribution ID: 22

Type: **not specified**

Generic studies of radioactivity induced by high energy beams in different absorber materials

Presenter: BRUGGER, Markus (CERN)

Contribution ID: 23

Type: **not specified**

Beam impact on collimator materials: Studies for LHC and SPS using BIG

Wednesday 5 September 2007 11:00 (30 minutes)

Presenter: TAHIR, Naeem (GSI)

Session Classification: Session 5: Codes and simulations results

Contribution ID: 29

Type: **not specified**

Discussions and closing remarks

Wednesday 5 September 2007 16:35 (1 hour)

Presenter: SCHMIDT, Rüdiger (CERN)

Session Classification: Session 5: Codes and simulations results

Contribution ID: 31

Type: **not specified**

Overview of FLUKA Energy Deposition and Design Studies for the LHC

Wednesday 5 September 2007 09:00 (30 minutes)

In order to assess the energy deposition in sensitive LHC components, extensive simulations were performed with the Monte Carlo cascade code FLUKA. In many cases specialized solutions needed to be found, challenging in several aspects, i.e., from the calculation as well as from the design point-of-view.

Depending on the problem, detailed geometrical implementations, an accurate consideration of magnetic fields, tracking of particles over hundreds of meters, grazing angles and special biasing need to be considered.

This presentation gives a brief overview over the performed calculations, points out important input- and output parameters and the respective assumptions in the simulation as well as tries giving an overview of related uncertainties, the latter being of statistical and systematic nature.

Co-Authors:

FERRARI Alfredo (CERN), LARI Luisella (CERN), MAURI Marco (CERN), SARCHIAPONE Lucia (CERN),

VLACHOUDIS Vasilis (CERN), CERUTTI Francesco (CERN).

Authors: FERRARI, Alfredo (CERN); BRUGGER, Markus (CERN)

Co-authors: CERUTTI, Francesco (CERN); SARCHIAPONE, Lucia (CERN); LARI, Luisella (CERN); MAURI, Marco (CERN); VLACHOUDIS, Vasilis (CERN)

Presenter: BRUGGER, Markus (CERN)

Session Classification: Session 5: Codes and simulations results

Track Classification: Overview of FLUKA Energy Deposition and Design Studies for the LHC

Contribution ID: 34

Type: **not specified**

Design and testing of ILC Beam Delivery System collimators

Monday 3 September 2007 17:15 (20 minutes)

<p>At the ILC, the removal of halo particles having large amplitudes relative to the ideal orbit is mandatory to both minimise damage to beam line elements and particle detectors and to achieve tolerable background levels in the latter. In the high energy, high intensity environment of the linear collider the low background levels will largely be ensured by placing a set of mechanical spoilers/absorbers very close to the beam. This presents two significant problems: (i) short-range transverse wakefields excited by these collimators may perturb beam motion and lead to both emittance dilution and amplification of position jitter at the IP, and (ii) impact of even a small number of bunches at the expected energy densities can damage the spoilers. Simulations were completed to determine the energy deposition of an ILC bunch using FLUKA, Geant4 and EGS4 to a set of different spoiler designs. These shower simulations were used as inputs to thermal and mechanical studies using ANSYS. A test proposal is under preparation to optimise the material choice and mechanical design of ILC spoilers jaws using ATF and benchmark the energy deposition simulations and the ANSYS studies. Measurements of the transverse wakefields induced by collimators of differing geometries were performed at the End Station A of SLAC. The trajectory of the beam upstream and downstream of the collimator test apparatus was calculated from the outputs of ten BPMs (four upstream and six downstream), thus allowing a measurement of the angular kick imparted to the beam by the collimator under test. The transverse wakefield was inferred from the measured kick. The different aperture designs, a preliminary analysis of the collected data and comparison to theoretical and analytic predictions are presented here. <p>

Author: FERNANDEZ HERNANDO, Juan Luis (STFC/ASTeC)**Presenter:** FERNANDEZ HERNANDO, Juan Luis (STFC/ASTeC)**Session Classification:** Session 1: Introduction –collimators and beam absorbers for different accelerators**Track Classification:** Design and testing of ILC Beam Delivery System collimators

Contribution ID: 35

Type: **not specified**

Numerical tools for the design of beam intercepting devices

Wednesday 5 September 2007 15:00 (20 minutes)

Beam intercepting devices (collimators, targets, absorbers) capable of sustaining high-intensity beams are key elements to meet the future physics needs. The highly non-linear phenomena involved in their design study (cavitation, transient magnetic-hydrodynamic effects on liquid metal jets, phase change, fluid-structure interactions) require advanced simulation tools at the forefront of today's numerical technology. This goes beyond the software usually available which uses numerical techniques not capable of modelling effectively or even unable to study such complex phenomena.

In order to address this issue, a technical survey has been performed to investigate the state-of-the-art in numerical simulations. The capabilities of existing advanced numerical tools has been assessed and a code has been identified which combines comprehensive equations of state, strength and failure material libraries, phase transition models and simulation techniques (meshless finite element methods) indispensable to satisfy the design needs.

The presentation will focus on the rationale for this choice by examples and a benchmark with experimental results on liquid metal targets performed at CERN.

Author: BRUNO, Luca (CERN)

Presenter: BRUNO, Luca (CERN)

Session Classification: Session 5: Codes and simulations results

Track Classification: Numerical tools for the design of beam intercepting devices

Contribution ID: 36

Type: **not specified**

Carbon-metal composites for thermal management

Tuesday 4 September 2007 11:25 (20 minutes)

Carbon-metal matrix composites are a very attractive materials for thermal applications, given their very high

thermal conductivity in at least two planes.

Therefore, in an attempt to obtain a good thermal conducting material as well as a low Coefficient of Thermal

Expansion (CTE), a mixture of reinforcements (graphite and carbon fibre) was infiltrated with liquid alloys.

The role of two reinforcing materials are following: while graphite reinforcement increases thermal

conductivity in the plane direction, the carbon fibre helps to reduce the CTE of the alloy in the same direction.

In the present work, graphite-carbon fibre preforms were infiltrated with Al/Si and Ag/Si alloys by means

of gas pressure to produce an anisotropic composite.

The influence of the volume fraction in the thermal conductivity and CTE was evaluated. The experiments

determined that the manufactured composites has a adequate thermal behaviour to be used as low cost materials in heat spreaders.

Co-Authors: LOUIS Enrique (Alicante University), MOLINA Jose Miguel (Alicante University), PRIETO Richard (Alicante University).

Author: NARCISO, Javier (Alicante University)

Co-authors: LOUIS, Enrique (Alicante University); MOLINA, Jose Miguel (Alicante University); PRIETO, Richard (Alicante University)

Presenter: NARCISO, Javier (Alicante University)

Session Classification: Session 2: New Ideas / New Materials

Track Classification: Carbon-metal composites for thermal management

Contribution ID: 37

Type: **not specified**

Dynamic vacuum - Collimator technology for suppression and control of desorption gases

Tuesday 4 September 2007 10:55 (20 minutes)

During operation with low charge state heavy ions (e.g. U28+) in the GSI synchrotron SIS18, fast beam losses have been observed in experiments. At the same time, a dynamic behaviour of the residual gas pressure was observed. To overcome these problems, a collimator system has been developed and is now in the final preparation for installation into two of the twelve sectors of SIS18 in the shutdown this year. It incorporates the use of the CERN developed NEG coating as well as low desorption rate materials found out by systematic studies using the ERDA (Elastic Recoil Detection Analysis) technology at GSI. The collimator system will both reduce the desorption rate as well as control the not avoidable produced desorption gases. Simulation studies using the code STRAHLSIM as well as construction details are presented.

Co-Authors: SPILLER Peter (GSI)

Author: OMET, Carsten (GSI)

Co-author: SPILLER, Peter (GSI)

Presenter: OMET, Carsten (GSI)

Session Classification: Session 2: New Ideas / New Materials

Track Classification: Dynamic vacuum - Collimator technology for suppression and control of desorption gases

Contribution ID: 38

Type: **not specified**

Dynamic structural analysis of absorbers with spectral-element code ELSE

Wednesday 5 September 2007 15:55 (30 minutes)

The dynamic structural behavior of beam diluter elements TCDS (LHC) and TPSG (SPS), protecting the extraction septum magnets in the event of an asynchronous firing of the extraction kickers, has been studied. The deposited energy densities, estimated by the high-energy particle transport code FLUKA, were converted to internal heat generation rates according to the time dependence of the extracted beam. The transient response to this thermal load was obtained by solving the power deposition and subsequent structural deformation by using the spectral-element code ELSE. This presentation gives a short overview of the used method and describes the spectral-element code ELSE. Furthermore we presents the results of the TCDS and TPSG analysis and finally conclude with some thoughts on the materials and numerical simulations. Co-authors: KADI Yacin (CERN), ROCCA Roberto (CERN), WETERINGS Wim (CERN)

Author: MASSIDDA, Luca (CRS4)**Co-authors:** ROCCA, Roberto (CERN); WETERINGS, Wim (CERN); KADI, Yacin (CERN)**Presenter:** MASSIDDA, Luca (CRS4)**Session Classification:** Session 5: Codes and simulations results**Track Classification:** Dynamic structural analysis of absorbers with spectral-element code ELSE

Contribution ID: 39

Type: **not specified**

Finite Element Methods for the Thermo-mechanical analysis of the Phase I Collimators

Wednesday 5 September 2007 14:00 (20 minutes)

The functional requirements of the LHC Collimators impose, for the start-up of the machine and the initial luminosity runs (Phase 1), a collimation system with a very high dimensional stability in nominal operating conditions, under considerable thermal loads and, at the same time, maximum robustness in case of accidental beam impacts.

In order to meet these requirements and to optimize the complex mechanical design, the extensive use of in-depth numerical analyses was essential. Given the number and the detail of the elements which

had to be taken into account in the collimator model, the recourse to a general-use, comprehensive,

multiphysics finite-element code was necessary: ANSYS Multiphysics proved very effective in dealing

with the coupled thermal/structural problems which were typically encountered and the disparate nature of used materials. The methods used and the approaches developed to correctly apply the thermal loads and to study coupled-field problems in the steady-state and transient domains, using both

fully elastic and elastic-plastic material properties will be presented.

Co-authors: DALLOCCHIO Alessandro (CERN)

Author: BERTARELLI, Alessandro (CERN)

Co-author: DALLOCCHIO, Alessandro (CERN)

Presenter: BERTARELLI, Alessandro (CERN)

Session Classification: Session 5: Codes and simulations results

Track Classification: FE codes for thermo-mechanical analysis for Phase I collimation

Contribution ID: 40

Type: **not specified**

Beam absorbers for Machine Protection at LHC and SPS

Monday 3 September 2007 14:50 (20 minutes)

A variety of machine protection absorbers are foreseen for the SPS and the LHC, to protect against failures during injection and extraction. The functional requirements for the different devices are presented, including expected operating conditions and anticipated performance limitations. General design constraints are briefly discussed, and some issues are outlined for possible future applications

Author: GODDARD, Brennan (CERN)**Presenter:** GODDARD, Brennan (CERN)**Session Classification:** Session 1: Introduction –collimators and beam absorbers for different accelerators**Track Classification:** Beam absorbers for Machine Protection at LHC and SPS

Contribution ID: 41

Type: **not specified**

Lattice optimization for low charge state heavy ion operation - Collimation concepts for beam ions after a charge change

Monday 3 September 2007 16:45 (20 minutes)

We present a new lattice design concept for heavy ion synchrotrons which is optimized for the control

of beam loss by projectile ionization.

The lattice cells of the FAIR SIS100 synchrotron has been designed as charge separators. Thereby ionized projectiles are well separated from the reference beam. The generated peaked loss distribution enables the operation of a highly efficient scraper system.

The main purpose of the scraper system is to suppress and control the production of desorption gases and thereby stabilize the residual gas pressure dynamics.

Co- Authors: OMET Carsten (GSI), SPILLER Peter (GSI)

Authors: OMET, Carsten (GSI); STADLMANN, Jens (GSI); SPILLER, Peter (GSI)

Presenter: STADLMANN, Jens (GSI)

Session Classification: Session 1: Introduction –collimators and beam absorbers for different accelerators

Track Classification: Lattice optimization for low charge state heavy ion operation - Collimation concepts for beam ions after a charge change

Contribution ID: 42

Type: **not specified**

Objectives and questions

Monday 3 September 2007 14:10 (10 minutes)

The idea to organise this workshop came up during the High Intensity High Brightness Hadron Beams workshop, HB2006, Tsukuba, Japan (2006). This workshop will focus on problems and solutions for absorbers and collimators for accelerators with Multi-MJoule stored beam energy. The objective of the workshop is to better understand the technological limits imposed by mechanisms related to beam impact on materials. This presentation will introduce the workshop and the issues to be addressed. The questions raised during the preparation of the workshop will be listed.

Author: SCHMIDT, Rudiger (CERN)**Presenter:** SCHMIDT, Rudiger (CERN)**Session Classification:** Session 1: Introduction –collimators and beam absorbers for different accelerators**Track Classification:** Objectives and questions

Contribution ID: 43

Type: **not specified**

LHC Collimators (Phase II): What is an ideal material?

Tuesday 4 September 2007 08:30 (20 minutes)

The collimation system which is being installed has been designed to ensure high robustness during the LHC start-up and initial luminosity runs (Phase I). However, RF studies predict that the Phase I collimator impedance will prevent the machine from attaining its nominal luminosity. Hence, from the early phases of design, it has been envisaged to complement this system with a series of Secondary collimators (Phase II), allowing to overcome the impedance issue and increase the collimation efficiency. One essential parameter to meet such an ambitious goal will certainly be the type of material chosen for the new collimator jaws. Given the Phase II collimation requirements, this “ideal” material shall have a low electrical resistivity and a relatively high mass density. On top of this, a close-to-zero Coefficient of Thermal Expansion, high yield strength and high thermal conductivity are desirable. The figures of merit which allow to identify the best candidate and the rationale which is behind these figures will be illustrated.

Author: BERTARELLI, Alessandro (CERN)**Presenter:** BERTARELLI, Alessandro (CERN)**Session Classification:** Session 2: New Ideas / New Materials**Track Classification:** LHC Collimators (Phase II): What is an ideal material?

Contribution ID: 44

Type: **not specified**

FE simulation of 450 GeV injection error test

Wednesday 5 September 2007 11:40 (15 minutes)

Dynamic phenomena provoked by the rapid interaction of energetic particle beams with slender structures

usually known as thermally induced vibrations are presented. Specific regard is given to the analysis

of the accident case triggered by a beam injection error at 450 GeV, recently tested at CERN on LHC

collimator prototypes.

A simplified analytical method, which was previously developed, has proved useful to obtain a preliminary

estimation of the vibrations induced on a collimator jaw.

A 3D Finite Element model for thermo-structural fast-transient elastic-plastic analysis has been fully studied.

The numerical method is carefully described with particular attention to initial conditions, boundary conditions

and integration scheme.

Numerical results are in good agreement with experimental measurements performed via Laser Doppler Vibrometer.

Co-authors: BERTARELLI Alessandro (CERN)

Author: DALLOCCHIO, Alessandro (CERN)

Co-author: BERTARELLI, Alessandro (CERN)

Presenter: DALLOCCHIO, Alessandro (CERN)

Session Classification: Session 5: Codes and simulations results

Track Classification: FE simulation of 450 GeV injection error test

Contribution ID: 45

Type: **not specified**

Experimental methods for material measurements at high strain-rate

Tuesday 4 September 2007 15:00 (20 minutes)

The detailed mechanical characterization of a material is the very first step in the design of structural components.

Depending on the type of application (dynamic, impact, thermal loading, fatigue...) different types of tests,

experimental methods, and testing equipments are required. After a general introduction about the effects of dynamic

loading on material behaviour, several related test methods will be outlined and discussed. The experimental

equipment, available at the Reliability and Safety Laboratory of Politecnico di Torino for static and dynamic

characterization of materials, will be described in detail and some examples of the most interesting results will be

presented, with particular attention to metals, polymers, and various types of composites and joints.

Co-authors: PERONI Lorenzo (Politecnico Di Torino)

Authors: PERONI, Lorenzo (POLITECNICO DI TORINO); AVALLE, Massimiliano (POLITECNICO DI TORINO)

Presenter: AVALLE, Massimiliano (POLITECNICO DI TORINO)

Session Classification: Session 3: Experimental results and future tests / test station

Track Classification: Experimental methods for material measurements at high strain-rate

Contribution ID: 46

Type: **not specified**

Beam impact on collimator materials: Studies for LHC by Kurchatov Institute

Wednesday 5 September 2007 12:05 (15 minutes)

Theoretical models and numerical calculations are presented here to understand an influence of the impact of a 7 TeV proton beam on the physical-mechanical properties of collimator materials (C, Cu) used in the LHC. Here we develop the theoretical model for shock wave propagation and theoretical model for calculations of primary radiation damage formation including calculations of a generation rate of point defects and atomic cascades in collimator materials under 7 TeV proton beam irradiation. In our calculations we assume that each 7 TeV proton bunch has 1.1×10^{11} protons with a bunch length of 0.5 ns and a bunch spacing of 25 ns. The high energy stored in each bunch can produce a shock wave and radiation damage near the impacting proton beam in these materials. The theoretical model for the investigations of shock wave propagation in the collimator materials takes into account ionization, electronic excitation, and energy transfer from excited electronic subsystem of material to the ionic subsystem. The changes of some physical properties of the collimator materials during shock wave propagation are considered here. The deposited energy is calculated with the FLUKA program. The numerical results of the microstructure changes in collimator materials produced by shock wave propagation near 7 TeV proton beam are presented for different numbers of bunches. This allows investigating changes of density and internal pressure, the distributions of atomic and sound velocities, and the temperature profiles in electronic and ionic subsystems of materials near the front of shock wave. These results are very relevant for the understanding the behavior of collimator materials used in LHC when hit by a 7 TeV proton beam. The new theoretical models and computer tools are developed for investigations of radiation damage formation: point defects, cascades and sub-cascades near a 7 TeV proton beam in collimator materials: Cu and Graphite, taking into account electronic excitation, energy loss, elastic and inelastic collisions in materials induced by interaction of 7 TeV proton beam with collimator materials. The numerical calculations for generation rates of point defects are based on the numerical calculations of displacement cross sections for point defect production taking into account primary knocked atom (PKA) energy spectra for nuclear products and neutron spectrum near 7 TeV proton beam obtained using FLUKA program.

Co-authors: SEMENOV E.v. (Kurchatov Institute), KOZLOVA O.a. (Kurchatov Institute), ASS-

MANN Ralph (CERN), FERRARI Alfredo (CERN), SCHMIDT Rudiger (CERN)

Author: RYAZANOV, Alexander (KURCHATOV INSTITUTE)

Co-authors: FERRARI, Alfredo (CERN); SEMENOV, E.V. (KURCHATOV INSTITUTE); KOZLOVA, O.A. (KURCHATOV INSTITUTE); ASSMANN, Ralph (CERN); SCHMIDT, Rudiger (CERN)

Presenter: RYAZANOV, Alexander (KURCHATOV INSTITUTE)

Session Classification: Session 5: Codes and simulations results

Track Classification: Beam impact on collimator materials: Studies for LHC by Kurtchatov Institute

Contribution ID: 48

Type: **not specified**

Diamond-based Metal Composites

Tuesday 4 September 2007 09:00 (20 minutes)

High end applications as the beam collimators for the LHC or first wall materials in fusion reactors require not only innovative engineering of the assembly and the structural parts but require also unique property combinations of the materials they are made of, e.g. good electrical conductivity, high thermal conductivity, low absorption of elemental particles, low coefficient of thermal expansion (CTE), high stiffness, high strength etc.. Some of these requirements may even be mutually exclusive in monolithic materials. A common strategy to cope with such unprecedented property combinations is to use a composite approach, which is essentially a structural solution on the micron scale. In this talk materials combining diamond particles and metallic matrices are presented that combine low CTE, high thermal and electrical conductivity, and high stiffness. A few fundamental issues concerning the potential and the limitations of these materials as well as possibilities to manufacture such materials and current challenges in the development will be discussed.

Author: WEBER, Ludger (EPFL)**Presenter:** WEBER, Ludger (EPFL)**Session Classification:** Session 2: New Ideas / New Materials**Track Classification:** Diamond-based Metal Composites

Contribution ID: 49

Type: **not specified**

Irradiation damage in LHC beam collimating materials

Tuesday 4 September 2007 15:55 (20 minutes)

Demand for high-performance materials that can safely intercept the LHC proton beam has prompted an extensive experimental study focusing on material degradation due to long radiation exposure. Given the multi-MW class of the beam interception process at LHC combined with the stringent positional requirements on the intercepting elements, the envelope of the current knowledge regarding material behavior and endurance for both short and long exposure needs to be extended. For the collimating structures intercepting the halo of an intense beam under normal or the entire beam during off-normal conditions, performance issues are essential and directly tied to materials and their ability to maintain key properties and absorb beam-induced shock. The limitations of most materials in playing such pivotal roles have led to an extensive search and experimentation with new alloys and composites that appear to possess the right combination of properties. Post-irradiation analysis results following exposure to the 200 MeV protons at the end of the BNL Linac will be presented. In addition, preliminary results of estimated neutron-induced damage on LHC materials will be discussed as a result of experimentation with a “unique” neutron source at BNL. Co-authors: MOKHOV Nikolai (BNL)

Authors: SIMOS, Nick (BNL); MOKHOV, Nikolai (FERMILAB)

Presenter: SIMOS, Nick (BNL)

Session Classification: Session 3: Experimental results and future tests / test station

Track Classification: Irradiation damage in LHC beam collimating materials

Contribution ID: 50

Type: **not specified**

Experience with implicit and explicit codes in analysing beam-induced thermo-mechanical shock

Wednesday 5 September 2007 14:30 (20 minutes)

In an effort to extrapolate the interaction of intense proton pulses with materials to power levels beyond those achieved to-date in accelerators, computational schemes based on finite element formulation are being widely employed. While the long-term interaction between radiating particles and materials result in the degradation of the ability of a material to absorb the induced shock, a concern addressed in parallel studies that is coupled with shock resistance, it is the rapid heating and shock generation in a material that results from short exposure to intense pulses that poses a serious concern and, for the power levels under consideration, is accompanied with serious uncertainties. Experimental studies at power levels generated by currently operating accelerators have been used to benchmark the computational processes which will be used to extrapolate the material response to desired, but yet to be achieved power levels. Different computational schemes that may serve different stages of the interaction problem may be utilized. The choice of such scheme is inherently bound between accuracy and computational cost. This presentation will discuss both the similarities as well as differences between implicit and explicit numerical formulations applicable to the thermo-mechanical shock problem where realistic description of the problem itself requires high-fidelity modeling or discretization and high computational cost regardless of the scheme selected. Experience from the benchmarking of numerical schemes against experimental results will also be presented.

Author: SIMOS, Nick (BNL)**Presenter:** SIMOS, Nick (BNL)**Session Classification:** Session 5: Codes and simulations results**Track Classification:** Experience with Implicit and Explicit codes in analyzing beam-induced thermo-mechanical shock

Contribution ID: 51

Type: **not specified**

Phase II Collimators for LHC Upgrade at SLAC - Material Issues

Monday 3 September 2007 16:15 (20 minutes)

A rotatable collimator as developed at SLAC for NLC was proposed for LHC's Phase II upgrade to provide a low impedance metal collimator, able to recover from several damaging hits by the beam. This talk reviews the technical problems involved, the FLUKA/ANSYS simulations which have guided our design decisions and the materials considered for the jaws. It focuses on the the reasons for the choice of Glidcop, copper and molybdenum for the jaws and the ongoing material issues relating to the jaws and ancillary components.
Co-authors: ANZALONE Leonard (SLAC), CAI Yunhai (SLAC), KELLER Lewis (SLAC), LUNDGREN Stephen (SLAC), MARKIEWICZ Thomas (SLAC), SMITH Jeffrey (SLAC)

Author: DOYLE, Eric (SLAC)

Co-authors: SMITH, Jeffrey (SLAC); ANZALONE, Leonard (SLAC); KELLER, Lewis (SLAC); LUNDGREN, Stephen (SLAC); MARKIEWICZ, Thomas (SLAC); CAI, Yunhai (SLAC)

Presenter: DOYLE, Eric (SLAC)

Session Classification: Session 1: Introduction –collimators and beam absorbers for different accelerators

Track Classification: Phase II collimators for LHC upgrade at SLAC

Contribution ID: 52

Type: **not specified**

Copper based composites reinforced with carbon nanofibers

Tuesday 4 September 2007 09:30 (20 minutes)

The Powder Technology Center of the Austrian Research Centers GmbH is working since several years on the development of materials with advanced thermal properties. Different Cu and Al based fiber or particle reinforced composites have been studied. As reinforcement materials carbon fibers, carbon nanofibers (nanotubes), SiC or diamond particles have been used to prepare materials with high thermal conductivity and reduced coefficient of thermal expansion. Such materials are of interest for heat sinks or heat spreaders in electronic's cooling. One material with a high potential - but big challenges - are copper reinforced by carbon nanofibers. Carbon nanofibers are a promising reinforcement material for copper based composites. The high thermal conductivity of the carbon nanofibers (up to 2000 W/mK) is expected to improve the thermal properties of the composite material. One main problem is the lack of any interfacial reaction between copper and carbon based materials, which requires either a pre-treatment of the nanofibers and/or modification of the matrix (e.g. via alloying). The influence of both possibilities on the thermal performance (thermal diffusivity/conductivity and Coefficient of Thermal Expansion) of the material will be shown. In addition microstructure analyses are carried out in order to assess the nanofiber distribution and the quality of the interface.

Author: NAGEL, René (ARC)**Presenter:** NAGEL, René (ARC)**Session Classification:** Session 2: New Ideas / New Materials**Track Classification:** Copper based composites reinforced with carbon nanofibers

Contribution ID: 53

Type: **not specified**

LHC requirements for collimation

Monday 3 September 2007 14:20 (20 minutes)

LHC foresees a staged implementation of collimation. The first stage is presently being constructed and installed.

A second stage should allow an even higher performance reach and should address several possible limitations in

the initial installation. Collimators are the closest elements to the high-intensity LHC beam and must be designed to

directly intercept beam particles. The question of material with high power load and high activation is a crucial ingredient

in the studies towards an upgraded collimation system. The open questions and required boundary conditions for

jaw materials in the LHC collimation system are presented.

Author: ASSMANN, Ralph (CERN)

Presenter: ASSMANN, Ralph (CERN)

Session Classification: Session 1: Introduction –collimators and beam absorbers for different accelerators

Track Classification: LHC requirements for collimators

Contribution ID: 54

Type: **not specified**

Studies of radiation effects on graphite collimator materials

Tuesday 4 September 2007 16:25 (15 minutes)

The effect of the 7 TeV proton beam irradiation on degradation of physical mechanical properties of graphite collimator materials for LHC is very important for the understanding of stability the collimators during operation of the LHC. At such high energies the carbon atoms in graphite collimator materials of LHC can get also very high energy with primary knock on carbon atoms (PKA) reaching an energy of up to hundred GeV due to elastic collisions with secondary particles formed in nuclear reactions. Carbon PKA atoms with such high energy will produce radiation damage. The radiation resistance of graphite collimator materials will be determined by the microstructure change under irradiation and defect cluster formation in atomic collision cascades. The main aim of these investigations is to measure the effect of fast particle irradiation (carbon ions) on physical-mechanical property changes of different graphite materials: thermal conductivity, thermal expansion coefficient, mechanical properties (including the measurements of compression ultimate tensile stress, dynamic elastic module, static elastic module), electrical resistivity, lattice constant and microstructure change. Samples of various types of graphite collimator materials prepared by different firms for CERN were investigated: C-C composite graphite REC, C-C composite graphite material AC and high-density graphite material R4SSO. The obtained results for the measurements of initial physical-mechanical properties of these materials and effect of irradiation of carbon ions with an energy of 5 MeV on radiation swelling and radiation erosion of these materials are discussed here. The microstructure investigations of irradiated samples have been performed as a function of the irradiation dose of fast carbon ions up to total dose of carbon ions 10^{18} cm^{-2} . The performed investigations shown that best radiation resistance properties including dose dependence of radiation swelling at room temperature has composite material R4SSO. Other C-C composite materials such as REC and AC have not so high radiation resistance properties that were confirmed by the dose dependence of radiation swelling.

Co-authors: BRUCHANOV A.n. (Kurchatov Institute), CHUGUNOV O.k. (Kurchatov Institute), LATUSHKIN S.t. (Kurchatov Institute), PRICHODKO K.e. (Kurchatov Institute), UNEZEV V.n. (Kurchatov Institute), ASSMANN Ralph (CERN), ABERLE Oliver (CERN), BERTARELLI Alessandro (CERN)

Author: RYAZANOV, Alexander (KURCHATOV INSTITUTE)

Co-authors: BERTARELLI, Alessandro (CERN); PRICHODKO, K.E. (KURCHATOV INSTITUTE); CHUGUNOV, O.K. (KURCHATOV INSTITUTE); ABERLE, Oliver (CERN); ASSMANN, Ralph (CERN); LATUSHKIN, S.T. (KURCHATOV INSTITUTE); UNEZEV, V.N. (KURCHATOV INSTITUTE)

Presenter: RYAZANOV, Alexander (KURCHATOV INSTITUTE)

Session Classification: Session 3: Experimental results and future tests / test station

Track Classification: Studies of radiation effects on graphite collimator materials

Contribution ID: 56

Type: **not specified**

Simulating radiation damage effects in LHC collimators (code development status)

Wednesday 5 September 2007 10:35 (15 minutes)

The current status of the code development for simulating the structural damage of the graphite jaws of the LHC collimators produced by 7 TeV protons is presented. The technique, which is being developed in the framework of the Monte Carlo code FLUKA, combined with the results of experimental tests of carbon-carbon composite materials in radiation hard environment will be capable of evaluating lifetime of the collimation system.

Co-authors: ASSMANN Ralph (CERN), BRAUN Hans (CERN), FERRARI Alfredo (CERN), GILARDONI Simone (CERN), JOWETT John (CERN), VLACHOUDIS Vasilis (CERN)

Author: SMIRNOV, George (CERN)

Co-authors: FERRARI, Alfredo (CERN); BRAUN, Hans (CERN); JOWETT, John (CERN); ASSMANN, Ralph (CERN); GILARDONI, Simone (CERN); VLACHOUDIS, Vasilis (CERN)

Presenter: SMIRNOV, George (CERN)

Session Classification: Session 5: Codes and simulations results

Track Classification: Studies of radiation effects on graphite collimator materials

Contribution ID: 57

Type: **not specified**

Development and manufacturing status of diamond-based composites

Tuesday 4 September 2007 10:25 (20 minutes)

Advanced metal diamond composites with Silver, Aluminum and Copper matrices exhibit high thermal conductivity in the range of 400-700 W m⁻¹ K⁻¹ and low CTE of about 7 –9 ppm/K. A gas pressure assisted infiltration process has been developed for cost-efficient industrial production of diamond composite substrates and heat sinks.

The composite microstructure and interface morphology determine the thermal properties and reliability during thermal cycling and represent the key to advanced composite formation. An industrial scale pilot production has been installed

and the product has reached a degree of maturity allowing the application for current and future high end thermal

management applications. The status of product development as well as thermal and mechanical properties and

results of thermal cycling tests will be reviewed.

Co-authors: BOLLINA Ravi (PLANSEE SE), MROTZEK Tobias (PLANSEE SE)

Author: KNIPPSCHEER, Sven (PLANSEE SE)

Co-authors: BOLLINA, Ravi (PLANSEE SE); MROTZEK, Tobias (PLANSEE SE)

Presenter: KNIPPSCHEER, Sven (PLANSEE SE)

Session Classification: Session 2: New Ideas / New Materials

Track Classification: Development and manufacturing status of diamond-based composites

Contribution ID: 59

Type: **not specified**

Issues Raised by the Design of the LHC Beam Dump Entrance Window

Wednesday 5 September 2007 08:30 (20 minutes)

The LHC beam dump entrance window consists of a carbon-carbon composite structural sheet backed by a thin stainless steel foil for leak tightness.

The design of this window has highlighted issues that merit further investigation.

The use of the bulk coefficient of thermal expansion coefficient for the composite should be questioned

where there is a significant temperature gradient between individual fibres.

Differential thermal expansion between fibre and matrix could lead to thermally induced fatigue.

The validity of the analytical dynamic stress model used should be confirmed by finite element or experiment.

After a brief description of the window design, I will outline the issues. From this I will draw some conclusions

about further analysis and the possible advantages of using windows to perform material and structural experiments.

Author: VENESS, Raymond (CERN)

Presenter: VENESS, Raymond (CERN)

Session Classification: Session 5: Codes and simulations results

Track Classification: Issues Raised by the Design of the LHC Beam Dump Entrance Window

Contribution ID: 60

Type: **not specified**

Tevatron Collider Collimators and Absorbers

Monday 3 September 2007 15:45 (20 minutes)

Beam collimation is mandatory at any superconducting collider to protect components against excessive

irradiation, minimize backgrounds in the experiments, maintain operational reliability over the life of the machine,

and reduce the impact of radiation on environment, both at normal operation and accidental situations.

Highly-efficient two-stage collimation system at Tevatron reliably serves these purposes.

The system evolution over 25 years is described. Recent developments include marble shells and crystal collimation.

The later, gives a possibility to test channeling techniques in a collider as an interesting option for LHC.

External and internal Tevatron collider beam absorbers are described. They also exhibit high performance.

Author: MOKHOV, Nikolai (FERMILAB)

Presenter: MOKHOV, Nikolai (FERMILAB)

Session Classification: Session 1: Introduction –collimators and beam absorbers for different accelerators

Track Classification: Tevatron Collider Collimators and Absorbers

Contribution ID: 61

Type: **not specified**

Accelerometer and microphone measurements of the LHC collimator

Tuesday 4 September 2007 14:30 (20 minutes)

Sound and vibration measurements of the LHC collimator were performed with various accelerometers and a microphone during collimator robustness tests in 2004 and 2006. The collimator jaws were hit by 450 GeV protons beam of up to 3.5×10^{13} , equivalent to a total energy of about 2.4 MJ (0.65% of the nominal LHC beam at 7 TeV). It was demonstrated that these measurements can be used to detect beam impacts of LHC beams on the collimators and hence possibly damaged collimators. In this talk the experimental layout is presented and detailed frequency analysis of the measured vibration signals are presented.

Author: REDAELLI, Stefano (CERN)**Presenter:** REDAELLI, Stefano (CERN)**Session Classification:** Session 3: Experimental results and future tests / test station**Track Classification:** Accelerometer and microphone measurements

Contribution ID: 62

Type: **not specified**

Generic studies of radioactivity induced by high energy beams in different absorber materials

Wednesday 5 September 2007 09:40 (20 minutes)

A rigorous campaign of benchmark measurements for materials typically used at accelerators has shown the high accuracy of FLUKA calculations for isotope production and residual dose rates. Accurate estimates of both quantities are important during all phases of an accelerator, i.e., design, operation and decommissioning.

A detailed implementation of geometries and accurate consideration of loss assumptions allows optimizing the layout of components

and performing detailed intervention planning starting already efficiently during the design phase.

Recent design modifications have shown the need to derive practical scaling coefficients in order to quickly assess

how estimated results can be roughly scaled for different assumptions affecting the calculated quantities, e.g.: chosen materials;

beam energies and particles; loss conditions, cooling times and beam impact parameters.

This talk gives an overview of dedicated generic simulations and the comparison of residual dose rates

for different chosen representative configurations.

Furthermore, the major contributing isotopes are derived

and obtained results are compared to those of dedicated simulations (TDI, IR7 collimators, etc).

Co-authors: ROESLER Stefan (CERN), FORKEL-WIRTH Doris (CERN)

Authors: FORKEL-WIRTH, Doris (CERN); BRUGGER, Markus (CERN); ROESLER, Stefan (CERN)

Presenter: BRUGGER, Markus (CERN)

Session Classification: Session 5: Codes and simulations results

Track Classification: Generic studies of radioactivity induced by high energy beams in different absorber materials

Contribution ID: 63

Type: **not specified**

TT40 collimator –Deformation measurement after beam test

Wednesday 5 September 2007 15:30 (10 minutes)

Author: CHAMIZO, Rocio (CERN)

Presenter: CHAMIZO, Rocio (CERN)

Session Classification: Session 5: Codes and simulations results