



### **Summary of ST/MA deliverables for LHC**

Luigi Scibile for the ST/MA group



### **Summary of deliverables**



- Access control systems
- Access safety systems
- Fire, gas and oxygen detection systems
- Evacuation systems
- Safety alarm transmission system (CSAM project)
- Technical infrastructure monitoring systems (TIM project)
- Radiation monitoring systems (RAMSES project) (in collaboration with TIS)

#### Access SAFETY systems Exppartooppoint 1 **Summary of deliverables** The LHC buildings access control systems PX15 PM15 USA15 UPS14 The LHC sites access UJ13 the LHC control systems ULX16 experimental **During beam operation, the LHC** services areas accelerator and experiment access access control RB16 AC3s UPS16 **US15** control systems is interlocked with: systems: for UL16 **ACCESSIBLE** areas The LHC accelerator and experiment during beam UJ16 access SAFETY system: beam and machine **UJ17** operation interiock for personnel protection.



## Gas, fire and oxygen deficiency detection systems



Summary of deliverables

- The Gas, fire and oxygen deficiency detection systems included in the ST/MA deliverables are:
  - The LHC Surface Detection of Fire, Gas and ODH systems
  - The LHC Underground Machine Fire Detection systems
  - The LHC Underground Machine ODH systems
  - LHC Experimental Areas Fire & Gas detection systems
  - The SNIFFER Experiment detection systems

#### Main Functions:

- To detect the hazard in an early stage and inform the Fire Brigade
- To trigger local safety actions if possible (e.g. close gas valves, electrical cuts, etc...)





- The evacuation systems included in the ST/MA deliverables covers the evacuation of the main LHC caverns.
- Extension to all the machine is pending validation
- **♦ The LHC Evacuation system has two main functions:** 
  - Sound the emergency evacuation LHC
  - Sound a Beam Imminent Warning (BIW) before injecting the beam in the LHC.



## CERN Safety Alarm Monitoring system (CSAM project)

ST/MA for LHC

Summary of deliverables

- The safety alarm monitoring systems included in the ST/MA deliverables are:
  - The SCR and TCR central monitoring systems
  - All LHC safety zones (10) alarm acquisition and display systems

### Main Functions:

- A local monitoring from the 10 LHC safety zones
- Fire Brigade central monitoring, archiving, display and reporting
- Non-interruptible 24h/365d system based on redundant networks
- Specific human computer interfaces and tools for the alarm handling



## LHC Technical Infrastructure Monitoring system (TIM project)

ST/MA for LHC

Summary of deliverables

- The LHC Technical Infrastructure Monitoring system included in the ST/MA deliverables covers:
  - the technical data acquisition, transmission, logging and display from all the LHC and LHC experiments technical infrastructure needing supervision from the TCR.

#### Main Functions:

- Integration tools
- Transmission tools -> for the technical infrastructure
- Monitoring tools



## Radiation Monitoring System for the Environment and Safety system (RAMSES project)




Summary of deliverables (in collaboration with TIS)

- The radiation monitoring systems included in the ST/MA deliverables are:
  - The LHC environmental monitoring systems for the ventilation gas for all sites
  - The LHC environmental monitoring systems for the release water for all sites (radiation and non-radiation) for all sites
  - The LHC meteorological monitoring systems for the environmental impact evaluation
  - The LHC environmental radiation monitoring systems
  - The LHC radiation personnel protection systems for mixed radiation fields, X rays and photons for the surface and underground machine and experimental areas.
  - **The LHC** radiation personnel contamination monitor systems for β and γ radioactivity for all sites.

## Radiation Monitoring System for the Environment and Safety system (RAMSES project) - Ex. part of point 5



Summary of deliverables (in collaboration with TIS)

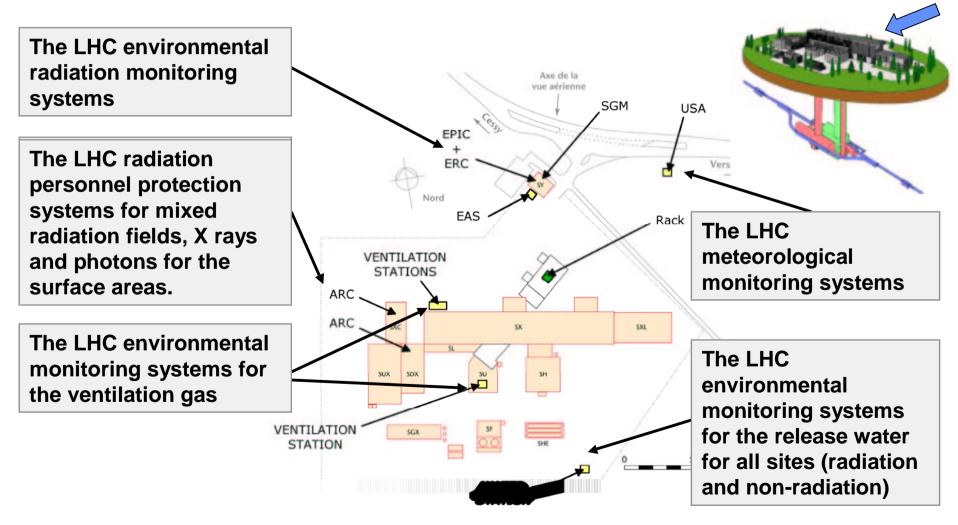



### Radiation Monitoring System for the Environment and Safety system (RAMSES project) - Ex. part of point 5



### Summary of deliverables (in collaboration with TIS)

The LHC radiation personnel contamination monitor systems for  $\beta$  and  $\gamma$  radioactivity for all sites.

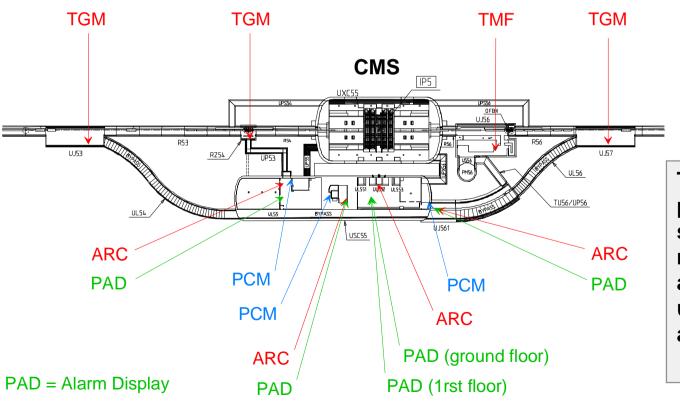



The LHC radiation personnel protection systems for mixed radiation fields, X rays and photons for the underground machine and experimental areas.



# **Conclusions**ST/MA deliverables: Facts and Figures



Systems/sub-systems: ~ 420

Engineering effort ~ 10 Man/year per year

♦ Contracts
4 + 3 in preparation

Computers/ Workstations : ~ 130/40

◆ PLC: ~ 200

Access gates/doors: ~ 10/80

Access identifications: ~ 150

Video cameras: ~ 100

Fire&Gas stations/sensors: ~ 140/1220

Radiation stations/sensors: ~ 80/360

♦ Generic sensors: ~ 370

♦ Generic Inputs/Outputs: ~ 6200

♦1-03 ATOTAL estimated value (ENM); 31.000.000 CHF





- Specifications of some systems are still pending validation
- Working on engineering specifications and the contact with the requesters for final validations
- Among the last services to be installed
- Collaborations, integration with the coordinating committees, within Earned Value Management, on-the-field coordination.
- Matrix organisation
- Take care of the teams evolution