

#### **2005 HIPPI Activities**

Maurizio Vretenar, CERN

- HIPPI Structure
- 2005 Highlights
- ESAC Report
- Planning and deliverables

## HIPPI: High Intensity Pulsed Proton Injectors



#### Main objective:

Research and development of the technology for high intensity pulsed proton linear accelerators up to an energy of 200 MeV.

#### Applications of the HIPPI results:

Upgrade of the linac injectors for GSI, CERN and RAL.

#### 9 participating laboratories:

RAL, CEA, CERN, FZJ, GSI, IAP-FU, INFN-MI, LPSC, IPNO

#### Expected budget:

14.7 M€ (FC-equivalent), EU contribution 3.6 M€


#### Hot topics for HIPPI R&D



- High shunt impedance normal conducting cavities
  - Focusing elements integrated/separated in the structure
- Low beta superconducting cavities
  - Pulsed operation
- Lossless injection in a ring
  - Fast chopping
- Control of the halo
  - Beam dynamics code development

#### **HIPPI Structure**



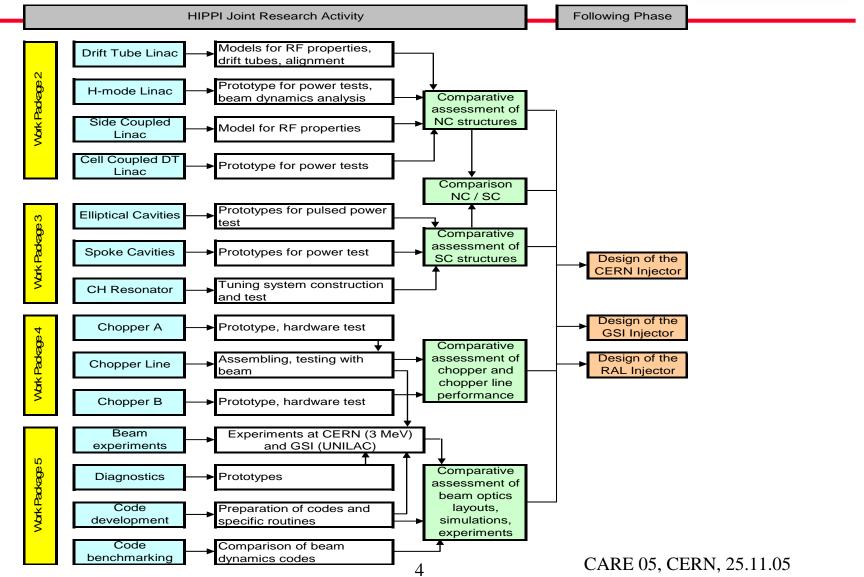

## **HIPPI Management**



From 1st July, 2005:

Coordinator: M. Vretenar replaced R. Garoby

Deputy Coordinator: A. Lombardi replaced M. Vretenar

#### WP Coordinators:

WP2: J.M. De Conto (IN2P3)

WP3: S. Chel (CEA)

WP4: A. Lombardi (CERN, confirmed)


WP5: I. Hofmann (GSI)

Reason for change purely CERN-related (R. Garoby took charge of the AB-BDI Group at CERN, and was forced to reduce his other activities). Continuity in the HIPPI Management, coordinator and deputy from CERN - allows sharing of tasks and more effective work.

#### **HIPPI in 2005**



- Critical year: highest number of milestones in the entire project!

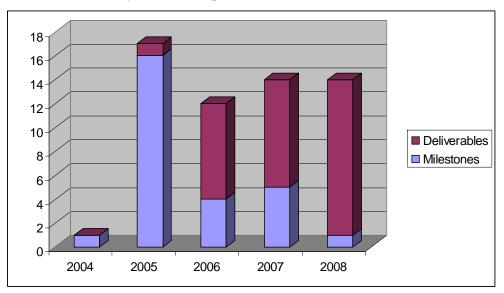

	Milestones	Deliverables	Total
2004	1	0	1
2005	16	1	17
2006	4	8	12
2007	5	9	14
2008	1	13	14
			58

- Constant exchange of information, more integration inside work packages and between work packages (see ESAC report).
- Internal and External (collaboration) meetings with good attendance and good quality of presentations.

## **2005 Meetings**



	Jan.	Feb.	March	April	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
CARE & HIPPI							-					
CSC meetings				5 CERN					5 & 6 Paris			
Workshop WP2		/				2 &3 CERN						
Workshop WP3			13 & 14 INFN-Mi									
Workshop WP4		/		13 &14 RAL								
Workshop WP5				14 & 15 RAL								
HIPPI yearly meeting									28 - 30 RAL			
CARE yearly meeting											23 - 25 CERN	)
Other workshops												
High Power SC Linac					23 - 25 FNAL							
Other collaborations												
<u>IPHI-SPL</u>	27 & 28 CERN										17 – 18 IPNO	
Russia (ISTC)				13 - 19 Russia				17 – 19 CERN (DTL)		10 – 13 CERN (CCDTL)		
Miscellaneous												
INTC										10 - 14 CERN		
PAC05					16 - 20 Knoxville							
ICIS05									12 -16 Caen			

#### **Dissemination & Recruitment**



- Publications of 26 HIPPI papers January-November 2005:
   11 Conference papers, 7 CARE Notes, 8 HIPPI Documents (average of 2.4 per month).
- Recruitment: 5 new positions in 2005 (relatively long term: 3 for 3 years, 2 for 2 years), which add to the 4 positions opened in 2004 (for 3 years).
- HIPPI is recruiting talented and motivated young people and is training them in field of accelerators.

#### Attracting a new partner



- Proposition for an additional member:

INFN-Naples has experience in Side Coupled NC Structures for medical applications. The SCL team (Prof. Vaccaro &C.) is ready to participate to the HIPPI WP2 activity from 2006.

A common programme has been defined with the laboratories working on this subject inside HIPPI and with the WP Coordinator.

## **2005 Annual Meeting**







The Cosener's House Abbey Close Abingdon, UK (organised by RAL)

- 43 participants from all the participating laboratories (38 for HIPPIO4).
- 30 technical presentations covering all aspects of HIPPI work.
- 25% of time devoted to questions and discussion.
- 2 members of the External Scientific Advisory Committee (ESAC) present, a 3<sup>rd</sup> contributed to the report.

## HIPPI 05 Programme - 1



	Wednesday 28, September, morning								
9h00	Welcoming address	C. Prior							
9h15	Status of HIPPI and introduction to the meeting	M. Vretenar							
	WORK PACKAGE 4 (Chopper)								
9h45	Introduction (10'+5')	A. Lombardi							
10h00	Status of the CERN chopper (25'+5')	M. Paoluzzi							
10h30	Coffee Break								
11h00	Status of the RAL 'Fast-Slow' beam chopper development programme (25'+5')	M. Clarke-Gayther							
11h30	The FETS: Front End Test Stand (15'+5')	A. Letchford							
11h50	Beam dynamics studies and design options for the RAL FETS chopper line (10'+5')	G. Bellodi							
12h05	Status of the CERN Chopper line (10'+5')	A. Lombardi							
12h20	Design of a rebunching cavity for the RAL FETS chopper line (10')	C. Plostinar							
12h30	End of session								
	Wednesday 28, September, afternoon								
	WORK PACKAGE 2 (Normal Conducting RF struct.)								
14h00	Introduction (10')	J.M. De Conto							
14h10	Progress on DTL design for CERN (30'+10')	F. Gerigk							
14h50	Waveguide RF coupler for NC structures (20'+10')	Bernaudin /Deconto							
15h20	Preliminary DTL studies at RAL (15'+5')	C. Plostinar							
15h40	Coffee Break								
16h10	Status of the RT CH-DTL development and beam dynamics layout of the GSI Proton Linac	G. Clemente							
16h50	CCDTL design and prototype measurements (20'+10')	M. Pasini							
17h20	Side Coupled Linac design at CERN (15'+5')	M. Pasini							
17h40	Side Coupled Linac analysis at LPSC (15'+5')	J.M. De Conto							
18h00	Adjourn								

## HIPPI 05 Programme - 2



Thursday 29, September, morning						
WORK PACKAGE 3 (Superconducting RF structures)						
Introduction (10')	S. Chel					
Status report of coaxial tuner design (25'+5')	P. Pierini					
Status of HIPPI activities at CEA-Saclay (35'+5')	G. Devanz					
Measurements with the 760 MHz Triple Spoke Cavity (15'+5')	R. Eichhorn					
Coffee break						
Final Mechanical Design of the 352 MHz Cavity and Options for Tuning (15'+5')	E. Zaplatine					
Status of spoke cavities at IN2P3-IPNO (25'+5')	G. Olry					
Status of the superconducting CH-Structure at IAP-FU (25'+5')	H. Podlech					
Super-conducting slot-finger structure with RF focusing (10'+10')	Y. Senichev					
End of session						
Thursday 29, September, afternoon  WORK PACKAGE 5 (Beam Dynamics)						
Introduction (10'+5')	I. Hofmann					
Development of non-intercepting longitudinal and transverse beam profile monitors (15'+5')	P. Fork					
High Intensity beam dynamics in the slot-finger structure (15'+5')	N. Vasyukhin					
Status of diagnostics development at FZJ (10'+5')	R. Tölle					
Progress in HIPPI code benchmarking (15'+5')	A. Franchi					
Coffee break						
Status report on the beam shape and halo monitor (15'+5')	M. Hori					
Beam dynamics in the Linac4 (10'+5')	A. Lombardi					
Measurements & simulations on emittance growth due to space charge along the DTL of the	L. Groening /					
GSI UNILAC (20'+5')	W. Bayer					
Status of LORASR Code Development and Recent Benchmarking Results (20'+5')	R. Tiede					

### HIPPI 05 Programme - 3



#### Friday 30, September, morning

Meeting on HIPPI administrative matters and planning for 2006 (in parallel with ESAC deliberations) ESAC preliminary assessment Concluding talk

Friday 30, September, afternoon: Visit to Rutherford Laboratory

#### Friday morning:

- Dissemination.
- 2006 planning.
- Budget status.
- CAREO5, HIPPIO6.


# Highlights WP 2 – Normal Conducting Structures



Investigation and comparison of 4 different types of NC structures:


2 standard: Drift Tube Linac (DTL) and Side Coupled Linac (SCL),


2 new: Cell-Coupled DTL (CCDTL) and CH-DTL.



DTL design (here 3D RF simulation showing B-field distribution) developed by CERN, LPSC and CEA.

RF coupler for DTL structures, developed by CEA and LPSC for CERN DTL prototype. Design completed, will be built at LPSC.





Design of SCL cells (here thermal study by LPSC) jointly by LPSC and CERN.


#### **WP2 Normal Conducting**




#### Engineering and prototyping of 2 novel accelerating structures:




CCDTL pre-prototype finished at CERN, ready for power tests (left). Prototype design finished (right), will be built in Russia (agreement with ISTC).



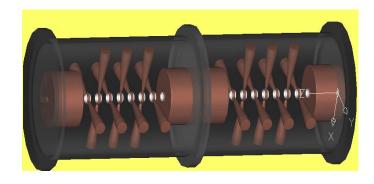

CH-DTL design completed (left, CH-DTL tanks with new end cells) and components for cold model built (press-fitted drift tubes, right).




Concerns for WP2: delays from CERN workshops, difficulties in recruitment (LPSC).

## Highlights WP 3 – Superconducting Structures





Focused on SC cavities for pulsed mode operation in the range 350-700 MHz

RF & mechanical design of elliptical (CEA) and spoke cavities (FZJ). Mechanical behavior in pulsed mode (CEA, INFN, FZJ, IPNO,IAP-FU) Tuner design for elliptical (INFN, CEA) and CH (IAP) cavities. Coupler design for multigap spoke (IPNO) and elliptical (CEA) cavities.

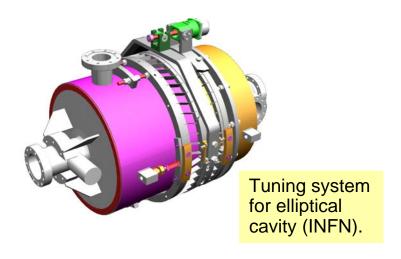

Stiffening rings for elliptical cavity (CEA, top) and for triple-spoke cavity (FZJ, bottom).





Preparation of test stand in Saclay is progressing (klystron ordered, modulator in preparation).

CARE 05, CERN, 25.11.05

#### Progress of the work : cavity tests





Cool-down and 1st test sc 700 MHz spoke

FZ- Juelich March 2005



Cool-down and 1st test sc 352 MHz spoke

IPN- Orsay April 2005




Cool-down and 1st test sc CH cavity

Frankfurt University
July 2005


### WP 4 – Beam chopping




Design of fast choppers (2 ns rise and fall time electrostatic kickers to prepare the beam for lossless injection into a ring) with appropriate drivers, dump and beam line.




CERN chopper assembled, ready for testing.



Beam dynamics design (envelopes) of CERN chopper line.



RAL chopper design. Driver components ordered and received, line redesigned.

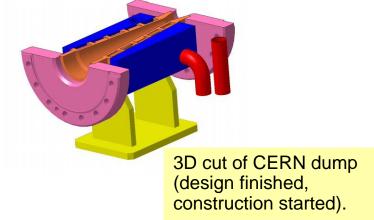

Concerns: delays from CERN workshops, need revision to the schedule.

### **WP 5 – Beam dynamics**




Preparation of appropriate tools for the analysis of high-intensity linear accelerators: beam dynamics codes and detectors.

Benchmarking of 7 codes (some old, some new, some updated) started, to be compared with measurements to be done at the UNILAC DTL linac at GSI (March and October 06).

Progress in the understanding of beam neutralization phenomena.

Different detectors developed at GSI, FZJ and CERN

Beam Shape and Halo Monitor assembled and tested at CERN: provides high sensitivity and dynamic range of 10<sup>6</sup> to identify halo from main beam. (only deliverable in 2005).

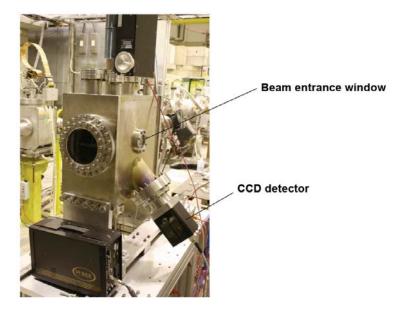

#### **ESAC** Assessment



- 2 ESAC members present at Abingdon (J. Stovall, A. Pisent), 1 contributed via e-mail (Y. Yamazaki), ESAC report received on Nov. 16<sup>th</sup>.
- 8 page document, quite complete analysis of all HIPPI activities, will be annexed to the HIPPI Annual Report.
- "The HIPPI activities represent the bulk of R&D activities addressing high-current linac technology under way worldwide."
- "We find the work to be of high quality and are encouraged to see HIPPI being used as a vehicle for recruiting new members to the fraternity of accelerator designers. It is very encouraging to see that some of the funding has been directed towards facility improvements aimed at advancing the art."
- "The committee is pleased to observe no reluctance among the participants to collaborate with their colleagues and in some cases to note strong inter-lab collaborations."
- WP4: noticed "stronger collaboration" from last year, still to improve collaboration with WP5.
- WP2: "very pleased" for response to last year remarks on DTL, check post-couplers length and cost CCDTL.
- WP3: better synthesis of activities and collaboration with WP5. "The collaboration among members of this work package is very strong, with many examples of common design choices and common use of existing infrastructures and instrumentation. Such continued collaboration will assure optimum use of the high-power RF test stand presently under development."
- WP5: stress importance of dynamics for ring injection, strengthen code benchmarking and coordination for detectors, test promising halo monitor.
- General comment: define a common set of HIPPI objectives, use to compare structures across WP's.

## Detailed planning and progress




#### **Progress up to end of September**

ID	Task Name	Milestones	Deliverables	2004	2005	
				12 01 02 03 04 05 06 07 08 09 10 11 1		3 09 10 11
1	WP2: NORMAL CONDUCTING STRUCTURES					
2	2.1 Drift Tube Linac					
3	2.1.1 DTL design					
4	2.1.2 Decision on prototyping			26/04		
5	2.1.3 DTL coupler prototype design				CE	A,LPSC
6	2.1.5 DTL coupler prototype construction and testing					
7	2.1.4 DTL beam dynamics design				<del></del>	
8	2.2 H-mode Drift Tube Linac					
9	2.2.1 RF model CH tank1 RF design			IAP-FU		
10	2.2.2 RF cold model design & construction				IAP-FU	
11	2.2.3 RF model construction					
12	2.2.4 Beam dynamics design CH tank1			!AP-FU		
13	2.2.5 CH model cavity tests	Dec-05 Intermediate repor				
14	2.2.6 CH-prototype design					1/
15	2.2.7 CH-prototype construction		Dec-06: Prototype read	V V		
16	2.2.8 CH-DTL beam dynamics study	Jun-05 Design report			IAP-FI	Ų
17	2.3 Side Coupled Linac	-				
18	2.3.1 RF model RF design				LPSC,CERN	
19	2.3.2 RF model mechanical design				LPSC	
20	2.3.3 RF model construction and testing				<u> </u>	
21	2.4 Cell Coupled Drift Tube Linac					
22	2.4.1 Pre-prototype construction	Jun-05 Intermediate repor		CERN		
23	2.4.2 Pre-prototype high-power RF tests			<u> </u>		CI
24	2.4.3 Contribution to ISTC prototype construction	Jun-06 Prototype ready			CER	
25	2.4.4 Revision of design after prototype testing	,, ,	Dec-06: Design report			<b>1</b>
26	WP3: SUPERCONDUCTING STRUCTURES					
27	3.1 ELLIPTICAL CAVITIES					
28	3.1.1 Cavity A vertical tests				INFN-MI,CEA	
29	3.1.2 Tuner design				<u> </u>	
30	3.1.3 Integration of piezo design				I	
31	3.1.4 Tuner construction and testing	Dec-05 Intermediate repor				
32	3.1.5 Design cavity B					L C
33	3.1.6 Construction cavity B		Jun-06: cavity B ready			
34	3.1.7 Power coupler design & engineering		zz co. cam, z loudy			
35	3.1.9 RF coupler construction					
36	3.1.8 RF source order & preparation					
37	3.1.10 Modulator preparation for 700 MHz test stand			<u> </u>		
38	3.2 SPOKE CAVITIES					
39	3.2.1 Test stand preparation at FZJ					
40	3.2.2 Evaluation of 760 MHz resonator in vertical cry	Mar-05 Intermediate moor				FZJ
41	3.2.3 Evaluation of 750 MHz resonator in vertical cry					IN2P3-Or
41	3.2.4 Design of coupler prototype	Ouros intermediate repon				J-UI:
42	3.2.5 Test of coupler prototype					
	3 Z 5 Lest of coupler projetype			T I		1

#### **Detailed planning and progress**



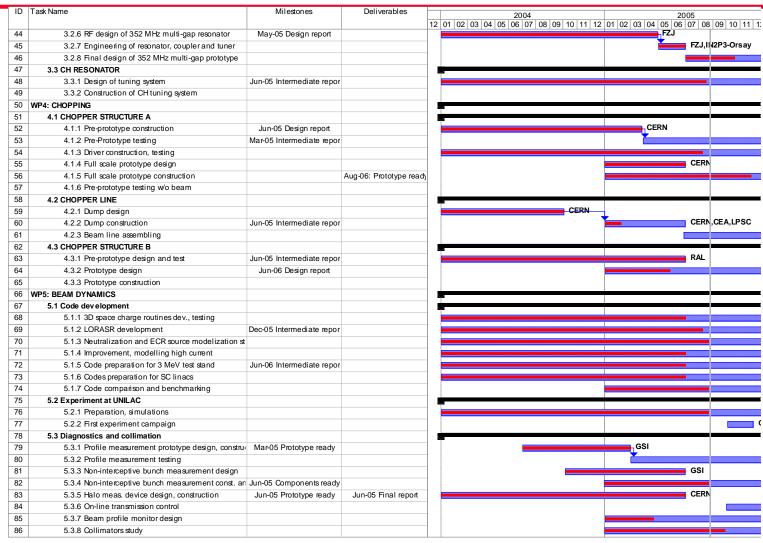

## Milestones and deliverables 2005 HPP→



WBS #	Title	Due date Annex		Status		atus	Revised delivery date	
2.2.5	2.2.5 Test of CH model cavity: intermediate report		er	On time				
2.2.8	Design report on beam dynamics in		05	Delayed	<u></u>		September 2005	
2.4.1	Construction of CCDTL pro prototypo:		05	Delayed	THE STATE OF THE PARTY OF THE P		December 2005	
3.1.4 Cavity A tuner: intermediate report		December 2005		On time				
3.2.2 Report on evaluation of 760 MHz prototype		March 20	005	Delivered	Delivered <b>C</b>			
3.2.3	Poport on avaluation of 352 MHz		2005	On time				
3.2.6	Docian report on 352 MHz n gans		May 2005 Results available		August 2005			
3.3.1	Report on CH tuners	June 20	05	Delayed 🔇			September 2005	
4.1.1		June	2005	EN .	delayed	December 2005		
4.1.2 Intermediate test report				ch 2005	A	Waiting for task 4.1.5	March 2006	
4.2.2	Dump design report		June	2005	M	pending	October 2005	
4.3.1	Chopper B intermediate report	June		2005		Delivered July2005		
5.1.2   LORASR development: intermediate		e report	port   December 2009			On time		
5.3.1 Profile measurement by fluorescence prototype		e	March 2005			Ready		
5.3.3 Non-interceptive meas. preparation			June	2005		80% Ready	October 2005	
5.3.5	Halo measurement device prototype	ready	June	2005		Ready		
5.3.5	5.3.5 Final report on Halo measurement de		June 2005			Done (CARE/HIPPI Document-05-005)		