



YETS 2015-16: recall CMS plans

...thanks to TE colleagues for various material herein

Top priorities:

- complete the cleaning /replacement of the cryo system (TE+EN+CMS)
- replace damaged cryo valve on 6000l dewar (Intermediate Cryostat) TE +CMS
- diagnose & fix water leaks & repair any collateral damage

Other activities (original YETS programme):

- left-overs/snagging from LS1 activities + prep for YETS 2016-17
- repair of RPC chambers damaged by ventilation incident on 4 Jan
- major cooling system maintenance including control system upgrade
- precautionary replacement of cooling block in ECAL power supplies


Before going any further....an important message of THANKS:

- for the excellent collaboration with TE & EN depts, as well as PH of course, in attacking the serious magnet cryogenic problems in 2015.
- and for the cooperation we also had from BE dept (also the other LHC experiments) in getting the best out of a rather sick CMS last year.

Cryo: Oil removal system

Oil removal equipment pressure and leak tested at factory.

Separator & Coalescer systems will both arrive end Jan.

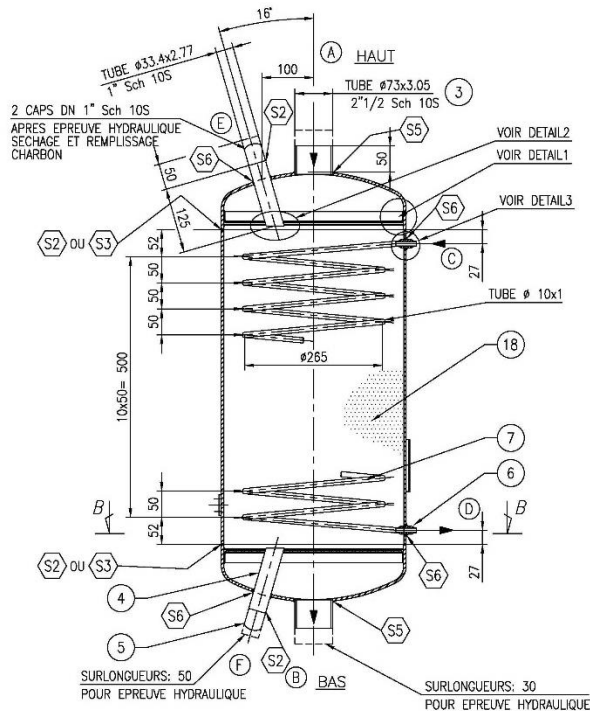

New adsorbers delivered to CERN by Air Liquide






Technical
Coordination

Chamonix 25 Jan 2016 AB

Cryo: CV273 valve replacement: UXC

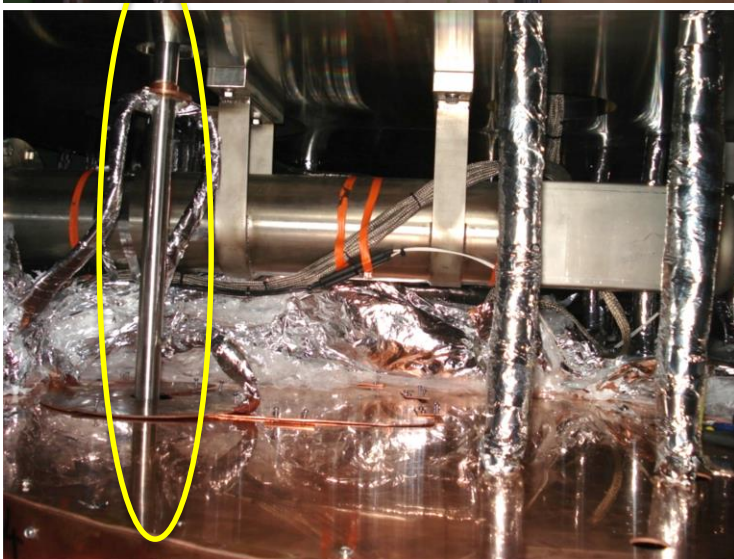

Replacement valve arrived at CERN.

All preparations for access to 60001
Dewar complete by 18 Jan.

Repair started 22 Jan (when mech.
interventions on the cold-box
finished)


Tank casing lowered, MLI removed
Next task is to cut Cu heat shield





Cold box open both ends

Modifications to isolate cold client & divide into 4 circuits for cleaning

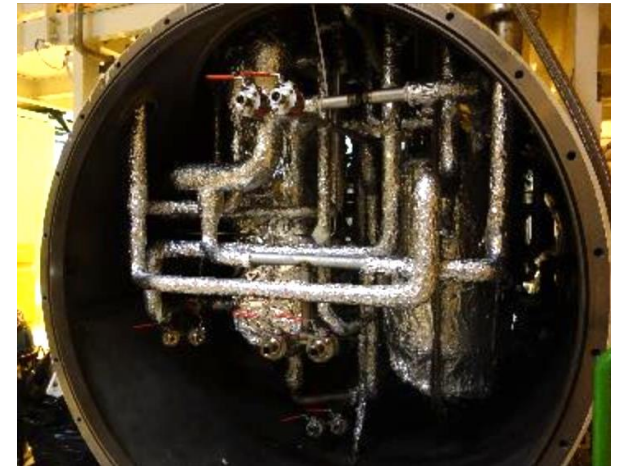

Cold end
modifications


Warm end modifications



Technical
Coordination



Chamonix 25 Jan 2016 AB

CMS Endoscope check inside heatex's

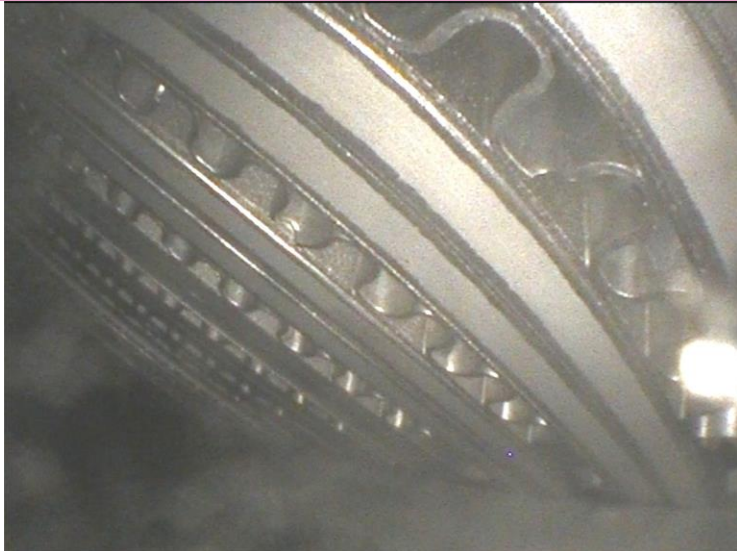


Clean except for

v. small metal chips

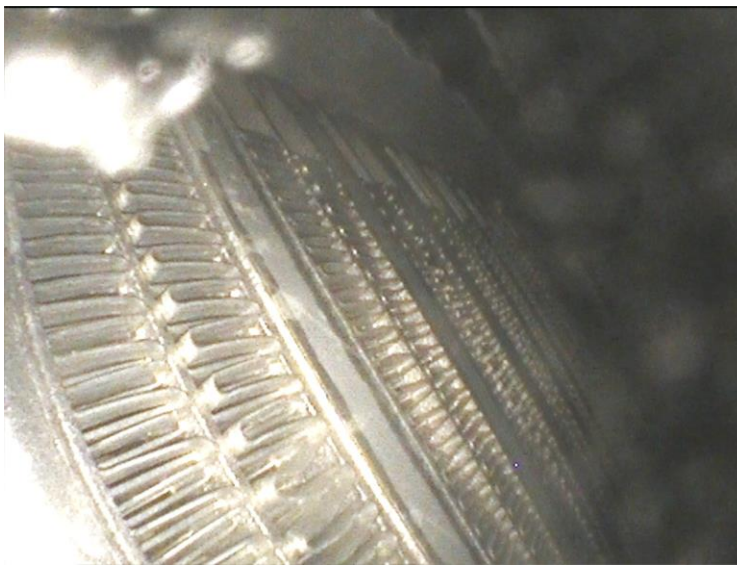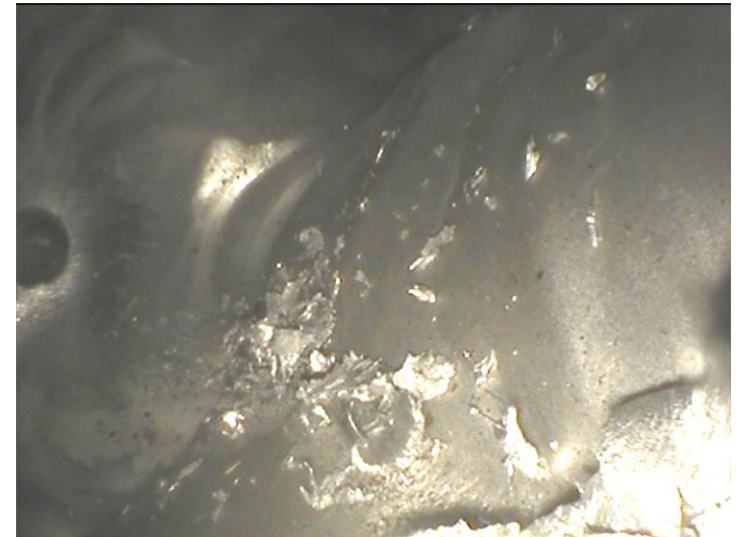

One small piece of
soft material
(few mm)
- likely MLI

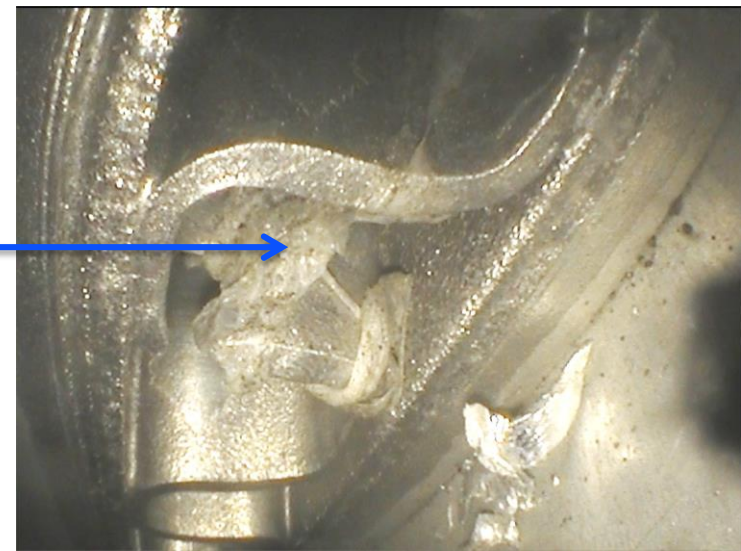




Technical
Coordination


Chamonix 25 Jan 2016 AB

N2 pre-cooler leak repaired

Spot the welder : puzzle # 3

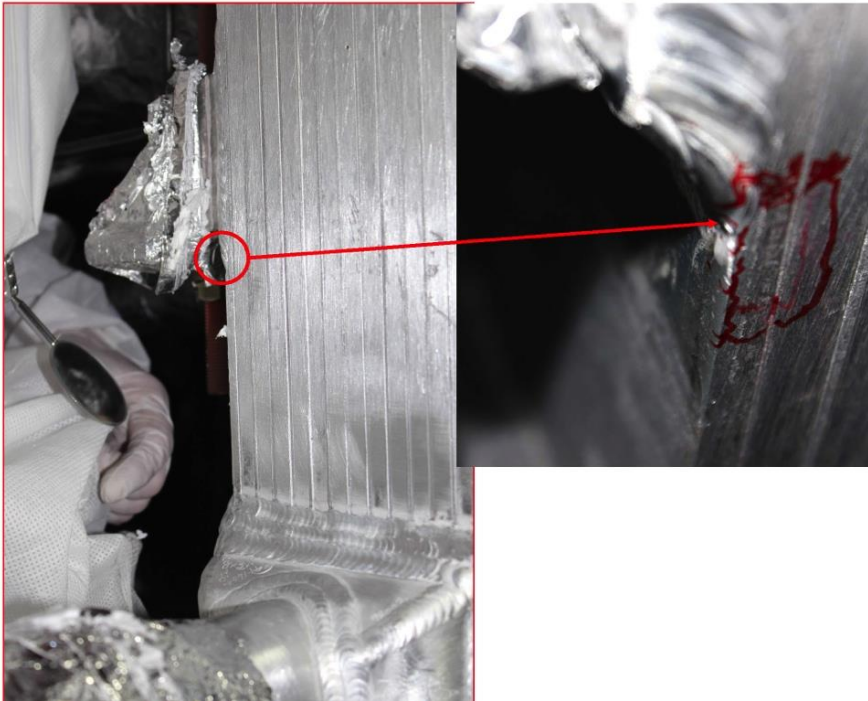

Exchanger accessed
Leak identified

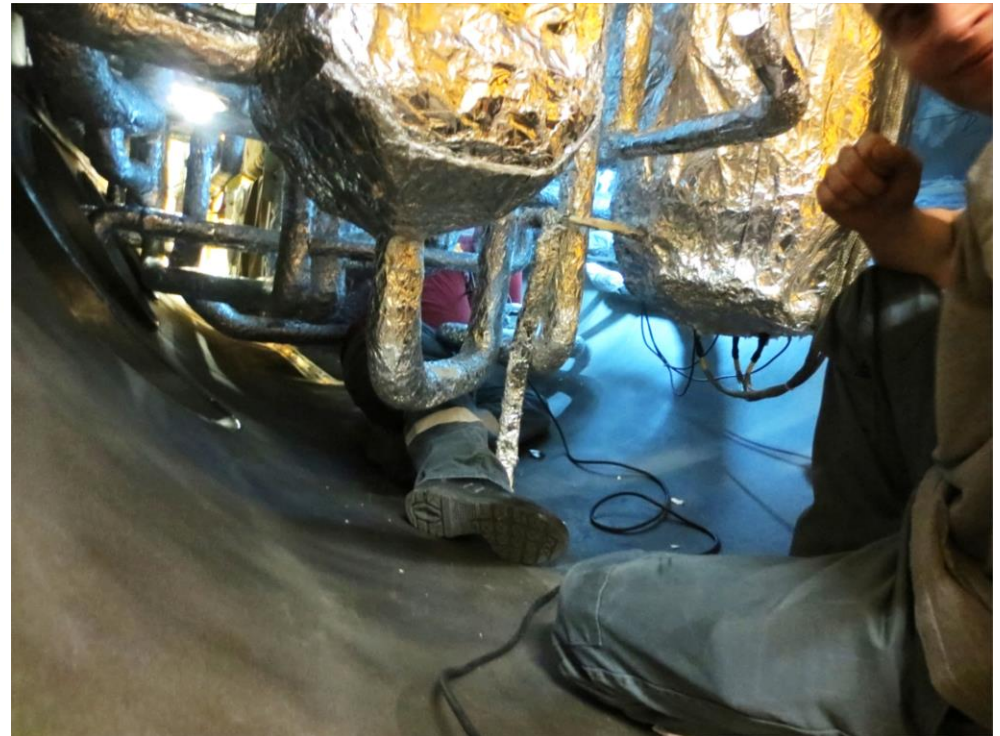

Repaired by specialist company
-preliminary leak check looks good
-final check after CB cleaning complete



Technical
Coordination

Chamonix 25 Jan 2016 AB

Dryer condenser: installed USC -2






Technical
Coordination

Chamonix 25 Jan 2016 AB

Cleaning machine & fluid: USC -3

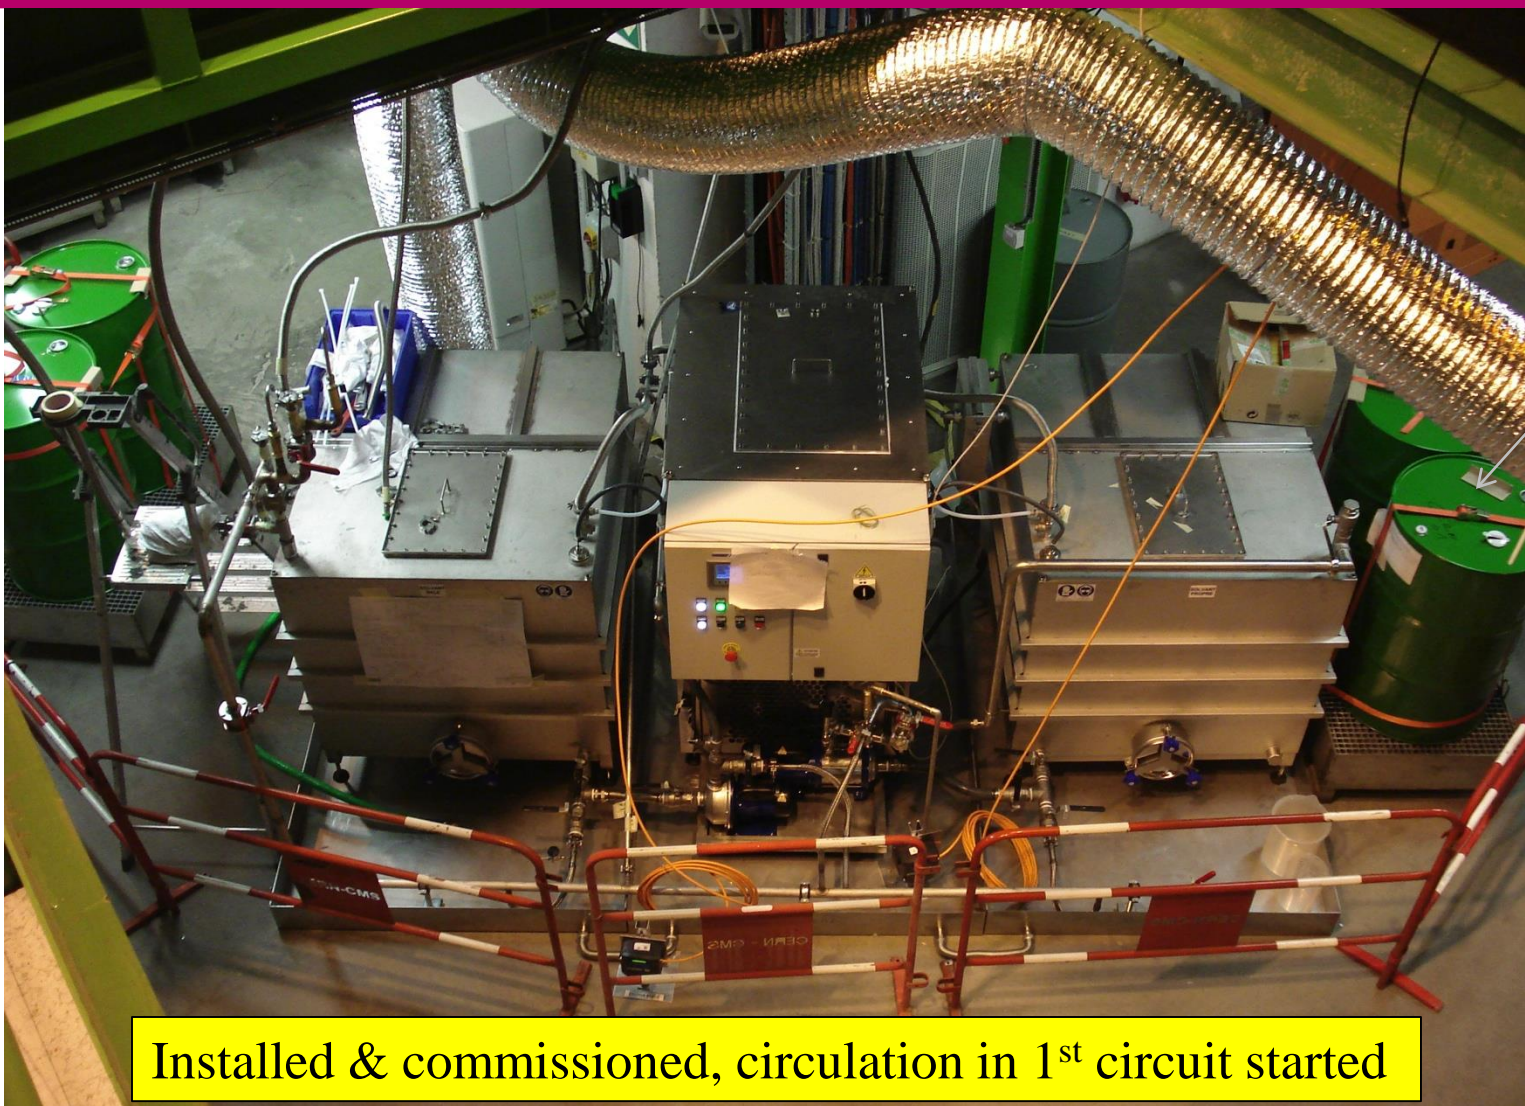

Vertrel XF
solvent
drums

Installed & commissioned, circulation in 1st circuit started



Technical
Coordination

Chamonix 25 Jan 2016 AB

Moment of truth: is there Breox in the solvent?

This morning: 10am

Taking samples from full circuit



Preparing IR analysis



Awaiting result.....




Bingo! strong Breox signature....

Looks like we are on the right track

Planning for all CB intervention driven by the “cleaning / drying” procedure

Task Name	Duration	Start	Finish
Field OFF	0 days	Mon 14/12/15	Mon 14/12/15
LHC recommissioning with beam	16 days	Mon 14/03/16	Sun 03/04/16
Field ON	0 days	Mon 28/03/16	Mon 28/03/16
▸ Cryo operation	3.25 days	Mon 14/12/15	Thu 17/12/15
▸ MEG machine	7 days	Mon 14/12/15	Tue 05/01/16
Safety equipment installed			
Condenser	3 days	Mon 14/12/15	Wed 16/12/15
▸ Preparation of CB	12 days	Wed 16/12/15	Fri 15/01/16
▸ Circuit 1a + 1c + 1d	6.5 days	Mon 18/01/16	Tue 26/01/16
Degreasing	1 day	Mon 18/01/16	Mon 18/01/16
Distillation	1 eday	Mon 18/01/16	Tue 19/01/16
Degreasing	0.5 days	Wed 20/01/16	Wed 20/01/16
Drying	6 edays	Wed 20/01/16	Tue 26/01/16
Distillation	2 edays	Wed 20/01/16	Fri 22/01/16
▸ Circuit 1b + 2	5 days	Tue 26/01/16	Tue 02/02/16
Degreasing	1 day	Tue 26/01/16	Wed 27/01/16
Drying	6 edays	Wed 27/01/16	Tue 02/02/16
Distillation	2 edays	Wed 27/01/16	Fri 29/01/16
▸ Circuit 3	5.25 days	Fri 05/02/16	Sun 14/02/16
▸ Circuit 4	5 days	Mon 15/02/16	Sun 21/02/16
▸ CB set up	2 wks	Mon 22/02/16	Fri 04/03/16
▸ CB conditioning	1.1 days	Mon 07/03/16	Tue 08/03/16
CB cool-down	1 day	Tue 08/03/16	Wed 09/03/16
Shields cool-down	1 day	Tue 08/03/16	Wed 09/03/16
Cold mass cool-down from 120K	10 edays	Wed 09/03/16	Sat 19/03/16
PSD and CI filling	2 edays	Sat 19/03/16	Mon 21/03/16
Cryo tuning	1 wk	Mon 21/03/16	Mon 28/03/16
Cryoready ON	0 days	Mon 28/03/16	Mon 28/03/16

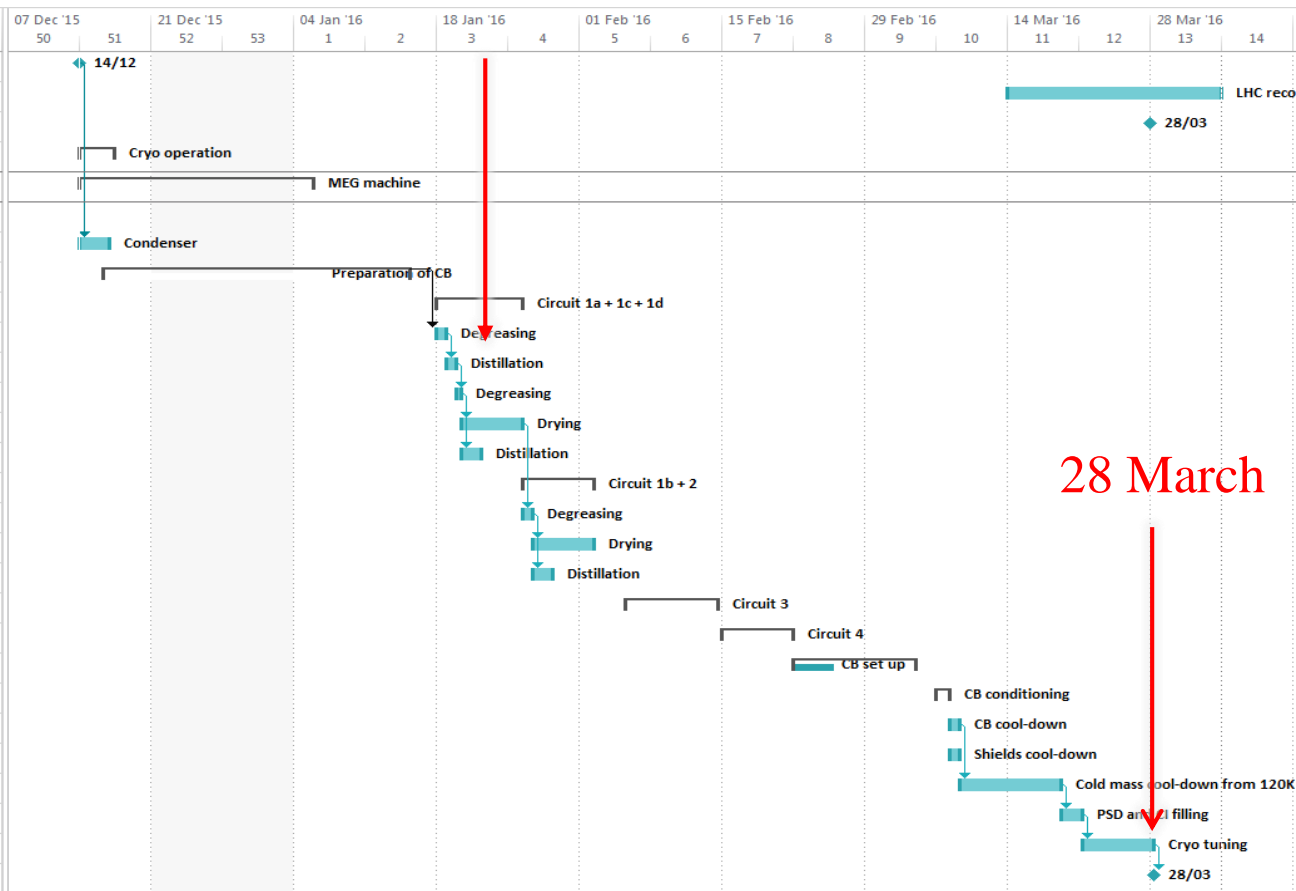


Consistent with planning within errors. Drying procedure is biggest uncertainty



Technical
Coordination

Chamonix 25 Jan 2016 AB

Water leaks seen near end of HI run

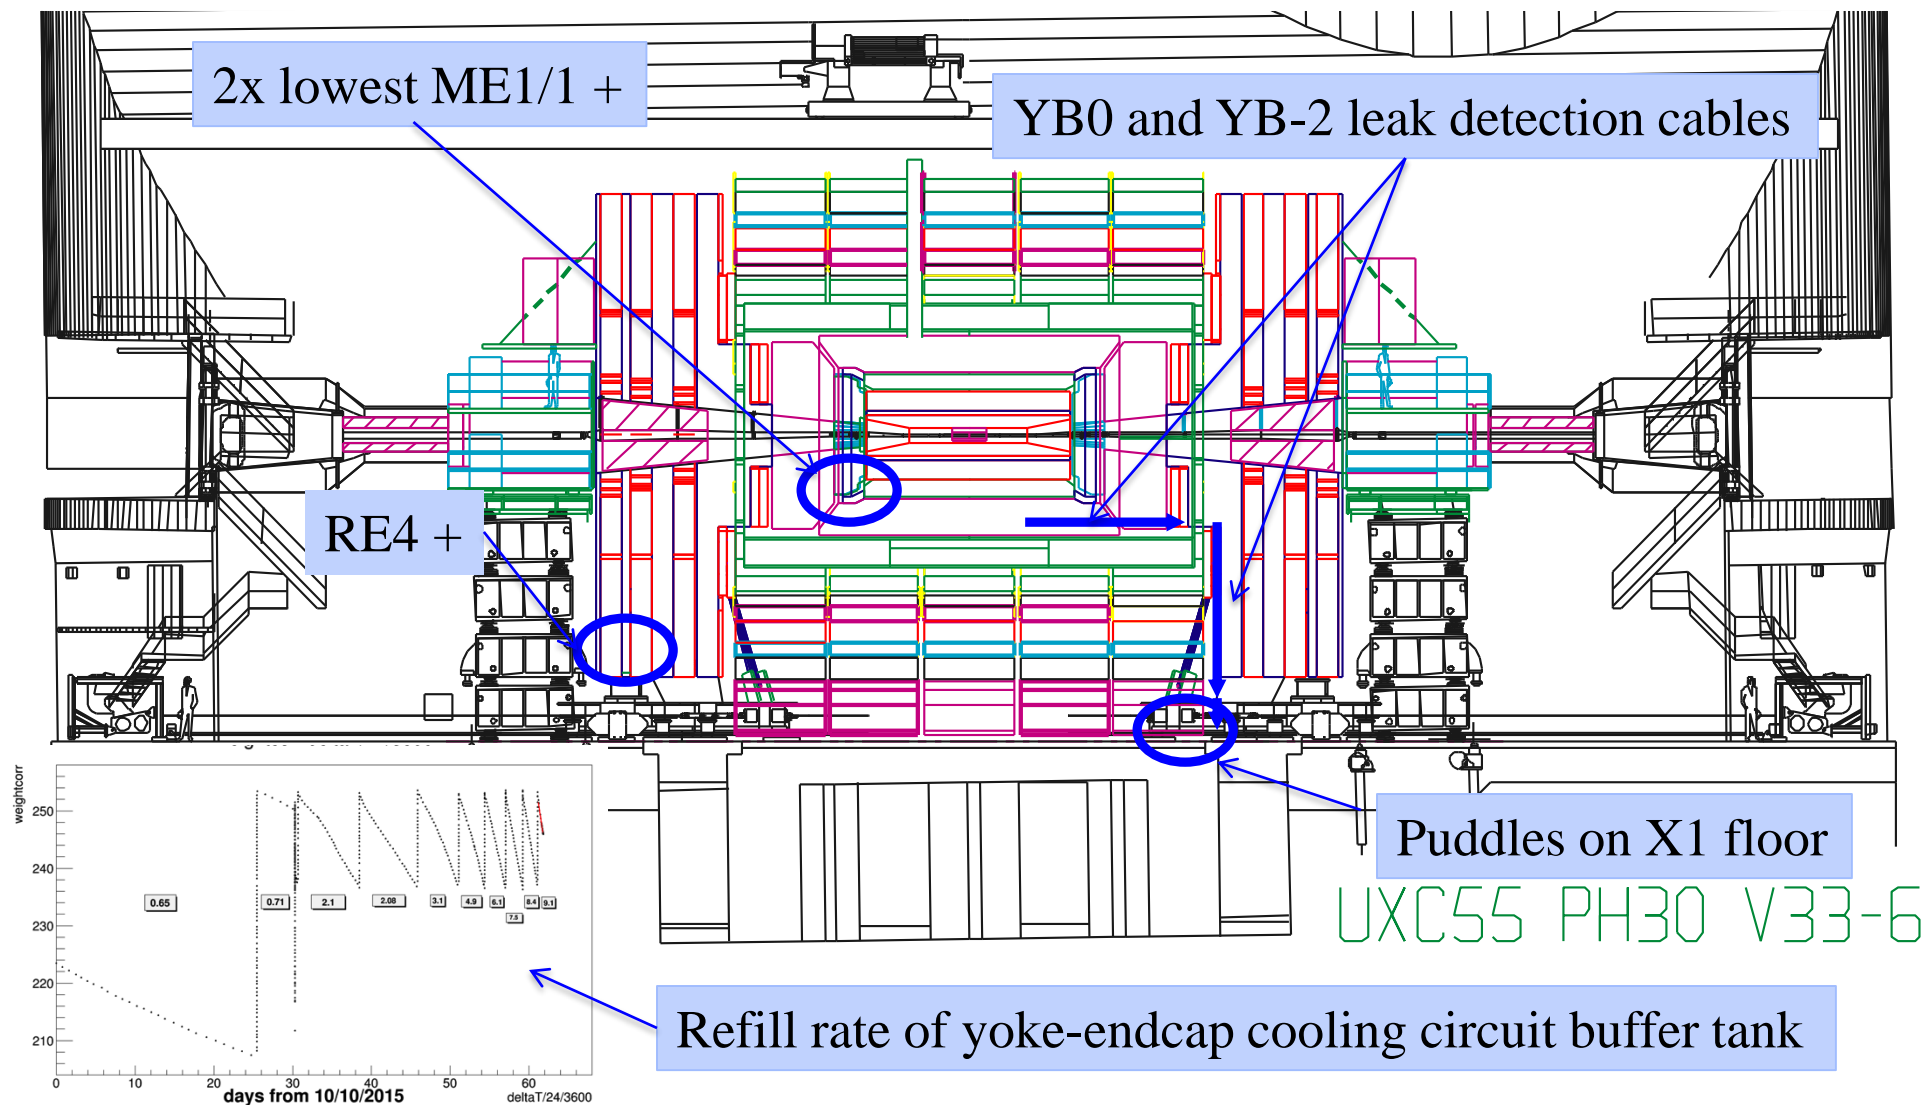




Technical
Coordination


Chamonix 25 Jan 2016 AB

Search for the leak on YE+1


YE1 disk (1500t) withdrawn from barrel
(beampipe in place)

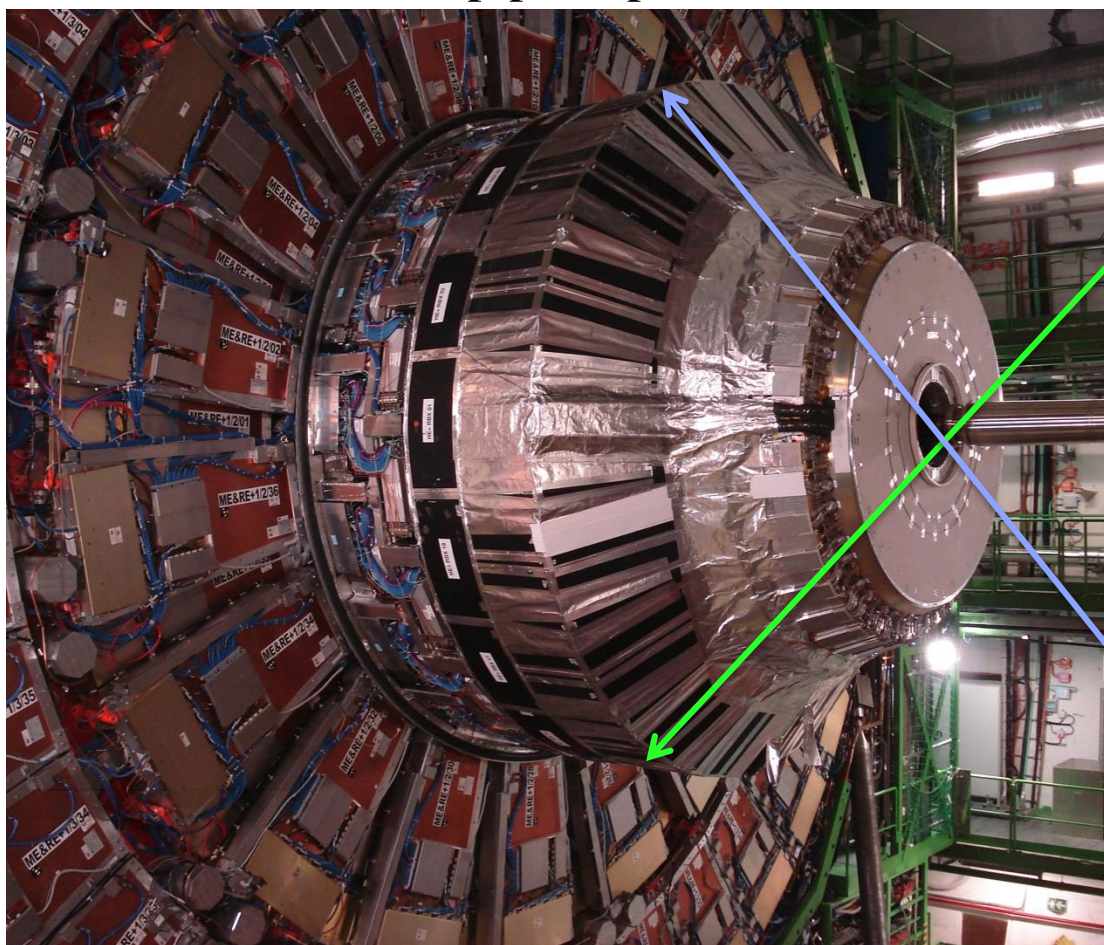

...obvious where the water came out

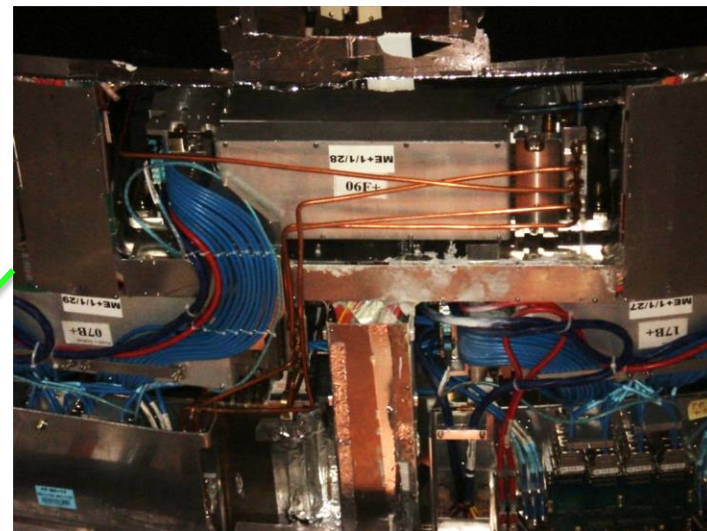

--source eventually traced to chamber 13

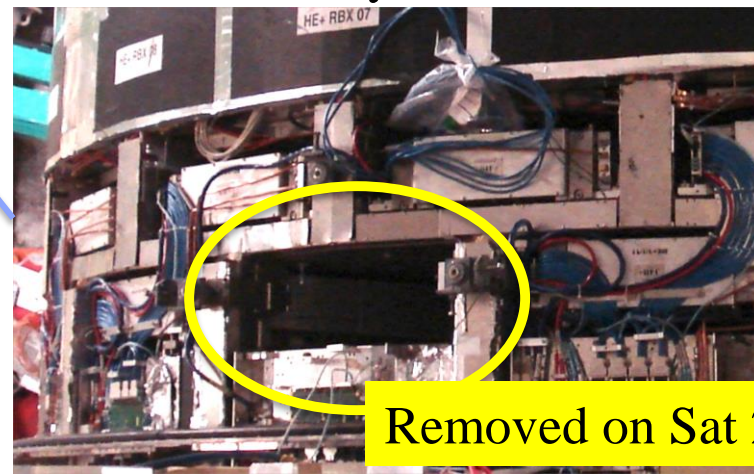

Removed on Sat 23 Jan



Technical
Coordination

Chamonix 25 Jan 2016 AB

Corrosion, sediment at exit from YE+1



Plate sent to Chem
group for analysis
Deposit has high
Pb & B content






Technical
Coordination

Chamonix 25 Jan 2016 AB

Exit from YE+1 to vac tank

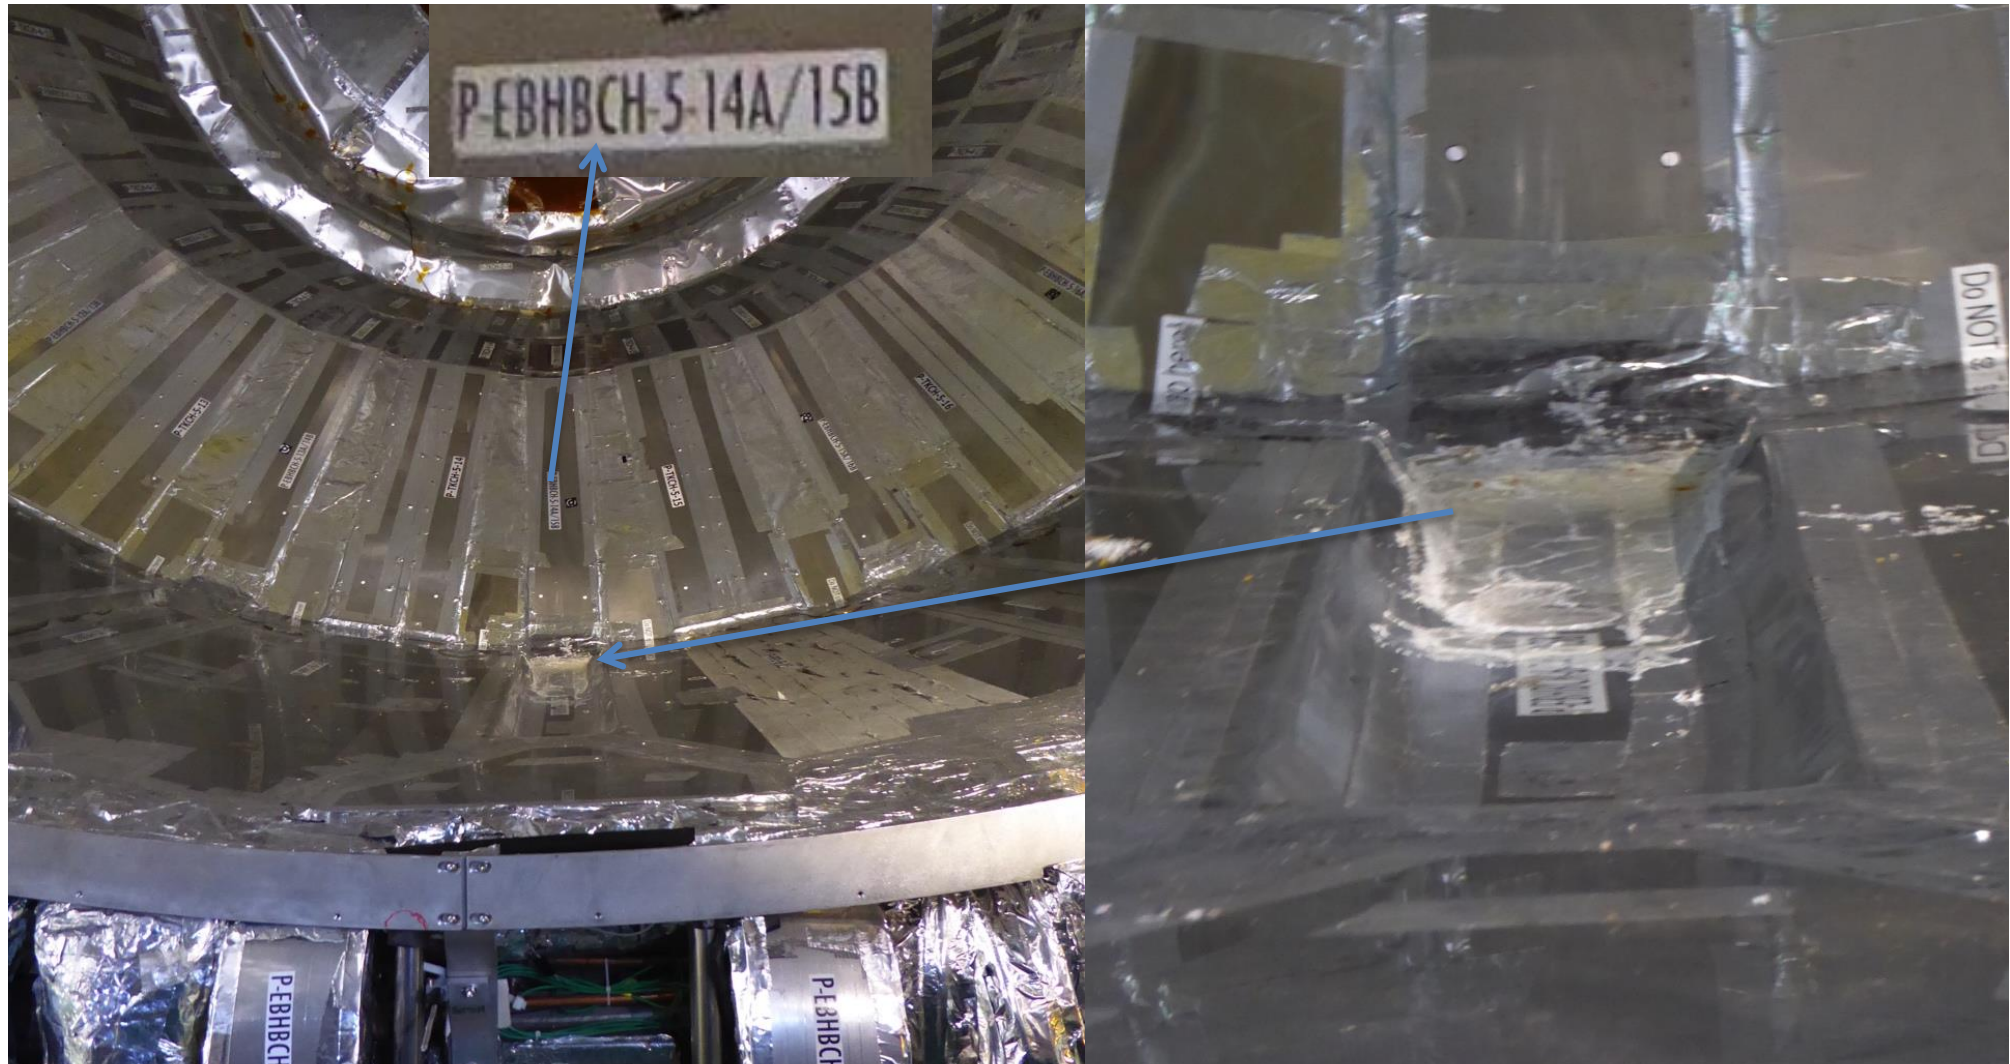




Technical
Coordination

Chamonix 25 Jan 2016 AB

Chamber 13

Removed Sat am – thanks to transport, CMS & HSE crews

Leak from internal joint

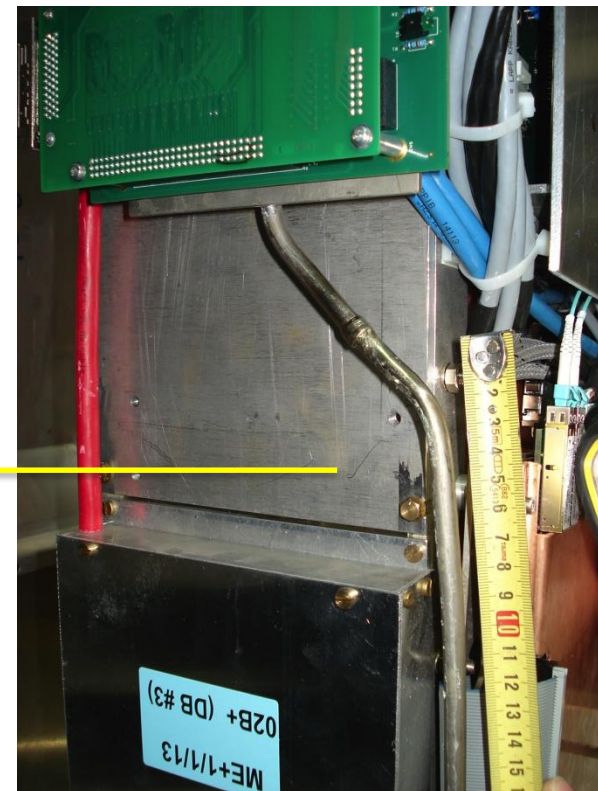

Is this a on-off (eg mech damage) or 1st symptom of a generic corrosion problem?





Cryo.	EL power	Water cool.	Database
IT	Magnet	C6F14	Gas

ECAL	ZEC	DT+ RB	Survey	TE-VSC	GS Dept
CMX	CSC RE	TK PIX	HCAL	EN Dept	RP


PX56
Plug
OPEN
TX54 Plug
CLOSED

Wednesday

27. January 2016

Cra

Next : open other endcap to attack collateral damage from water exit thru vac tank

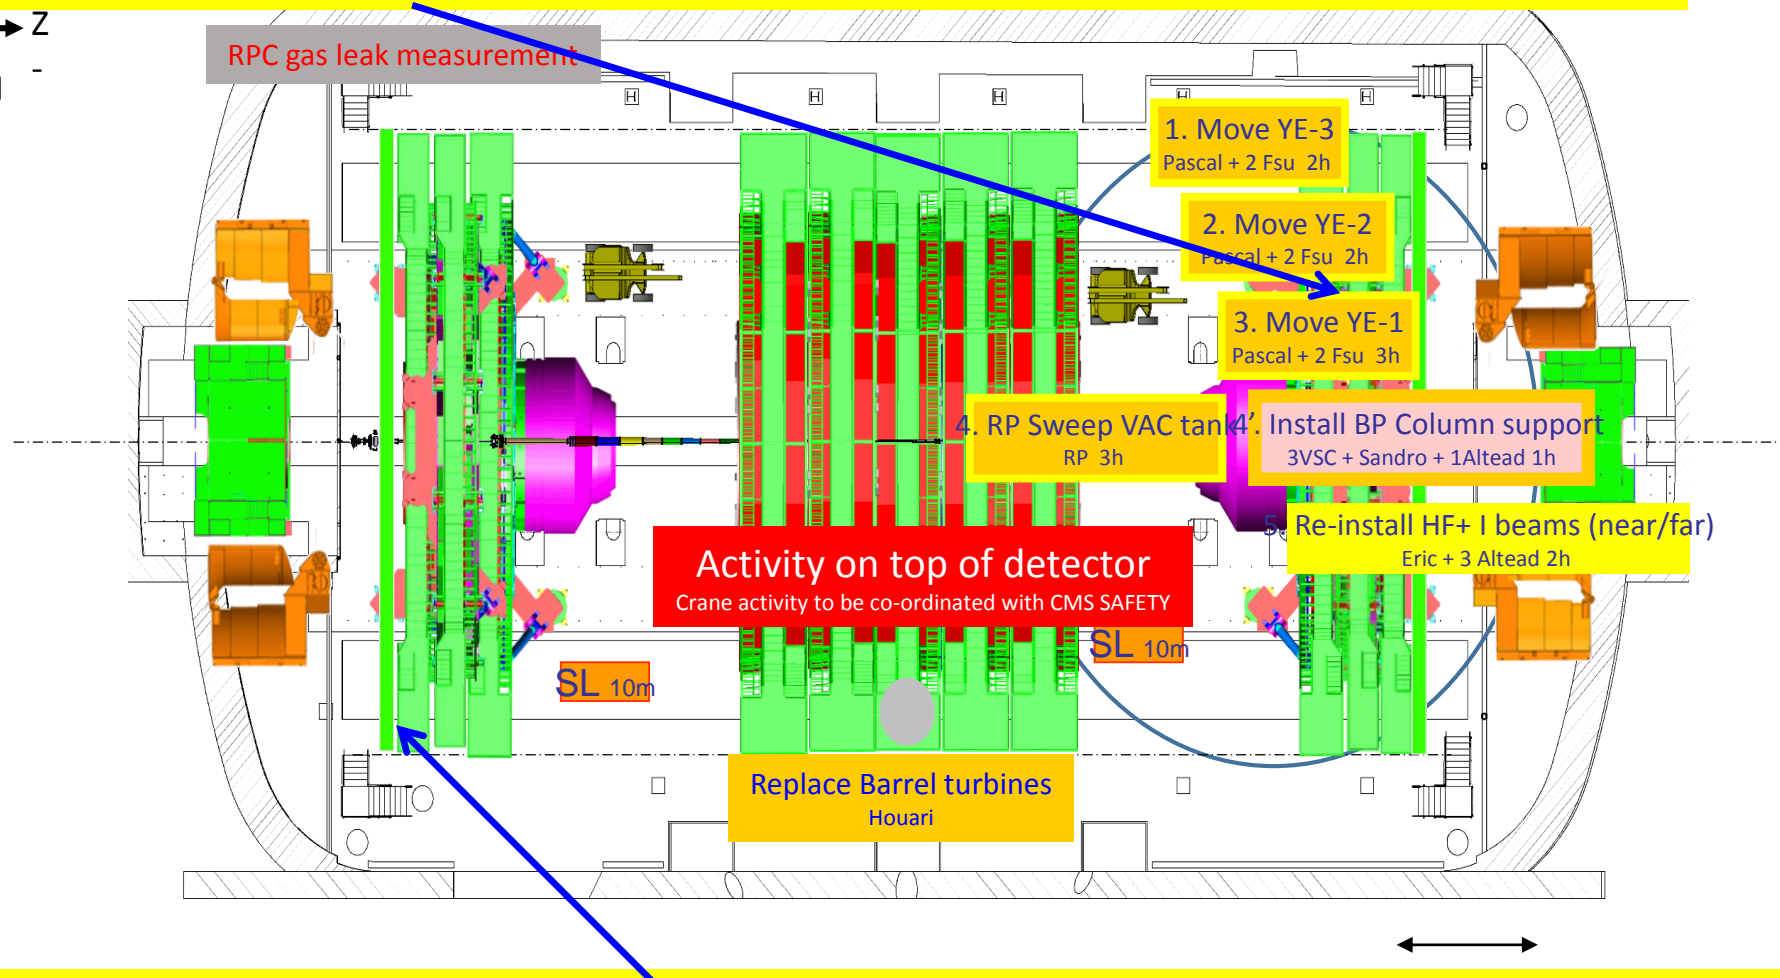

Then : separate +z endcap disks (3 & 4) to check small RPC leak – correlated with main one?



Technical
Coordination

Chamonix 25 Jan 2016 AB

Can CMS stick to the nominal YETS schedule?

Chamonix mtg

Latest date to start closing to be ready 21 Mar

	Jan				Feb				Mar				21 Mar
Wk	1	2	3	4	5	6	7	8	9	10	11	12	13
Mo	4	11	18	25	1	8	15	22	29	7	14	21	Easter Mon 28
Tu													
We										Powering tests		Recommissioning with beam	
Th													
Fr												G. Friday	
Sa													
Su													

18Apr 25 Apr

	Apr			
Wk	14	15	16	17
Mo	4	11	18	25
Tu				
We				
Th				
Fr				
Sa				
Su				1st May

Cryo system/cleaning/replacement: looking good....

finish valve repair in UXC: : mid Feb

finish cold box cleaning + new oil removal: end Mar

Water leak repair:

replace ME1/1 chamber 13 : end Jan

collateral damage clean-up : mid Feb

secondary leak (RE4) diagnosis & repair : mid Feb

Water leak precautionary measures (if generic fault)

no estimate yet –stay tuned please!!