

## AIDA 2020

### WP8/NA7 Large scale cryogenic liquid detectors

AIDA 2020 Annual Meeting, Paris 5/4/2017

WP8 Overview and scientific goals

D.Autiero (IPNL Lyon) and S.Murphy (ETHZ)

# Cryogenic Detectors NA

		13:00 - 14:30	LPNHE	13:00 - 14:30
15:00	<b>Overvier WP8 scientific goals</b> <i>Dario Autiero</i> <i>Salle des Conseils- 1213-RC-11, LPNHE</i>	<b>Introduction</b> <i>Anna Macchiolo et al.</i>	<b>Welcome &amp; Introduction</b> <i>Frank Simon et al.</i>	
		<b>Discussion on common LGAD production</b> <i>Nicolo Cartiglia</i>	<b>Amphi Charpak, LPNHE</b> 14:30 - 14:50	<b>Task 14.2.1. Overview</b> <i>Amphi Charpak, LPNHE</i>
	<b>Purification and monitoring</b> <i>Laura Manenti</i> <i>Salle des Conseils- 1213-RC-11, LPNHE</i>	<b>3D pixel sensors in Trento: update on activities and plans</b> <i>Arianna Morozzi</i>	<b>The Brunel Fiber Irradiation Facility</b> <i>Dr. David Smith</i>	
15:00	<b>Charge Readout and dual phase</b> <i>Dario Autiero</i> <i>Salle des Conseils- 1213-RC-11, LPNHE</i>	<b>Development of a radiation model for T...</b> <i>Dominik Dannheim</i>	<b>Task 14.2.2 Overview</b> <i>Lucia Masetti</i>	
		<b>Update on small-pitch active-edge planar sensor studies for...</b> <i>Gerald Eigen</i>	<b>Temperature stabilisation of SiPMs</b> <i>Amphi Charpak, LPNHE</i> 15:25 - 15:45	
16:00	<b>Coffee break</b> <i>Amphi Charpak</i> 16:00 - 16:30	<b>Update on activities in M...</b> <i>Cinzia Da Via</i>	<b>Coffee break</b> <i>Amphi Charpak</i> 16:00 - 16:30	<b>Coffee break</b> <i>Amphi Charpak</i> 16:00 - 16:30
		<b>Coffee break</b> <i>Amphi Charpak</i> 16:20 - 16:30		
17:00	<b>Light readout</b> <i>Clara Cuesta</i> <i>Salle des Conseils- 1213-RC-11, LPNHE</i>	<b>Update on activities at MPP</b> <i>Anna Macchiolo</i>	<b>Task 14.3.1 Overview</b> <i>Vincent Boudry</i>	
		<b>3D and Planar Pixel Sensors Results and ...</b> <i>Marco Meschini</i>	<b>Task 14.3.2 Overview</b> <i>Marek Idzik</i>	
	<b>Very high voltage</b> <i>Laura Molina Bueno</i> <i>Salle des Conseils- 1213-RC-11, LPNHE</i>	<b>Status of Lgad technology f...</b> <i>Giulio Pellegrini et al.</i>	<b>Task 14.4. Overview</b> <i>Dirk Zerwas et al.</i>	
17:00	<b>Magnetisation</b> <i>Etam Noah Messomo</i> <i>Salle des Conseils- 1213-RC-11, LPNHE</i>	<b>Update on activities at Santander</b> <i>Ivan Vila Alvarez</i>	<b>Electron Beam Weldi...</b> <i>Enrique Calvo Alamillo</i>	
		<b>Common discussion on ...</b> <i>Maurizio Boscardin</i>	<b>Task 14.5.2 Overview</b> <i>Denis Pierre Grondin</i>	

- **Topics and corresponding deliverables: (detector technologies)**
    - **Task 8.2 Purification and monitoring (Task leader UCL)**
    - **Task 8.3 Charge readout and double-phase (Task leader IPNL)**
    - **Task 8.4 Light readout (Task leader Ciemat)**
    - **Task 8.5 Very high voltage (Task leader ETHZ)**
    - **Task 8.6 Magnetization (Task leader Glasgow)**
  - These 5 topics are identically structured in terms of goals and deliverables, following the guidelines presented above. They corresponds to the frontier developments in the field.
  - Collaborating institutes: CIEMAT, CEA, LHEP Bern, ETHZ, Genève, Glasgow, IN2P3 (IPNL, APC, LPNHE, LAPP), UCL; strong connections with the US groups involved in the common project DUNE
- Worldwide impact on the community working on large cryogenic detectors

## Cryogenic detectors Networking Activity:

### Basic concept and modus operandi:

- ✦ **Benefit from the R&D infrastructure at CERN for WA105** and of other infrastructures available in different laboratories (piggy-back)
- ✦ Integrate the hardware available in these infrastructures in a networking activity with dedicated personnel (→main requests to AIDA II in terms of manpower: postdocs contracts)
- ✦ Matching funds from other personnel involved in the activities and existing equipment

### Goals:

- ✦ **Networking and exchange** among the existing EU expert groups involved in the development of the most innovative experimental techniques
- ✦ **Reviewing and reporting** on some crucial development aspects for large cryogenic detectors.
- ✦ **Sharing of information and tools (dissemination)** in the community and creation of a state of the art common knowledge of the field broadly applicable in future projects

### AIDA II support:



- 5 Postdoc contracts of 2 years each for the 5 sub-tasks of WP8 (profiting of ongoing developments on WA105 and R&D on small prototypes present in collaborating laboratories, help in organizing the networking and exchange among the groups and in producing a reporting on some crucial development aspects for the cryogenic detectors).
- Travel money for meetings of the NA

**Common infrastructures of the WP8** for the R&D activities at CERN supported by the CERN Neutrino Platform

- 3x1x1 m<sup>3</sup> Dual-phase WA105 Pilot detector
- 6x6x6 m<sup>3</sup> Dual-phase Demonstrator (WA105/NP02/dua I-phase ProtoDUNE)

Data taking with charged hadrons and electrons bear 2018


- Baby MIND prototype (NP05)

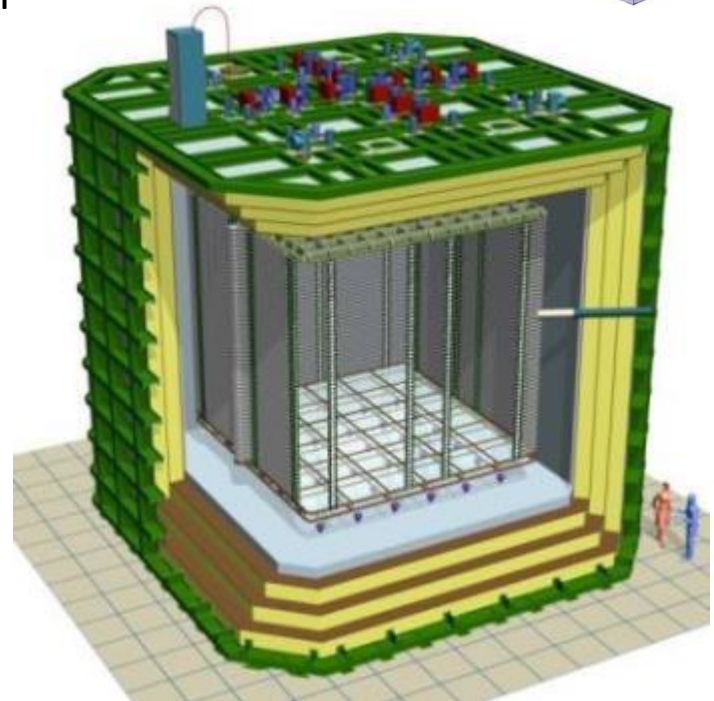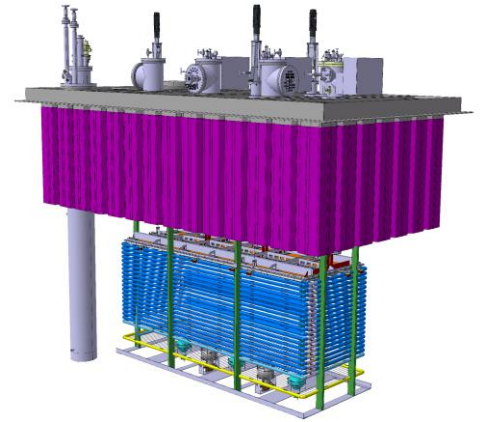



LBNF-DUNE project:


**1.2 MW neutrino beam from FNAL to SURF underground laboratory with 40 kton Liquid Argon detector.**

4 underground caverns with detector modules of 10 kton

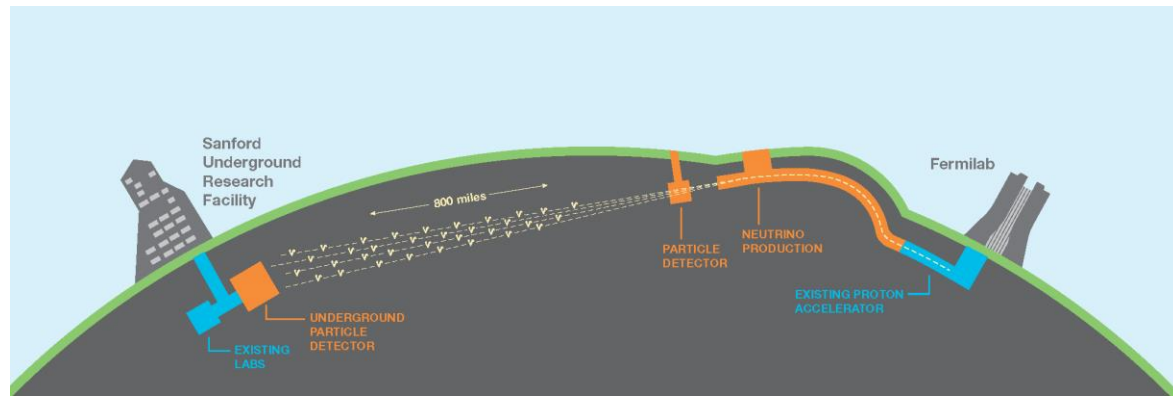


dual-phase 10kton module.  
Active volume 12x12x60 m<sup>3</sup>

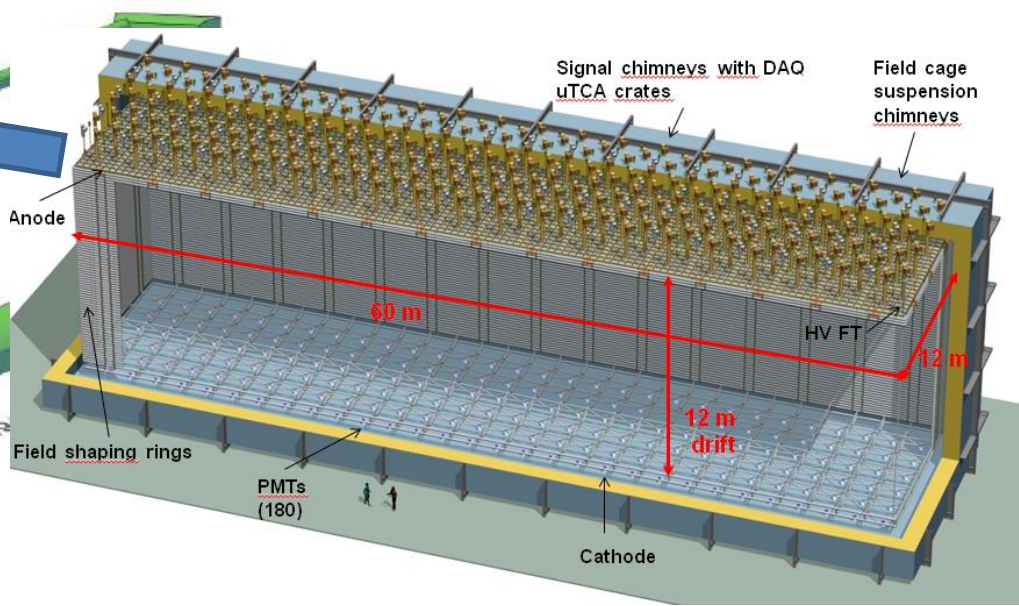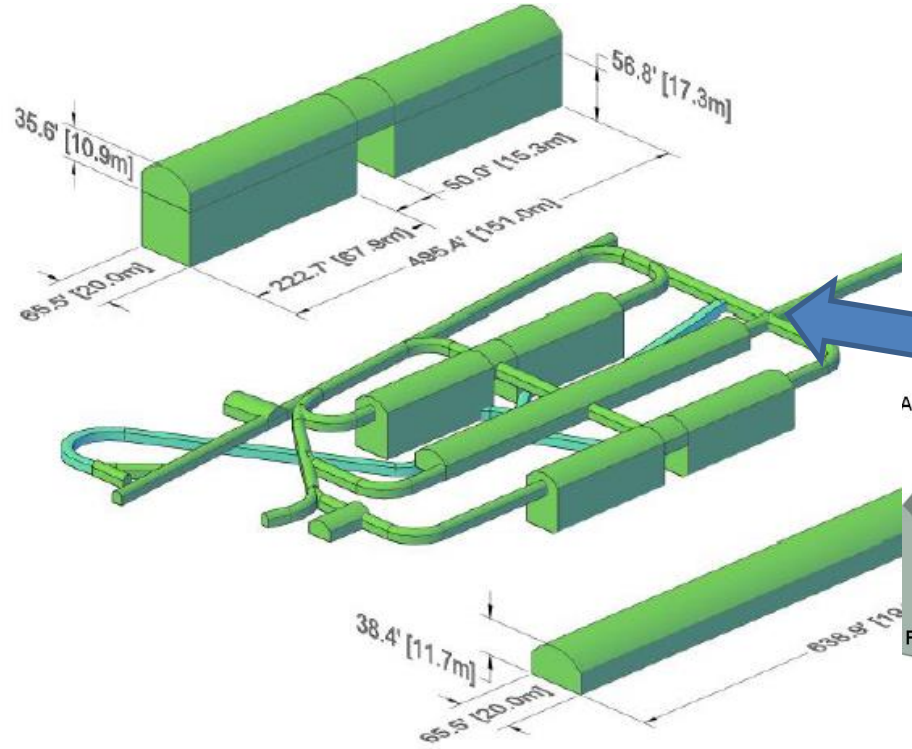

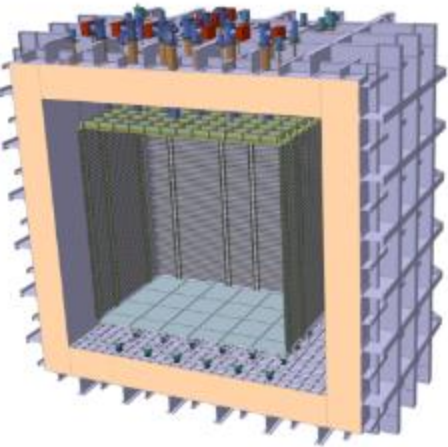


The Dual-Phase ProtoDUNE/WA105 6x6x6 m<sup>3</sup> detector is built out of the same **3x3m<sup>2</sup> Charge Readout Plane units (CRP)** foreseen for the 10 kton Dual-Phase DUNE Far Detector (same QA/QC and installation chains)

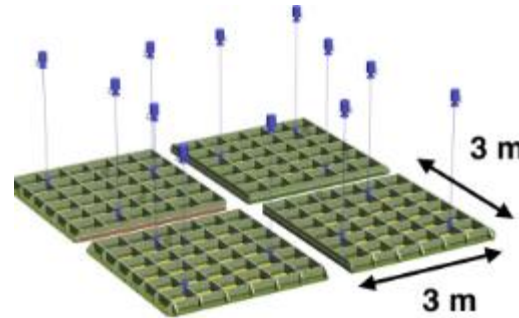



**WA105: 4 CRP**

3x3m<sup>2</sup> CRP

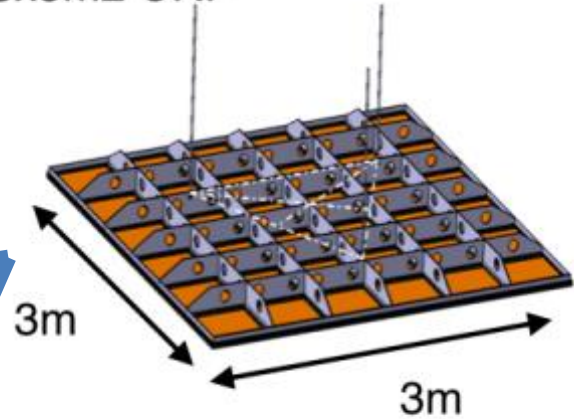


1920 channels/CRP  
Accessible cold electronics in chimney

**10 kton: 80 CRP**

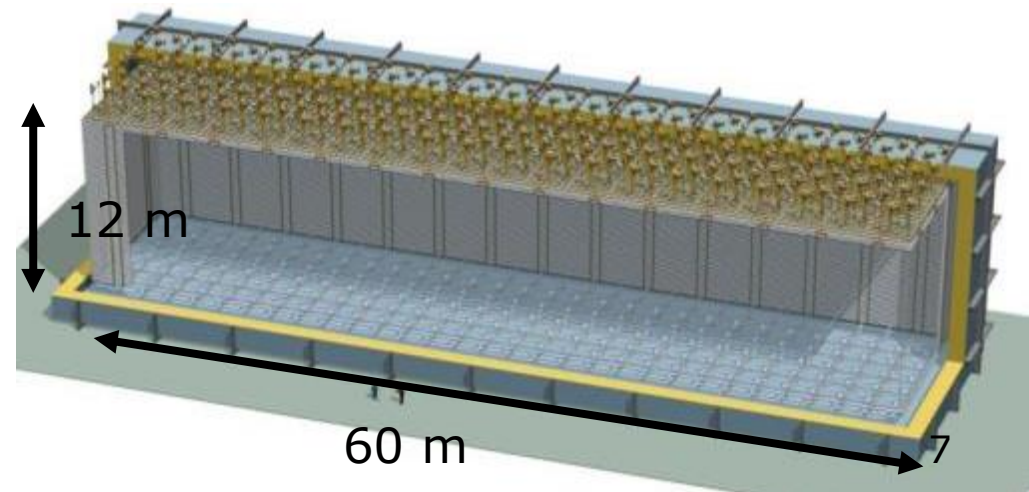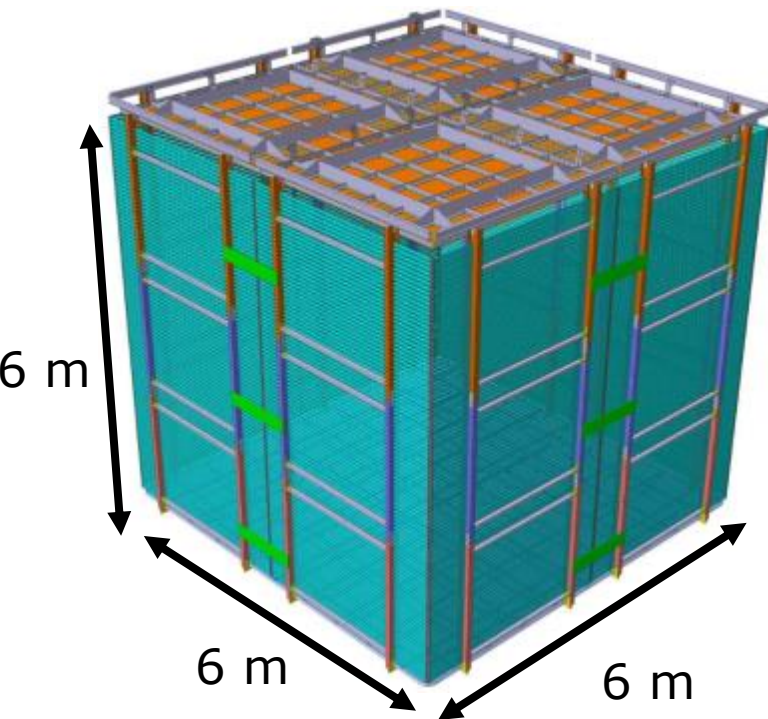




- Extension of North Area completed in 2016. Infrastructure in advanced state of installation. Beam-line construction started
- Cryostat construction completed for the steel exoskeleton, installation of insulation panels started  
→ Available for WA105/ProtoDUNE-DP detector installation in June 2017
- Detector executive design completed in November 2016. Production/installation activities started. Detector installation inside the cryostat expected to be completed by February 2018

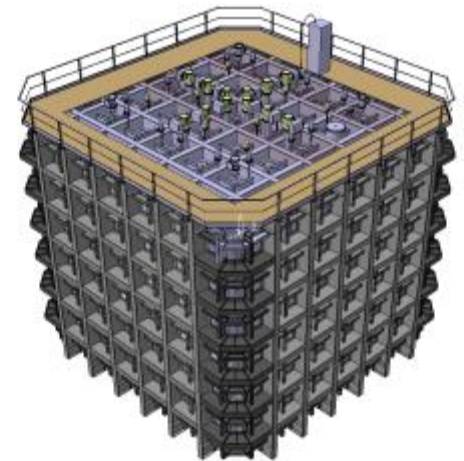




two detectors closely linked

**3x1x1m<sup>3</sup>**  
(3x1x1 m<sup>3</sup> active 24 ton LAr total)

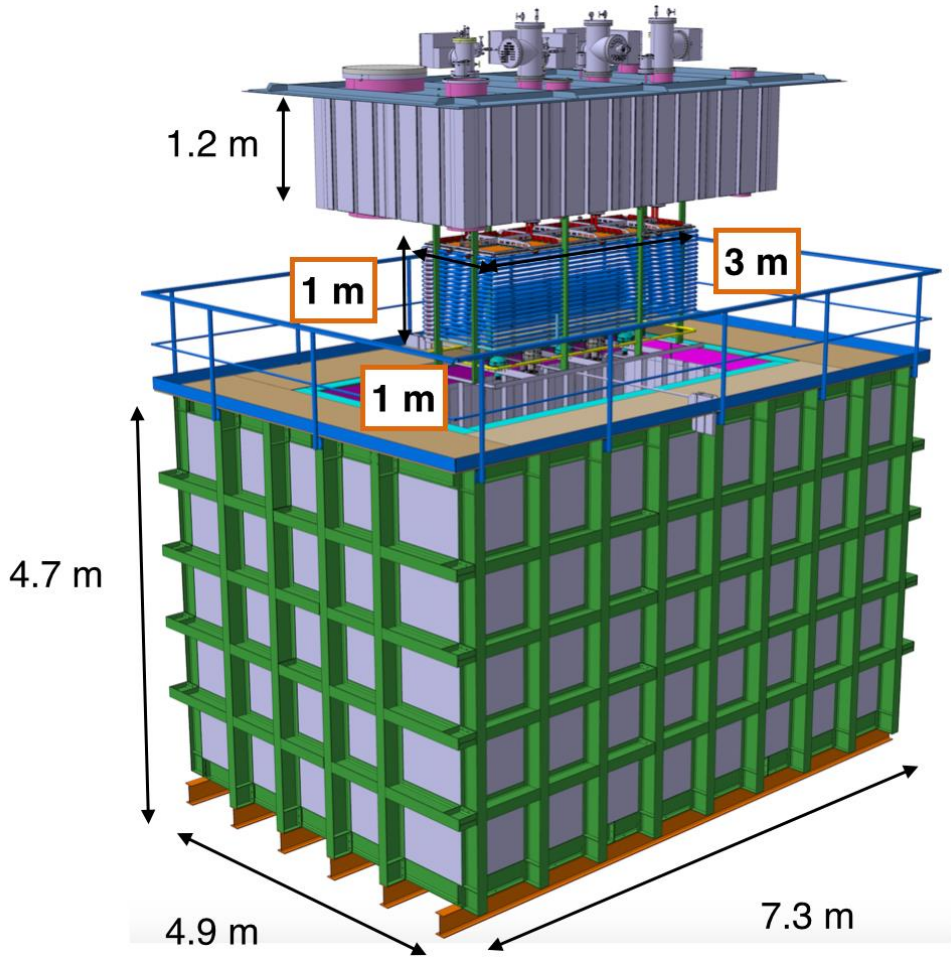

**Dual-Phase ProtoDUNE / WA105**  
(6x6x6 m<sup>3</sup> active 700 ton LAr total)

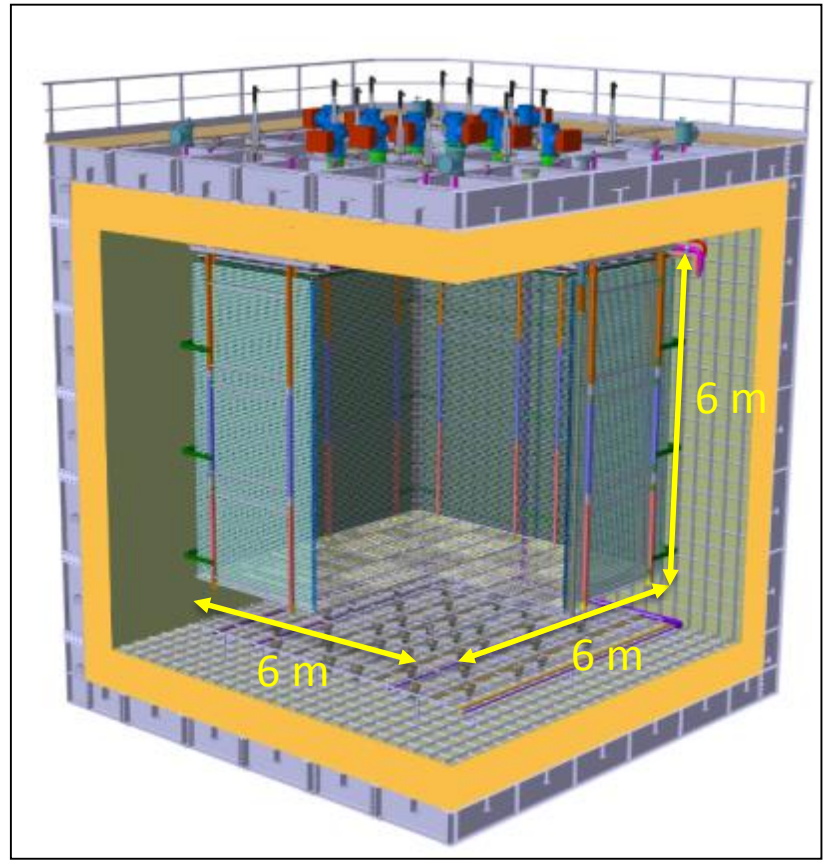

**two detectors closely linked**

(3x1x1 m<sup>3</sup>)

1.2 m

- ✓ LEMs and anode: design, purchase, cleaning and QA
- ✓ Chimneys, FT and slow control sensors
- ✓ Membrane tank: legal aspects, construction, tightness and QA methods
- ✓ Accessible cold front-end electronics, DAQ system
- ✓ Amplification in pure Ar vapour on large areas

NA105  
r total)



**First GTT constructed cryostat for LAr**  
**Fully engineered versions of many detector components** with pre-production and direct implementation (installation details and ancillary services)  
**First overview of the complete system integration:** set up full chains for Quality Assessment, construction, installation and commissioning  
**Anticipate legal and practical aspects** related to procurement, costs and schedule verification  
 short term data taking with cosmics

- ✓ Large hanging field cage structure
- ✓ Very high voltage generation and guiding
- ✓ Large area charge readouts
- ✓ long drift (e- diffusion, purity, etc..)
- ✓ Test beam data (calibration, reconstruction, fully contained events, x-sections, etc..)
- ✓ Long term stability of UV scintillation light readout
- ✓ Underground construction method


4.9 m

7.3 m


4.7

The finalization of the 3x1x1 has been in 2016 a main playground for the WP8 activities

**8.2 Purification and monitoring:** design and test of purification circuit and purity monitors

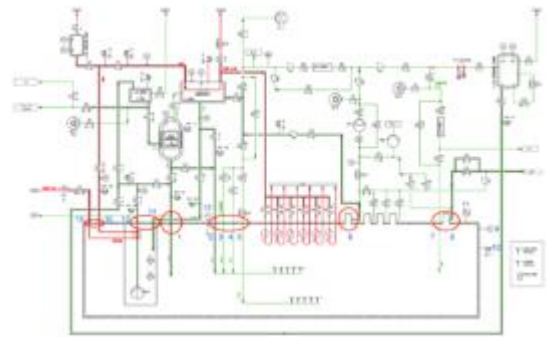

**8.3 Charge readout:** LEM characterization, electronics design and Charge Readout Plane design

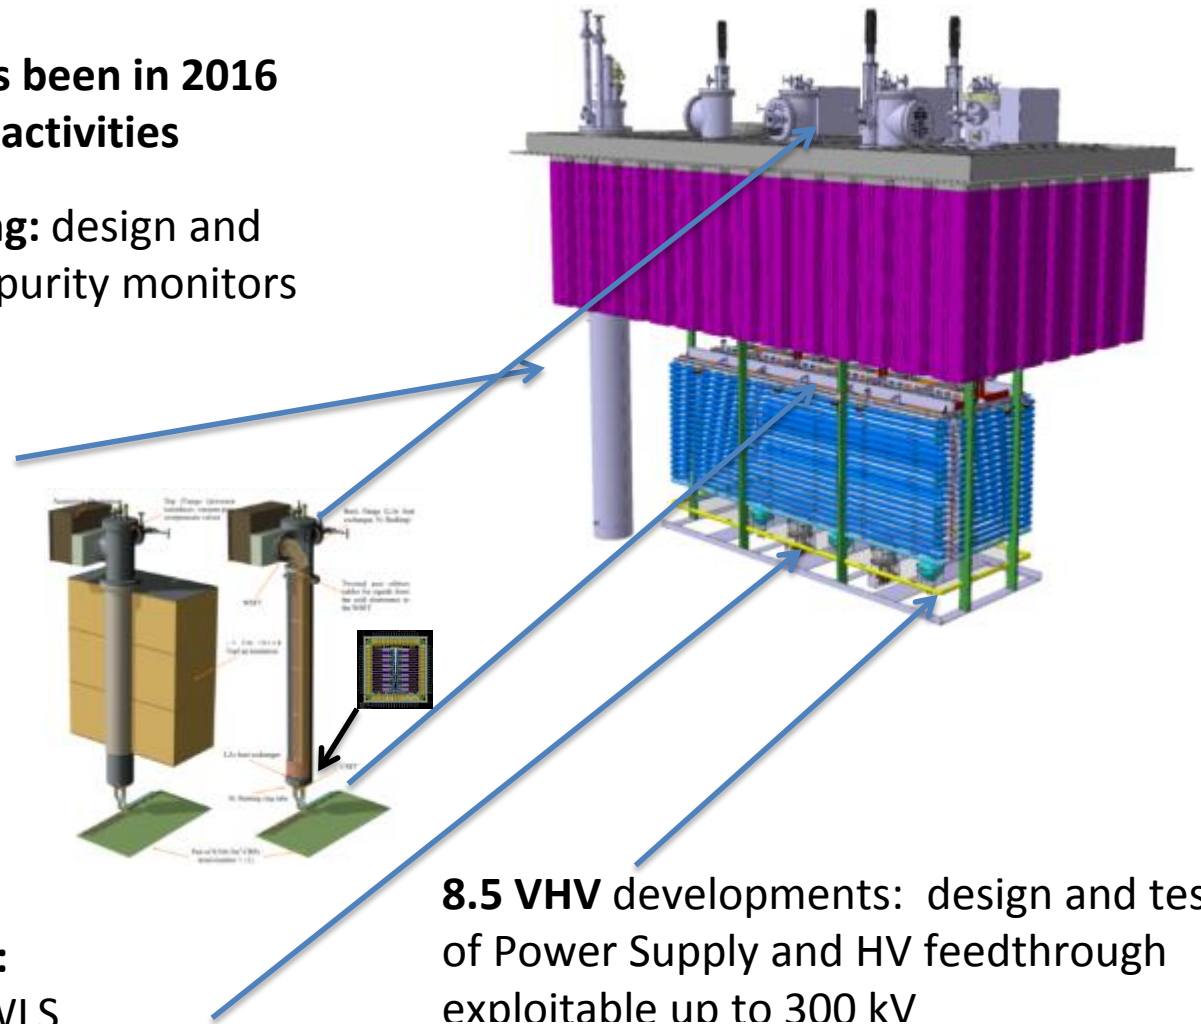





**8.4 Light readout:** test of different WLS configurations for the PMTs, digitization development


**8.5 VHV developments:** design and test of Power Supply and HV feedthrough exploitable up to 300 kV



# Pilot detector 3x1x1

- Ready since the fall 2016

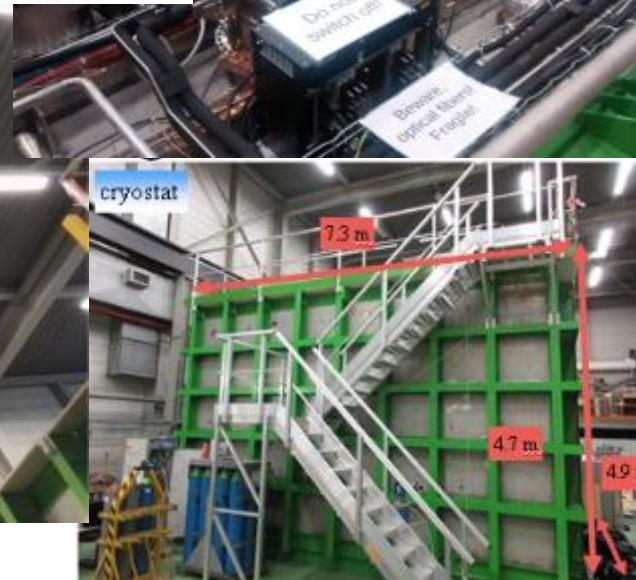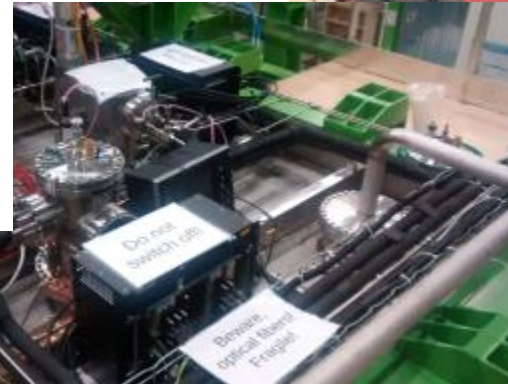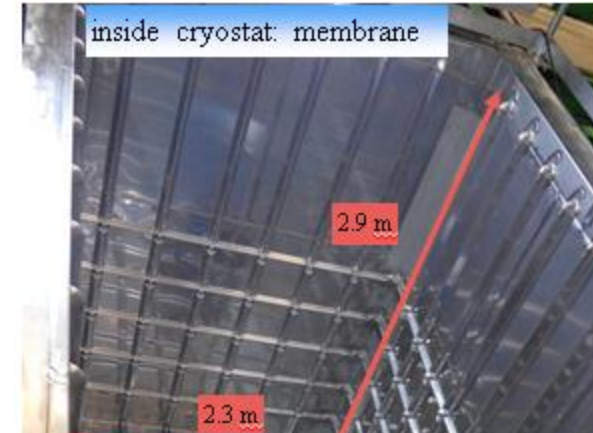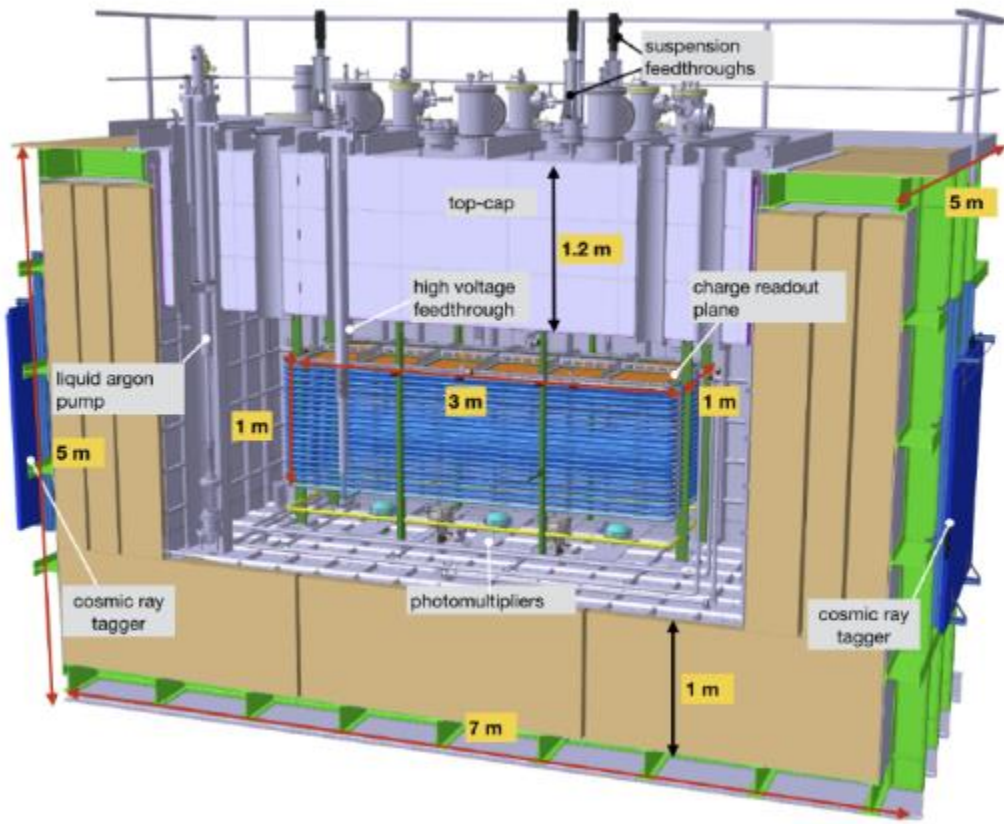

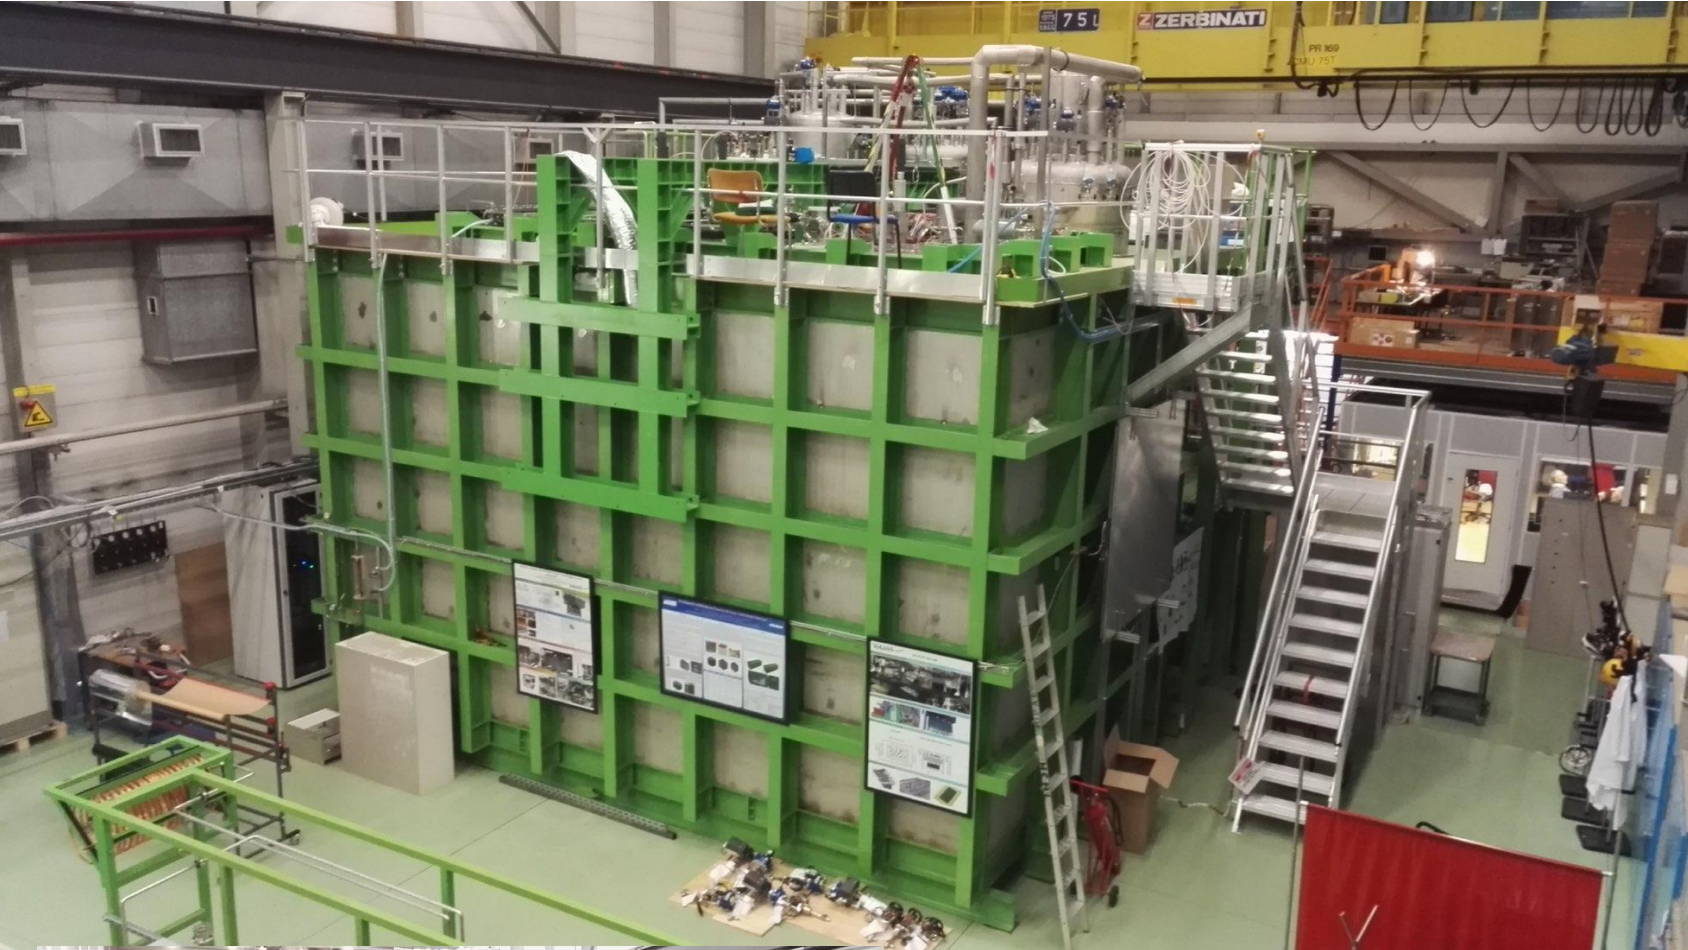


- Delay in the cryogenic system installation and of its commissioning
- The cryostat purge with pure argon was successfully performed by middle of February.
- Cool-down was almost completed on March 3<sup>rd</sup> in order to start filling with LAr when a cold spot of ice appeared in a corner of the cryostat
- Cryostat warmed up since March 3<sup>rd</sup> to investigate, Access on 14/3 → No leaks: defect in insulation
- Cryostat purging restarted last week

- January 24<sup>th</sup> -February 7<sup>th</sup> : open loop purge, 1.5 ppm O2 reached
- February 8<sup>th</sup> - February 15<sup>th</sup> : closed loop purge, 80 volumes 0.2 ppm O2 reached
- February 15<sup>th</sup> attempt to cool-down, problems due to the formation of gas pockets on the LN2 line  
 → modification of the LN2 line needed by adding a purging valve at the input of the condenser (1.5 weeks of delay added on the commissioning schedule of the cryogenic system.


- Cryostat cool-down started on February 27<sup>th</sup> - March 3<sup>rd</sup>

- March 3<sup>rd</sup> observation of a cold spot with ice in a corner of the cryostat exoskeleton → LAr temperature not reached, warming up for inspection

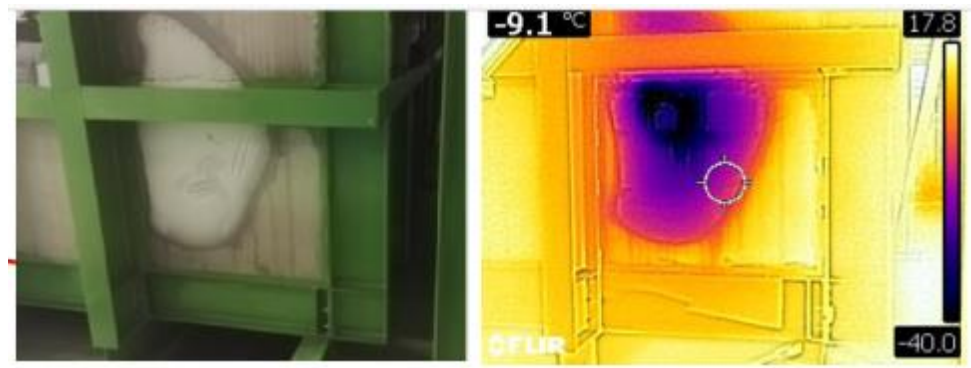

- March 14<sup>th</sup> access possible, visual inspection shown no damages to membrane, March 14<sup>th</sup> -March 18<sup>th</sup> several negative leak searches with helium

- March 21<sup>st</sup> , drilling of point corresponding to cold spot on external steel plates showed the presence of an empty corridor without insulation

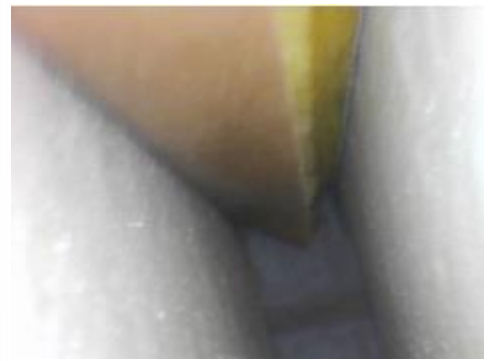

Empty gap of 10x2x95 cm in the insulation, refilled with foam

# Slow control, cryocameras, level meters, purity monitoring (Task 2)

Very extensive slow control system in 3x1x1 as baseline design for the ProtoDune detectors



Wa105cam0:  
- On top  
- HV feedthrough

7/7/2018




Wa105cam1:  
- On top  
- Ar level




Wa105cam2:  
- On top  
- Ar level




10

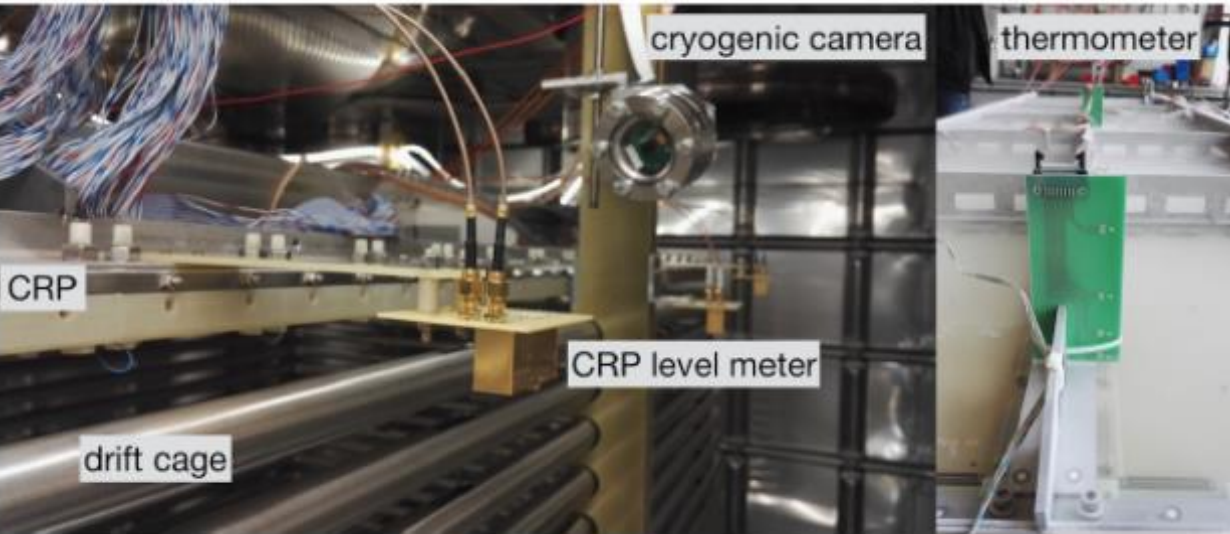

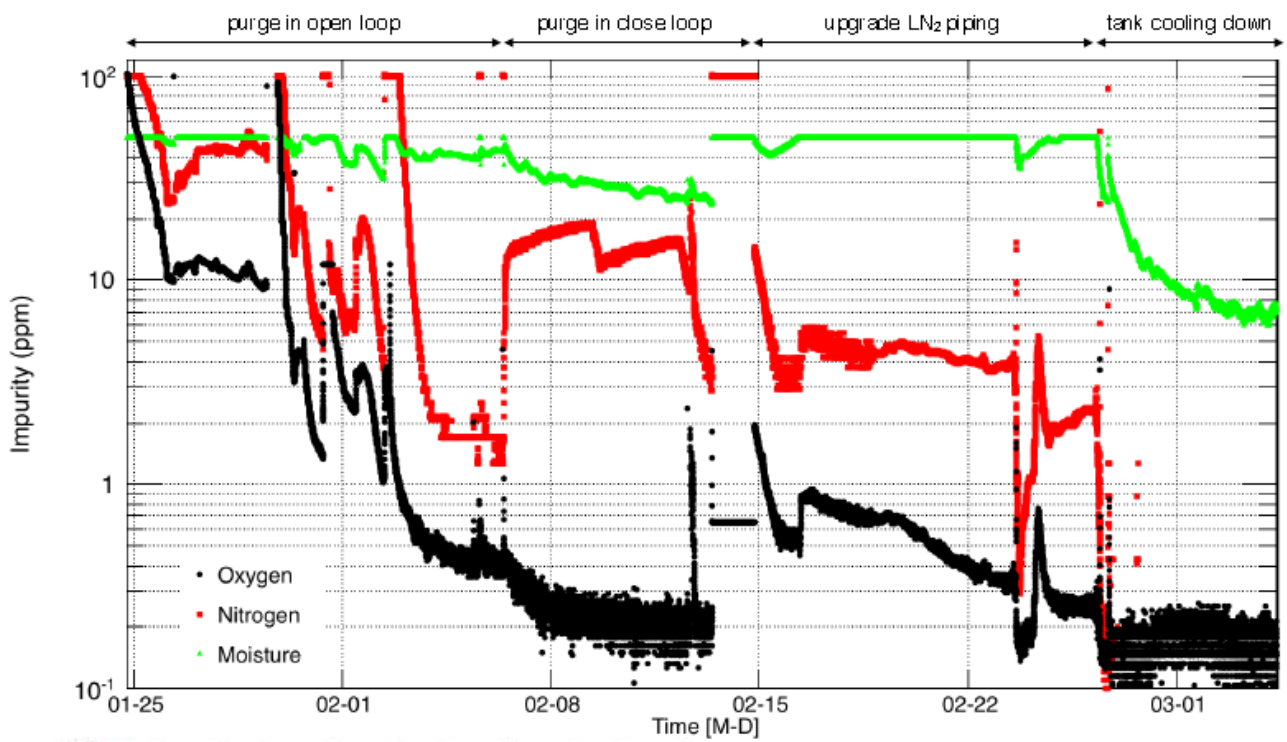

Purification studies:  
Gas impurities evolution during purge and cool-down of 3x1x1

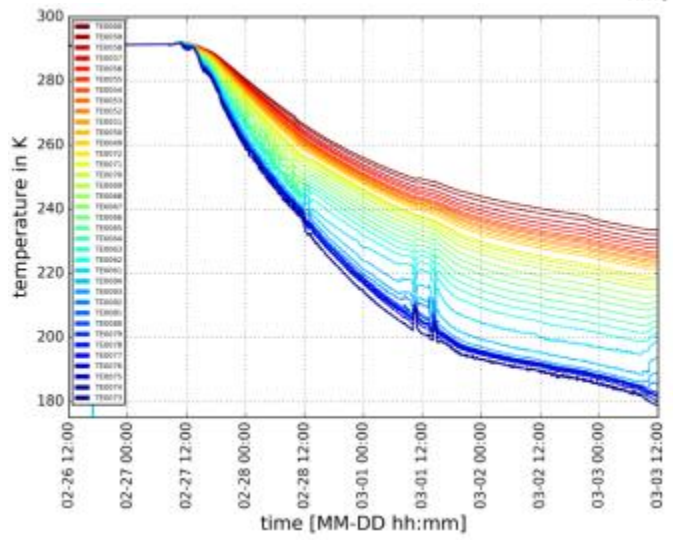


Temperature evolution in the gas at different heights during cool-down of 3x1x1




### Dual-phase readout (Task 3) :

Long drift, high S/N: extraction of electrons from the liquid and multiplication with avalanches in pure argon with micro-pattern detectors like LEM (Large Electron Multipliers)




Tunable gain ( $\sim 20$  minimum), two symmetric collection views, coupling to cold electronics

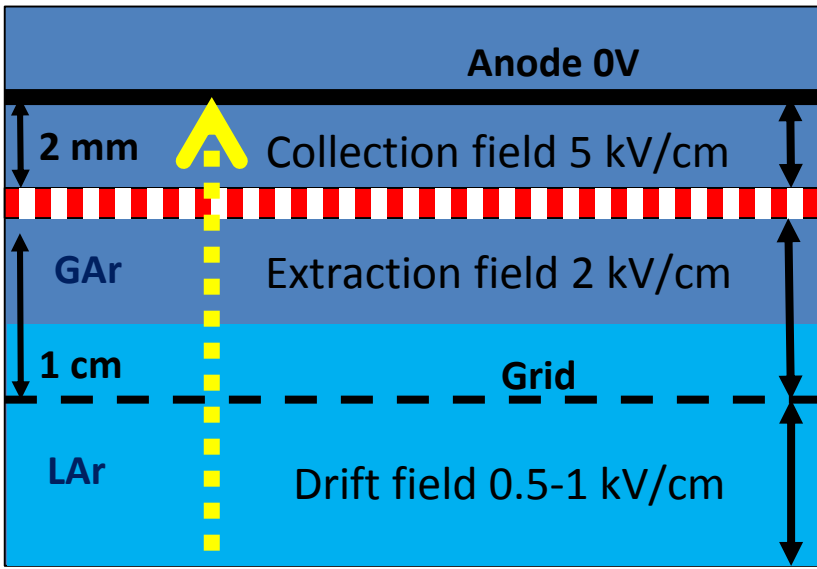

LEM (1mm)  
 25-35 kV/cm

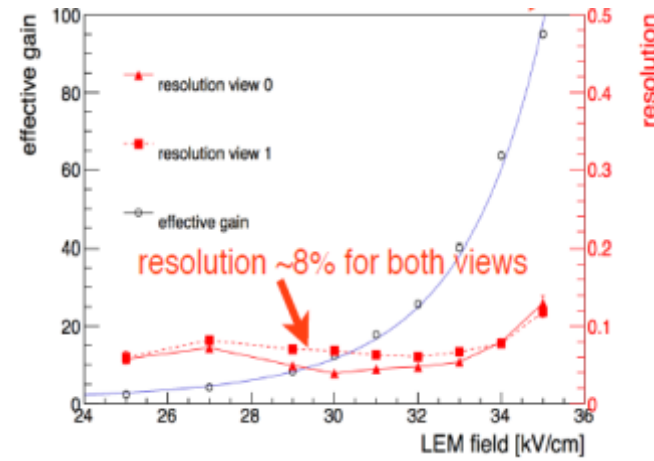

50x50 cm<sup>2</sup> LEM

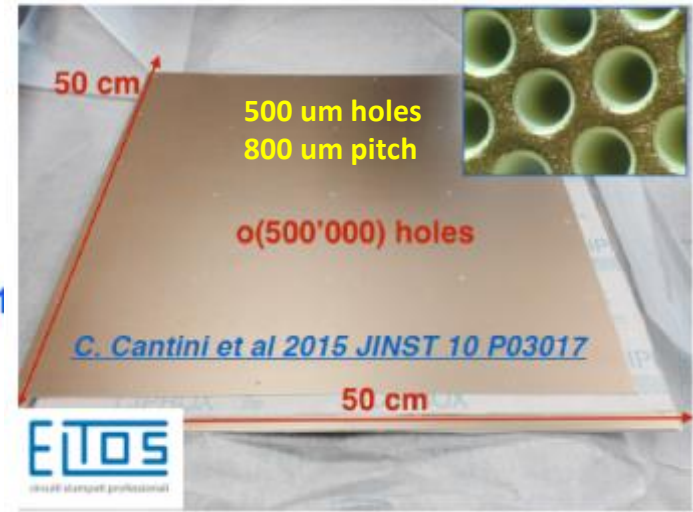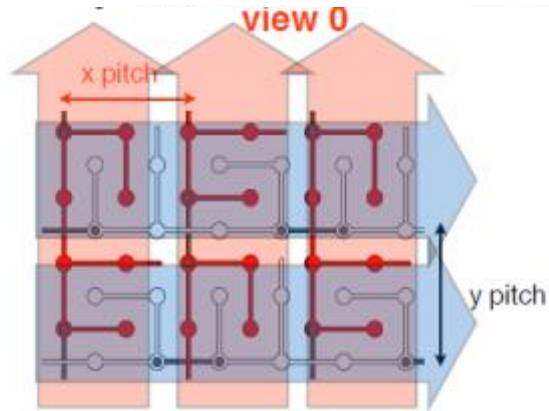
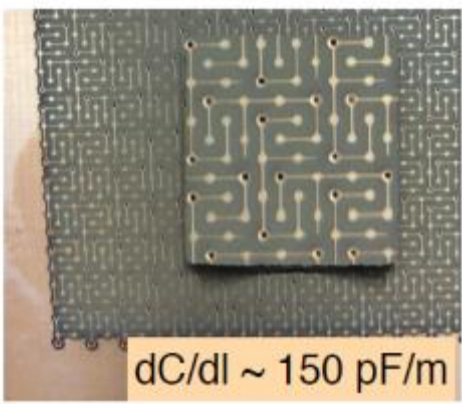


**Full accessibility provided by the double-phase charge readout at the top of the detector**

➤ **Digital electronics at warm on the tank deck:** ➤ **Cryogenic ASIC amplifiers (CMOS 0.35um) 16ch externally accessible:**

- Architecture based on uTCA standard
- 1 crate/signal chimney, 640 channels/crate
- 12 uTCA crates, 10 AMC cards/crate, 64 ch/card

- Working at 110K at the bottom of the signal chimneys
- Cards fixed to a plug accessible from outside
- Short cables capacitance, low noise at low T

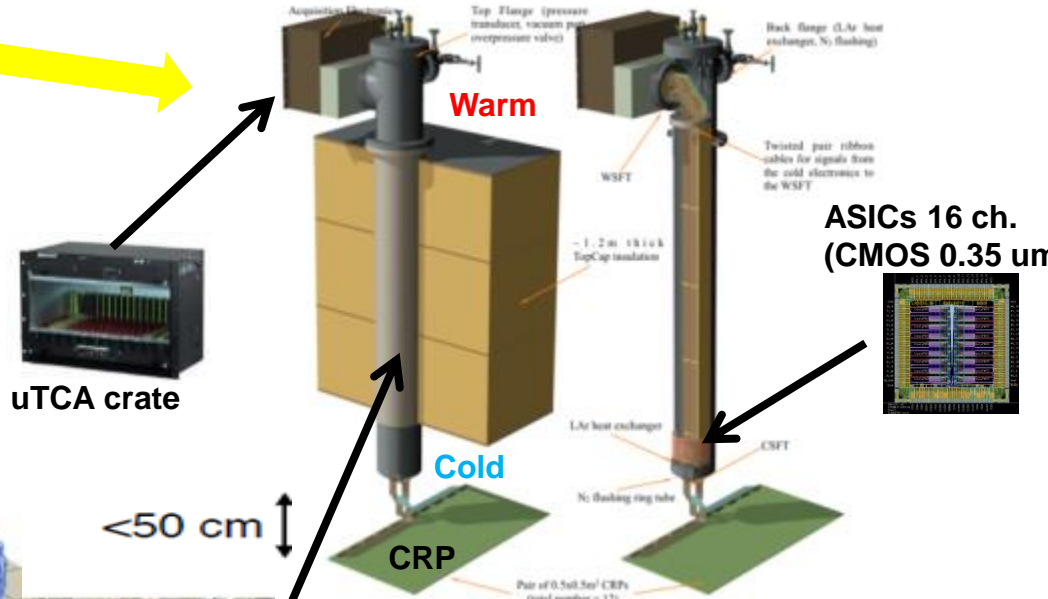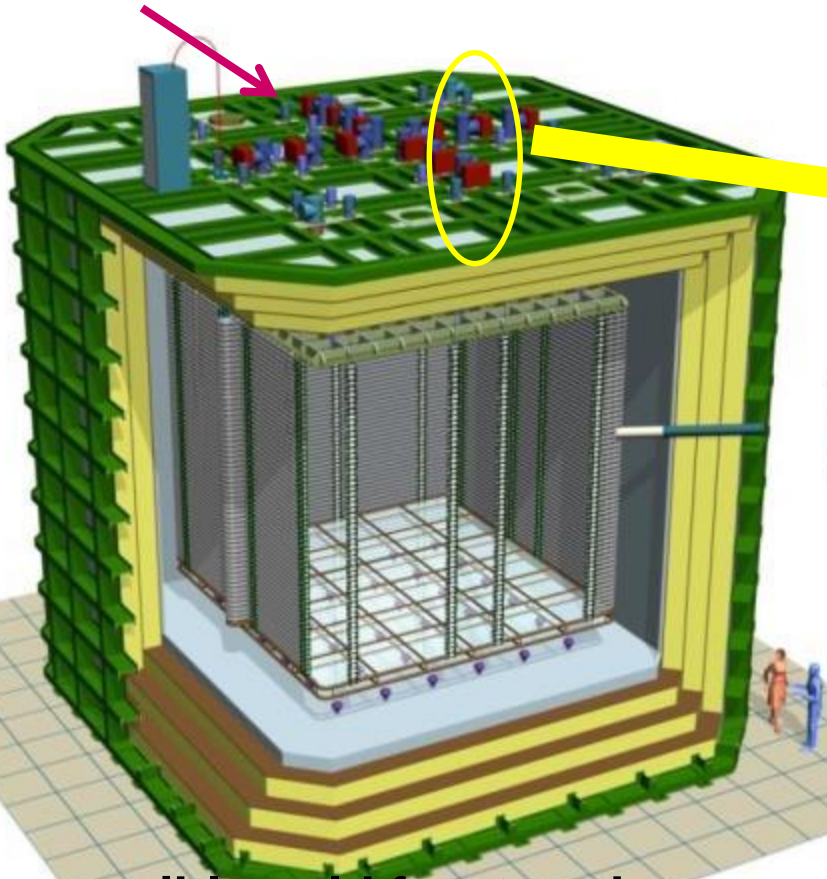


**Accessible cold front-end electronics and uTCA DAQ system**

Signal chimney

6x6x6: 12 uTCA crates (120 AMCs, 7680 readout channels)

→ 3x1x1: 4 uTCA crates (20 AMCs, 1280 readout channels)

+ Slow Control

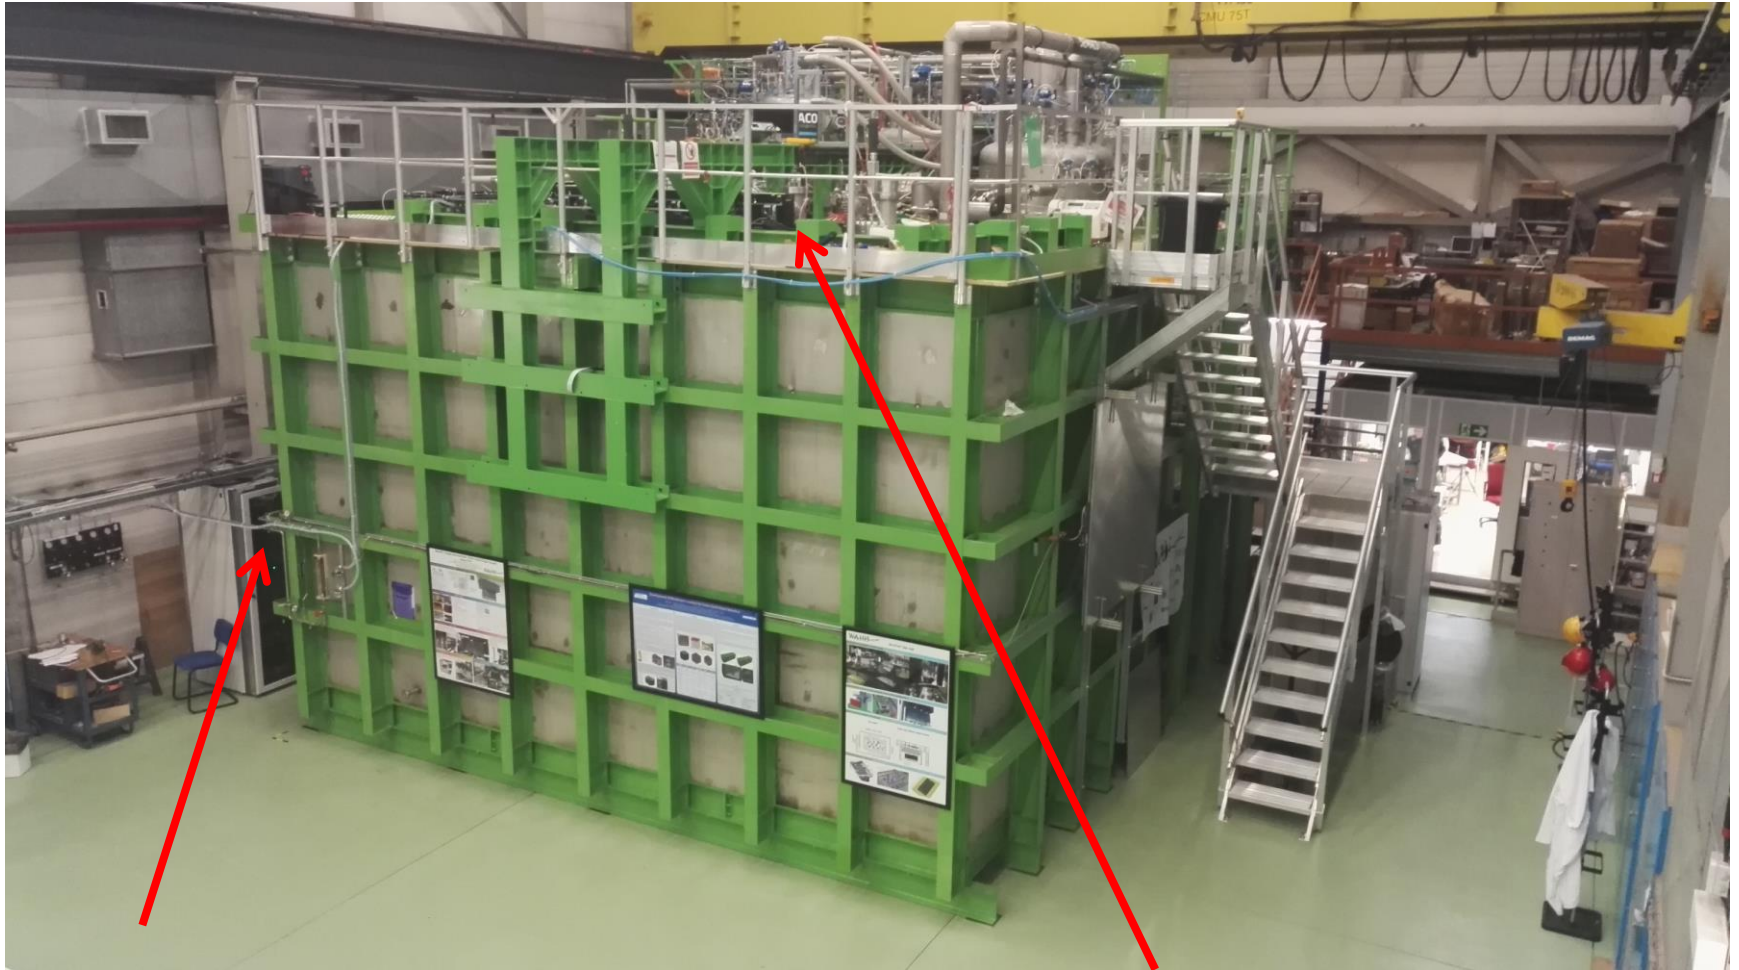


Event builder, network, GPS/White Rabbit GM,  
WR Trigger PC

Signal Chimneys and uTCA crates

# Task 5 VHV



**Major milestone:** test of HV feedthrough in a dedicated Lar test setup at the end of the scale of the Heinzinger PS (about 300 kV)

→ HV for nominal drift field of 0.5 kV/cm in the 6x6x6

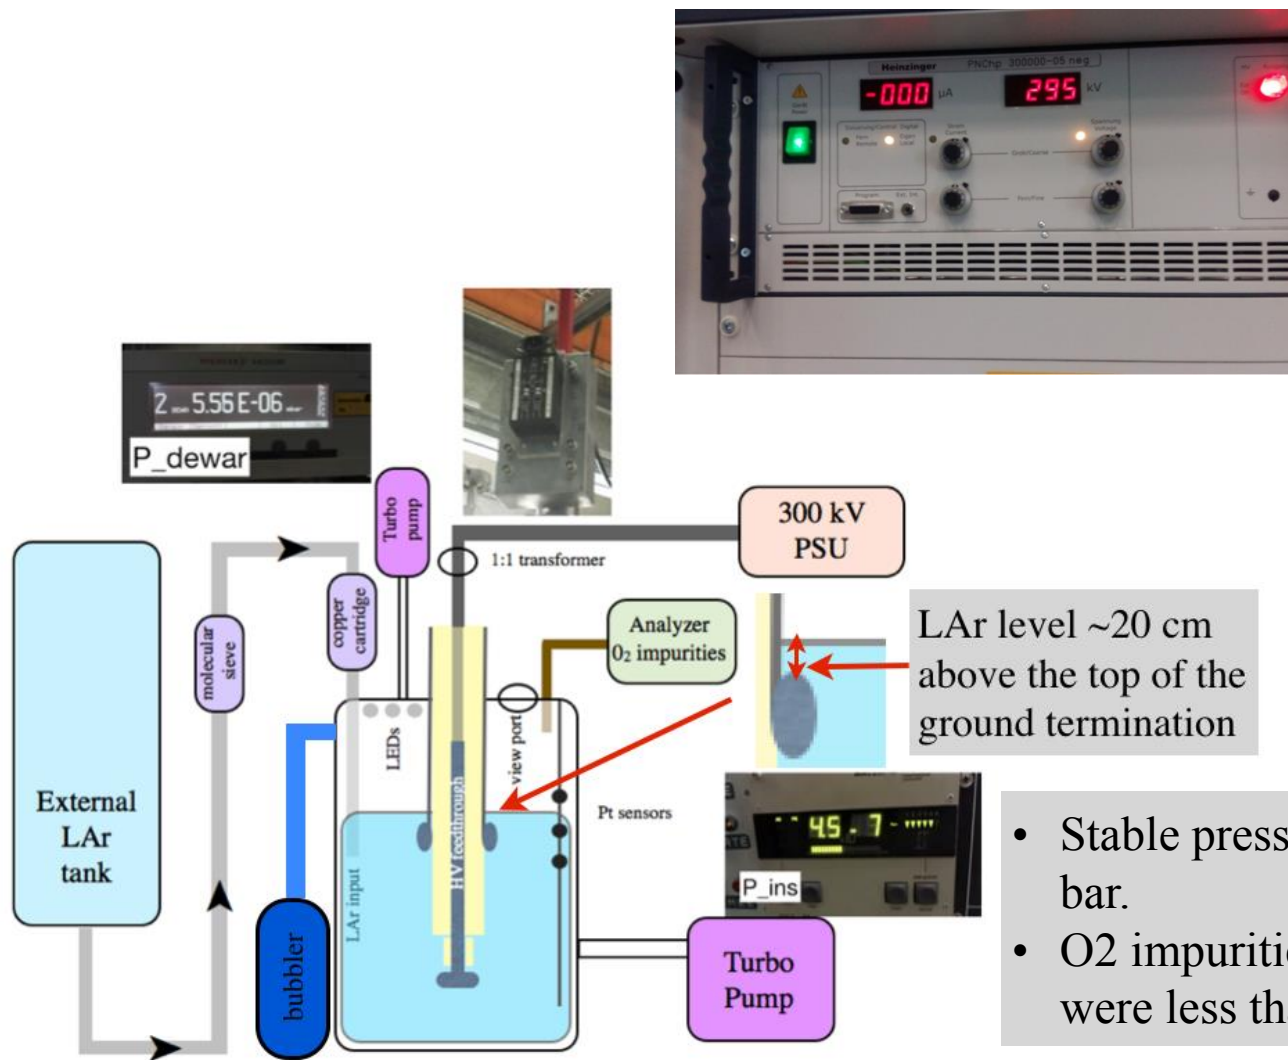


LAr level ~20 cm above the top of the ground termination

- Stable pressure in the dewar at 1.05 bar.
- O2 impurities measured in the gas were less than 0.1ppm

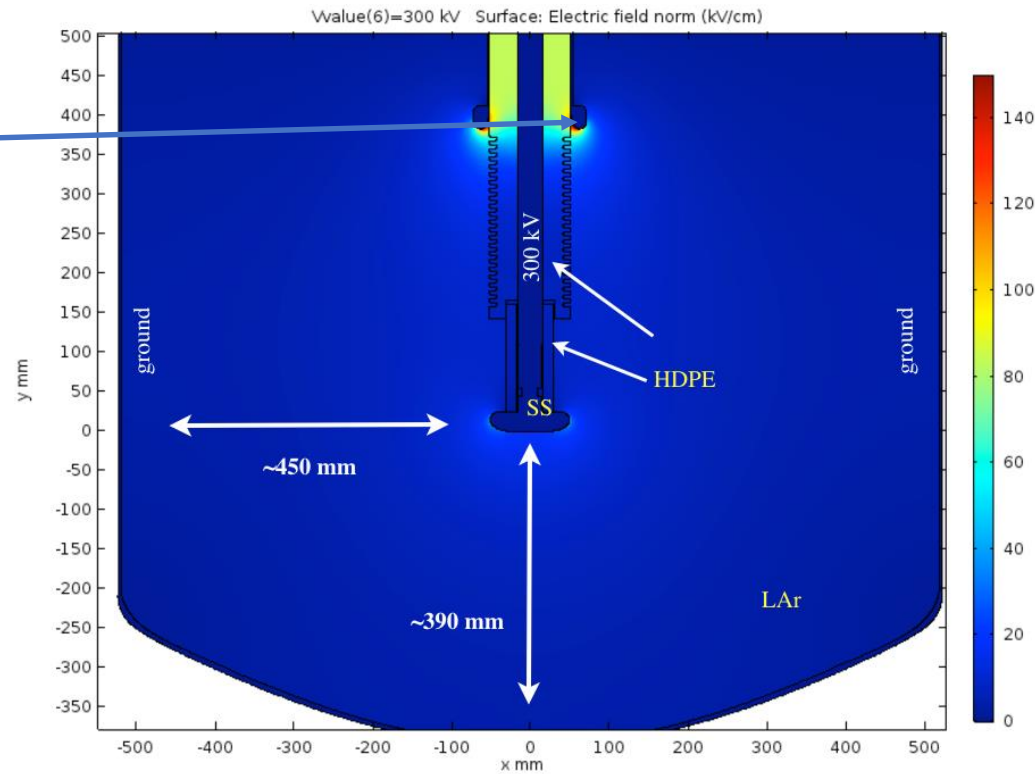
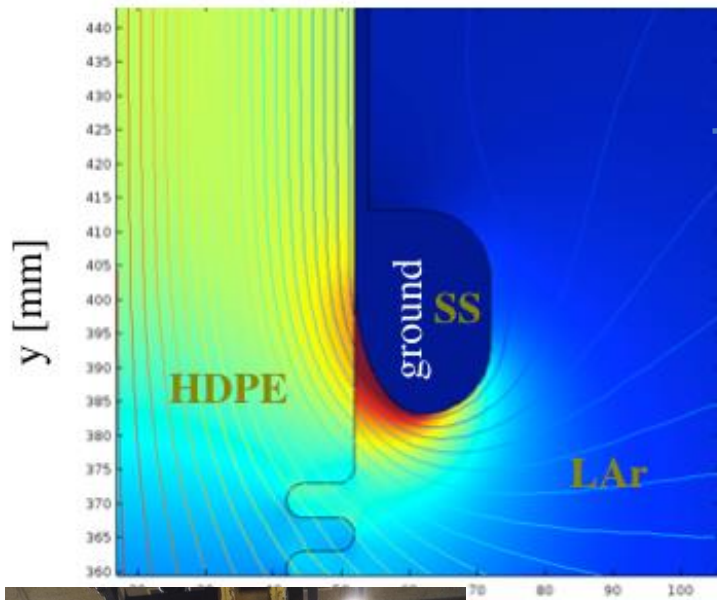


- Simulations of the operation at 300 kV achieved in the test setup showing the highest field values reached around the FT neck where the ground conductor ends
- HV feedthrough and PS operational on 3x1x1
- Completion of electrostatic simulation for entire feedthrough, field-cage, cathode system of 6x6x6

# Light readout (Task 5)

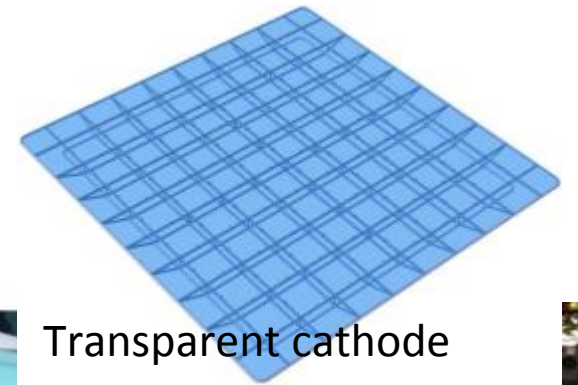

Transparent cathode

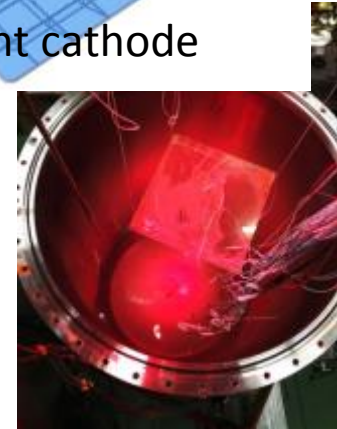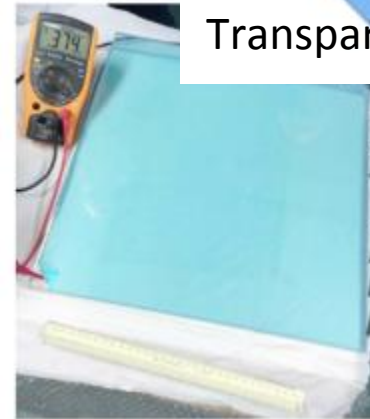


**Transparent cathode with ITO** (Indium-Tin-Oxyde) **resistive coating** on two sides of PMMA plates + TPB deposition at the top side:

- R&D and conceptual design for plates integration in cathode structure completed
- Infrastructure set up for TPB evaporation coating
- Tested ITO coated PMMA plates up to 850x600 mm<sup>2</sup> (produced by industry) → chosen size 650x650x10 mm<sup>3</sup>



Integration and test of different PMT solutions (coating, signal+HV distribution in a single cable) in 3x1x1, development of PMT readout electronics for 6x6x6



## PMTs characterization chain

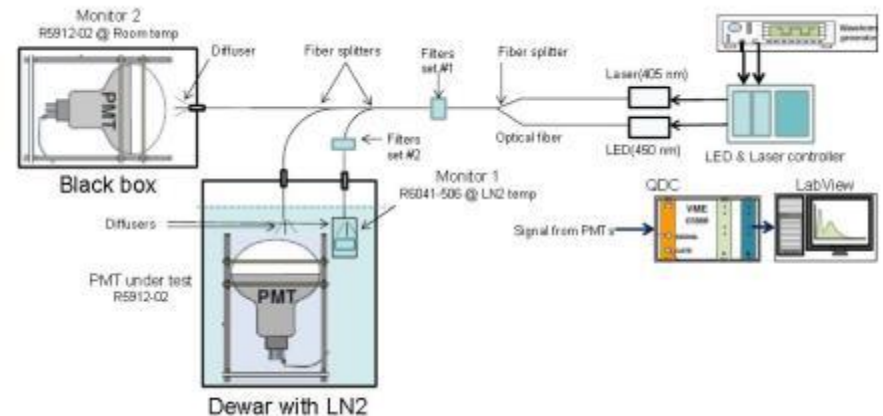

## Dark current (DC)





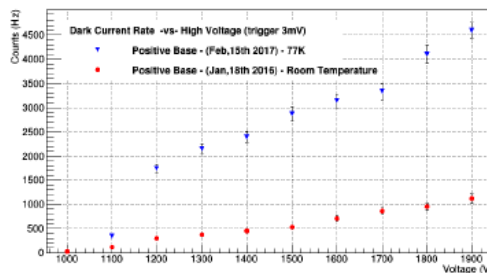
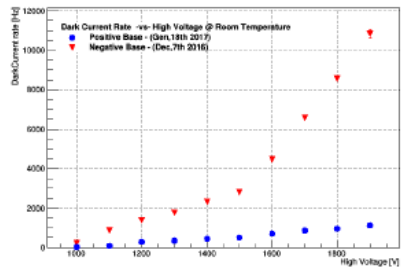


The Baby MIND collaboration is going to **perform beam tests on the Baby MIND spectrometer at the CERN PS-T9 beam line in May and June 2017.**

**Construction of the 33 Baby MIND novel magnet modules was completed on schedule at the end of February 2017 by CERN.** This brought to an end a production phase started in September 2016 with ARMCO steel, following first prototyping activities in March 2016 on standard construction steel. A paper on the magnet design is under preparation, close to being finalised. The design will also be presented at a Magnet Technology conference, MT25, in Amsterdam in August 2017.

**Scintillator bars delivered to CERN from INR in November 2016,** well ahead of the initial plans which foresaw delivery Q3 2017. Of the 18 custom scintillator modules required for the test, 9 have been assembled, and integrated onto magnet modules. **Assembly of the remaining 9 modules will proceed as planned in April 2017.**

## Task 6 Magnetization: Baby MIND

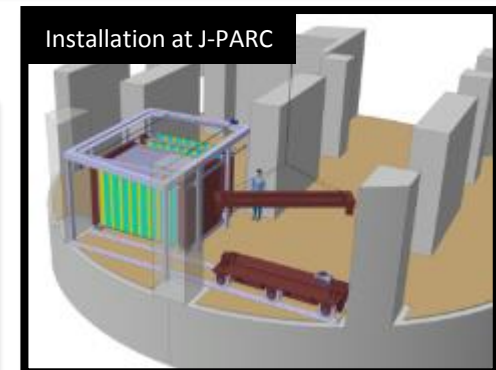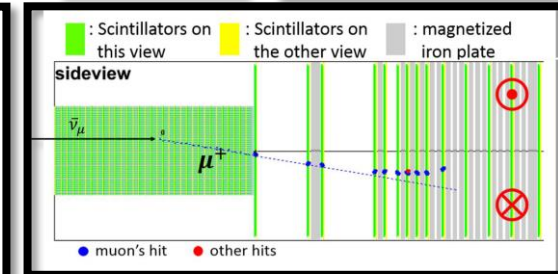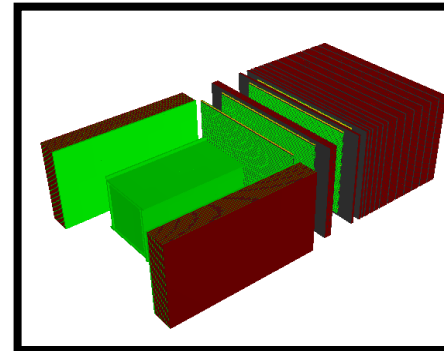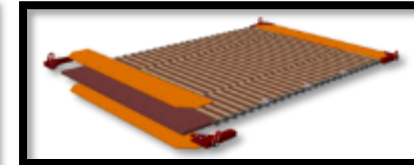

## Conclusions:

- The AIDA2020 groups involved in WP8 are intensively working on the hardware activities related to Baby MIND, the exploitation of the 3x1x1, the construction of the 6x6x6 and the design of the 10 kton. These activities have now a strong connection with the USA community
- These WP8 activities are in an advanced state with already a set of remarkable achievements for all the tasks, which will be useful to the entire community. The topics reviewed by the WP8 tasks are essential ingredients concerning the state of the art technologies. The AIDA2020 involvement will contribute to a wide dissemination of all this experience
- 3x1x1 detector operation delayed by cryogenic system installation and commissioning → looking forward to data taking which will be exploited by many activities of WP8.
- 6x6x6 design being completed by the end of November 2016, cryostat construction in advanced state, preparation for detector installation started
- ***The R&D activities connected to WP8 already achieved several interesting results and gathered a considerable amount of knowledge of general interest for the community. We should now focus on the dissemination and make all that available via the WEB (WP8 wiki), as originally foreseen. This is a fundamental aspect of the deliverables.***