Introduction to Transverse Beam Dynamics

Bernhard Holzer,
CERN-LHC

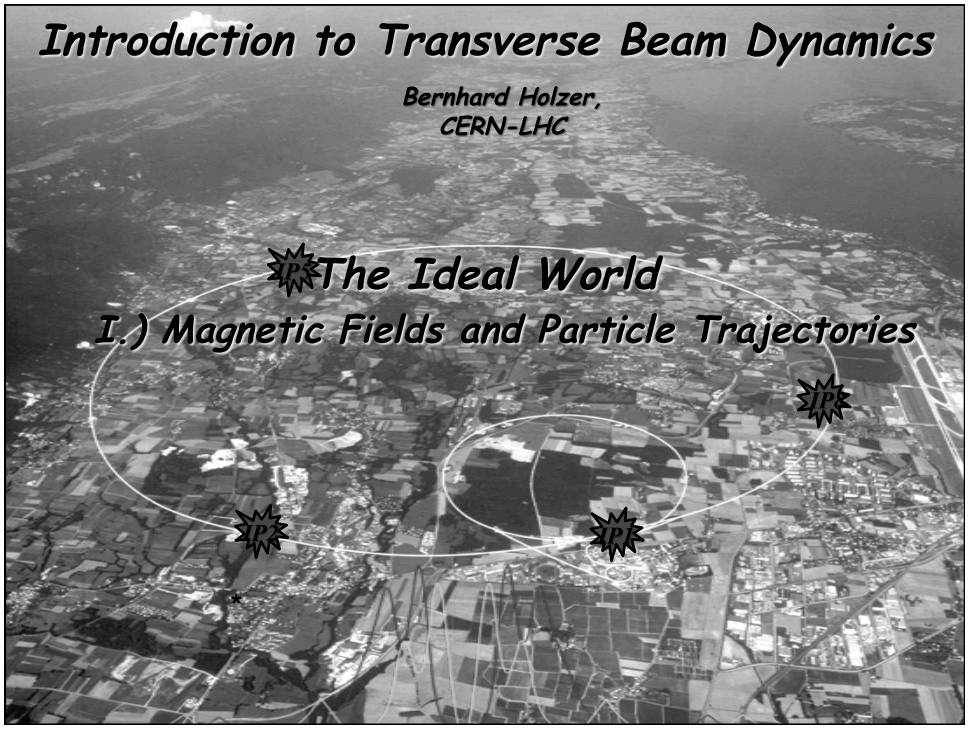

The Ideal World

I.) Magnetic Fields and Particle Trajectories

Luminosity Run of a typical storage ring:

LHC Storage Ring: Protons accelerated and stored for 12 hours
distance of particles travelling at about v ≈ c
L = 10^{10}-10^{11} km
... several times Sun - Pluto and back

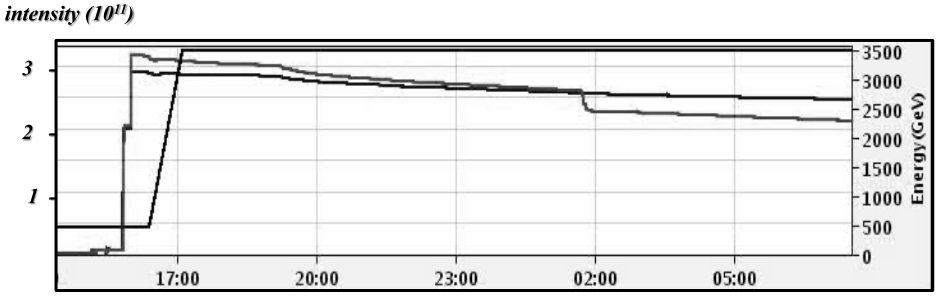

→ *guide the particles on a well defined orbit („design orbit“)*
→ *focus the particles to keep each single particle trajectory within the vacuum chamber of the storage ring, i.e. close to the design orbit.*

1.) Introduction and Basic Ideas

„ ... in the end and after all it should be a kind of circular machine“
→ need transverse deflecting force

Lorentz force $\vec{F} = q*(\cancel{\vec{E}} + \vec{v}\times\vec{B})$

typical velocity in high energy machines: $v \approx c \approx 3*10^8\ {}^{m}\!/_{s}$

Example:

$B = 1\,T \quad \rightarrow \quad F = q*3*10^8 \frac{m}{s}*1\frac{Vs}{m^2}$

$F = q*300\underbrace{\frac{MV}{m}}$

equivalent el. field ... E

technical limit for el. field:

$E \le 1\frac{MV}{m}$

old greek dictum of wisdom:
if you are clever, you use magnetic fields in an accelerator wherever it is possible.

The ideal circular orbit

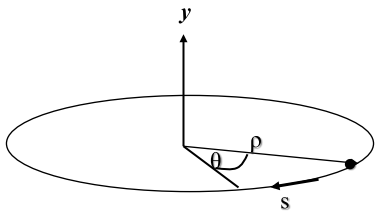

circular coordinate system

condition for circular orbit:

Lorentz force $F_L = e\,v\,B$

centrifugal force $F_{centr} = \frac{\gamma\, m_0\, v^2}{\rho}$

$\frac{\gamma\, m_0\, \cancel{v}}{\rho} = e\,\cancel{B}$

$\frac{p}{e} = B\,\rho$

B ρ = "beam rigidity"

1.) The Magnetic Guide Field

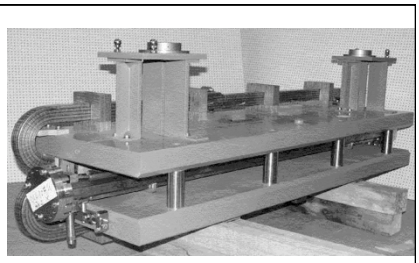

Dipole Magnets:

define the ideal orbit
homogeneous field created
by two flat pole shoes

$$B = \frac{\mu_0 \, n \, I}{h}$$

Normalise magnetic field to momentum:

$$\frac{p}{e} = B\,\rho \longrightarrow \frac{1}{\rho} = \frac{e\,B}{p}$$

convenient units:

$$B = [T] = \left[\frac{Vs}{m^2}\right] \qquad p = \left[\frac{GeV}{c}\right]$$

Example LHC:

$$B = 8.3\,T$$

$$p = 7000\,\frac{GeV}{c}$$

$$\frac{1}{\rho} = e\,\frac{8.3\ Vs/m^2}{7000*10^9\ eV/c} = \frac{8.3\,s\ 3*10^8\ m/s}{7000*10^9\ m^2}$$

$$\frac{1}{\rho} = 0.333\,\frac{8.3}{7000}\,1/m$$

The Magnetic Guide Field

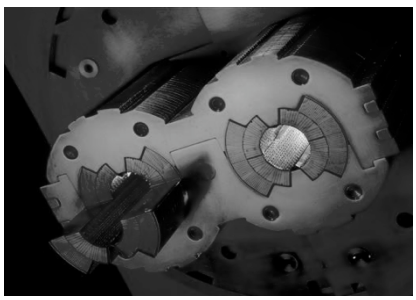

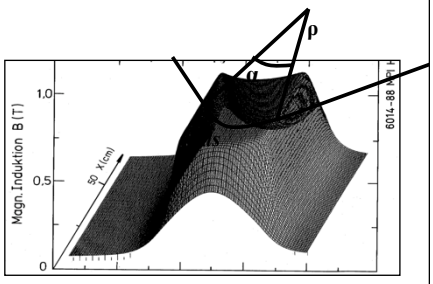

field map of a storage ring dipole magnet

$\rho = 2.53\ km \longrightarrow$ ***2πρ = 17.6 km***
≈ 66%

$B \approx 1 \ldots 8\ T$

rule of thumb: $\frac{1}{\rho} \approx 0.3\,\frac{B[T]}{p[GeV/c]}$ ***„normalised bending strength“***

2.) Focusing Properties – Transverse Beam Optics

Classical Mechanics: pendulum



there is a restoring force, proportional to the elongation x:

$$F = m * \frac{d^2x}{dt^2} = -k * x$$

Ansatz $x(t) = A * \cos(\omega t + \varphi)$

$$\dot{x} = -A\omega * \sin(\omega t + \varphi)$$

$$\ddot{x} = -A\omega^2 * \cos(\omega t + \varphi)$$

general solution: free harmonic oszillation

Solution $\omega = \sqrt{k/m}, \quad x(t) = x_0 * \cos(\sqrt{\frac{k}{m}}t + \varphi)$

Storage Ring: ***we need a Lorentz force that rises as a function of the distance to ..... ?***

..... the design orbit

$$F(x) = q * v * B(x)$$

Quadrupole Magnets:

required: ***focusing forces to keep trajectories in vicinity of the ideal orbit***

linear increasing Lorentz force

linear increasing magnetic field $B_y = g\,x \qquad B_x = g\,y$

normalised quadrupole field:

gradient of a quadrupole magnet: $g = \dfrac{2\mu_0 nI}{r^2}$

$\longrightarrow \quad k = \dfrac{g}{p/e}$

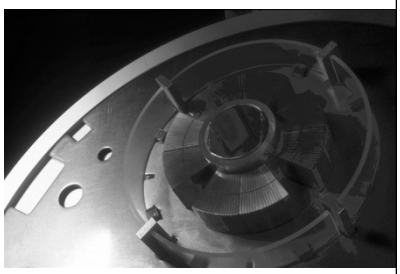

LHC main quadrupole magnet

simple rule: $k = 0.3\,\dfrac{g(T/m)}{p(GeV/c)}$

$g \approx 25 \ldots 220 \;\; T/m$

what about the vertical plane: ... Maxwell

$$\vec{\nabla} \times \vec{B} = \cancel{\mu_0 \vec{j}} + \cancel{\frac{\partial \vec{E}}{\partial t}} = 0 \qquad \Rightarrow \qquad \frac{\partial B_y}{\partial x} = \frac{\partial B_x}{\partial y}$$

3.) The equation of motion:

Linear approximation:

* ideal particle → design orbit

* any other particle → coordinates x, y small quantities
  $x,y \ll \rho$

→ magnetic guide field: only linear terms in x & y of B have to be taken into account

Taylor Expansion of the B field:

$$B_y(x) = B_{y0} + \frac{dB_y}{dx}x + \frac{1}{2!}\frac{d^2B_y}{dx^2}x^2 + \frac{1}{3!}\frac{eg''}{dx^3} + \dots$$

normalise to momentum
p/e = Bρ

$$\frac{B(x)}{p/e} = \frac{B_0}{B_0\rho} + \frac{g*x}{p/e} + \frac{1}{2!}\frac{eg'}{p/e} + \frac{1}{3!}\frac{eg''}{p/e} + \dots$$

The Equation of Motion:

$$\frac{B(x)}{p/e} = \frac{1}{\rho} + k\,x + \cancel{\frac{1}{2!}m\,x^2} + \cancel{\frac{1}{3!}n\,x^3} + \dots$$

only terms linear in x, y taken into account *dipole fields*
quadrupole fields

Separate Function Machines:

Split the magnets and optimise them according to their job:

bending, focusing etc

Example:
heavy ion storage ring TSR

* man sieht nur dipole und quads → linear

Equation of Motion:

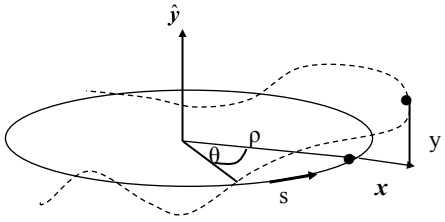

Consider local segment of a particle trajectory ... and remember the old days:
(Goldstein page 27)

radial acceleration:

$$a_r = \frac{d^2\rho}{dt^2} - \rho\left(\frac{d\theta}{dt}\right)^2$$

Ideal orbit: $\rho = const, \quad \frac{d\rho}{dt} = 0$

Force: $F = m\rho\left(\frac{d\theta}{dt}\right)^2 = m\rho\omega^2$

$$F = mv^2 / \rho$$

general trajectory: $\rho \rightarrow \rho + x$

$$\boldsymbol{F = m\frac{d^2}{dt^2}(x+\rho) - \frac{mv^2}{x+\rho} = e\,B_y\,v}$$

$$\boldsymbol{F = m\frac{d^2}{dt^2}(x+\rho) - \frac{mv^2}{x+\rho} = e\,B_y\,v}$$

① ②



① $\boldsymbol{\frac{d^2}{dt^2}(x+\rho) = \frac{d^2}{dt^2}x}$ ***… as ρ = const***

② ***remember: x ≈ mm , ρ ≈ m … → develop for small x***

$$\frac{1}{x+\rho} \approx \frac{1}{\rho}\left(1 - \frac{x}{\rho}\right)$$

Taylor Expansion

$$f(x) = f(x_0) + \frac{(x-x_0)}{1!}f'(x_0) + \frac{(x-x_0)^2}{2!}f''(x_0) +$$

$$\boldsymbol{m\frac{d^2x}{dt^2} - \frac{mv^2}{\rho}\left(1 - \frac{x}{\rho}\right) = eB_y v}$$

guide field in linear approx.

$$B_y = B_0 + x\frac{\partial B_y}{\partial x} \qquad m\frac{d^2x}{dt^2} - \frac{mv^2}{\rho}(1-\frac{x}{\rho}) = ev\left\{B_0 + x\frac{\partial B_y}{\partial x}\right\} \quad \Big| \; : m$$

$$\frac{d^2x}{dt^2} - \frac{v^2}{\rho}(1-\frac{x}{\rho}) = \frac{e\,v\,B_0}{m} + \frac{e\,v\,x\,g}{m}$$

independent variable: $t \rightarrow s$

$$\frac{dx}{dt} = \frac{dx}{ds}\frac{ds}{dt}$$

$$\frac{d^2x}{dt^2} = \frac{d}{dt}\left(\frac{dx}{ds}\frac{ds}{dt}\right) = \frac{d}{ds}\underbrace{\left(\frac{dx}{ds}\right)}_{x'}\underbrace{\frac{ds}{dt}}_{v}\frac{ds}{dt}$$

$$\frac{d^2x}{dt^2} = x''v^2 + \cancel{\frac{dx}{ds}\frac{dv}{ds}}v$$

$$x''v^2 - \frac{v^2}{\rho}(1-\frac{x}{\rho}) = \frac{e\,v\,B_0}{m} + \frac{e\,v\,x\,g}{m} \quad \Big| \; : v^2$$

$$x'' - \frac{1}{\rho}(1-\frac{x}{\rho}) = \frac{e\,B_0}{mv} + \frac{e\,x\,g}{mv} \quad \Big| \; m\,v = p$$

$$x'' - \frac{1}{\rho} + \frac{x}{\rho^2} = \frac{B_0}{p/e} + \frac{x\,g}{p/e}$$

normalize to momentum of particle

$$\frac{B_0}{p/e} = -\frac{1}{\rho}$$

$$\frac{g}{p/e} = k$$

$$x'' - \cancel{\frac{1}{\rho}} + \frac{x}{\rho^2} = -\cancel{\frac{1}{\rho}} + k\,x$$

$$x'' + x(\frac{1}{\rho^2} - k) = 0$$

✲ *Equation for the vertical motion:*

$$\frac{1}{\rho^2} = 0 \qquad \textit{no dipoles … in general …}$$

$$k \;\leftrightarrow\; -k \qquad \textit{quadrupole field changes sign}$$

$$y'' + k\,y = 0$$



Remarks:

* $x'' + (\frac{1}{\rho^2} - k) \cdot x = 0$

… there seems to be a focusing even without a quadrupole gradient

„weak focusing of dipole magnets“

$k = 0 \quad \Rightarrow \quad x'' = -\frac{1}{\rho^2} x$

even without quadrupoles there is a retriving force (i.e. focusing) in the bending plane of the dipole magnets

… in large machines it is weak. (!)



Mass spectrometer: particles are separated according to their energy and focused due to the 1/ρ effect of the dipole

---

* ***Hard Edge Model:***

$$x'' + \left\{\frac{1}{\rho^2} - k\right\} x = 0$$

… this equation is not correct !!!

$$x''(s) + \left\{\frac{1}{\rho^2(s)} - k(s)\right\} x(s) = 0$$

bending and focusing fields … are functions of the independent variable „s“

!

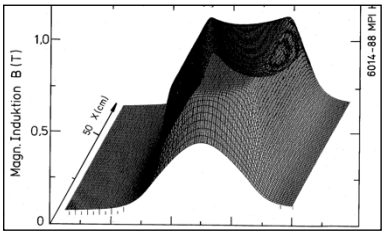

Inside a magnet we assume constant focusing properties !

$\frac{1}{\rho} = const \qquad k = const$

$$B\, l_{eff} = \int_0^{l_{mag}} B\, ds$$

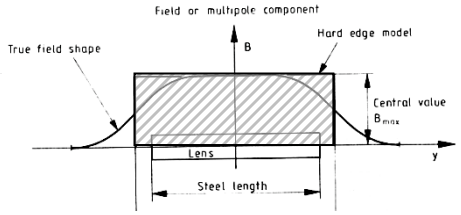

4.) Solution of Trajectory Equations

Define … hor. plane: $K = 1/\rho^2 - k$

… vert. Plane: $K = k$

$$x'' + K\,x = 0$$

Differential Equation of harmonic oscillator … with spring constant K

Ansatz: $x(s) = a_1 \cdot \cos(\omega s) + a_2 \cdot \sin(\omega s)$

general solution: linear combination of two independent solutions

$$x'(s) = -a_1\omega \sin(\omega s) + a_2\omega \cos(\omega s)$$

$$x''(s) = -a_1\omega^2 \cos(\omega s) - a_2\omega^2 \sin(\omega s) = -\omega^2 x(s) \longrightarrow \omega = \sqrt{K}$$

general solution:

$$x(s) = a_1 \cos(\sqrt{K}s) + a_2 \sin(\sqrt{K}s)$$

determine a_1, a_2 by boundary conditions:

$$s = 0 \longrightarrow \begin{cases} x(0) = x_0 \quad , \quad a_1 = x_0 \\ x'(0) = x_0' \quad , \quad a_2 = \dfrac{x_0'}{\sqrt{K}} \end{cases}$$

Hor. Focusing Quadrupole K > 0:

$$x(s) = x_0 \cdot \cos(\sqrt{|K|}s) + x_0' \cdot \frac{1}{\sqrt{|K|}} \sin(\sqrt{|K|}s)$$

$$x'(s) = -x_0 \cdot \sqrt{|K|} \cdot \sin(\sqrt{|K|}s) + x_0' \cdot \cos(\sqrt{|K|}s)$$

For convenience expressed in matrix formalism:

$$\begin{pmatrix} x \\ x' \end{pmatrix}_{s1} = M_{foc} * \begin{pmatrix} x \\ x' \end{pmatrix}_{s0}$$

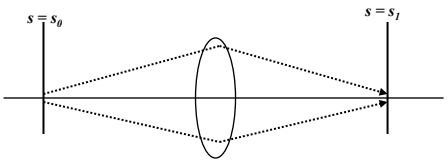

$$M_{foc} = \begin{pmatrix} \cos(\sqrt{|K|}s) & \dfrac{1}{\sqrt{|K|}} \sin(\sqrt{|K|}s \\ -\sqrt{|K|} \sin(\sqrt{|K|}s) & \cos(\sqrt{|K|}s) \end{pmatrix}_0$$

hor. defocusing quadrupole:

$$x'' - K\,x = 0$$

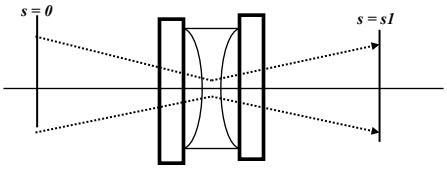

Remember from school:

$$f(s) = \cosh(s) \quad , \quad f'(s) = \sinh(s)$$

Ansatz: $x(s) = a_1 \cdot \cosh(\omega s) + a_2 \cdot \sinh(\omega s)$

$$M_{def\,oc} = \begin{pmatrix} \cosh\sqrt{|K|}l & \frac{1}{\sqrt{|K|}}\sinh\sqrt{|K|}l \\ \sqrt{|K|}\sinh\sqrt{|K|}l & \cosh\sqrt{|K|}l \end{pmatrix}$$

drift space: ***K = 0***

$$M_{drift} = \begin{pmatrix} 1 & l \\ 0 & 1 \end{pmatrix}$$

! with the assumptions made, the motion in the horizontal and vertical planes are independent „ ... the particle motion in x & y is uncoupled“

Thin Lens Approximation:

matrix of a quadrupole lens

$$M = \begin{pmatrix} \cos\sqrt{|k|}l & \frac{1}{\sqrt{|k|}}\sin\sqrt{|k|}l \\ -\sqrt{|k|}\sin\sqrt{|k|}l & \cos\sqrt{|k|}l \end{pmatrix}$$

in many practical cases we have the situation:

$f = \frac{1}{k l_q} >> l_q$ ***... focal length of the lens is much bigger than the length of the magnet***

limes: $l_q \rightarrow 0$ ***while keeping*** $k\,l_q$ ***= const***

$$M_x = \begin{pmatrix} 1 & 0 \\ \frac{1}{f} & 1 \end{pmatrix} \qquad M_z = \begin{pmatrix} 1 & 0 \\ \frac{-1}{f} & 1 \end{pmatrix}$$

... useful for fast (and in large machines still quite accurate) „back on the envelope calculations“ ... and for the guided studies !

Combining the two planes:

Clear enough (hopefully ... ?) : a quadrupole magnet that is focussing o-in one plane acts as defocusing lens in the other plane ... et vice versa.

hor foc. quadrupole lens

$$M_{foc} = \begin{pmatrix} \cos(\sqrt{|K|}s) & \frac{1}{\sqrt{|K|}}\sin(\sqrt{|K|}s \\ -\sqrt{|K|}\sin(\sqrt{|K|}s) & \cos(\sqrt{|K|}s) \end{pmatrix}$$

matrix of the same magnet in the vert. plane:

$$M_{defoc} = \begin{pmatrix} \cosh\sqrt{|K|}l & \frac{1}{\sqrt{|K|}}\sinh\sqrt{|K|}l \\ \sqrt{|K|}\sinh\sqrt{|K|}l & \cosh\sqrt{|K|}l \end{pmatrix}$$

$$\begin{pmatrix} x \\ x' \\ y \\ y' \end{pmatrix}_f = \begin{pmatrix} \cos(\sqrt{|k|}s) & \frac{1}{\sqrt{|k|}}\sin(\sqrt{|k|}s) & 0 & 0 \\ -\sqrt{|k|}\sin(\sqrt{|k|}s) & \cos(\sqrt{|k|}s) & 0 & 0 \\ 0 & 0 & \cosh(\sqrt{|k|}s) & \frac{1}{\sqrt{|k|}}\sinh(\sqrt{|k|}s) \\ 0 & 0 & \sqrt{|k|}\sinh(\sqrt{|k|}s) & \cosh(\sqrt{|k|}s) \end{pmatrix} * \begin{pmatrix} x \\ x' \\ y \\ y' \end{pmatrix}_i$$

Transformation through a system of lattice elements

combine the single element solutions by multiplication of the matrices

$$M_{total} = M_{QF} * M_D * M_{QD} * M_{Bend} * M_{D*}.....$$

$$\begin{pmatrix} x \\ x' \end{pmatrix}_{s2} = M(s_2,s_1) * \begin{pmatrix} x \\ x' \end{pmatrix}_{s1}$$

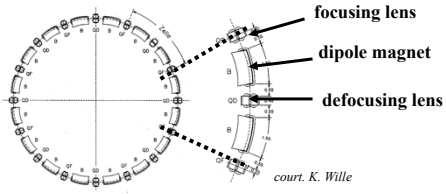

court. K. Wille

in each accelerator element the particle trajectory corresponds to the movement of a harmonic oscillator „

x(s)

0

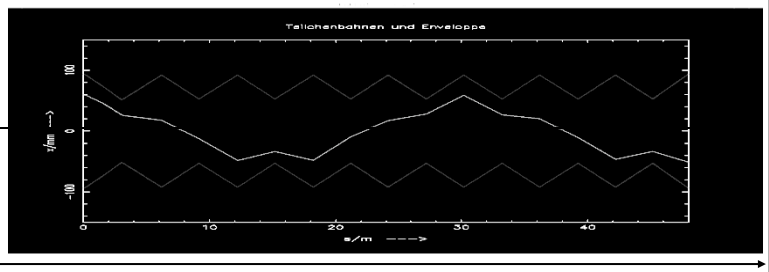

typical values in a strong foc. machine:
x ≈ mm, x´ ≤ mrad

5.) Orbit & Tune:

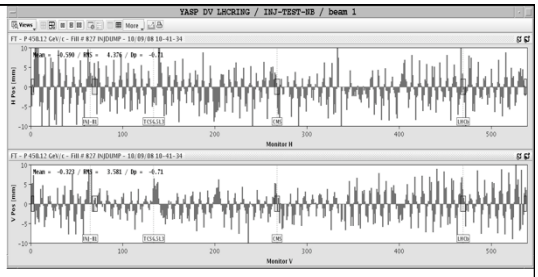

Tune: number of oscillations per turn

64.31
59.32

Relevant for beam stability:
non integer part

LHC revolution frequency: 11.3 kHz $0.31*11.3 = 3.5kHz$

LHC Operation: Beam Commissioning

First turn steering "by sector:"

- One beam at the time
- Beam through 1 sector (1/8 ring),

correct trajectory, open collimator and move on.



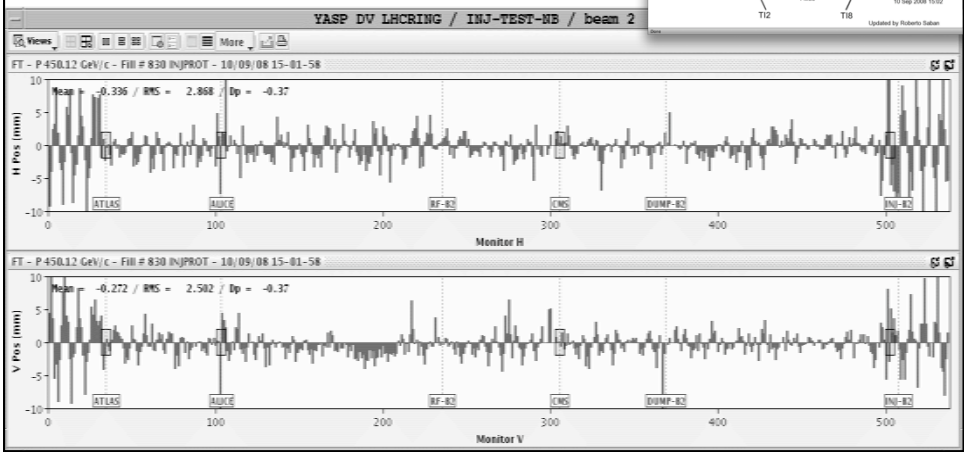

LHC Operation: the First Beam

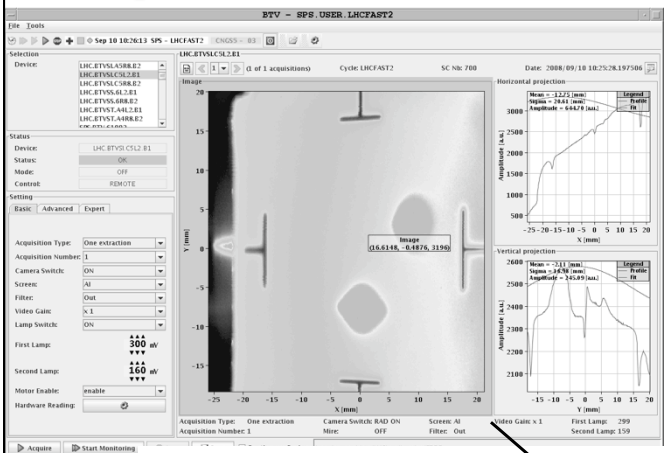

Beam 1 on OTR screen
1st and 2nd turn

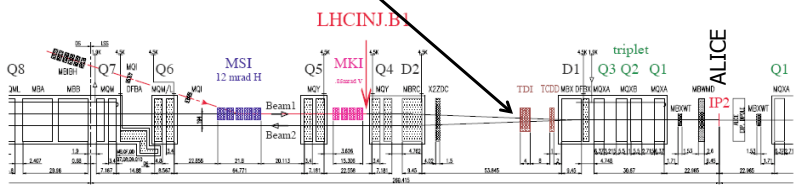

Question: what will happen, if the particle performs a second turn ?

... or a third one or ... 10^{10} turns

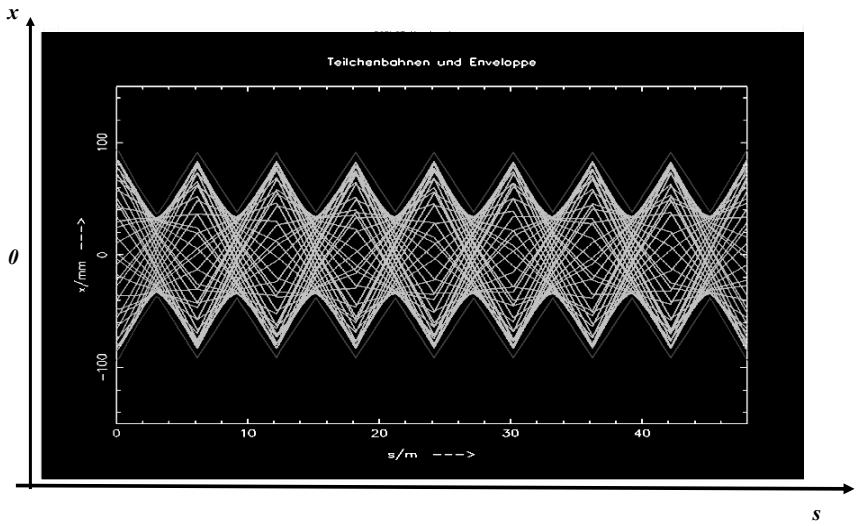

Résumé:

beam rigidity: $B \cdot \rho = {}^{p}\!/_{q}$

bending strength of a dipole: $\frac{1}{\rho}\left[m^{-1}\right] = \frac{0.2998 \cdot B_0(T)}{p(GeV/c)}$

focusing strength of a quadrupole: $k\left[m^{-2}\right] = \frac{0.2998 \cdot g}{p(GeV/c)}$

focal length of a quadrupole: $f = \frac{1}{k \cdot l_q}$

equation of motion: $x'' + Kx = \frac{1}{\rho}\frac{\Delta p}{p}$

matrix of a foc. quadrupole: $x_{s2} = M \cdot x_{s1}$

$$M = \begin{pmatrix} \cos\sqrt{|K|}l & \frac{1}{\sqrt{|K|}}\sin\sqrt{|K|}l \\ -\sqrt{|K|}\sin\sqrt{|K|}l & \cos\sqrt{|K|}l \end{pmatrix}, \qquad M = \begin{pmatrix} 1 & 0 \\ \frac{1}{f} & 1 \end{pmatrix}$$

Bibliography:

1.) P. Bryant, K. Johnsen: The Principles of Circular Accelerators and Storage Rings Cambridge Univ. Press

2.) Klaus Wille: Physics of Particle Accelerators and Synchrotron Radiation Facilicties, Teubner, Stuttgart 1992

3.) Peter Schmüser: Basic Course on Accelerator Optics, CERN Acc. School: 5th general acc. phys. course CERN 94-01

4.) Bernhard Holzer: Lattice Design, CERN Acc. School: Interm.Acc.phys course, http://cas.web.cern.ch/cas/ZEUTHEN/lectures-zeuthen.htm cern report: CERN-2006-002

5.) A.Chao, M.Tigner: Handbook of Accelerator Physics and Engineering, Singapore : World Scientific, 1999.

6.) Martin Reiser: Theory and Design of Chargged Particle Beams Wiley-VCH, 2008

7.) Frank Hinterberger: Physik der Teilchenbeschleuniger, Springer Verlag 1997

8.) Mathew Sands: The Physics of e+ e- Storage Rings, SLAC report 121, 1970

9.) D. Edwards, M. Syphers : An Introduction to the Physics of Particle Accelerators, SSC Lab 1990