



# FCC-ee - Lepton Collider

## Optics Challenges

*Bernhard Holzer*

*... court J. Wenninger*



***For the TLEP Lattice and Optics Design Team:***

***B. Haerer, R. Martin, H. Garcia, R. Tomas, L. Medina, Y. Cai and many colleagues***

*There is only **one real challenge ...**  
the parameter list*

	Z	W	H	tt
Beam energy [GeV]	45.5	80	120	175
Beam current [mA]	1450	152	30	6.6
Bunches / beam	16700	4490	1360	98
Bunch population [ $10^{11}$ ]	1.8	0.7	0.46	1.4
Transverse emittance e				
- Horizontal [nm]	29.2	3.3	0.94	2
- Vertical [ $\mu\text{m}$ ]	60	7	1.9	2
Momentum comp. [ $10^{-5}$ ]	18	2	0.5	0.5
Betatron function at IP b*				
- Horizontal [m]	0.5	0.5	0.5	1
- Vertical [mm]	1	1	1	1
Beam size at IP s* [mm]				
- Horizontal	121	26	22	45
- Vertical	0.25	0.13	0.044	0.045
Bunch length [mm]				
- Synchrotron radiation	1.64	1.01	0.81	1.16
- Total	2.56	1.49	1.17	1.49
Energy loss / turn [GeV]	0.03	0.33	1.67	7.55
Total RF voltage [GV]	2.5	4	5.5	11

*design & optimise a lattice  
for **4 different energies***

*Interaction Region layout  
for a **large number of bunches**  
 $\Delta s = 6\text{m}$  (LHC = 7.5m)*

*small hor. emittance  
**increasing** with reduced energy  
 $\varepsilon_y / \varepsilon_x = 10^{-3}$*

***extremely small vert. beta**  
 $\beta_y = 1\text{mm}$   
→ **high chromaticity**  
→ **challenging dynamic aperture***

***high synchrotron radiation losses**  
include sophisticated  
absorber design in the lattice*

# Challenge 1: TLEP ... Lattice Design

## Definition of the cell to get the right hor. emittance

Text-Book like approach: Start with a FODO

*high fill factor, robustness & flexibility, easy to handle & modify*  
*easy to optimise analytically*

Design of single cell:  $L_{cell} = 50m$

equilibrium emittance



$$\varepsilon = \left( \frac{\delta p}{p} \right)^2 (\gamma D^2 + 2\alpha D D' + \beta D'^2)$$

scaling of dispersion in a FoDo

$$\hat{D} = \frac{L_{cell}^2}{\rho} * \frac{(1 + \frac{1}{2} \sin \frac{\psi_{cell}}{2})}{\sin^2 \frac{\psi_{cell}}{2}}$$

scaling of beta-function in a FoDo

$$\hat{\beta} = \frac{(1 + \sin \frac{\psi_{cell}}{2}) L_{cell}}{\sin \psi_{cell}}$$

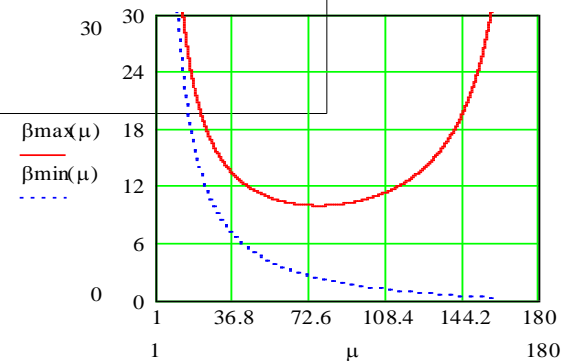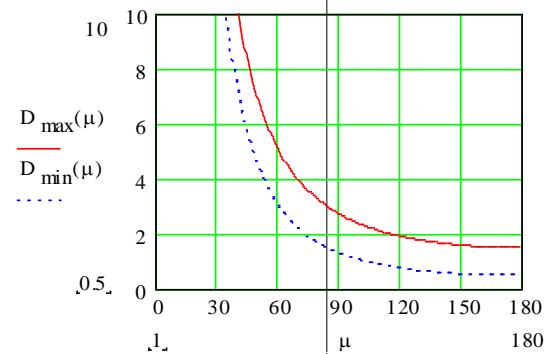

→ cell length to define the emittance

→ phase advance for fine tuning

→ re-arranging & re-scaling for the different energies

# Challenge 1: TLEP ... Lattice Design

## Definition of the cell

*Arc: the single FoDo cell*

*phase advance: 90° / 60°*

*to be discussed ...*

*90° horizontally: small dispersion & emittance*



*60° vertically: small beam size ( $\beta_y$ )*

*and better orbit correction tolerance (LEP experience)*

*Main Parameters:*

*momentum compaction*

$$\alpha_{cp} \approx \frac{\langle D \rangle}{R} = \frac{12 * 10^{-2} m}{L_0 / (2\pi)} \approx 7.7 * 10^{-6} \quad \text{MADX: } \alpha_{cp} \approx 6.6 * 10^{-6} \quad (80km)$$

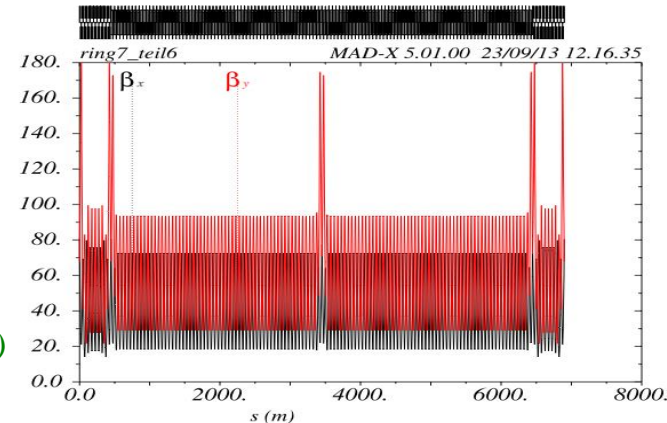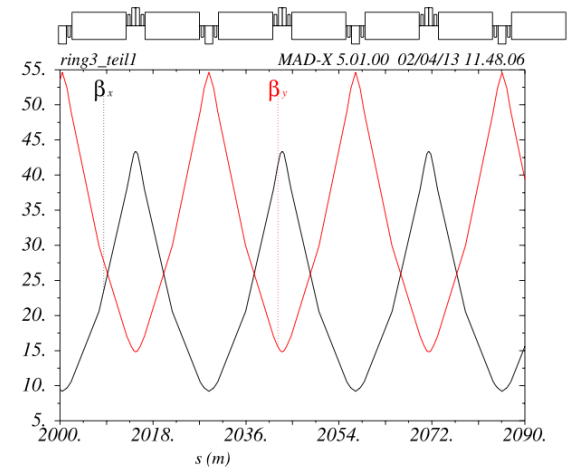

**Question 1:** *can we follow with a flexible lattice design the parameters for the 4 energies ? Dispersion suppressor ? Geometry ?*


# Challenge 2: Lattice Design ... Layout of the Magnets

Achieve **highest possible fill factor**


to limit synchrotron radiation losses

Include **Absorber Design** in the lattice layout

Distribute RF straights to **limit saw tooth effect**  
(dispersion suppressor layout)

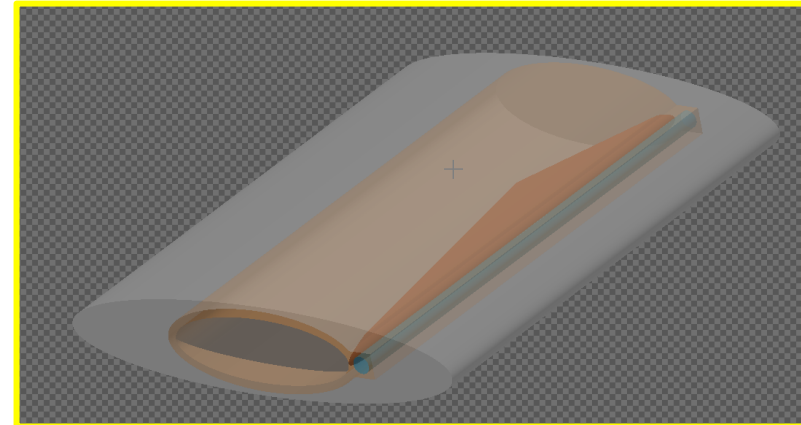

power density along the dipole magnet

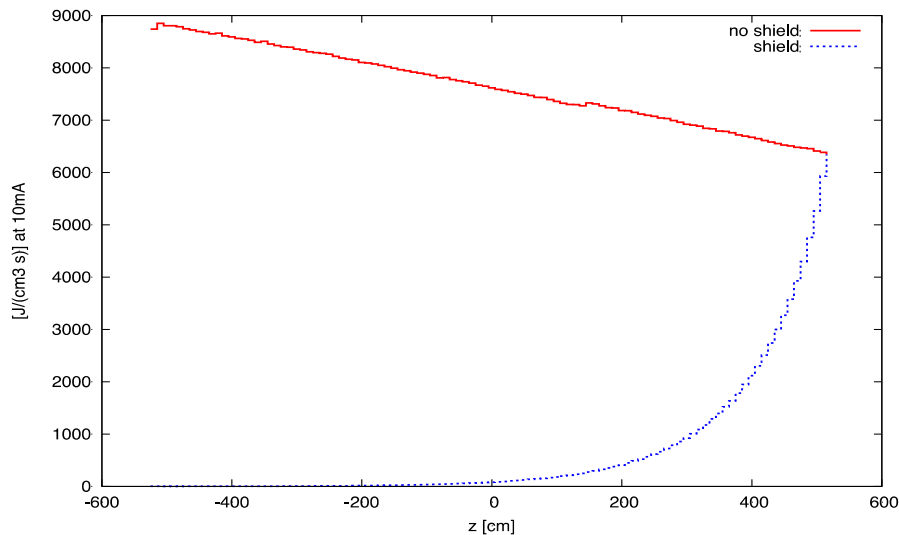

*Dipole length defined by  
synchrotron radiation load*


$$L_{dipole} < 11m$$

*court. Luisella Lari et al*



## Challenge 2: Lattice Design ... Layout of the Magnets

include boundary conditions into the cell design ... dipole length / absorbers

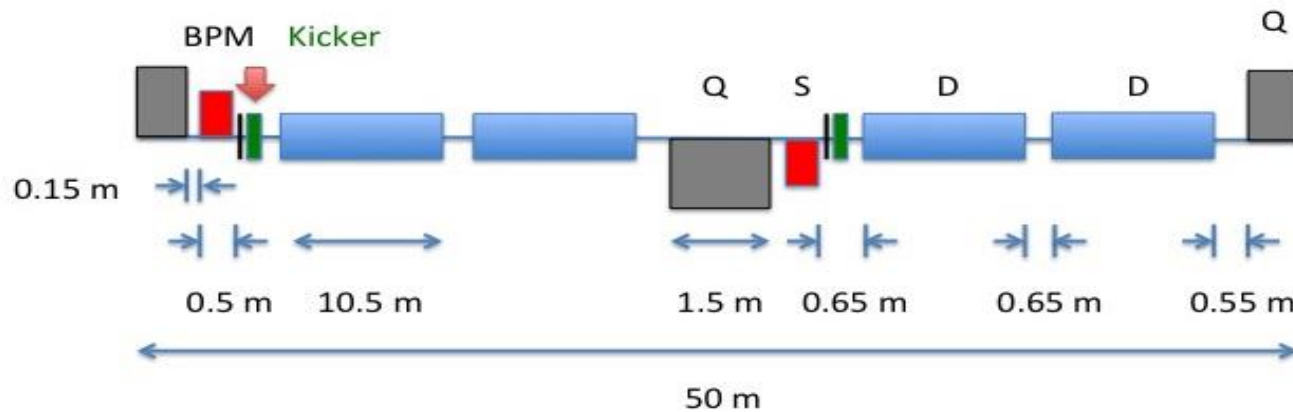

D = Dipole, Q = Quadrupole, S = Sextupole

$$N_{dipoles} = 6048$$

$$L_{dipoles} = 10.5 \text{ m}$$

$$\theta = \frac{2\pi}{6048} = 1.04 \text{ mrad per dipole}$$

$$E = 175 \text{ GeV}, \quad B\rho = 583.33$$

$$\rho = \frac{L_B}{\theta} \approx 10 \text{ km}$$

$$\Delta U_0 (\text{keV}) \approx \frac{89 * E^4 (\text{GeV})}{\rho}$$




$$\Delta U_0 \approx 8.3 \text{ GeV} \quad \dots 7.6 \text{ GeV (100km)}$$

*court. Bastian Haerer*

# TLEP ... Lattice Design

**12 Arcs** : built out of 2\*56 standard FoDo cells & 2 half bend cells at beginning and end  
length of arc:  $\approx 3.0\text{km}$   
each arc is embedded in dispersion free regions ...

arcs are connected by straight. sections ... 12 long (mini  $\beta$  and RF)

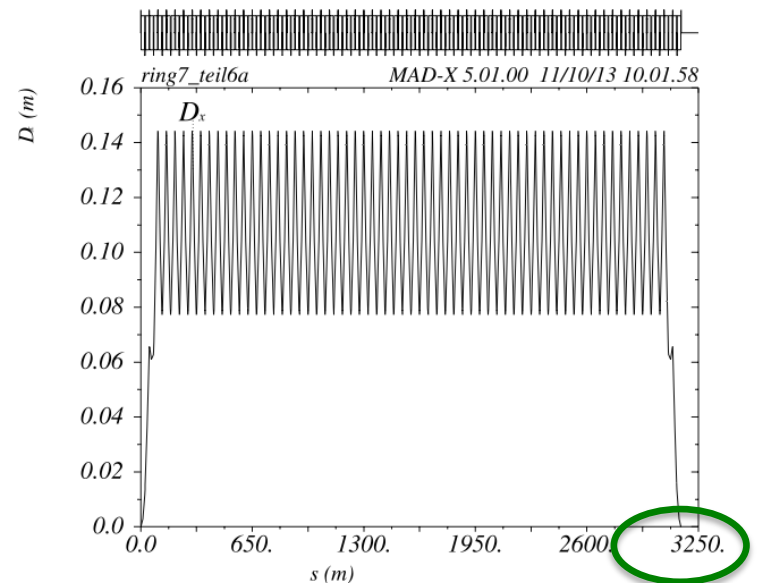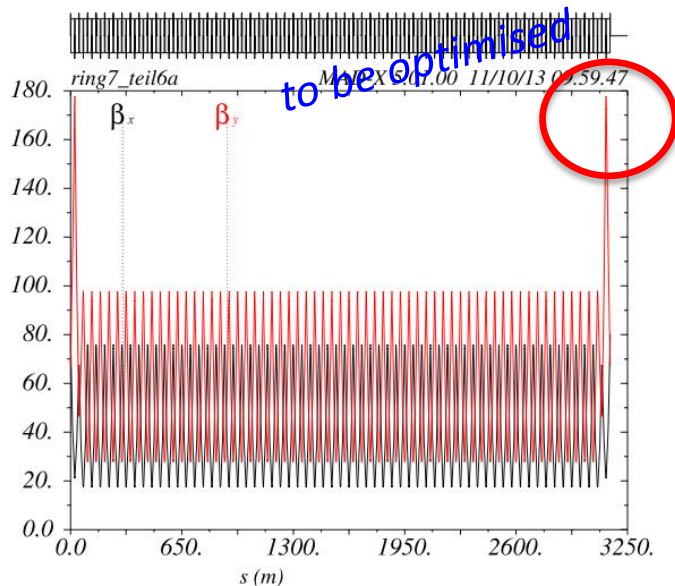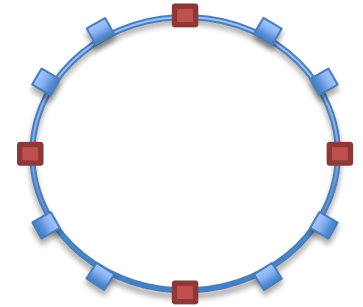

**Question 2:** Is a FODO the best solution ?

... for fill factor yes, for momentum acceptance ???

What about TBA, FFAG etc ?? ... B. Dalena, J. Payet

# Challenge 3: Beam Emittance Ratio ... can we make it ?

required:  $\varepsilon_y / \varepsilon_x = 1 \cdot 10^{-3}$

horizontal ... defined by energy, cell length and focusing properties


vertical ... defined by *orbit tolerances* (magnet misalignment & coupling)

... *without mini-beta-insertion !!*

$$D_x = D_y = 150 \text{ mm}$$

assumed magnet alignment tolerance (D. Missiaen)

$$x_{rms} = \frac{\sqrt{N_d}}{\sqrt{2} \sin(\rho Q_x) \cos(f/2)}$$

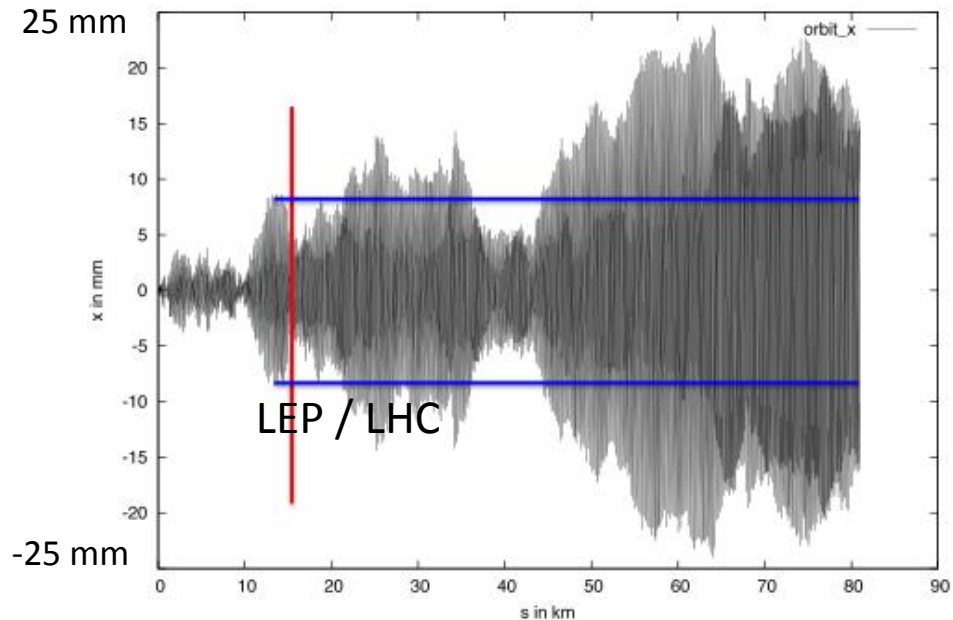


*orbit tolerances add up to very large distortions and are amplified by the extreme mini-beta concept*

*court. Bastian Haerer*




# Challenge 3: Beam Emittance Ratio ... can we make it ?


*horizontal orbit after 3 iterations*

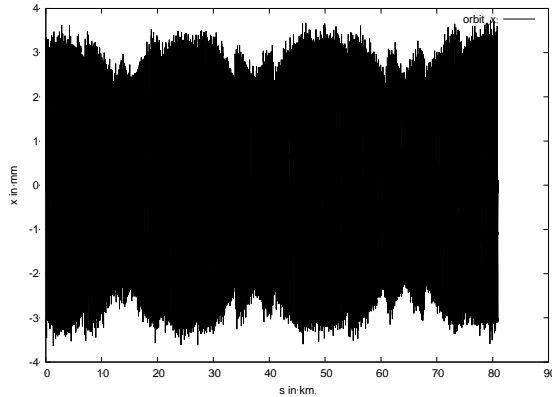

*after final correction  
& switching on sextupoles*

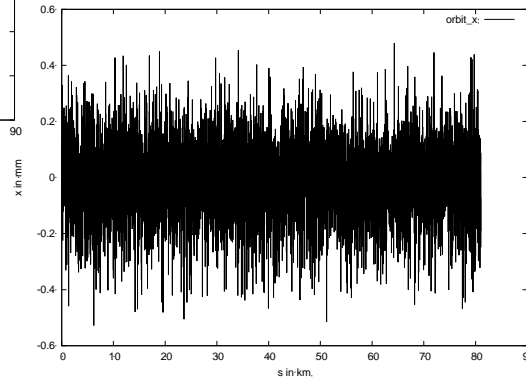

*including radiation & rf structures*

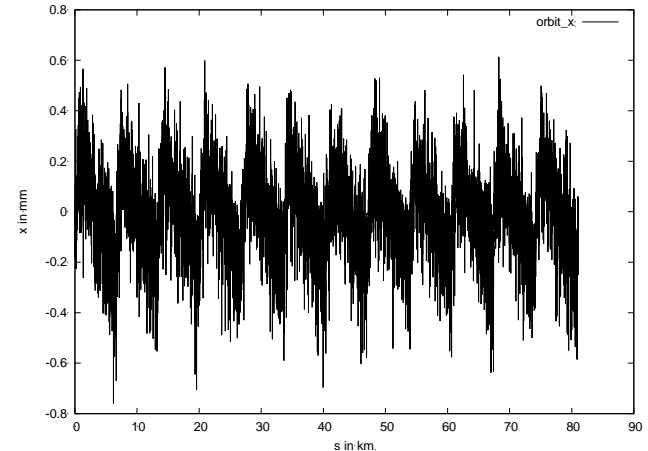

Horizontal emittance :  $e_x = 1.23$  nm (2 nm)

Vertical emittance:  $e_y = 1.05$  pm (2 pm)

**Question 3** ... can we maintain this values including ...

*coupling ? / beam beam effects ?*

*... how do we deal with the extreme sensitivity in the mini-beta-sections ... special quadrupole alignment features (piezo) ?*

# Challenge 4: ... Lattice Modifications for smaller energies

... the most interesting challenge !!

	Z	W	H	tt
Beam energy [GeV]	45.5	80	120	175
Beam current [mA]	1450	152	30	6.6
Bunches / beam	16700	4490	1360	98
Bunch population [ $10^{11}$ ]	1.8	0.7	0.46	1.4
Transverse emittance e				
- Horizontal [nm]	29.2	3.3	0.94	2
- Vertical [pm]	60	7	1.9	2
Momentum comp. [ $10^{-5}$ ]	18	2	0.5	0.5

emittance is a factor 15 higher at low energy compared to 175 GeV

... positiv for luminosity  $\leftrightarrow$  counter productive for beam dynamics

$$\varepsilon_0 = C \gamma^2 \frac{I_5}{j_x I_2},$$

$$I_2 = \oint \frac{1}{\rho^2} ds,$$

$$I_5 = \oint \frac{\mathcal{H}_x}{|\rho|^3} ds, \quad \mathcal{H}_x = \gamma_x \eta_x^2 + 2\alpha_x \eta_x \eta_{px} + \beta_x \eta_{px}^2$$


**Question 4a:** how can we counteract the natural emittance shrinking for lower energies ?

# Challenge 4: ... Lattice Modifications for smaller energies

$$\varepsilon = \left( \frac{\delta p}{p} \right)^2 (\gamma D^2 + 2\alpha D D' + \beta D'^2)$$

$$\hat{D} = \frac{l^2}{\rho} * \frac{(1 + \frac{1}{2} \sin \frac{\psi_{cell}}{2})}{\sin^2 \frac{\psi_{cell}}{2}}$$

coarse tuning via cell length,  
fine tuning via phase advance  
& wigglers ??


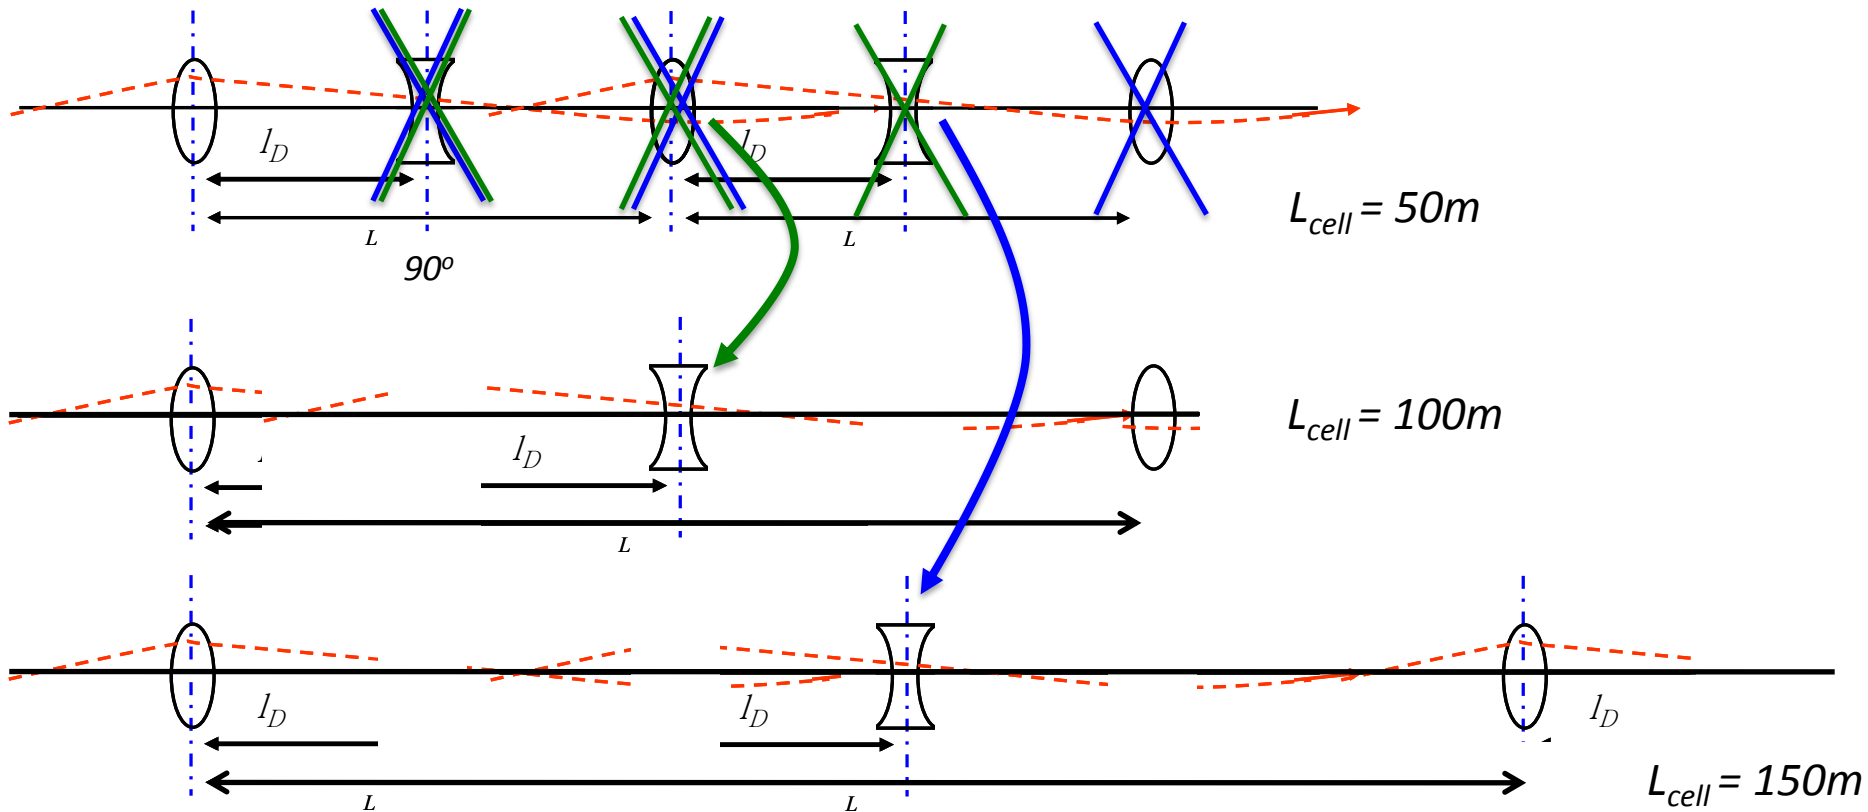


**Question 4b:** do we need wigglers for emittance tuning ? (... yes)

# Challenge 5: Interaction Region Lattice

large bunch number requires two rings & crossing angle

→ influence on mini beta optics / beam separation scheme

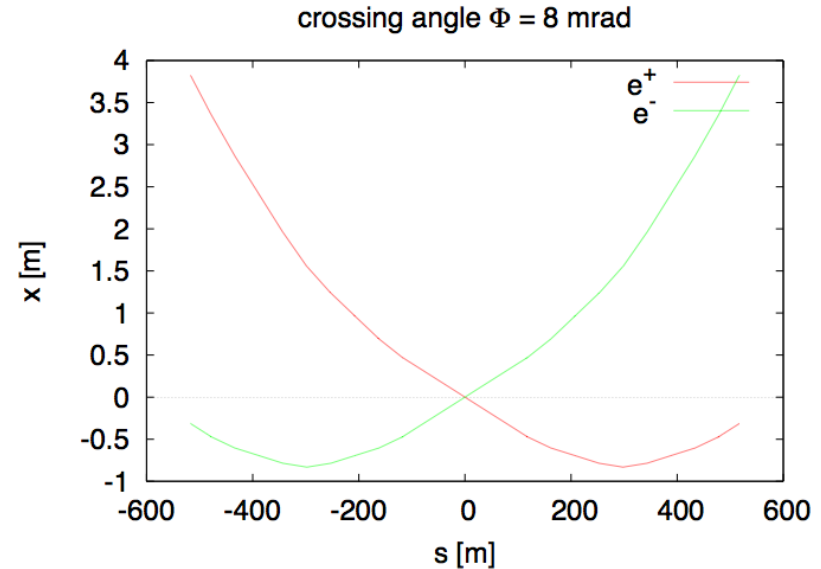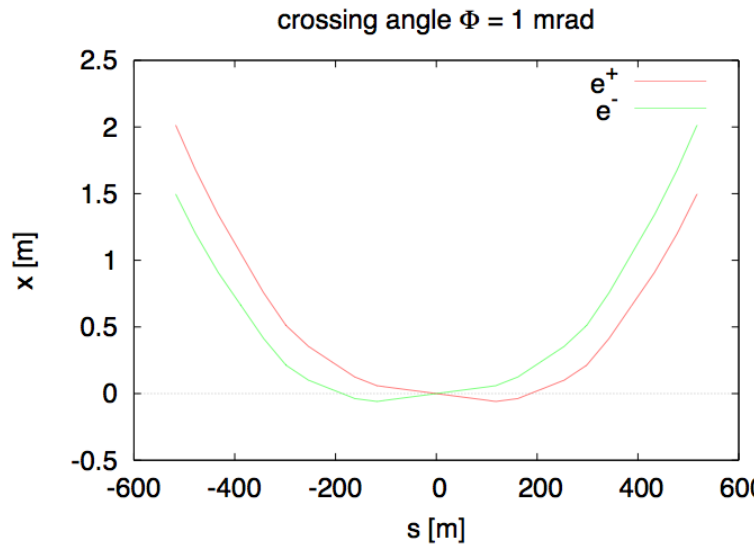

\*\* A scheme with  $2\Phi = 70$  mrad was presented by A. Bogomyagkov et al.

**Question 5a:** How do we get sufficient separation (beam-beam-effect) ?


How do we **bend back the beams** into their closed orbit ?

How do we **avoid to large synchrotron radiation** background ?


Do we need a 10% bend at the end of the arc ?

court. R. Tomas, R. Martin

# Challenge 5: Interaction Region Lattice

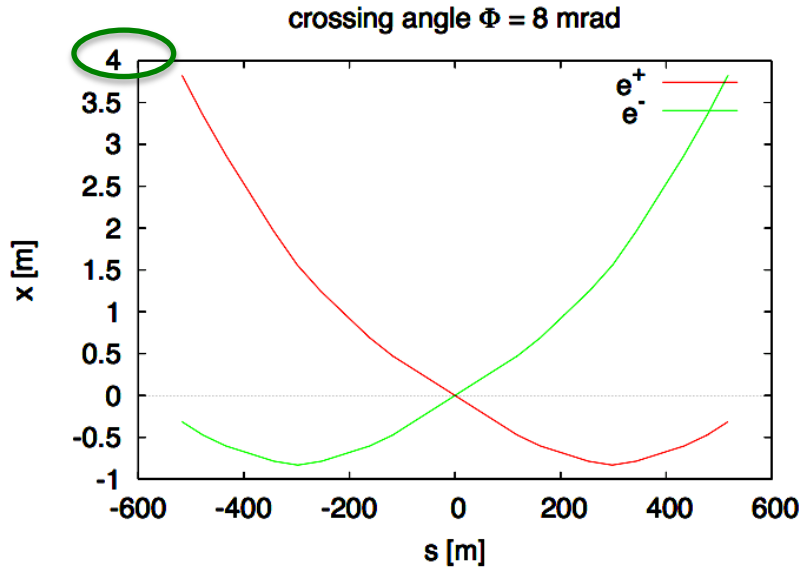

Beam orbits for the  $e^+/e^-$  case  
requires two well separate rings

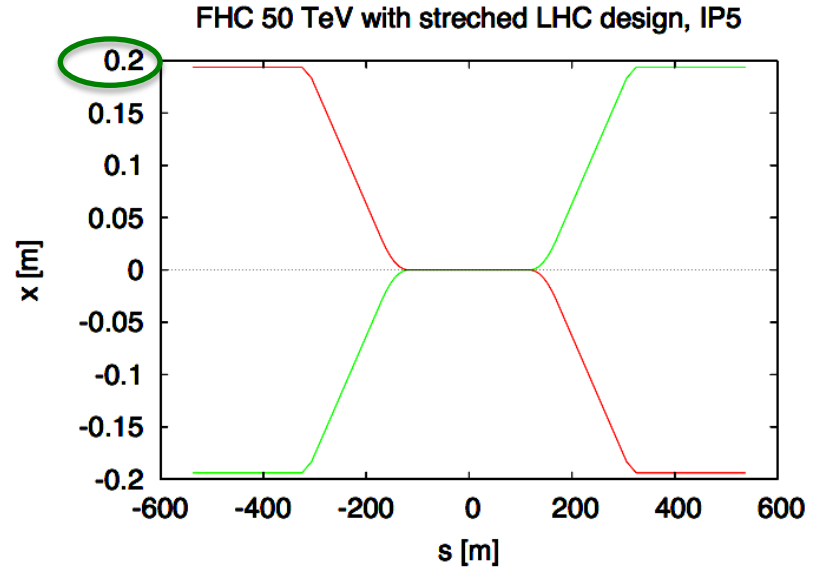

... for the  $p/p$  case  
calls for a twin-aperture design ? !


**Question 5b:** *How do we get proton and electron geometry together ?  
... in the interaction regions ?  
... for the complete ring ?*



# Challenge 6: Mini-Beta-Optics

*extreme (!!)* mini beta requirements vert.  $\beta^* = 1\text{mm}$   
 call for a Linear Collider like Interaction Region

*standard straight section / dispersion suppressor / mini beta combined*  
 with quasi local chromaticity control court. Hector Garcia / Yunhai Cai

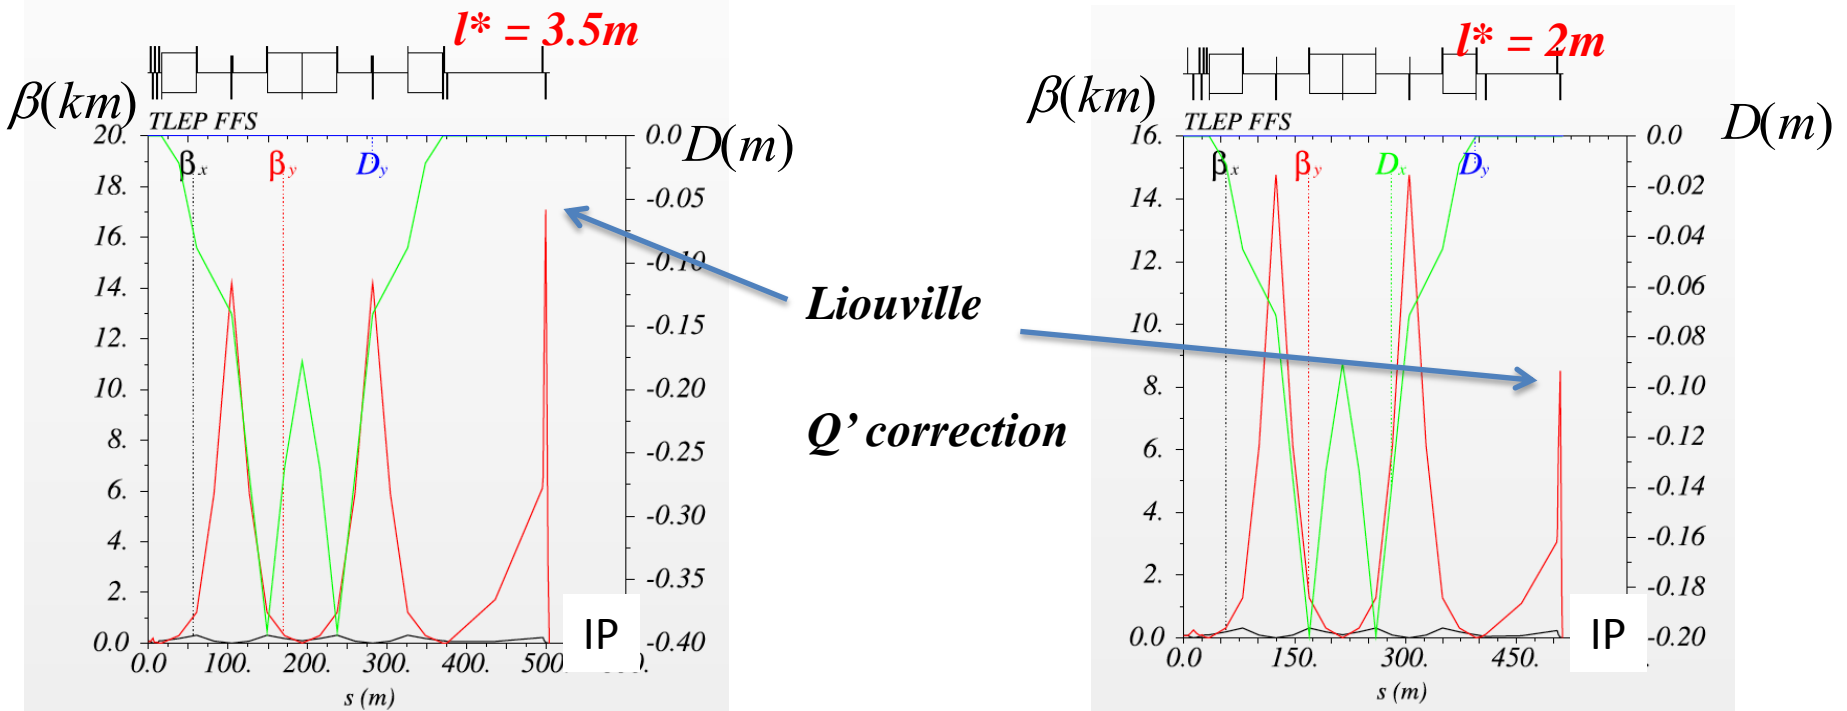

$L^*$ [m]	Magnet	L [m]	k [ $\text{m}^{-2}$ ]	G [T/m]	Ap. rad. ( $15\sigma_x$ ) [mm]	B ( $15\sigma_x$ ) [T]
3.5	QD0	2.02	-0.195	113.6	3.4	0.4
3.5	QF1	1.15	0.195	113.6	9.8	1.11
2.0	QD0	2.66	-0.195	113.6	2.6	0.3
2.0	QF1	1.16	0.195	113.6	9.8	1.11

# Challenge 6: Mini-Beta-Optics / Non-linear beam dynamics



*challenging (!!)* mini beta requirements

$\beta_y^* = 1\text{mm}$  drives chromaticity to extreme values

without mini-beta:  $Q'_x = -399$   
 $Q'_y = -332$

with mini-beta:  $Q'_x = -483$   
 $Q'_y = -3066$

up to now: state of the art  
mini-betas  $\approx$  double the  
 $Q'$  budget of the ring

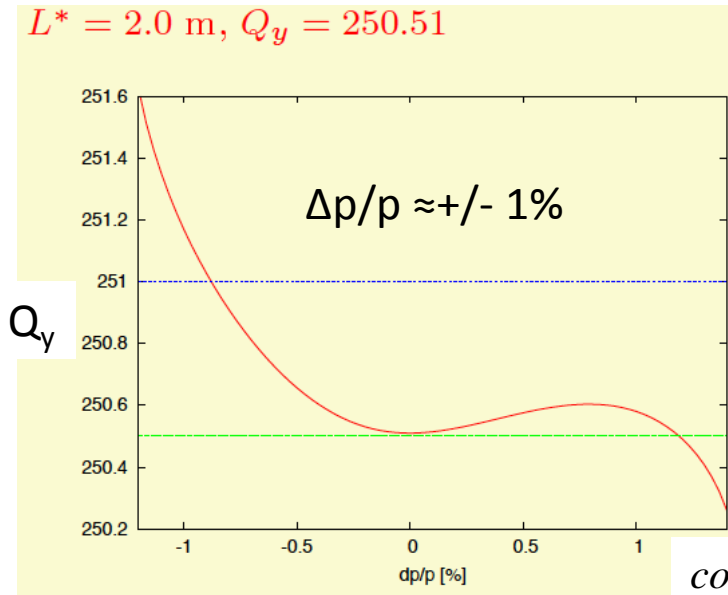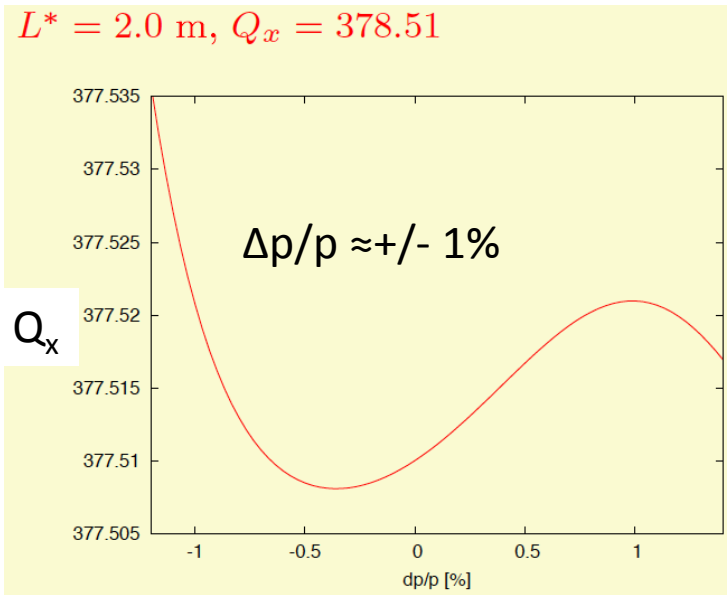

*court. Hector Garcia*

Non-linear tune shift with momentum drives the off-momentum particles on strong resonances



**Question 6:** *How do compensate the higher order chromaticity ?*

*How do we get the required momentum acceptance  $\Delta p/p > \pm 2\%$*

# Challenge 7: Non-linear beam dynamics and dynamic aperture

very first dynamic aperture calculations for the case  
 $l^*=2m$  (guess why ...)

... and ideal momentum  $\Delta p/p = 0$

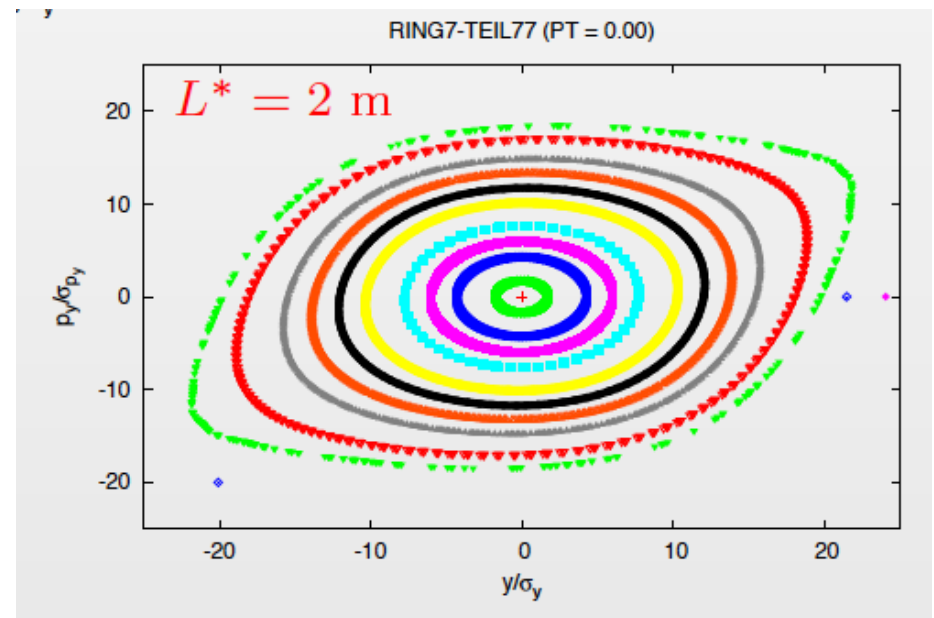
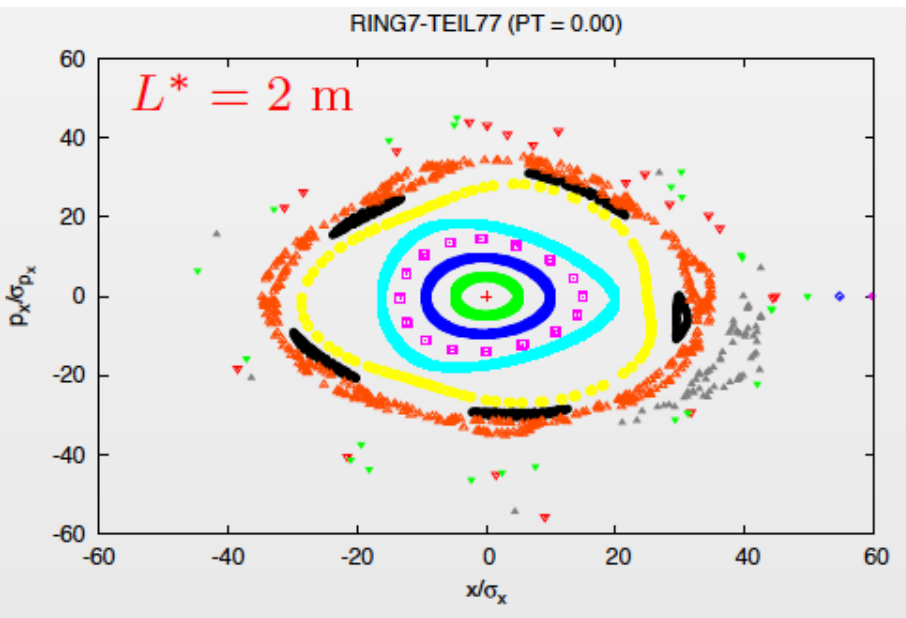


*On Energy everything looks ok.*

# Challenge 7: Non-linear beam dynamics and dynamic aperture

very first dynamic aperture calculations for the case  
 $l^*=2m$  (guess why ...)


and off momentum  $\Delta p/p = \pm 1\%$

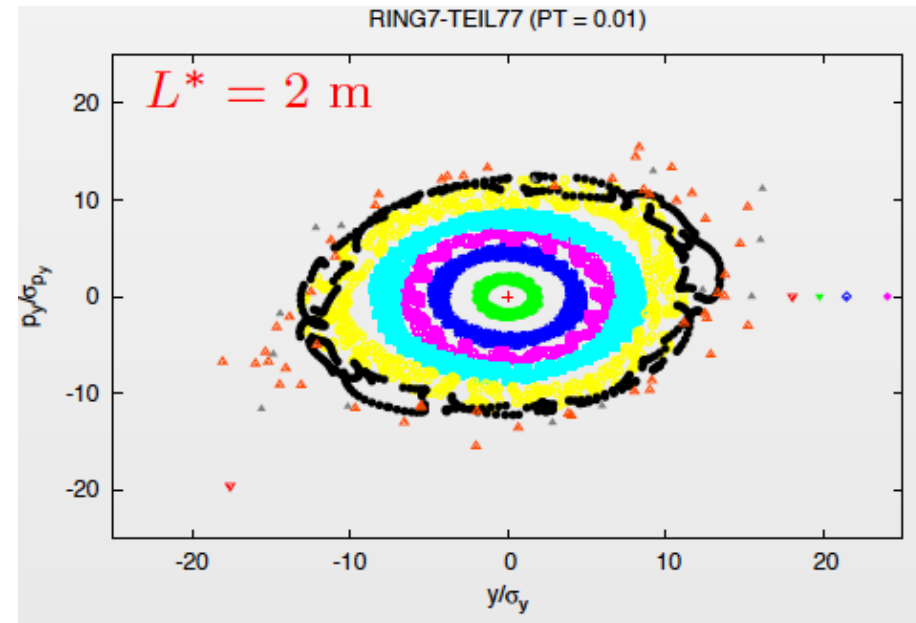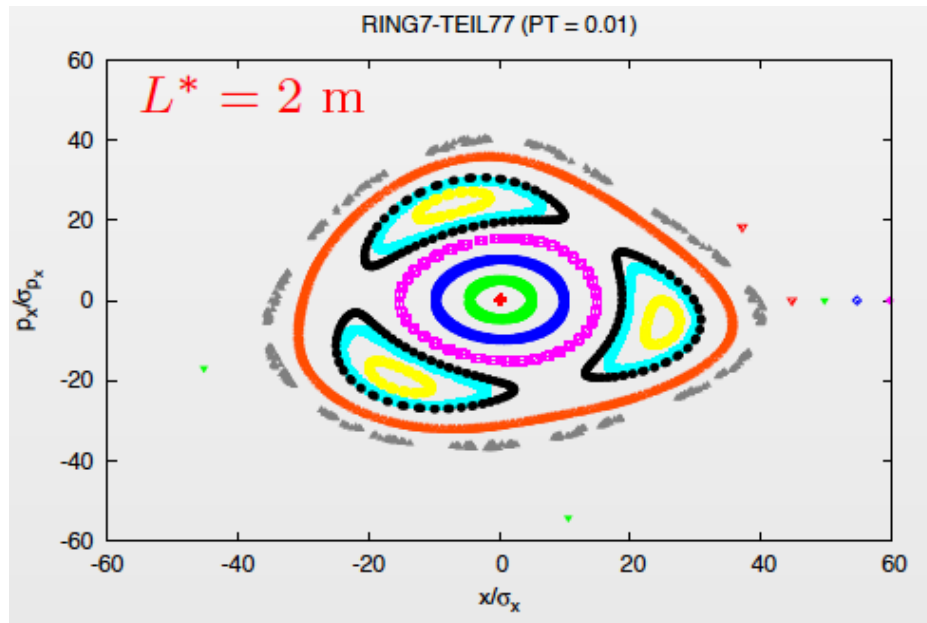


**Question 7:** How do we improve the dynamic aperture for  $\Delta p/p > \pm 2\%$   
How does the best chromaticity compensation look like ?  
Should we go for a true local compensation (i.e.  $D'(IP) \neq 0$ ) ?

# Challenge 7b: get the best momentum acceptance

**Question 7b:** What about combining a local or a quasi-local  $Q'$  correction system ... with a state of the art (2+3) sextupole family concept in the arc ? to get an achromatic structure between arc-IR-arc !! and distribute the correction load between IR and arc ???

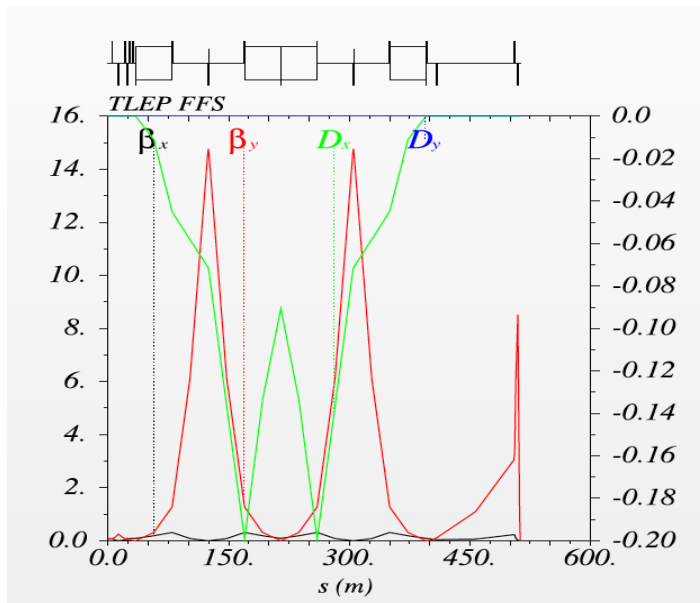

&

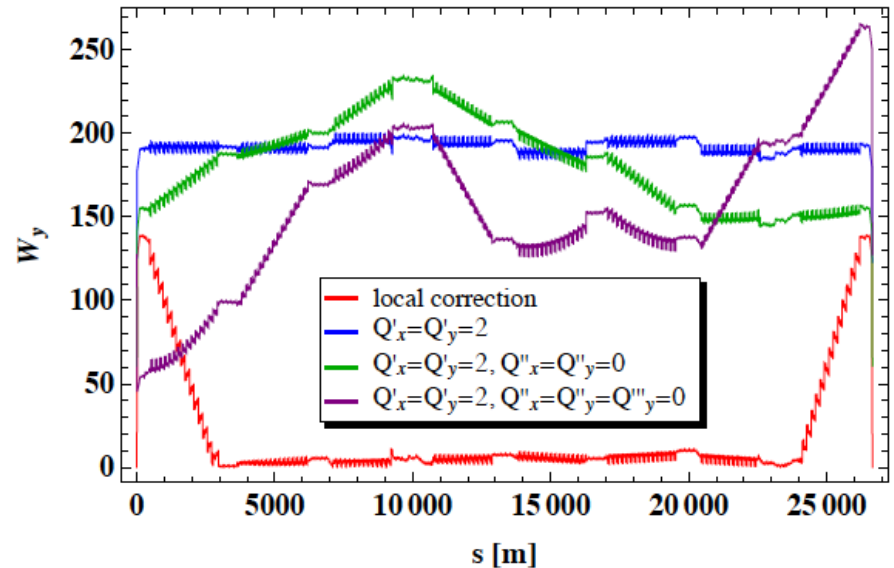

present quasi-local  $Q'$  compensation design

LHeC design with arc-IR-arc  $Q'$  compensation  
cour. Miriam Fitterer



# ***Resume:***

***I.) We need a lattice design with highest flexibility to create a set of beam optics valuable for 4 different energies***

***II.) We have to establish beam optics to get the required emittances and  $\varepsilon_y / \varepsilon_x$  emittance ratios***

***III.) We have to design a beam separation scheme with tolerable synchrotron light conditions***

***IV.) ... in combination with the layout of the pp collider***

***V.) We have to build mini-beta insertions with  $\beta^* = 1\text{mm}$***

***VI.) And still control / compensate the up to now unknown chromaticity budget***

***VII.) We have to obtain a momentum acceptance of  $\Delta p / p = \pm 2\%$***



# FCC-ee - Lepton Collider

*... feel motivated to join the Friday  
afternoon break out session*

