

Electron Muon Ranger (EMR) Software Development

François Drielsma
on behalf of the EMR Group




University of Geneva

June 25, 2014



Digitization scheme: scintillation and transport



- 1 Convert G4 energy deposition to a number of scintillating photons n_{sph} : **2000 ph/MeV^a**
→ Apply Birk's Law
- 2 Convert n_{sph} to a number of photons trapped in the WLSf n_{tph} : **4 %^a**
- 3 WLSf atten.: **2.0 dB/m^a**
- 4 Connector atten.: **up to 30 %^b**
- 5 CLf atten: **0.35 dB/m^a**



^aPreliminary parameters (data sheets) ^bBased on LED tests

Digitization scheme: Multi-Anode PM



- Convert the number of absorbed photons n_{aph} to the number of photoelectrons n_{pe} : **20% QE^a**
- Correct for photocathode non-uniformity: **up to 40%^b**
- Get ADC counts n_{ADC} : **8 ADC/npe^a**
- Convert to the Time over Threshold: **ToT = a + b log($n_{ADC}/c + d$)**
- Convert G4 time stamp to a time Δt in ADC counts: **2.5ns/ADC**

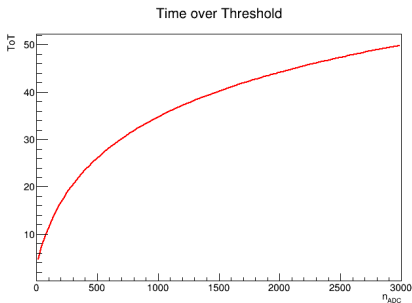

^aPreliminary parameters (data sheets) ^bBased on cosmic calibration

Digitization scheme: Single-Anode PMT



- Convert the number of absorbed photons n_{aph} to the number of photoelectrons n_{pe} : **14.5% QE^a**
- Correct for photocathode non-uniformity: **up to 50%^{ab}**
- Get ADC counts n_{ADC} : **1 ADC/npe^a**
- Set signal baseline: **~ 130 ADC^a**
- Simulate negative voltage pulse with random noise




^aParameters will change with new SAPMTs ^bBased on cosmic calibration

Cosmics vs Digitized MC

- 4 GeV muons compared with Digitized MC
- The agreement with cosmic data is outstanding
- Peak around 10 and 15 ADC in ToT and 11 ADC in Charge
→ The second peak in ToT is due to the shaper of the MAROC

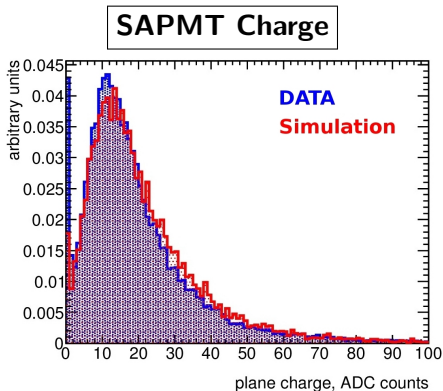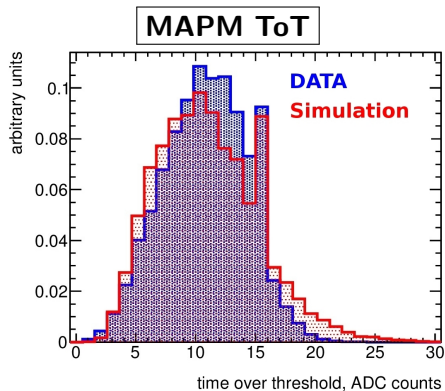


Digitized Beam Event Display

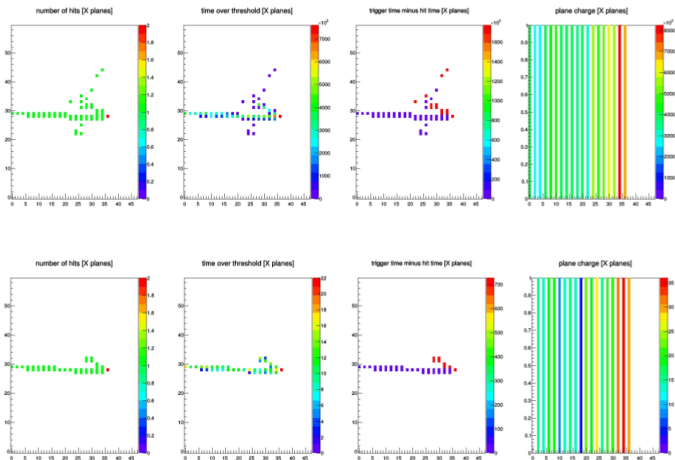


- The smallest energy depositions don't produce a signal
- The signals are converted using the calibration parameters
- Entirely **integrated into MAUS** (version 1.1)

Reconstruction: Scheme

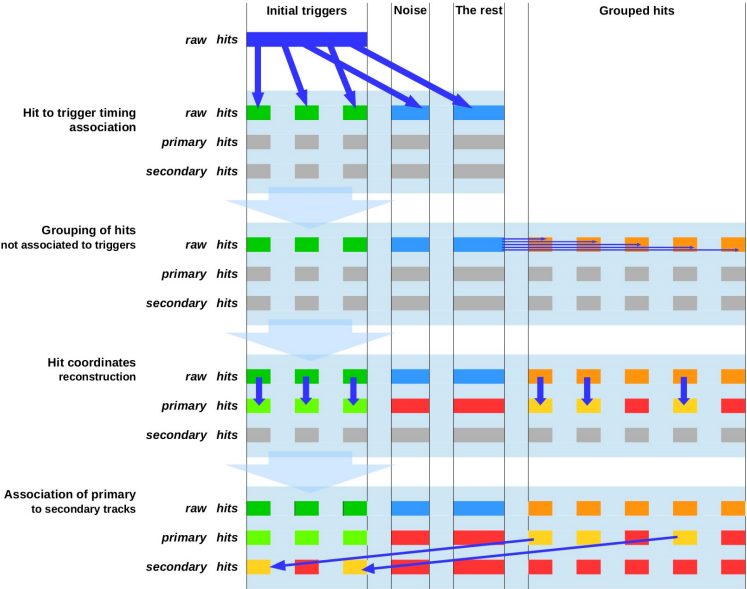


Reconstruction: Timing Association

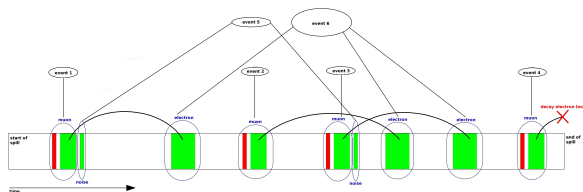

Timing cuts are used to sort the EMR hits in different categories:


- **primary particles** (close to the trigger) are stored in separate EMR reconEvents (*Event 1, 2, 3, 4*);
- **noise** (close to the primary), in an additional reconEvent (*Event 5*);
- the rest, in one last reconEvent (*Event 6*), i.e.
 - ▶ **decay products** (e, μ);
 - ▶ **cosmic muons**.



Reconstruction: Hit Coordinates

Each particle track is assembled **piecewise** in each projection:

- for each X (resp. Y) plane, the bar with the highest amplitude is selected as the x (resp. y) coordinate of the track in that plane;
- the y (resp. x) coordinate is interpolated as the average y (resp. x) coordinate of the two surrounding Y (resp. X) planes.

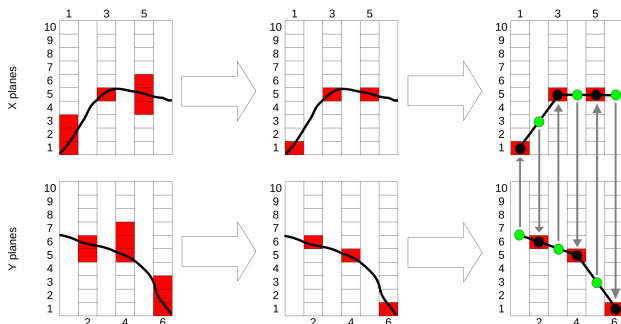


Reconstruction: Track matching


- An end point of a decay must match the end point of the primary
- The presence of a secondary discriminates the muons from electrons
- Reconstructed Variables:

- ▶ Presence of a secondary track
- ▶ Range of the primary and secondary track (function of momentum)
- ▶ Total charge in a track
- ▶ Ratio of the last 1/5 of the track over the first 4/5 (> 1 for muons,

~ 1 for electrons), i.e. $R_Q = \frac{\sum_{i=0}^{n_1-1} Q_{pl}^i / (n_1 - 1)}{\sum_{i=n_1}^{n_2-1} Q_{pl}^i / (n_2 - n_1)}$

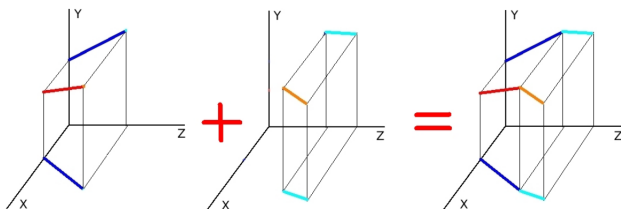

Reconstruction: EMR Data Structure

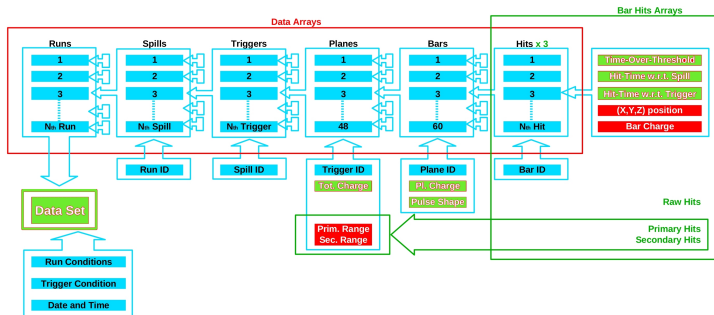

- Addition of **new variables** (range, presence of a secondary track, etc.) in the current data structure (EMREvent, EMRPlaneHit, EMRBarHit)
- Modification of the corresponding **Data Processors**
- Modification of the **reconEvent Processor Test**

Integration in MAUS

What has been done:

- **MC Digitization** entirely in MAUS (version 1.1)
- Modification of the **data structure** implemented
- **Data Processors, tests** adapted

What needs to be done:



- Modification of the **EMRPlaneHits** map to accommodate two additional reconEvents (noise+decay particles) and fill them
- Integrate the **reconstruction code** (already exists)

→ functional by the end of summer.

Additional Code

Additional programs exist in standalone and can improve precision:

- **calibration** uses cosmic data to evaluate the photomultipliers irregularities and give a parameter for each channel
 - ▶ ran in March 2014 and correction map included in MAUS
 - ▶ 300k (~ 1 k) cosmic tracks recorded in the EMR
 - ▶ Measurement of the mean charge for each bar i in a plane j , $\overline{Q_{ij}}$
 - ▶ Calculation of the correction factor $\epsilon_{ij} = \overline{Q_{ij}}/\overline{Q}$, with \overline{Q} global average
- **correction** uses these parameters to correct the data

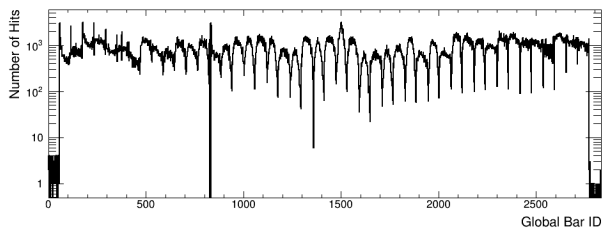

Future prospects

Things will be done in the future to improve the existing code:

- Measurement of the digitization parameters on a test bench
- Calibrate the detector in energy using Monte Carlo simulation
- Improve reconstruction:
 - ▶ the coordinate in each plane as a weighted average of the position of the bars hit and their ToT measurements
 - ▶ include the triangular geometry in the range measurement
 - ▶ redefine the end point of the primary track using bar multiplicity
 - ▶ implement PID tag (e, μ, π) based on reconstructed variable using cut based analysis and multivariate analysis
- development of a new class EMRHist to represent triangular bars in the event displays based on ROOT's TH2Poly

