

# **FLUKA** Scoring

**FLUKA Advanced Course** 

### Contents

- fluence
- the Monte Carlo way
- FLUKA built-in scoring
- user routines [in the dedicated lecture]
- (statistical) errors

### Reaction Rate and Cross Section [1/3]

- We call mean free path  $\lambda[cm]$  the average distance travelled by a particle in a material before an interaction. Its inverse,  $\Sigma[cm^{-1}]$  is the probability of interaction per unit distance, and is called macroscopic cross section. Both  $\lambda$  and  $\Sigma$  depend on the material and on the particle type and energy.
- For N identical particles, the number of reactions R occurring in a given time interval will be equal to the total distance travelled Nl times the probability per unit distance  $\Sigma$ :  $R = Nl\Sigma$
- The reaction rate will be  $\dot{R} = N \mathrm{d}l/\mathrm{d}t$   $\Sigma = N v \Sigma$ , where v is the average particle velocity.

### Reaction Rate and Cross Section [2/3]

- Assume now that n(r,v)=dN/dV [ $cm^{-3}$ ] be the density of particles with velocity v=dl/dt [cm/s], at a spatial position r. The reaction rate inside the volume element dV will be:  $d\dot{R}/dV = n(r,v)v\Sigma$
- The quantity  $\dot{\Phi}(\mathbf{r}, v) = n(\mathbf{r}, v)v$  is called fluence rate or flux density and has dimensions  $[cm^{-3} \ cm \ s^{-1}] = [cm^{-2} \ s^{-1}].$
- The time integral of the flux density  $\Phi(\mathbf{r}, v) = n(\mathbf{r}, v) dl$  is the fluence  $[cm^{-2}]$
- Fluence is measured in particles per cm<sup>2</sup> but in reality it describes the density of particle tracks
- The number of reactions inside a volume V is given by the formula:  $R = \Sigma \Phi V$  (where the product  $\Sigma \Phi$  is integrated over energy or velocity)

### Reaction Rate and Cross Section [3/3]

• Dividing the macroscopic cross section by  $N_0$ , the number of atoms per unit volume, one obtains the microscopic cross section  $\sigma[barn=10^{-24}cm^2]$ .

i.e., the area of an atom weighted with the probability of interaction (hence the name "cross section").

- But it can also be understood as the probability of interaction per unit length, with the length measured in atoms/cm<sup>2</sup> (the number of atoms contained in a cylinder with a 1 cm<sup>2</sup> base).
- In this way, both microscopic and macroscopic cross section are shown to have a similar physical meaning of "probability of interaction per unit length", with length measured in different units. Thus, the number of interactions can be obtained from both, by multiplying them by the corresponding particle track-length.

### Fluence estimation [1/2]

Track length estimation:

USRTRACK

$$\dot{\Phi}(v) dt = n(v) v dt = \frac{dN(v)}{dV} \frac{dl(v)}{dt} dt = \lim_{\Delta V \to 0} \frac{\sum_{i} l_i(v)}{\Delta V}$$

Collision density estimation (NOT IN VACUUM!):


**USRCOLL** 

$$\dot{\Phi}(v) = \frac{d\dot{R}(v)}{dV}\lambda(v) \qquad 0 \times \infty$$

### Fluence estimation [2/2]

#### Surface crossing estimation

• Imagine a surface having an infinitesimal thickness dtA particle incident with an angle  $\theta$  with respect to the normal of the surface S will travel a segment  $dt/cos\theta$ .

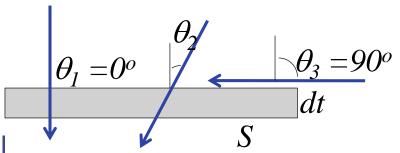

$$\Phi = \lim_{dt \to 0} \frac{\sum_{i} \overline{\cos \theta_{i}}}{Sdt}$$

• While the current *J* counts the number of particles crossing the surface divided by the surface:

$$J = dN/dS$$

The fluence is independent of the orientation of the surface *S*, while the current is NOT!

In an *isotropic field* it can be easily seen that for a flat surface  $J=\Phi/2$ 

## Complexity

- Simple case: a mono-directional (zero divergence) monochromatic beam attenuated by a uniform shielding layer of thickness  $\mathcal{T}$
- The source term: a *fluence*  $\Psi(E,\theta,r) = dN/d\Omega/dE/dS = C \delta(E-E_0) \delta(\theta-\theta_0)$
- Suppose that the particles are absorbed according to a macroscopic absorption cross section  $\Sigma_t$  = interaction probability per cm =  $\sigma_t N_A \rho/A$
- In an infinitesimal thickness dt the probability to be absorbed is  $P = \Sigma$  dt
- $d\Psi(t) = -\Psi(t)P = -\Psi(t)\sum_t dt$ , a differential equation that is solved by the exponential function  $\rightarrow$
- $\Psi(T) = \Psi(0) \exp(-\Sigma_t T)$  EASY !!
- Now ... suppose that the particles are not absorbed, but scattered according to some energy-dependent distribution  $d\sigma$  (E',  $\theta'$ )/ $d\Omega'$ , exiting with E' =  $g(E,\theta')$  where g is defined by the kinematics.
- Now ... suppose that the original beam was not monochromatic, or that
  particles can also be produced or that the geometry is not uniform, and
  the dimensions of the integral will explode.

### MC mathematical foundation

The Central Limit Theorem is the mathematical foundation of the Monte Carlo method. In words:

Given any observable A, that can be expressed as the result of a convolution of random processes, the average value of A can be obtained by sampling many values of A according to the probability distributions of the random processes.

MC is indeed an integration method that allows to solve multidimensional integrals by sampling from a suitable stochastic distribution.

The accuracy of MC estimator depends on the number of samples:

$$\sigma \, \propto \, rac{1}{\sqrt{N}}$$

## Integration efficiency

- Traditional numerical integration methods (e.g., Simpson) converge to the true value as  $N^{-1/n}$  where N = number of "points" (intervals) and n = number of dimensions
- Monte Carlo converges as  $N^{-1/2}$ , independent of the number of dimensions
- Therefore:
  - $\square$   $n=1 \rightarrow MC$  is not convenient
  - $\square$   $n=2 \rightarrow MC$  is about equivalent to traditional methods
  - $n > 2 \rightarrow MC$  converges faster (and the more so the greater the dimensions)
- the dimensions are those of the largest number of "collisions" per history
- Note that the term "collision" comes from low-energy neutron/photon transport theory. Here it should be understood in the extended meaning of "interaction where the particle changes its direction and/or energy, or produces new particles"

### Particle transport

- Particle transport is a typical physical process described by probabilities (cross sections = interaction probabilities per unit distance)
- Therefore it lends itself naturally to be simulated by Monte Carlo
- Many applications, especially in high energy physics and medicine, are based on simulations where the history of each particle (trajectory, interactions) is reproduced in detail
- However in other types of application, typically shielding design, the
  user is interested only in the expectation values of some quantities
  (fluence and dose) at some space point or region, which are
  calculated as solutions of a mathematical equation
- This equation (the Boltzmann equation), describes the statistical distribution of particles in phase space and therefore does indeed represent a physical stochastic process
- But in order to estimate the desired expectation values it is not necessary that the Monte Carlo process be identical to it

### Integration without simulation

- In many cases, it is more efficient to replace the actual process by a different one resulting in the same average values but built by sampling from modified distributions
- Such a biased process, if based on mathematically correct variance reduction techniques, converges to the same expectation values as the unbiased one
- But it cannot provide information about the higher moments of statistical distributions (fluctuations and correlations)
- In addition, the faster convergence in some userprivileged regions of phase space is compensated by a slower convergence elsewhere

## **Analog Monte Carlo**

In an analog Monte Carlo calculation, not only the mean of the contributions converges to the mean of the actual distribution, but also the variance and all moments of higher order:


$$\lim_{N\to\infty} \left[ \frac{\sum_{1}^{N} (x - \bar{x})^{n}}{N} \right]^{\frac{1}{n}} = \sigma_{n}$$

Then, partial distributions, fluctuations and correlations are all faithfully reproduced: in this case (and in this case only!) we have a real simulation

## Random sampling: the key to MC

The central problem of the Monte Carlo method:

Given a Probability Density Function (pdf), f(x), generate a sample of x's distributed according to f(x) (x can be multidimensional)

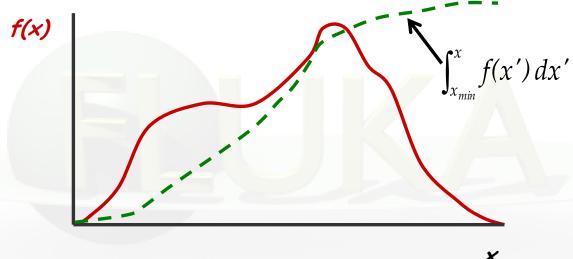

The use of random sampling techniques is the distinctive feature of Monte Carlo Solving the integral Boltzmann transport equation by Monte Carlo consists of:

- Geometry and material description of the problem
- Random sampling from probability distributions of the outcome of physical events

# Particle transport Monte Carlo

Application of Monte Carlo to particle transport and interaction:

- Each particle is followed on its path through matter
- At each step the occurrence and outcome of interactions are decided by random selection from the appropriate probability distributions
- All the secondaries issued from the same primary are stored in a "stack" or "bank" and are transported before a new history is started
- The accuracy and reliability of a Monte Carlo depend on the models or data on which the probability distribution functions are based
- Statistical precision of results depends on the number of "histories"
- Statistical convergence can be accelerated by "biasing" techniques.

## Assumptions

- Static, homogeneous, isotropic, amorphous media and geometry
   Problems: e.g. moving targets\*, atmosphere [must be represented by
   discrete layers of uniform density], radioactive decay taking place in a
   geometry different from that in which the radionuclides were produced\*,
   crystal channeling\*.
  - \* These restrictions have been (\* are being) overcome in FLUKA
- Markovian process: the fate of a particle depends only on its actual present properties, not on previous events or histories
- Particles do not interact with each other
   Problems: e.g. the Chudakov effect (charges cancelling in e+e- pairs)
- Particles interact with individual electrons / atoms / nuclei / molecules
   Problems: invalid at low energies (X-ray mirrors)
- Material properties are not affected by particle reactions
   <u>Problems</u>: e.g. burnup

### **Built-in scoring**

- Several pre-defined estimators can be activated in FLUKA.
- One usually refers to these estimators as "scoring" capabilities
- Users have also the possibility to build their own scoring through user routines (some of which mentioned afterwards), HOWEVER:
  - Built-in scoring covers most of the common needs
  - Built-in scoring has been extensively tested
  - Built-in scoring takes BIASING weights automatically into account
  - Built-in scoring has refined algorithms for track subdivision
  - Built-in scoring comes with utility programs that allow to evaluate statistical errors
- Geometry dependent and geometry independent scoring both available
- FLUKA can score particle fluence (tracklength), current, energy spectra, angular distributions, energy deposition, activity ...
- Either integrated over the "run", with proper normalization, OR eventby event
- Standard scoring can be weighted by means of simple user routines

## Scoring cards [1]

#### see the Beginners' Course

- SCORE scores energy deposited (or star density) in each region [table in the .out file, not automatically merged over cycles]
- RESNUCLEi scores residual nuclei (or their activity) in a given region
- USRTRACK (USRCOLL) scores average differential fluence dΦ/dE of a given type or family of particles over a given region
- USRBDX scores average double differential fluence (or current)  $d^2\Phi/dEd\Omega$  of a given type or family of particles over a given surface
- USRBIN scores the spatial distribution of deposited energy density, dose, integrated fluence, star density, dose equivalent, net charge, specific activity, ... in a regular mesh (cylindrical or Cartesian) described by the user
- USRYIELD scores a double differential yield [do not ask for cross section, like by default] of particles escaping from a surface. The distribution can be with respect to energy and angle (wrt the beam direction), but also many other more "exotic" quantities

Remember that *low energy (<20MeV) neutrons* have a pre-defined energy binning

## Warnings [I]

USRBIN scoring algorithm:

By selecting **WHAT(1)>=10**, energy deposition, dose, ... are distributed along the particle track (recommended!)

\*\*\* Activity/fission/neutron balance binnings cannot be track-length!!!

\*\*Point-wise quantities\* have to be scored at a point (select WHAT(1)<10)

Badly defined USRBIN limits


```
****** Fluka stopped in Usrbin: "usr/eventbin" n. 1 ******

***** with zero width 0.000 for axis R ******
```

- Never use unit numbers smaller than 20 or higher than 99
   <20 reserved by FLUKA >99 FORTRAN limitation
- Never mix the output of different scoring cards in the same unit
- Verify that you didn't merge cycles referring to different input versions (change the name of the input file for every new problem!)

## Example

- Thin window with low-E (5MeV) electron beam
- Energy deposition profile in the window (for radiation damage studies)
- Observation of 'strange peaks'
- Trying to understand: lower e⁻-thresholds help
- Real-Problem: point-wise scoring requested

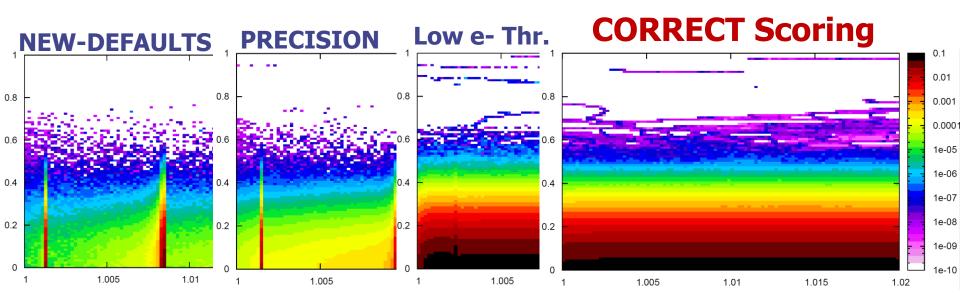

## Scoring cards [2]

- EVENTBIN is like USRBIN, but prints the binning output after each event instead of an average over histories
- ROTPRBIN sets the storage precision (single or double) and assigns rotations/translations for a given user-defined binning (USRBIN or EVENTBIN). Quite useful in case of LATTICE
- USERDUMP defines the events to be written onto a "collision tape" file Coupled to the mgdraw user routine
- AUXSCORE defines filters and conversion coefficients
- TCQUENCH sets scoring time cut-offs and/or Birks quenching parameters for binnings (USRBIN or EVENTBIN) indicated by the user
- DETECT scores energy deposition in coincidence or anti-coincidence with a trigger, separately for each "event" (primary history). Dedicated postprocessing routine available

## Dose-Equivalent (not Dose)

For some quantities, there is the possibility to get built-in conversions, without the need for user routines, rather through dedicated generalized particles. The most commonly used is dose equivalent (ambient dose equivalent or effective dose):

Dose Equivalent [pSv] DOSE-EQ

DOSEQLET Dose Equivalent via Q(LET) – unrestricted LET in water –

according to ICRP60 [GeV/g]

!!!! Different to !!!

DOSE total absorbed dose in GeV/g
DOSE-EM as above but electromagnetic

as above but electromagnetic contribution only

DOSE-EQ is calculated by folding particle fluences with conversion coefficient sets, selected by the user among a list (see manual) through AUXSCORE. The default set (not requiring the AUXSCORE association) is "AMB74".

WARNING: in case of DOSE-EQ no coefficients available for heavy ions (ok for DOSEQLET)!!!

### "FILTER": AUXSCORE

There is the possibility to filter the estimators, restricting the scoring to a selected subset of particles.

For instance: USRBIN energy deposition by muons only

```
      USRBIN
      11.0
      ENERGY
      -40.0
      10.0
      15.0 TargEne

      USRBIN
      0.0
      -5.0
      100.0
      200.0 &

      AUXSCORE USRBIN
      MUONS
      TargEne
```

<u>ionization (+NIEL)</u> by the selected particle, critically depending on the delta rays threshold! [doubtful physical meaning]

Another example: score the yield [vs polar angle and kinetic energy] of 56-Iron ions (there is no separate name for each ion specie, except light ones. HEAVYION scores all isotopes heavier than alpha together!)

```
USRYIELD 124.0 HEAVYION -87. TARGS3 INAIR 1.0Fe56
USRYIELD 180.0 0.0 18. 10.0 0.0 3.0&
AUXSCORE USRYIELD -5602600. Fe56
```

The requested ion is coded in WHAT(2)= - (100\*Z + 100000\*A + m\*100000000) according to its **A**, **Z** and (optionally) isomeric state **m** with 0==all, i.e. -2600 == all Iron isotopes

## Routines associated to FLUKA scoring

comscw.f
 weighting energy deposition and star production

• fluscw.f weighting fluence, current and yield

mgdraw.f general event interface

usrrnc.f intercepting produced residual nuclei (at the end of their path)

endscp.f shifting energy deposition

fldscp.fshifting fluence

musrbr.f special USRBIN binning (lattice): returns region #

lusrbl.f special USRBIN binning (lattice): returns lattice #

special USRBIN binning (lattice): returns zero

mdstck.f

fusrby.f

stuprf.f

stupre.f

intercepting particle stack

### Statistical Errors [1]

- Can be calculated for single histories (not in FLUKA), or for batches of several histories
- Distribution of scoring contributions by single histories can be very asymmetric (many histories contribute little or zero)
- Scoring distribution from batches tends to Gaussian for  $N \to \infty$ , provided  $\sigma^2 \neq \infty$  (thanks to Central Limit Theorem)
- The standard deviation of an estimator calculated from batches or from single histories is an estimate of the standard deviation of the actual distribution ("error of the mean")
- How good is such an estimate depends on the type of estimator and on the particular problem (but it converges to the true value for  $N \to \infty$ )

## Statistical Errors [2]

 The variance of the mean of an estimated quantity x (e.g., fluence), calculated in N batches, is:

$$\sigma_{\langle x \rangle}^2 = \frac{1}{N-1} \left[ \frac{\sum_{1}^{N} n_i x_i^2}{n} - \left( \frac{\sum_{1}^{N} n_i x_i}{n} \right)^2 \right]$$

mean of squares - square of means

N-1

#### where:

 $n_i$  = number of histories in the i th batch

 $n = \Sigma n_i$  = total number of histories in the N batches

$$x_i$$
 = average of x in the i th batch:  $x_i = \sum_{j=1}^{n_i} \frac{x_{ij}}{n_i}$ 

 $x_{ij}$  is the contribution to x of the  $j^{th}$  history in the  $i^{th}$  batch

In the limit N = n,  $n_i = 1$ , the formula applies to single history statistics

### Statistical Errors [3]

#### Practical tips:

- Use always at least 5-10 batches of comparable size (it is not at all mandatory that they be of equal size)
- Never forget that the variance itself is a stochastic variable subject to fluctuations
- Be careful about the way convergence is achieved: often (particularly with biasing) apparent good statistics with few isolated spikes could point to a lack of sampling of the most relevant phase-space part
- Plot 2D and 3D distributions! Looking at them the eye is the best tool in judging the quality of the result

## Statistical Errors [4]

from an old version of the MCNP Manual:

Relative error	Quality of Tally
50 to 100%	Garbage
20 to 50%	Factor of a few
10 to 20	Questionable
< 10%	Generally reliable

- Why does a 30% σ mean an uncertainty of a "factor of a few"?
   Because σ in fact corresponds to the sum (in quadrature) of two uncertainties: one associated to the fraction of histories which don't give a zero contribution and the other reflecting the spread of the non-zero contributions
- The MCNP guideline is empirically based on experience, not on a mathematical proof. But it has been generally confirmed as working also with other codes
- Small penetrations and cracks are very difficult to handle by MC, because the "detector" is too small and too few non-zero contributions can be sampled, even by biasing

### **Systematic Errors**

- physics: different codes are based on different physics models. Some models are better than others. Some models are better in a certain energy range. Model quality is best shown by benchmarks at the microscopic level (e.g. thin targets)
- artifacts: due to imperfect algorithms, e.g., energy deposited in the middle of a step\*, inaccurate path length correction for multiple scattering\*, missing correction for cross section and dE/dx change over a step\*, etc. Algorithm quality is best shown by benchmarks at the macroscopic level (thick targets, complex geometries)
- data uncertainty: results can never be better than allowed by available experimental data!
- material composition: not always well known. In particular concrete/soil composition (how much water content? Can be critical). Air contains humidity and pollutants, has a density variable with pressure
- beam losses: most of the time these can only be guessed
- presence of additional material, not well defined (cables, supports...)
- geometries cannot be reproduced exactly (or would require too much effort) Is it worth doing a very detailed simulation when some parameters are unknown or badly known?

### **Mistakes**

- mis-typing the input: Flair is good at checking, but the final responsibility is the user's
- error in user code: use the built-in features as much as possible!
- wrong units
- wrong normalization: quite common
- unfair biasing: energy/space cuts cannot be avoided, but must be done with much care
- forgetting to check that gamma production is available in the low energy neutron library (e.g., Ba cross sections)

• ...

### Biasing Mean Free Paths

#### Multiplicity Tuning BIASING

- Multiplicity tuning is meant to be to hadrons what LPB is for electrons and photons.
- A hadronic nuclear interaction at LHC energies can end in hundreds of secondaries. Except for the leading particle, many secondaries are of the same type and have similar energies and other characteristics
- The user can tune the average multiplicity in different regions
   Interaction Length
   LAM-BIAS
- Mean life / average decay length of unstable particles can be artificially shortened
- Can increase generation rate of decay products without discarding the parent
- For hadrons the mean free path for nuclear inelastic interactions can be artificially decreased. Useful for very thin targets, and also for photonuclear reactions where the cross section is relatively small