ATF2 December run ground motion study

K. Artoos, D. Bett, C. Charrondiere, St. Janssens, M. Patecki*, J. Pfingstner, Y. Renier, D. Schulte, R. Tomas, (CERN)
A. Jeremie (LAPP-IN2P3-CNRS)
K. Kubo, S. Kuroda, T. Naito, T. Okugi, T.Tauchi, N. Terunuma (KEK)

CLIC Workshop 28/01/2015


Outline

A) Comparison of Ground Motion and BPM data May/June 2014 – December 2014


B) Investigation of QD10AFF region – suspect of vibrations being transmitted from cooling water pipes to the beamline.

C) Sensor location – why top of the quadrupole is better than any other location?

Quick reminder: sensors locations

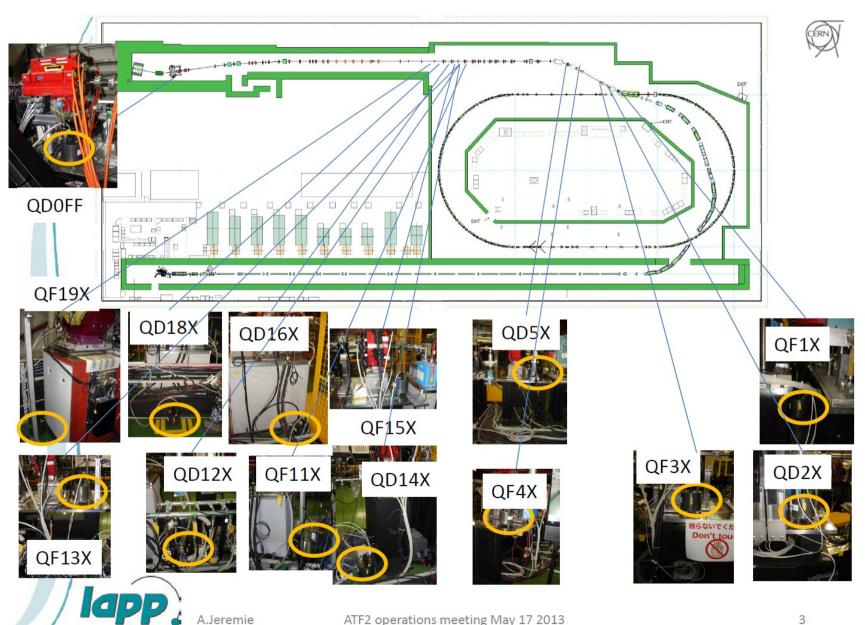


Quick reminder: experimental setup

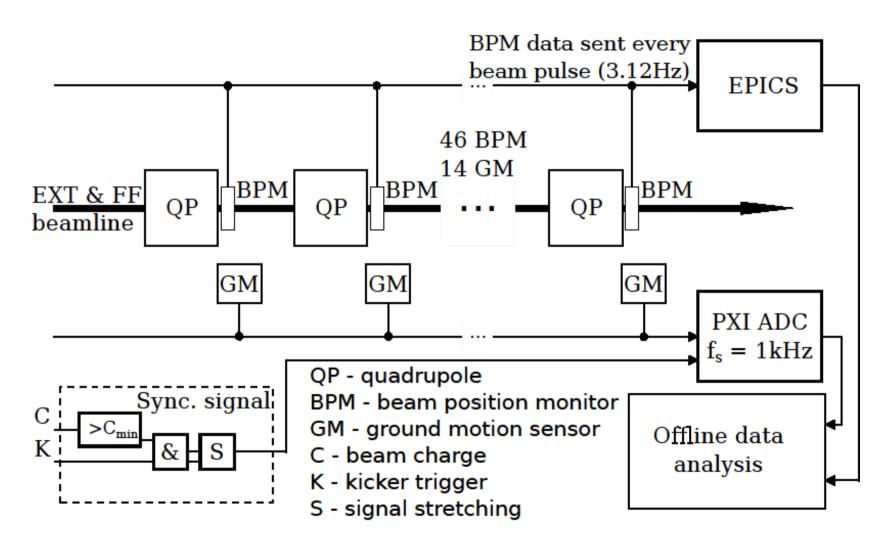


Quick reminder:

Vibration source around QF1X and QD2X removed in May/June

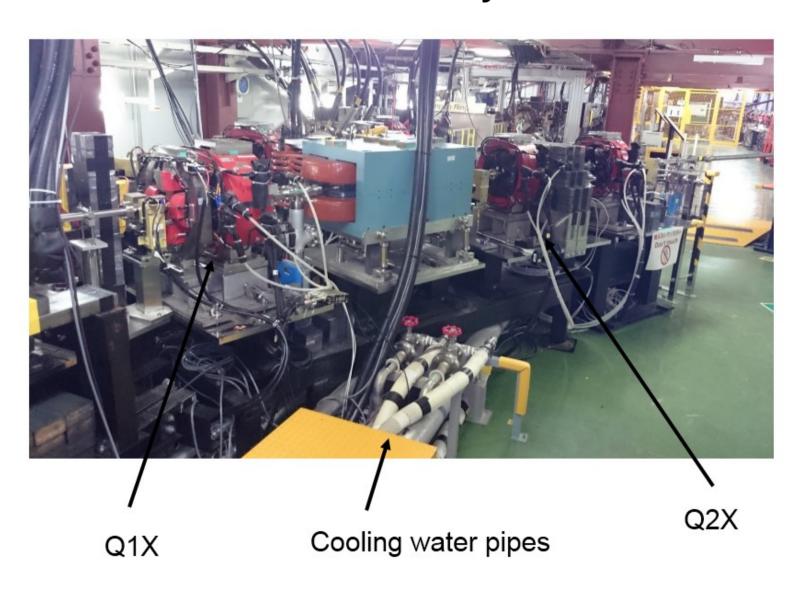

A. Comparison of GM and BPM data May/June 2014 – December 2014

Ratio of PSD for horizontal and vertical vibration: May/Dec

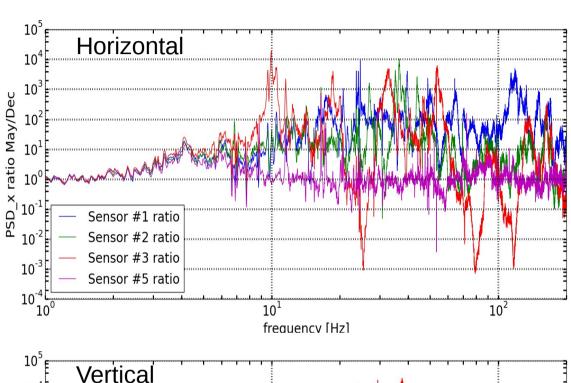

Vertical

10³
10²
10¹

Sensor #1 ratio

Sensor #2 ratio


Sensor #3 ratio


Sensor #5 ratio

10⁴
10¹
10¹
10²
10¹
10²
10¹
10²
10¹
10²
10²
10²
10³
10³
10³
10³
10⁴
10⁸
10¹
10¹
10²

- S1 next to QF1X
- S2 next to QD2X
- S3 next to QF3X
- S4 next to QF4X
- S5 next to QD5X
- Sensors 1,2,3 were vibrating much stronger in May than in Dec.
- Sensor 4 was not working in May (now it works – fixed by A. Jeremie and myself in Oct.)
- Sensor 5 shows similar vibration as in May


Ratio of PSD for horizontal and vertical vibration: May/Dec

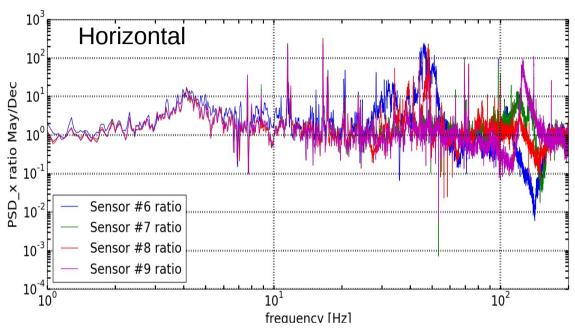


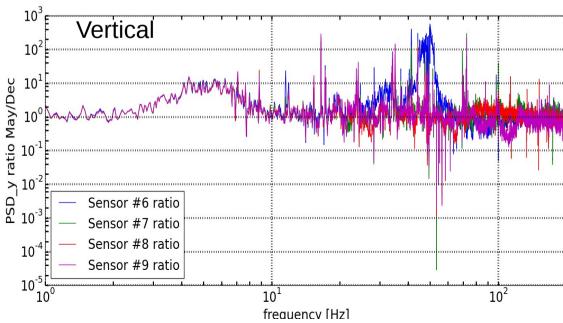

- S6 next to QF11X
- S7 next to QD12X
- S8 next to QF13X
- S9 next to QD14X
- Most of the sensors show similar vibrations as in May
- Sensors 6 and 8 vibrate stronger for around 50Hz in horizontal direction
- Sensor 6 vibrates stronger for around 50Hz in horizontal direction


Ratio of PSD for horizontal and vertical vibration: May/Dec

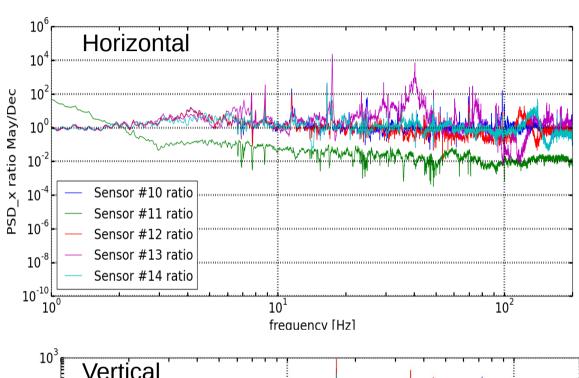

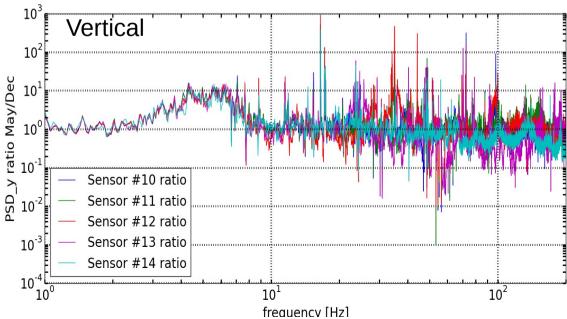


- S10 next to QF11X
- S11 next to QD12X
- S12 next to QF13X
- S13 next to QD14X
- S14 next to QD0FF
- All sensors except of 11 show similar vibrations as in May
- Sensor 11 vibrates horizontally much stronger in Dec than in May. New vibration source?
- Sensors 13 cannot be compared (different location in Dec.)

Correlation coefficient along the beamline (May and December comparison)

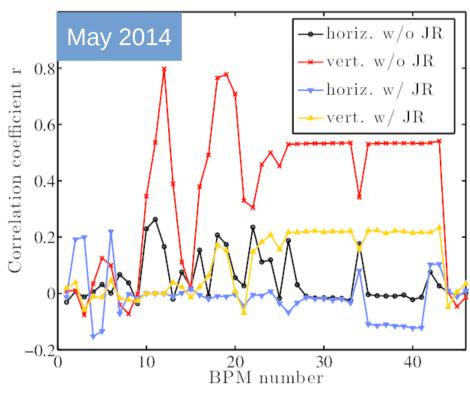


- > $10\beta_x 1\beta_y$ optics ($\beta_x = 40$ mm, $\beta_y = 100$ µm);
- BPMs #10,11,12 are used for jitter reduction (JR);
- In May there was a vibration source downstream from BPMs #10,11,12 (next to QD10X, QF11X, QD12X);

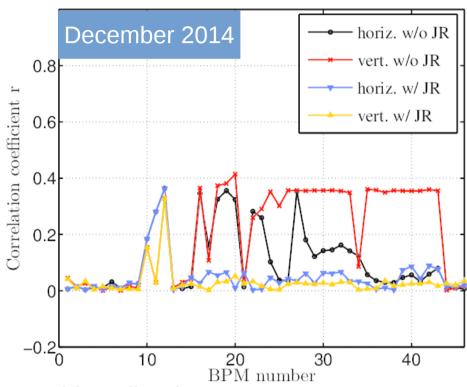


- This vibration source was removed (maybe during the OTRs investigation?);
- The only source left is upstream from BPMs #10,11,12;
- In May sensors #1,2,3 were installed on the top of QPs, in Dec next to Qps
- More horizontal correlation in Dec. (S11?)

Beam orbit jitter in June and December $10\beta_x 1\beta_v$ optics

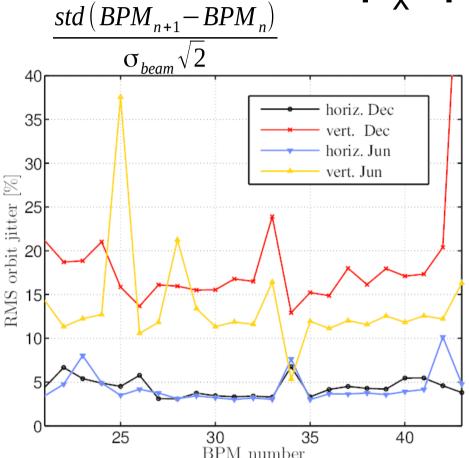


- The horizontal beam orbit jitter is kept on 5% level;
- The vertical beam orbit jitter measured in December increased to ~18%;
- It is equivalent to ~1.5% increase of the vertical beam size.

Correlation coefficient for $0.5\beta_y^*$ (50 µm)

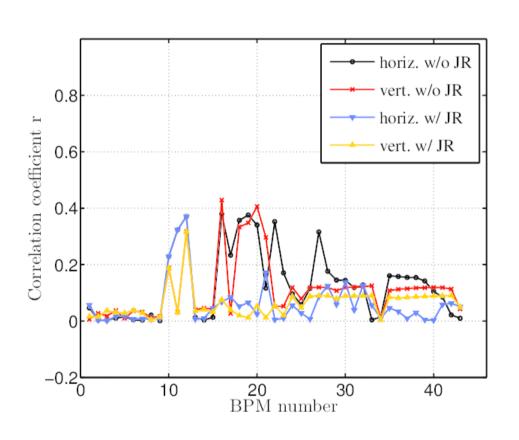

- Horizontal correlation higher for 0.5β_v* optics;
- Vertical correlation lower for 0.5β_v* optics;
- However, vertical correlation is still present for after jitter reduction (JR);
- Further investigation is needed...

Beam jitter for $10\beta_x 1\beta_y$ and $10\beta_x 0.5\beta_y$ optics normalized by β

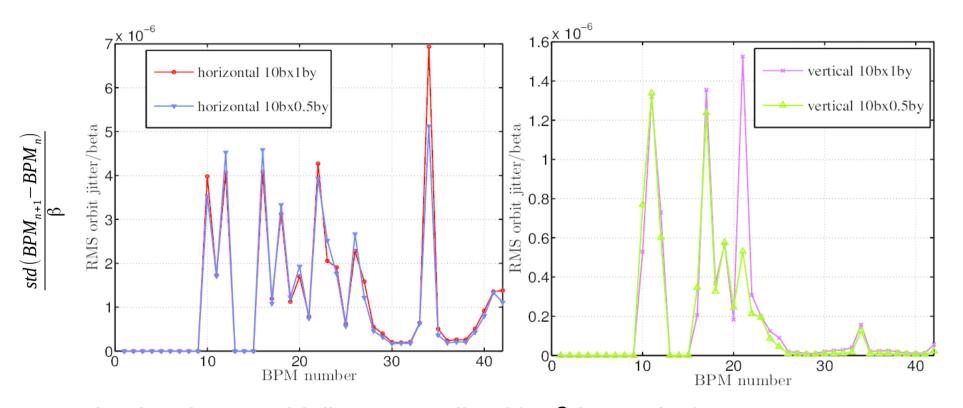


- Absolute beam orbit jitter normalized by β is nearly the same
- Both datasets taken in December


Summary A

- The most noisy region of sensor #1,#2,#3 vibrates much less in December than in May. However, in May sensors were placed on the top of QP, in Dec. next to QP.
- There is one, strong vibration source upstream from BPMs #10,#11,#12 responsible for the whole observed correlation.
- Vibration seen by sensors #6 and #8 in May was not observed in Dec.
- Sensor #11 shows stronger vibration than in May.
- Beam orbit jitter has increased from ~14% to ~18%.

B. Investigation of QD10AFF region – suspect of vibrations being transmitted from cooling water pipes to the beamline.


Cooling water pipes near to QD10AFF magnet

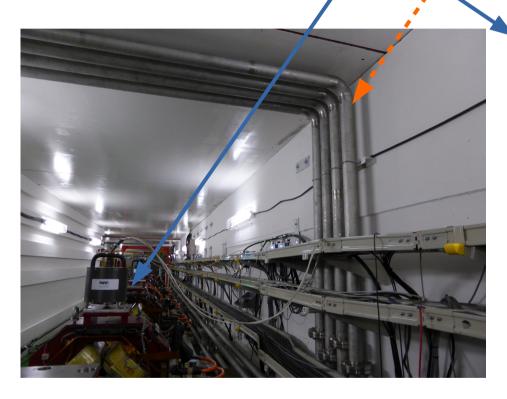

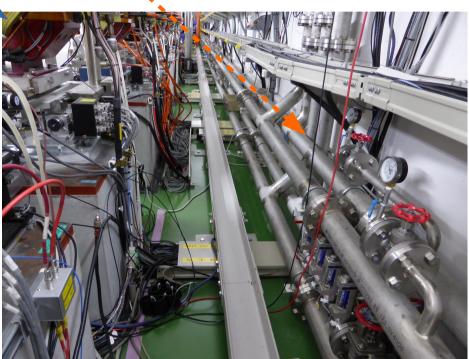


The cooling water pipes were responsible for the strong vibrations in the region of QF1X and QD2X magnets. Therefore, it was checked if the cooling water pipes near to QD10AFF are also source of vibrations.


PSD and IRMS of sensor #13 (QD10AFF)

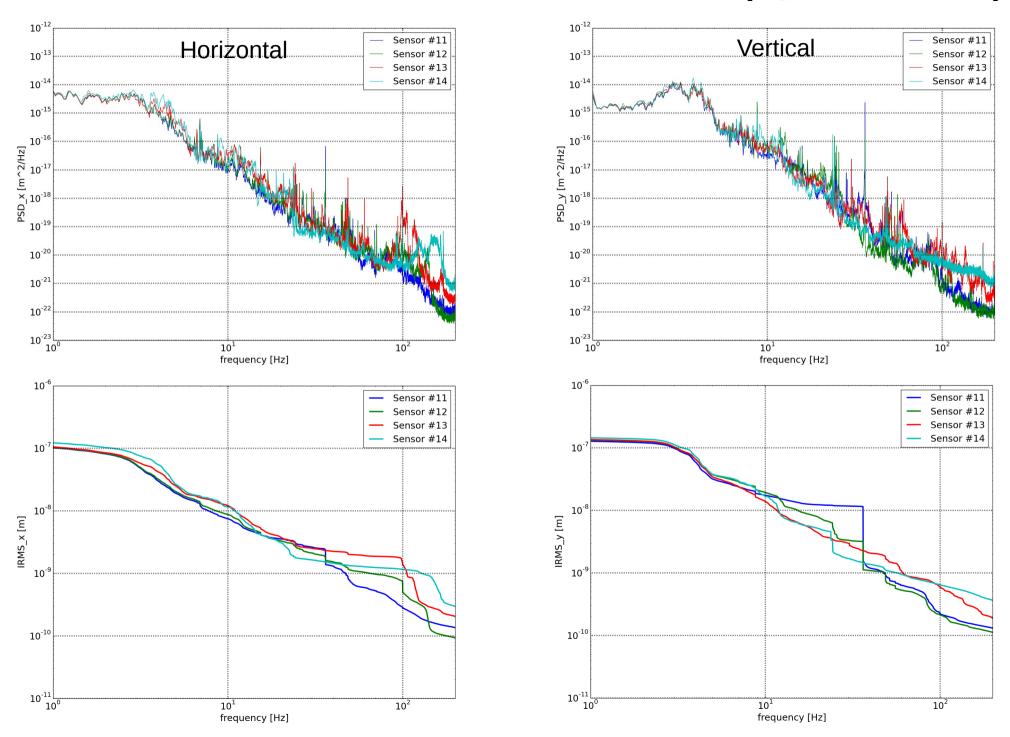



PSD and IRMS of sensor #13 (QD10AFF)

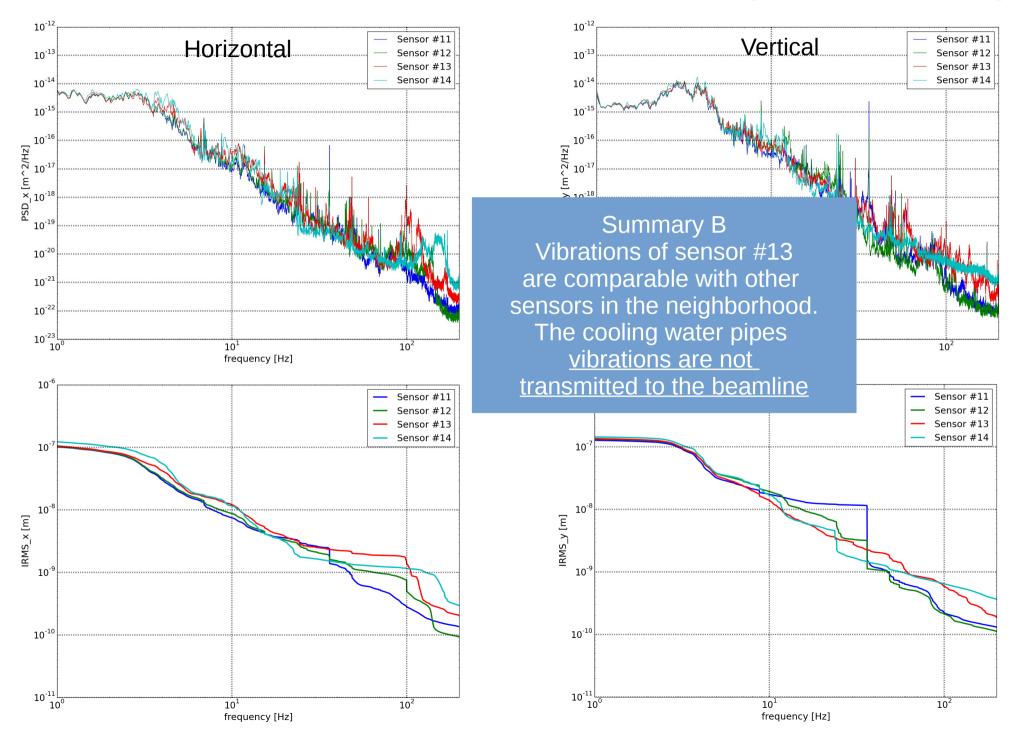

However,...

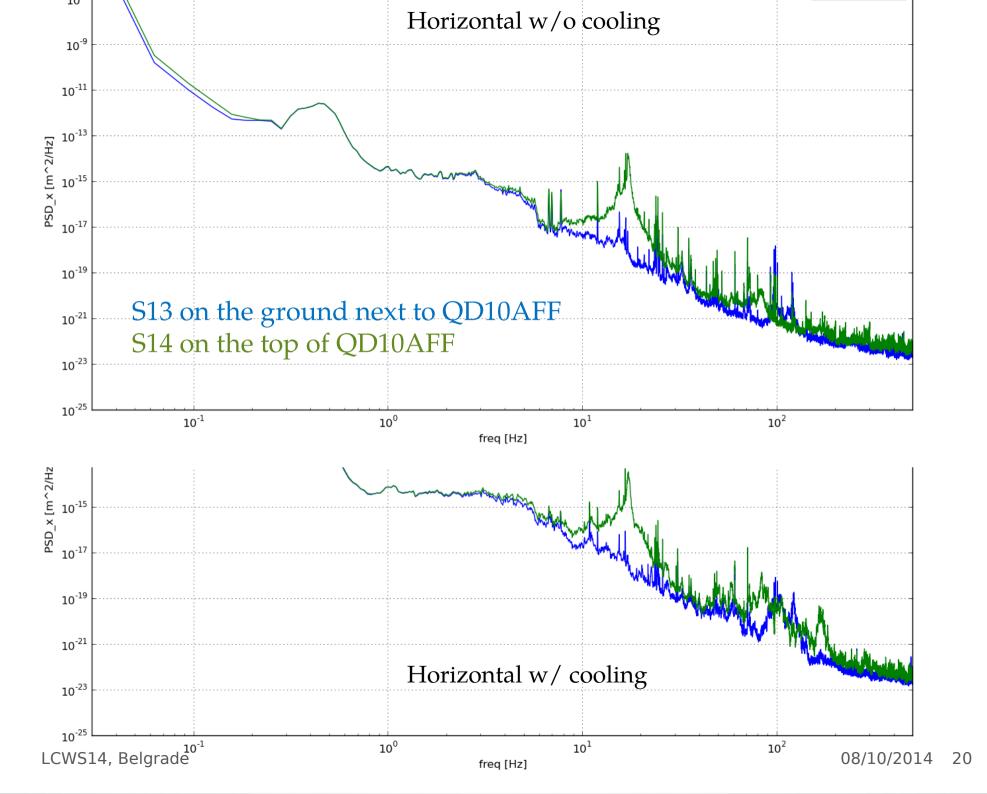

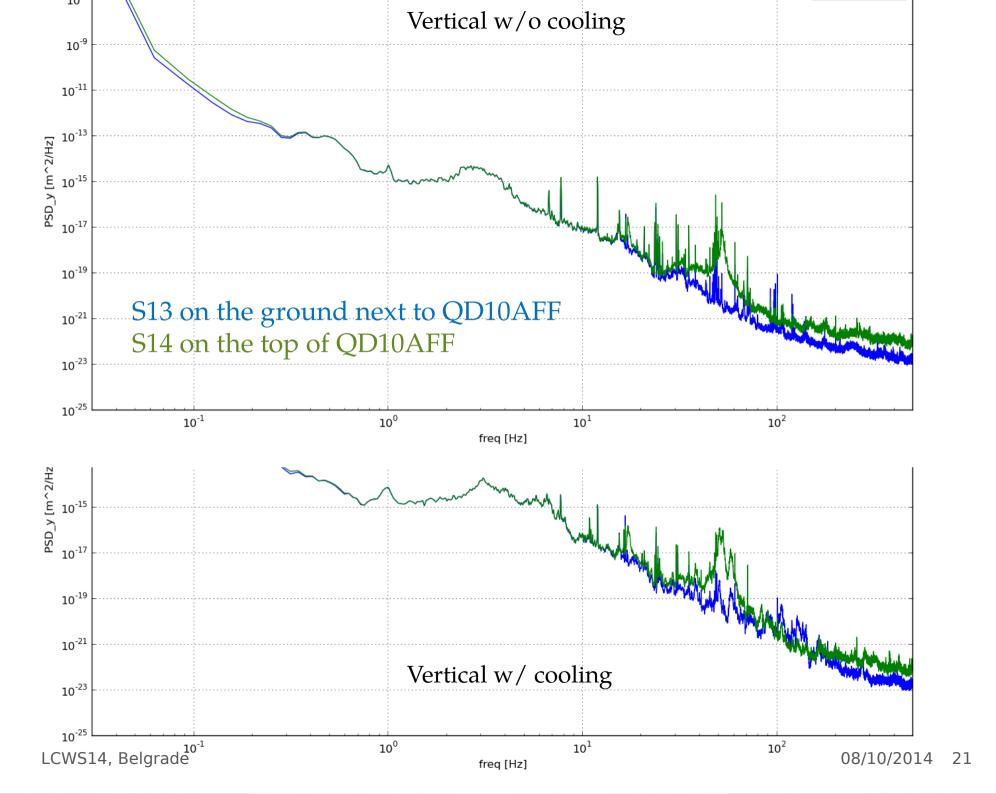


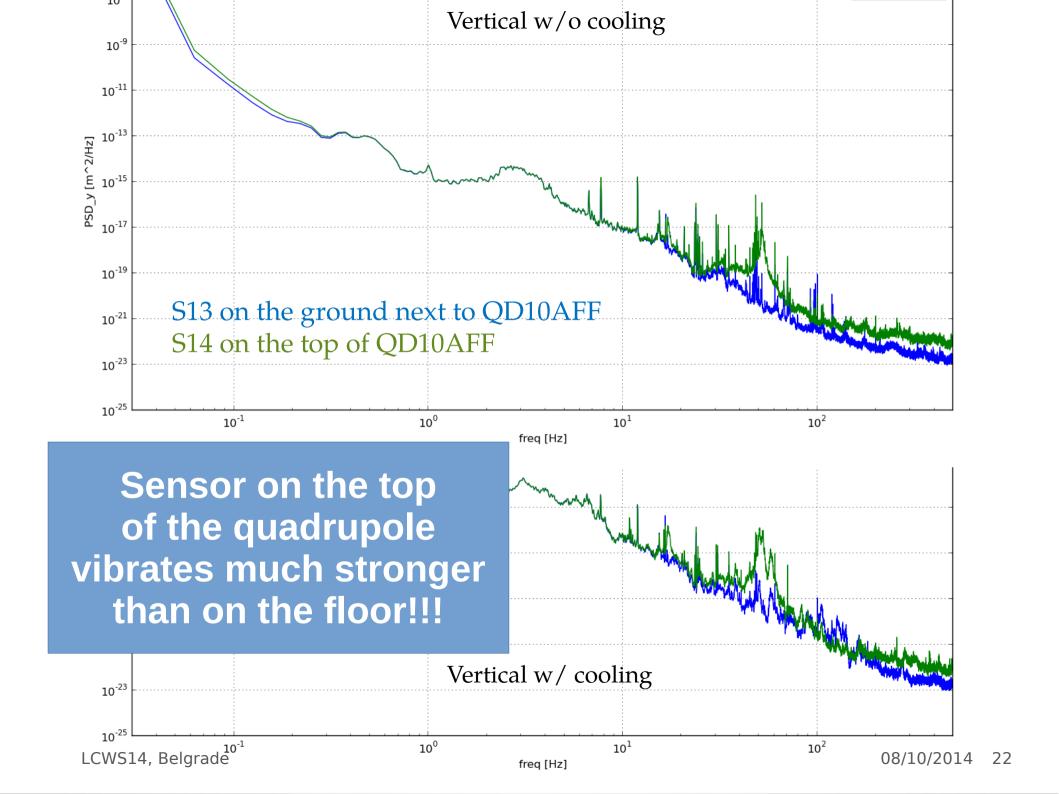



C. Difference between sensors located at the top of the quadrupoles and in available space (usually quadrupole table or floor next to quadrupole).

Sensors #1,#2,#3 (main contribution to the correlation factor) used for demonstration.

Measurements performed in October together with A. Jeremie.

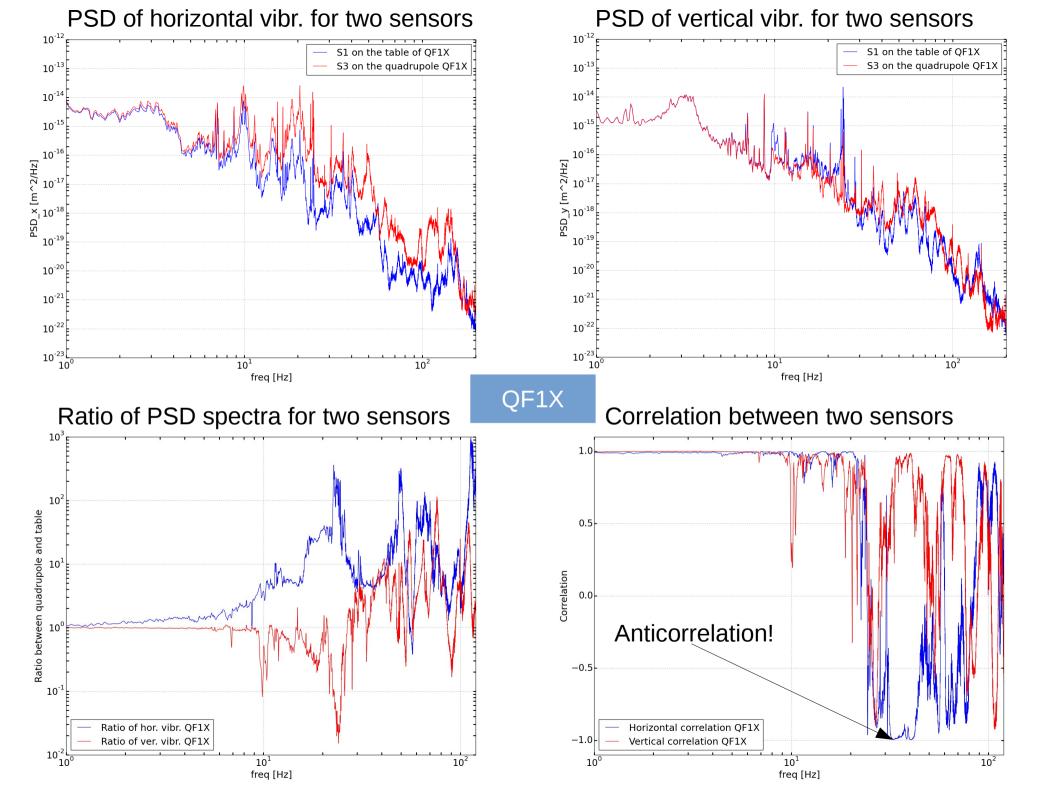

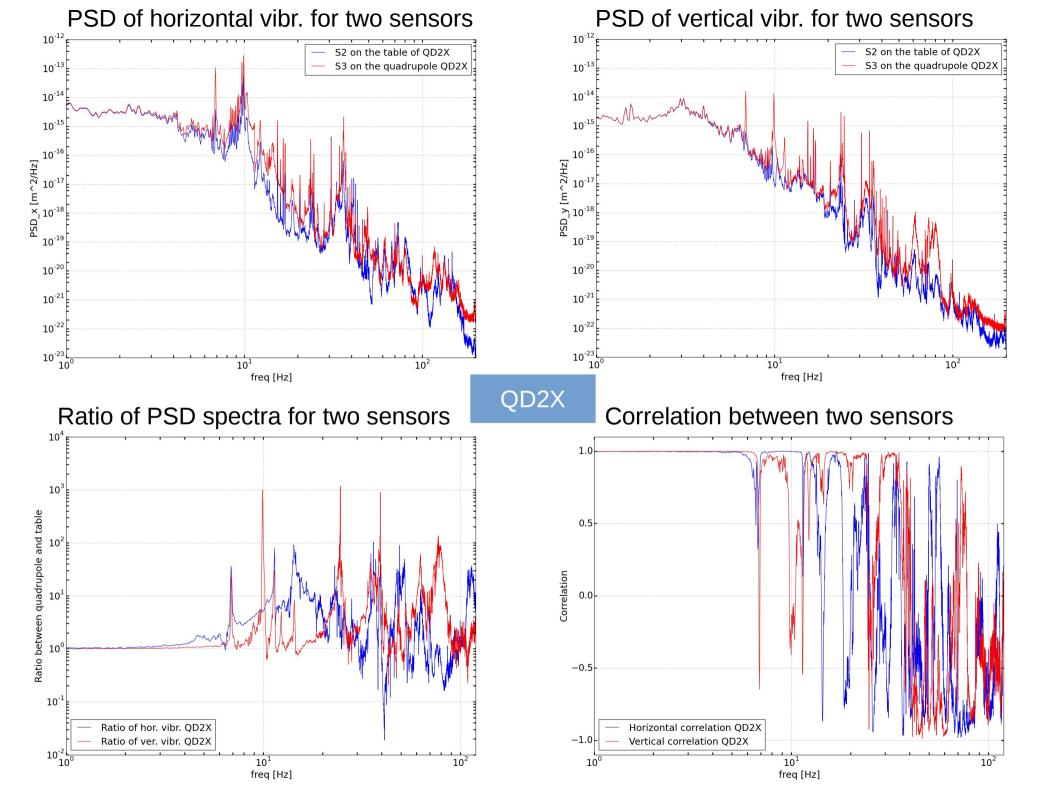

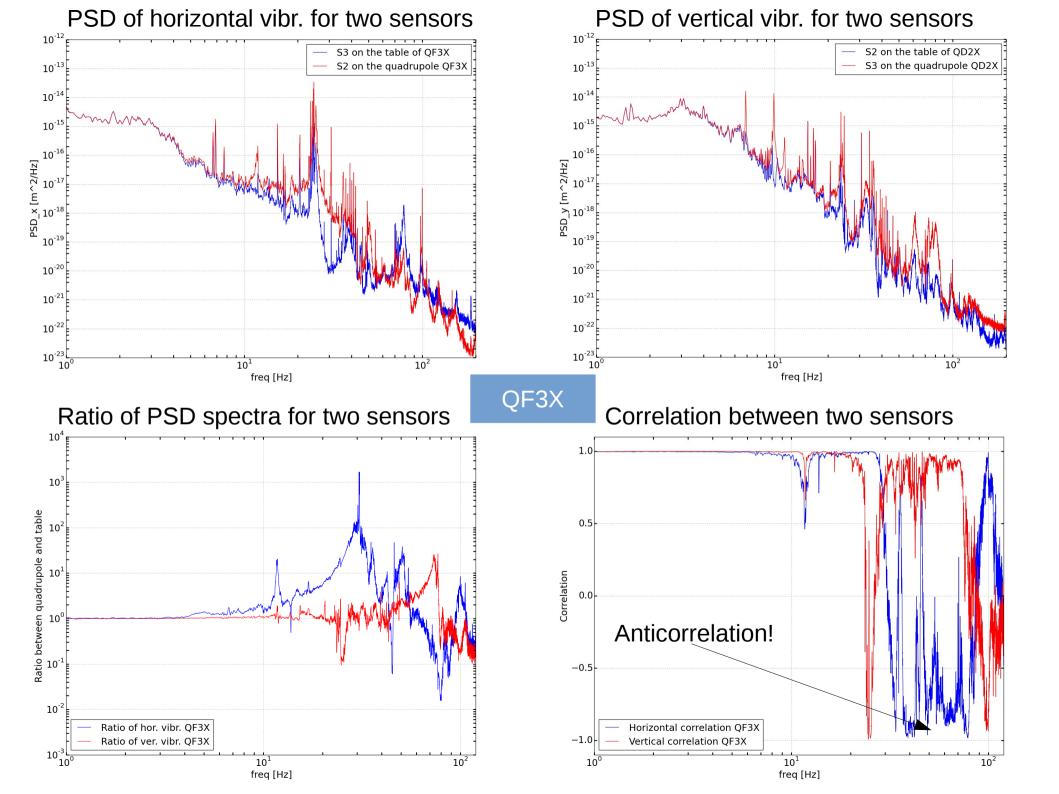

Summary C

- We observe important differences between putting the sensor on the quadrupole and another position;
- It may be a reason of small correlation;
- There is a strong justification of placing the sensors on the top of the quadrupoles;

Thank you for your attention!

Backup slides

