

2nd ECFA HL-LHC Workshop

Phil Allport and Didier Contardo

- Introduction
- Context & experiment plans
- Accelerator & experiment interface
- Physics & performance highlights
- Detector technology highlights
- Outlook

**2nd ECFA
HIGH
LUMINOSITY
LHC**
Experiments **LHC** Workshop

Physics and technology developments

21st - 23rd
OCTOBER 2014

Aix-les-Bains | France

Programme Committee:
P. Allport | A. Ball | S. Berlucchi | F. Bordry | T. Carozzi | D. Chaitin | D. Contardo | B. Di Girolamo
P. Gubellino | M. Kramer | M. Mangano | L. Rost | B. Schmidt | T. Virdee | J.P. Ussels | G. Wilkinson

Organising Committee:
P. Allport | D. Contardo | D. Hudson | C. Potter

Registration and further information at: <https://hdico.cern.ch/event/315626/>
or d.hudson@cern.ch and conix.potter@cern.ch

Image: Bruno Voigt

Logos at the bottom: aix les bains - centre des congrès, CERN, High Luminosity LHC, ALICE, ATLAS, CMS, LHCb, CERN.

Context of the Workshop

- **May 2013** - CERN Council approves the European Strategy report recommending the HL-LHC as the top HEP priority
- **May 2014** - US Particle Physics Project Prioritization Panel (P5) makes similar recommendation
- **June 2014** - CERN Council discusses the planning up to 2025 & approves the 2015-2019 plan, including first HL-LHC expenses
- The HL-LHC project is acknowledged as the next crucial step in any future for collider HEP
- The ECFA workshops contribute to developing the studies of the HL-LHC physics goals and the motivations for the upgrades which drive the performance requirements
- They also help to organize the different communities in working together on the technical solutions needed to meet these requirements

Workshop Links and Organization

- ECFA 2013 - agenda


<https://indico.cern.ch/conferenceDisplay.py?confId=252045>

Report <https://cds.cern.ch/record/1631032> (ECFA-13-284)

- ECFA 2014 - agenda <http://indico.cern.ch/event/315626/other-view?view=standard>

- As for 2013, the bulk of the material has been organised by Preparatory Groups, but with the focus on technologies rather than sub-detector systems to emphasise further the synergies between experiments and R&D collaborations

- PG1: Physics theory, physics experiment, performance
- PG2: Solid state tracking detectors
- PG3: Scintillating devices
- PG4: Gaseous detector systems
- PG5: Electronics systems
- PG6: Mechanics and cooling
- PG7: Trigger, online and offline computing
- PG8: Accelerator & experiment interface, activation & mitigation

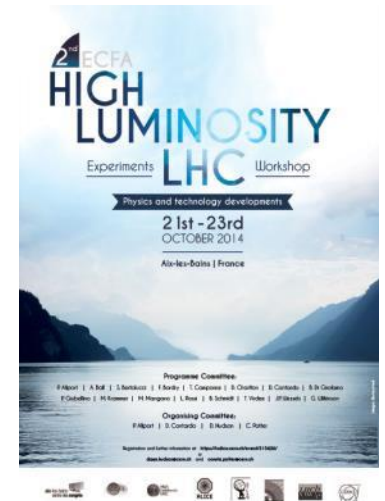

Workshop Steering Committee

P. Allport, A. Ball, S. Bertolucci, F. Bordry, P. Campana, T. Camporesi, D. Charlton, D. Contardo, B. Di Girolamo, P. Giubellino, M. Krammer, M. Mangano, L. Rossi, B. Schmidt, J. Virdee, J.P. Wessels

Preparatory Group Members & Speakers

M. Abbrescia, T. Affolder, A. Apyan, O. Arnaez, P. Aspell, S. Bally, **P. de Barbaro**, A. Belloni, **O. Beltramello**, I. Bergstrom, L. Betev, P. Braun Munzinger, M. Campbell, A. Canepa, A. Cardini, S. Caron, F. Cavallari, P. Clarke, P. Collins, J. Christiansen, N. De Bortoli, A. Dainese, P. Dupieux, K. Einsweiler, **P. Farthouat**, D. Ferrere, M. Ferro-Luzzi, C. Gargiulo, T. Gershon, V. Gligorov, M. Girone, **D. Giugni**, N. Glover, B. Gorini, T. Grassi, Lindsey Gray, G. Graziani, A. Grillo, C. Grojean, **M. Hansen**, **F. Hartmann**, A. Henriques, A. M. Henriques Correia, F. Huegging, P. Iengo, G. Isidori, A. Kluge, **M. Klute**, N. Konstantinidis, **O. Kortner**, M. Krzewicki, D. Lange, F. Lanni, C. Lipmann, V. Manzari, F. Meijers, I. Melzer-Pellmann, P. Moreira, **D. Muenstermann**, F. Nessi-Tedaldi, N. Neufeld, **A. Nisati**, G. Perez, D. Petyt, **J. Proudfoot**, R. Richter, I. Riu, F. Ronchetti, **G. Salam**, R. Santonico, O. Sasaki, B. Schmidt, A. Sharma, D. Silvermyr, **W. Smith**, W. Snoeys, G. Stewart, A. Straessner, **P. Tropea**, V. Vagnoni, P. Vande Vyvre, F. Vasey, S. Veneziano, H. Vincke, U. Wiedmann, **A. Weiler**, P. Wells, S. Willocq, K. Wyllie, K. Zabrzycycki, **W. Zeuner**



The HL-LHC is a very bright lamp to see physics details, which makes it a challenging environment for detectors and reconstruction





○ Radiation

- Ionizing dose
- Neutron fluences up to 2×10^{16} n/cm² in pixels

○ Pileup

- 140 average simultaneous interactions (many events with > 180)

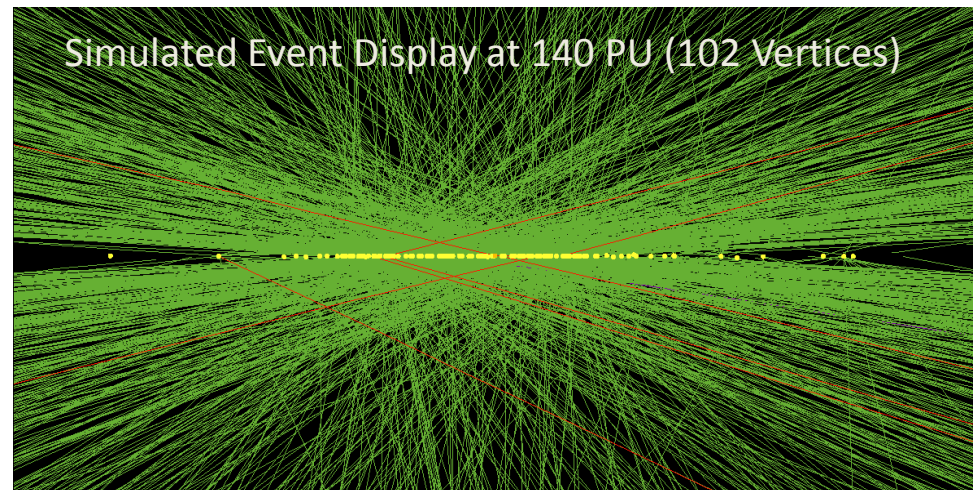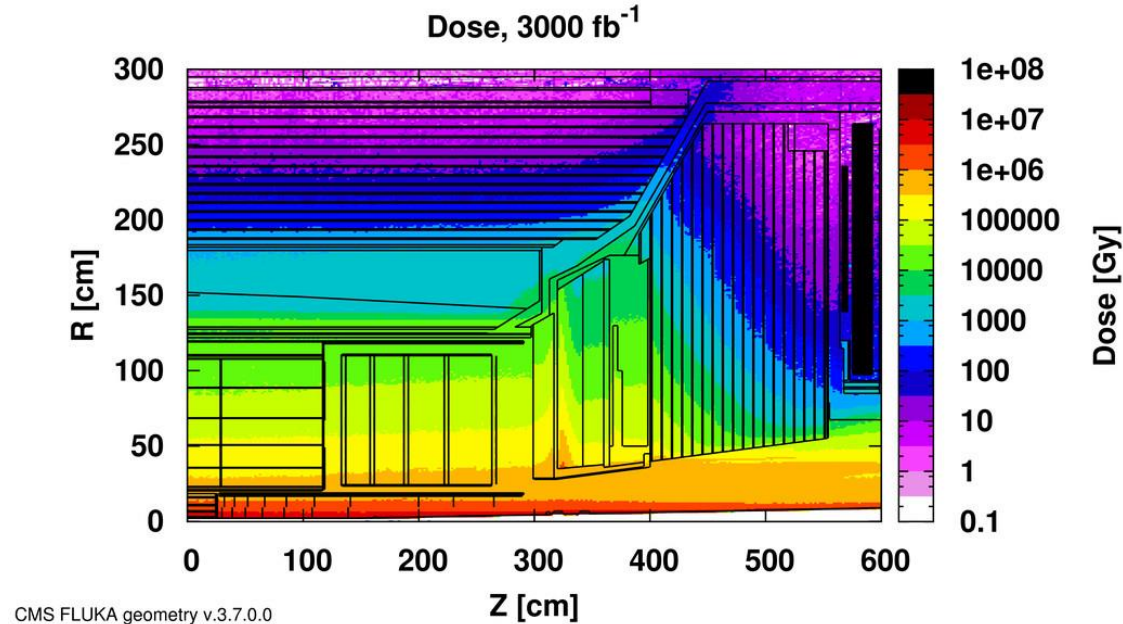

CMS has a comprehensive plan for adjusting detector, where necessary, to cope with these challenges.

New Tracker

- Radiation tolerant - high granularity - less material
- Tracks in hardware trigger (L1)
- Coverage up to $\eta \sim 4$

Muons

- Replace DT FE electronics
- Complete RPC coverage in forward region (new GEM/RPC technology)
- Investigate Muon-tagging up to $\eta \sim 3$

Barrel ECAL

- Replace FE electronics
- Cool detector/APDs

New Endcap Calorimeters


- Radiation tolerant
- High granularity

Trigger/DAQ

- L1 (hardware) with tracks and rate up ~ 750 kHz
- L1 Latency $12.5 \mu\text{s}$
- HLT output rate 7.5 kHz

Other R&D


- Fast-timing for in-time pileup suppression
- Pixel trigger

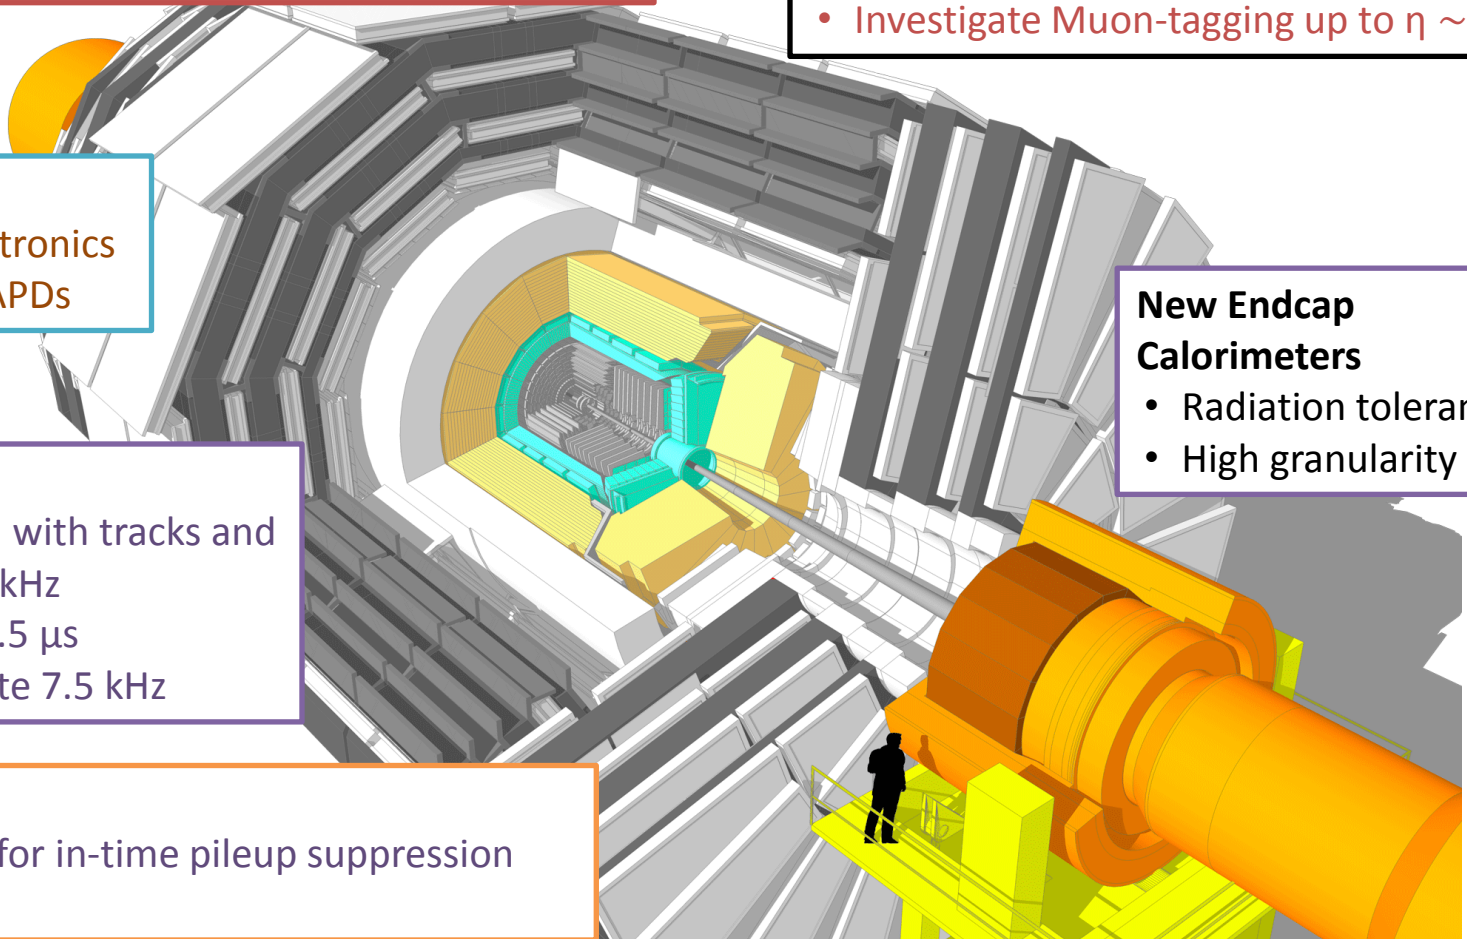



Introduction

(As for CMS: phased upgrades towards HL-LHC)

- ATLAS detector being re-commissioned for Run 2.
- Biggest challenge during LS1: additional pixel layer added (IBL).
- Detailed upgrade plans for Phase-1 and Phase-2 taking shape.

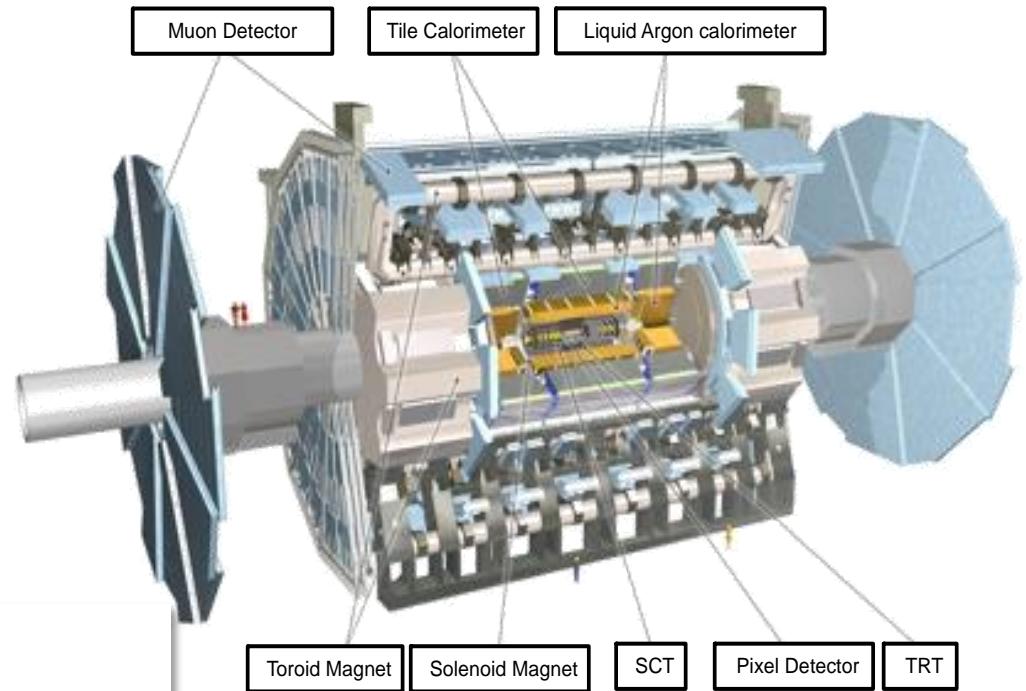

The ATLAS Roadmap

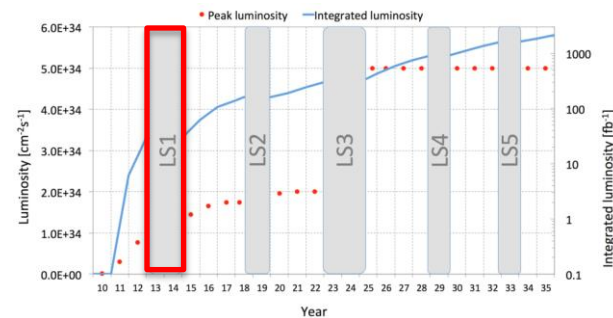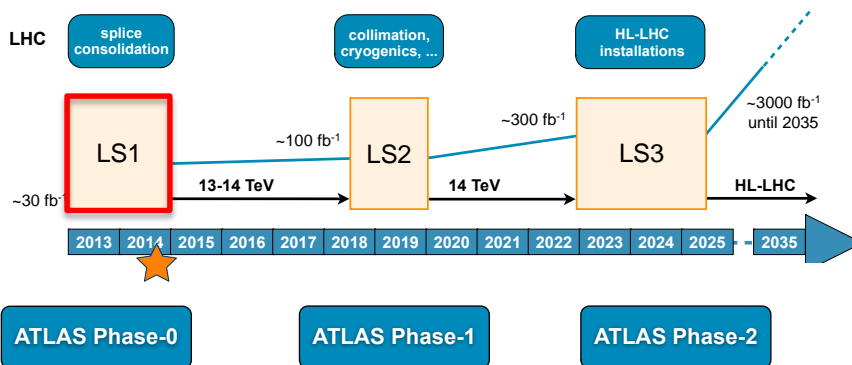


Introduction



(As for CMS: phased upgrades towards HL-LHC)

Selection of upgrades: Phase-I

- Fast Tracking (FTK) input to HLT (already started)
- New Small Wheel (NSW) for the forward Muon Spectrometer
- Finer granularity LAr data to Level-1
- TDAQ Upgrades to Level-1/HLT
- Additional forward proton system (AFP)

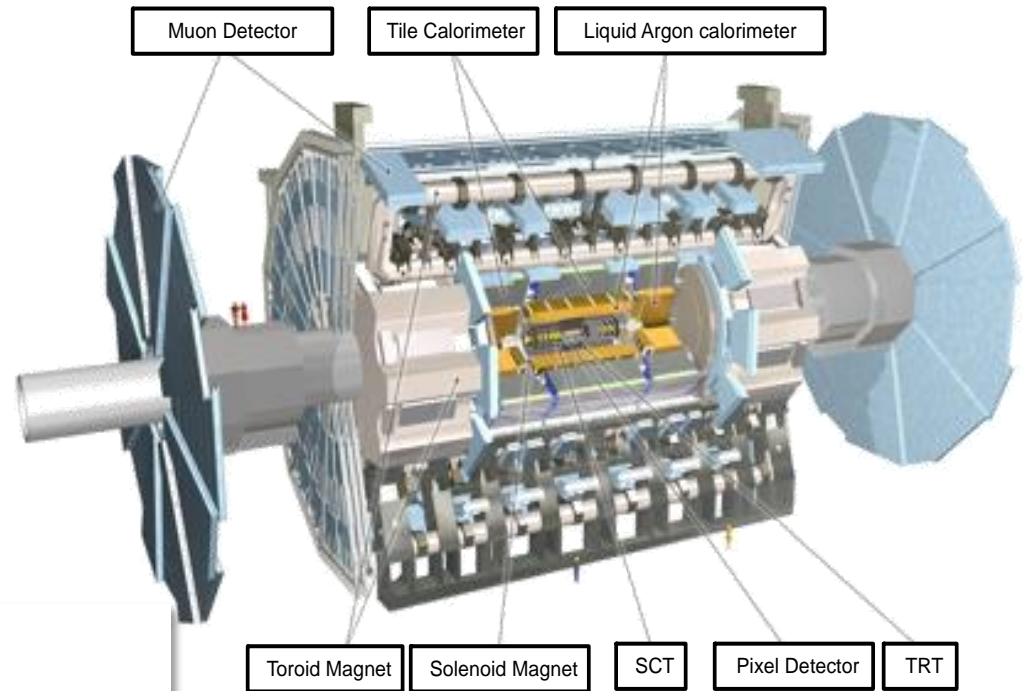


The ATLAS Roadmap

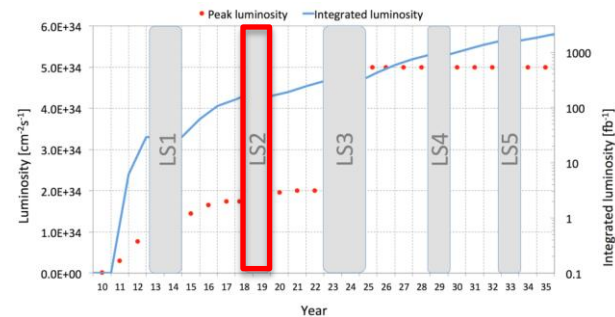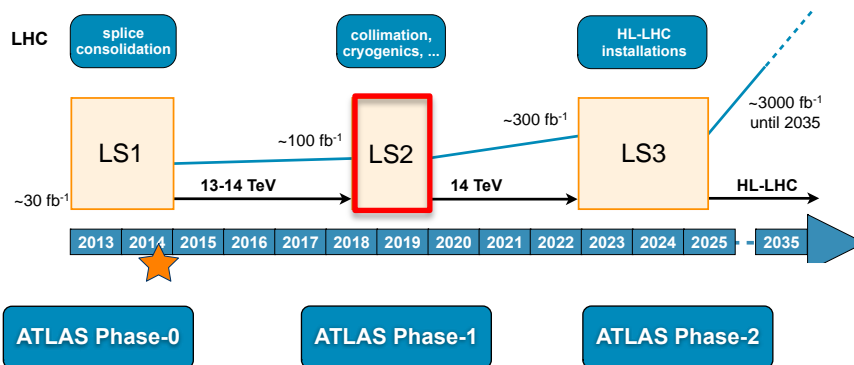



Introduction

Selection of upgrades: Phase-II

- All new Inner Tracking Detector
- Introduction Level 0/1 trigger
- Level-1 track trigger
- Calorimeter electronics upgrades
- Upgrade muon trigger system and electronics
- DAQ upgrade
- Enhancements to high-eta region

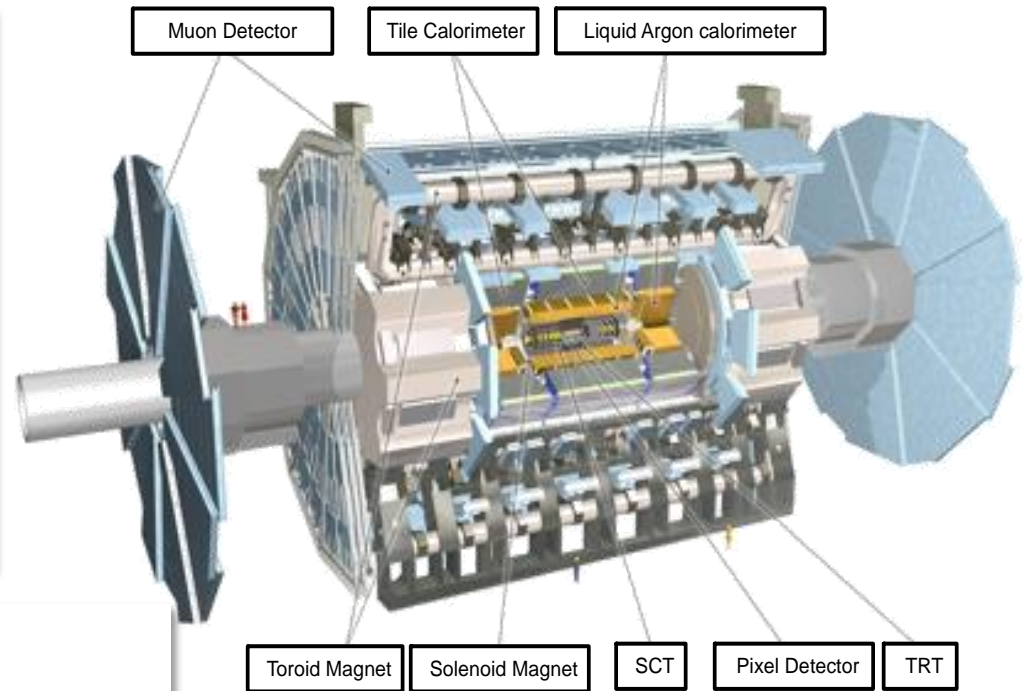

The ATLAS Roadmap

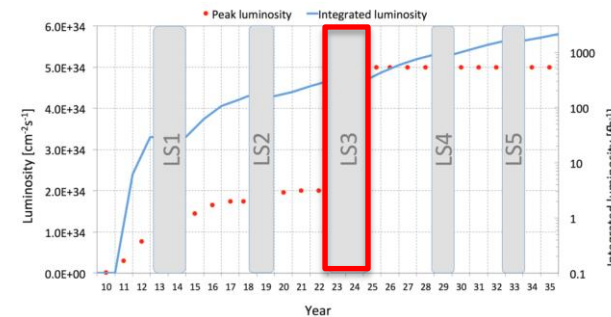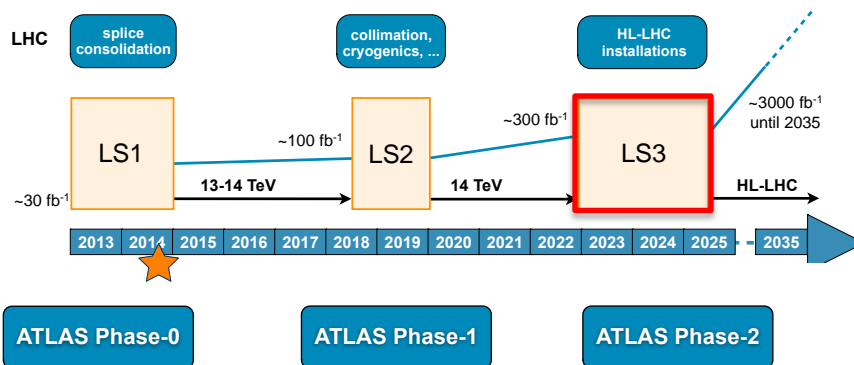

ALICE Upgrade

New Inner Tracking System (ITS)

- improved pointing precision
- less material -> thinnest tracker at the LHC

Muon Forward Tracker (MFT)

- new Si tracker
- Improved MUON pointing precision

Time Projection Chamber (TPC)

- New Micropattern gas detector technology
- continuous readout


MUON ARM

- continuous readout electronics

New Central Trigger Processor (CTP)

Data Acquisition (DAQ)/ High Level Trigger (HLT)

- new architecture
- on line tracking & data compression
- 50kHz Pbb event rate

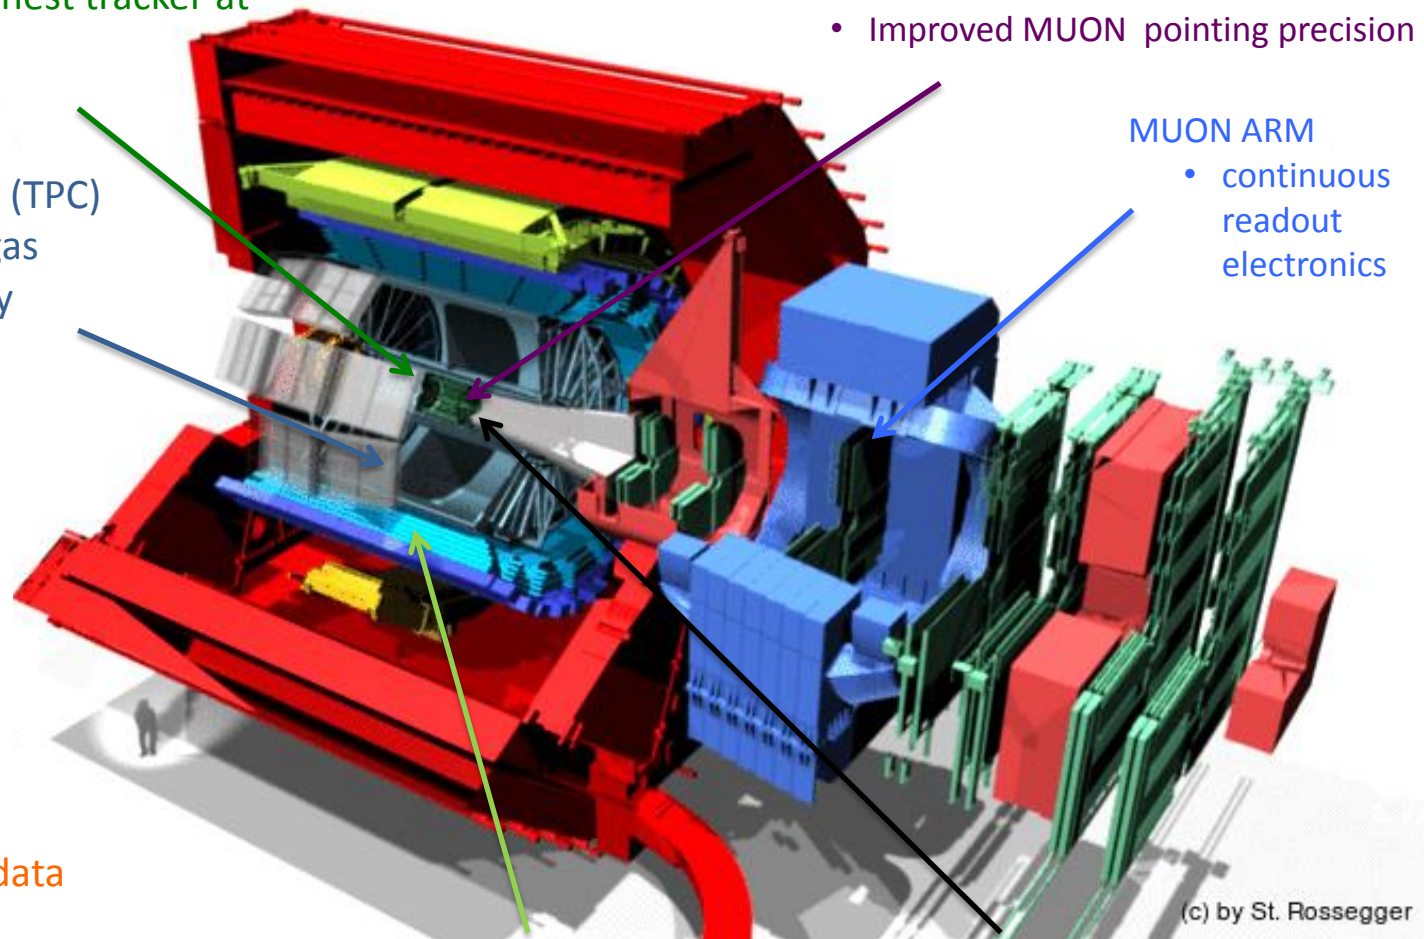


TOF, TRD

- Faster readout

New Trigger Detectors (FIT)

Upgraded LHCb

All subdetectors are read out at 40 MHz

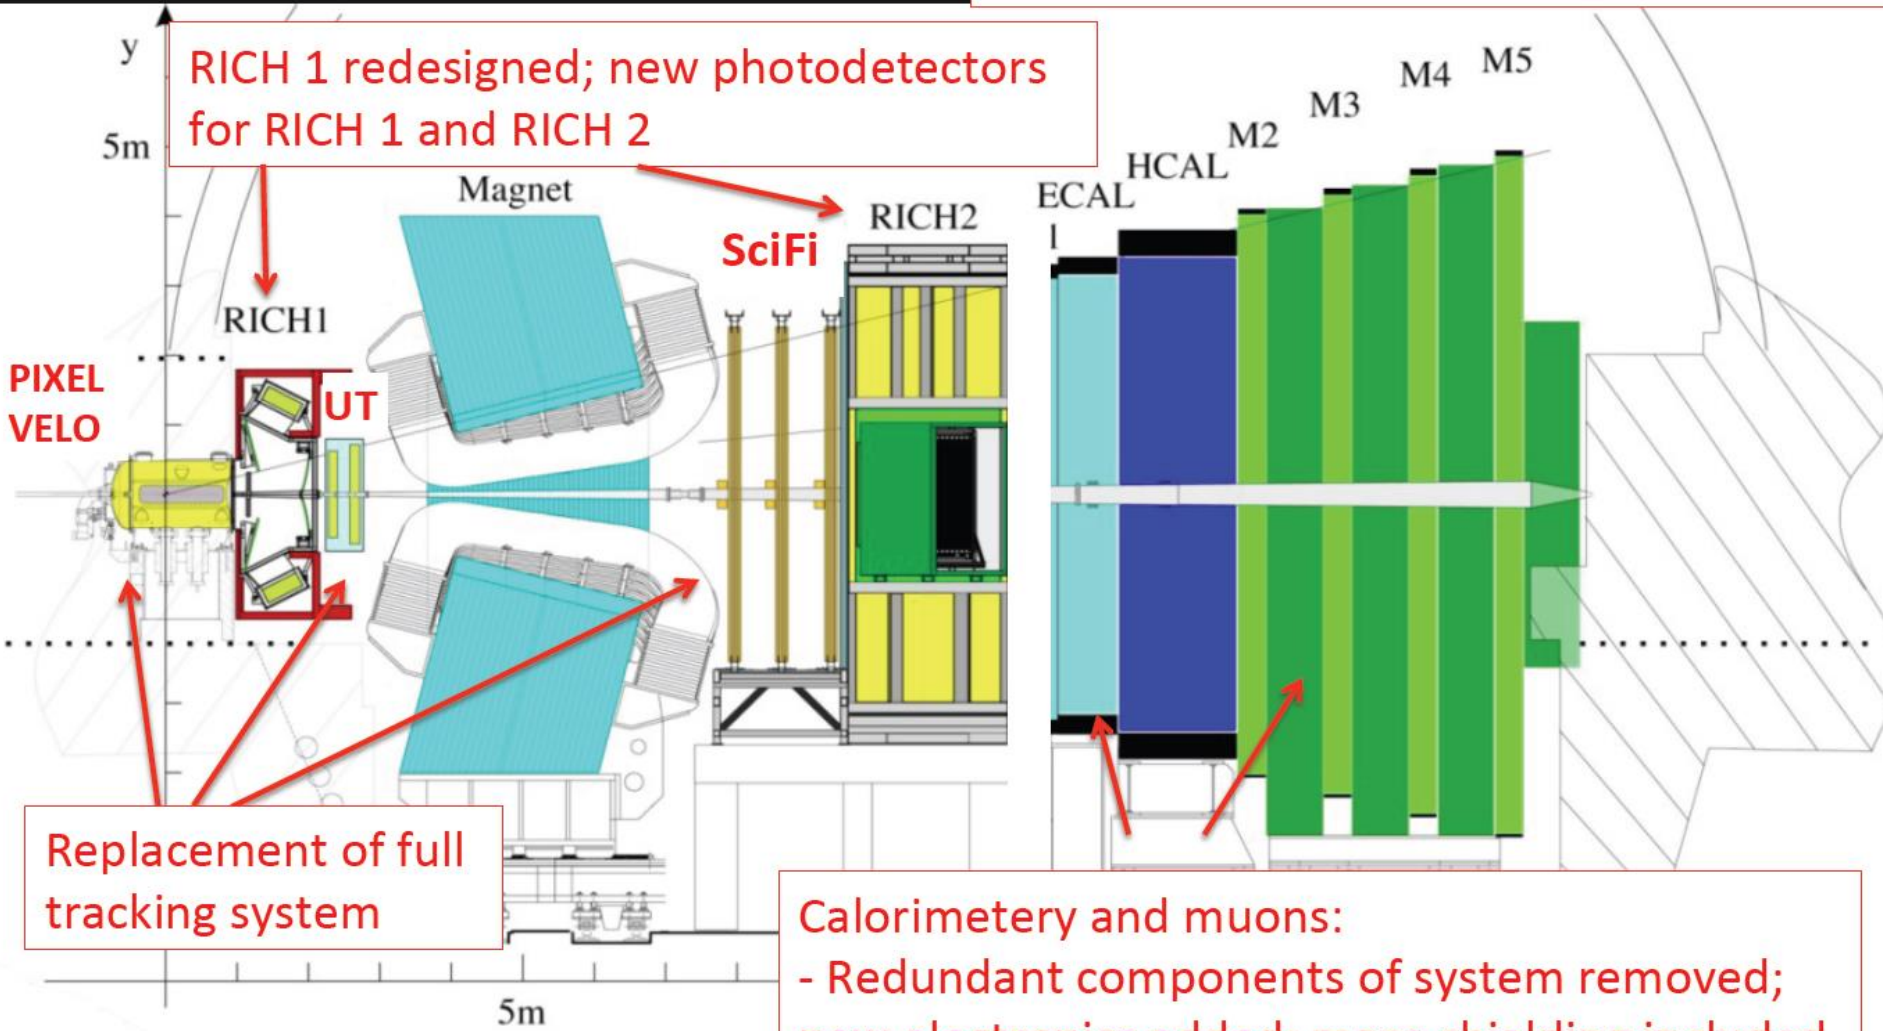


RICH 1 redesigned; new photodetectors for RICH 1 and RICH 2

Replacement of full tracking system

Calorimetry and muons:
 - Redundant components of system removed;
 new electronics added; more shielding included


Similar tight timelines for different steps for Accelerator, ATLAS & CMS - ≤ 3 years to complete designs & R&D

HL-LHC planning

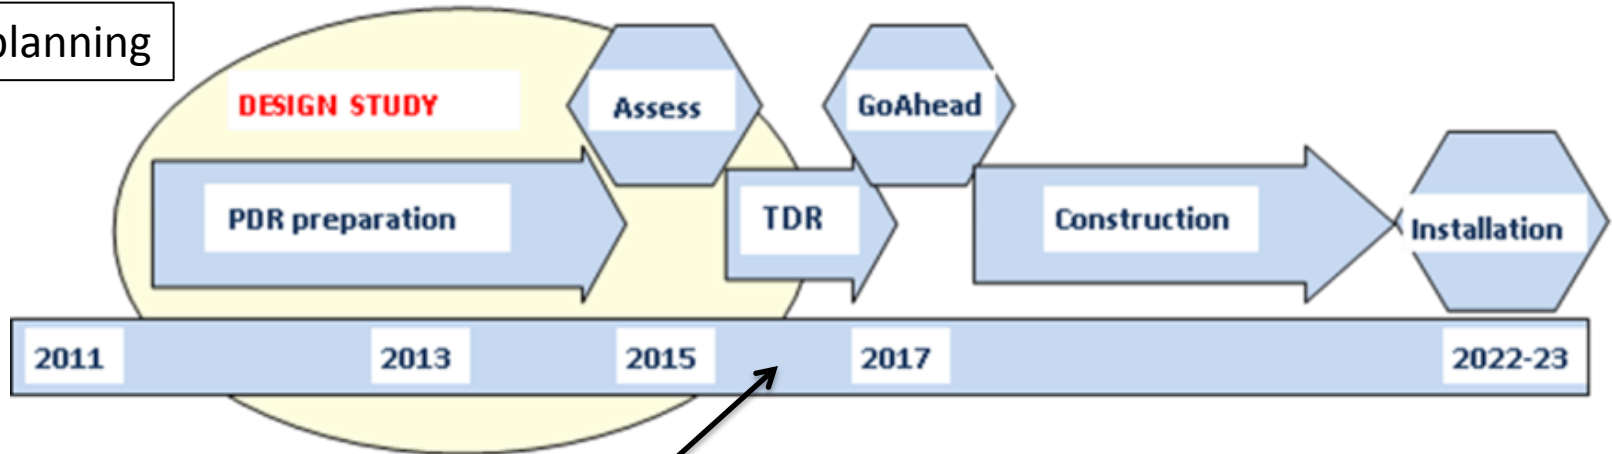

Example of the CMS planning for major upgrade work - it is similar for ATLAS

Calendar Year											
2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025
	TP				LS2				LS3		
Technology R&D											
		TDRs									
	Design and Prototyping										
			Engineering Design								
			Pre-Production								
			Production / Construction								
									Install / Commission		

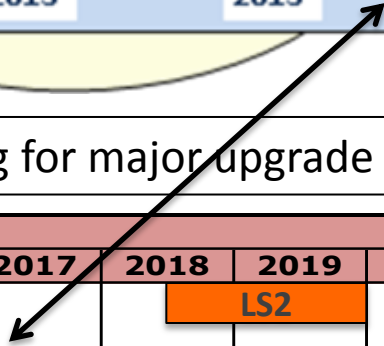

2nd ECFA HL-LHC... Beam conditions & integrated luminosity

Good progress demonstrating feasibility of the HL-LHC upgrade - new magnet apertures, low β^* , Crab cavities...

- Reaching 3000 fb⁻¹ by 2036 sets severe constraints on operation of the HL-LHC with luminosity leveling at 5×10^{34} Hz/cm²
- Preliminary studies of different luminous region and levelling schemes were presented


Preparation of work in LS3 needs considerably more planning than previous LS due to scale of work and activation levels

- Planning HI and low luminosity runs at the end of run 3 will reduce cooling time in LS3
- Anticipating some infrastructure & upgrade work in LS2 maybe needed to ensure a 30 months shutdown

Substantial progress in activation studies with improved operation scenario

- Good agreement of estimates from Accelerator, ATLAS and CMS

Targeted beam conditions & integrated luminosity

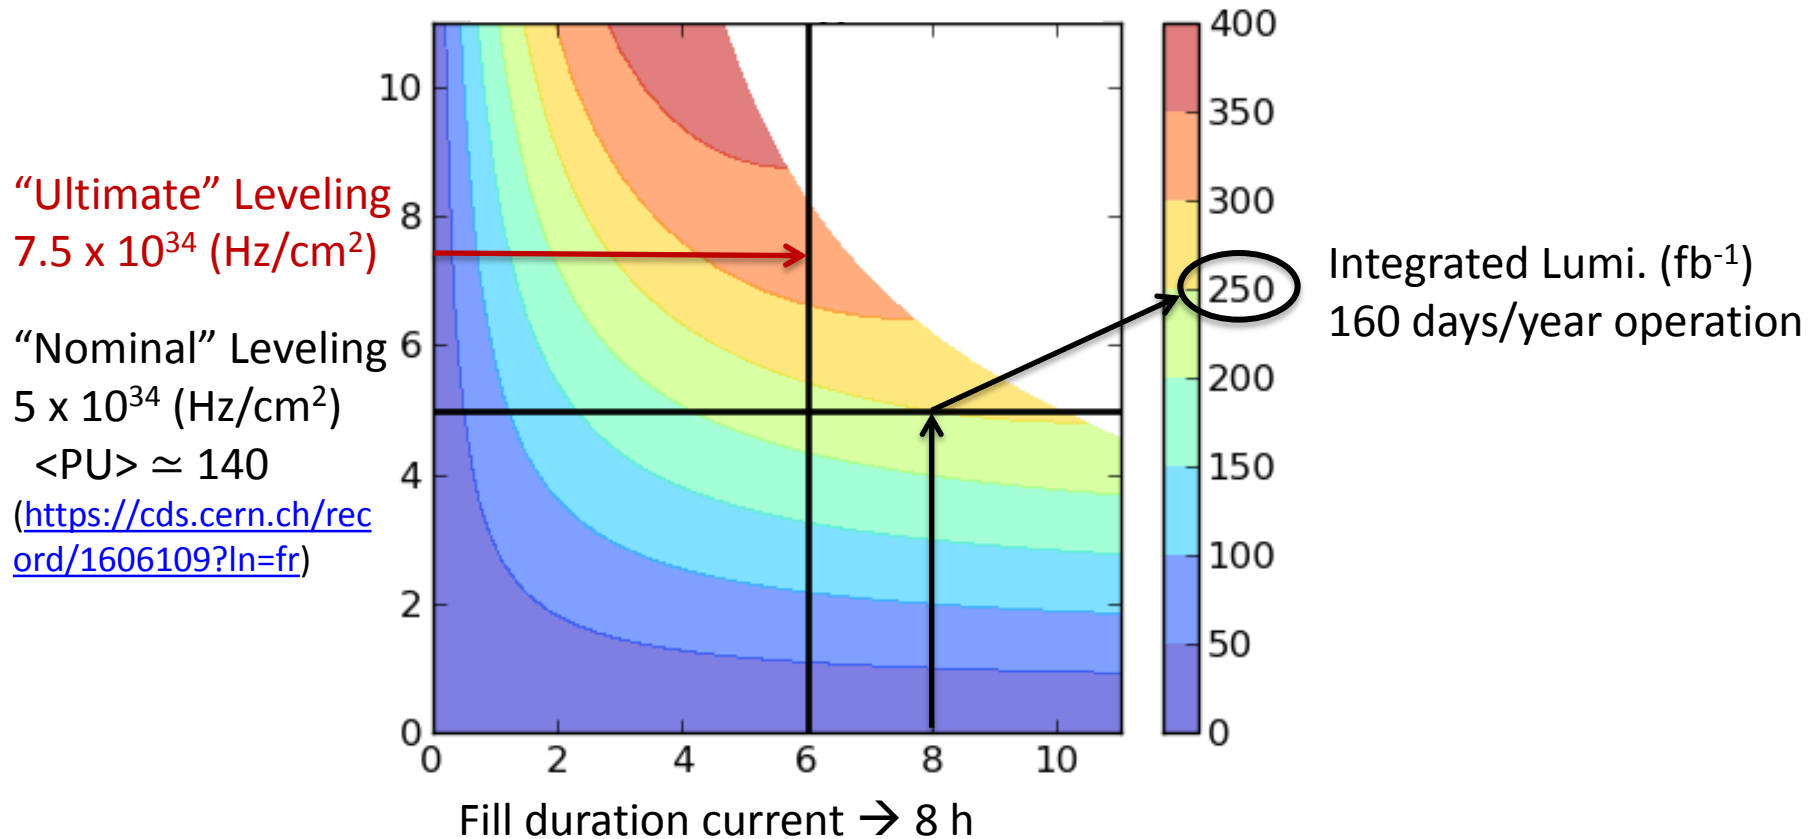



“Nominal” conditions → $\approx 2000 \text{ fb}^{-1}$ in Phase 2 by end 2035 (+ 300 fb^{-1} in Phase 1)

“Ultimate” conditions → $\approx 2600 \text{ fb}^{-1}$ in Phase 2 by end 2035 (+ 300 fb^{-1} in Phase 1)

- set severe constraints on experiments to perform at $\langle \text{PU} \rangle$ up to ~ 200
- gain in number of physics operation days would also benefit integrated luminosity

Good agreement of activation estimates from Accelerator, ATLAS and CMS - similar scaling factors

Model validated with data - some discrepancies due to material description

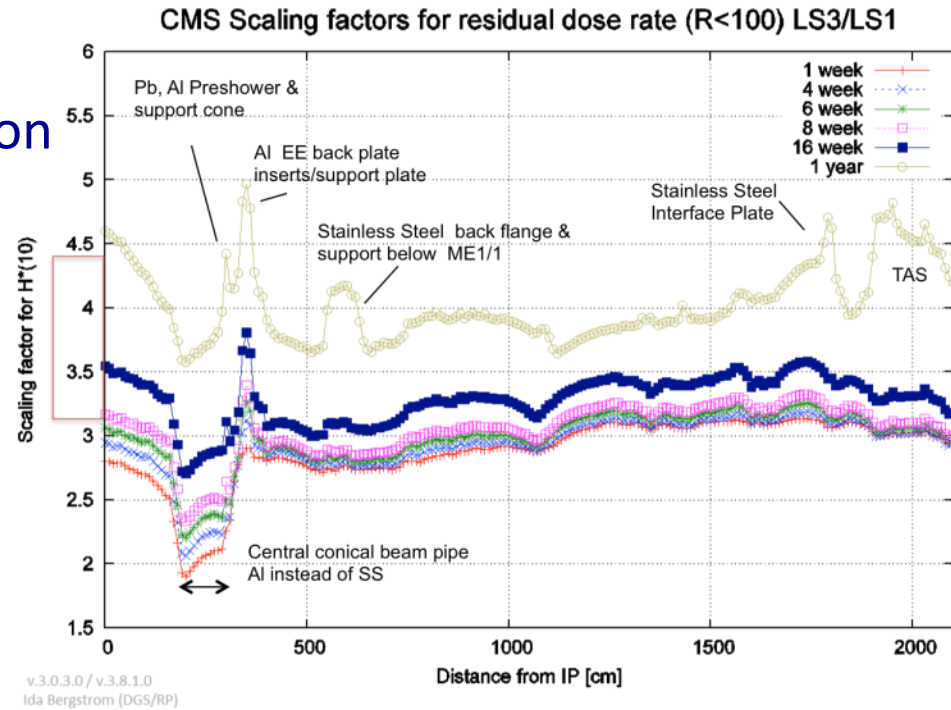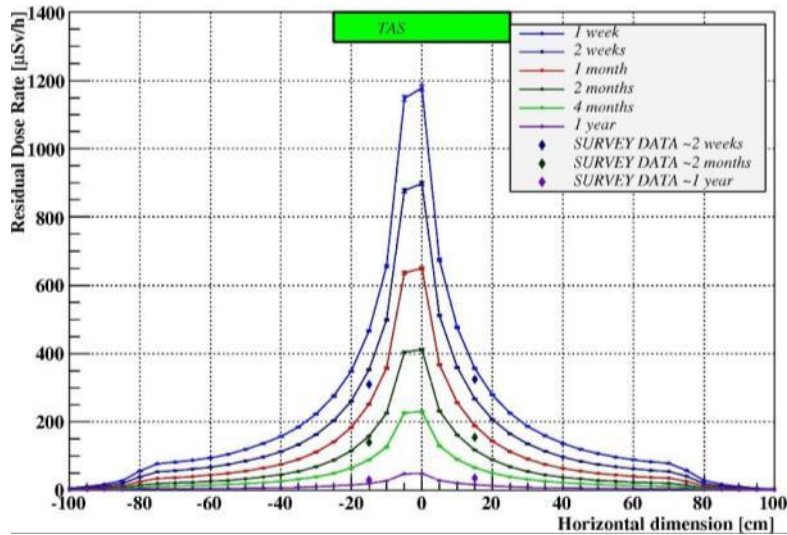

ATLAS “design” - R < 100 cm

CMS “design” - R < 100 cm

Dose LS#/LS1	1 wk	4 wks	6 wks	8 wks	16 wks	1 year	Dose LS#/LS1	1 wk	4 wks	6 wks	8 wks	16 wks	1 year
LS2	1.9	1.9	1.9	2.0	2.3	2.7	LS2	2.0	2.0	2.1	2.2	2.5	3.4
LS3	2.9	2.9	3.0	3.1	3.3	4.0	LS3	3.1	3.2	3.3	3.4	3.8	5.0
LS4	15	16	16	17	18	21	LS4	17	18	18	19	20	26
3000 fb ⁻¹	15	16	16	17	21	27	3000 fb ⁻¹	17	18	18	19	23	34

2nd ECFA HL-LHC... Physics goals and performance reach

Many areas of progress shown at the workshop - a unique opportunity for common theory and experiments community discussions - general feeling that this should continue

- Experiments continue substantial efforts in full simulation to optimize upgrade conceptual designs
 - ATLAS and CMS to assess PU mitigation capabilities
- Improvements of performance reach projection studies with detector parameterization
- Progress of work to reduce theory errors, long endeavour but prospect to halve the errors - following the increase in integrated luminosity
- Proposals to investigate new physics channels
- Implementation of theoretical models in performance reach studies and studies of model interpretation if discoveries




Physics Studies - Higgs

Aim to measure as many Higgs couplings to fermions and bosons as possible to really test if this is the SM Higgs or a pointer to the BSM physics we know has to exist







HL-LHC (3000 fb⁻¹): as a Higgs factory:

- 170M Higgs events produced
- > 3M useful for precise measurements (more than or similar to ILC/CLIC/TLEP)
- LHC $gg \rightarrow H$ (50pb); $e^+e^- \rightarrow ZH$ (0.2-0.3pb)


	Higgs bosons at $\sqrt{s}=14\text{TeV}$
HL-LHC, 3000fb ⁻¹	170M
VBF (all decays)	13M
ttH (all decays)	1.8M
H->Zγ	230k
H->μμ	37k
HH (all)	121k

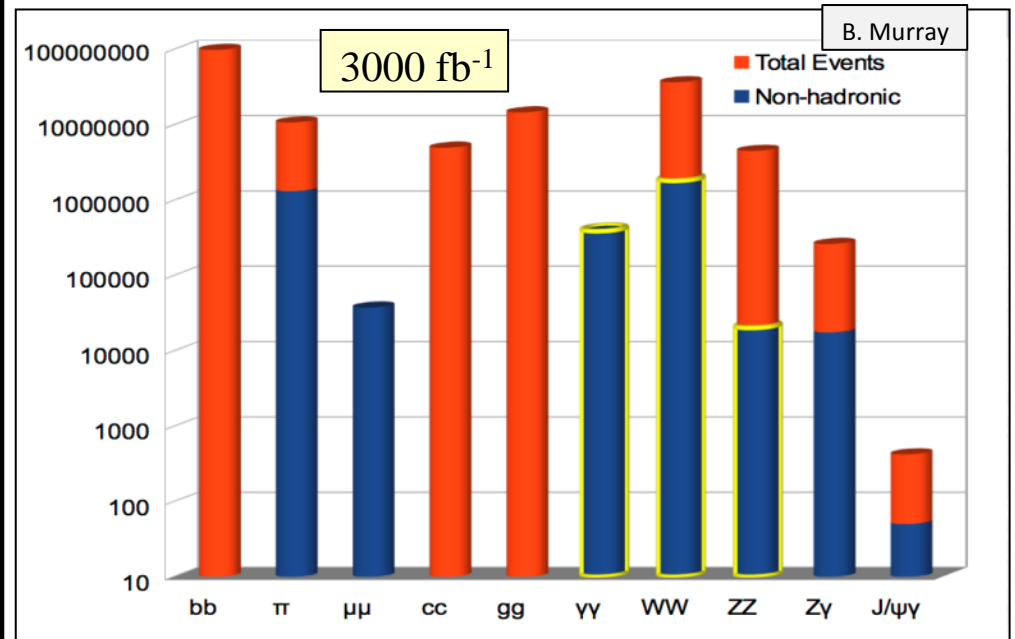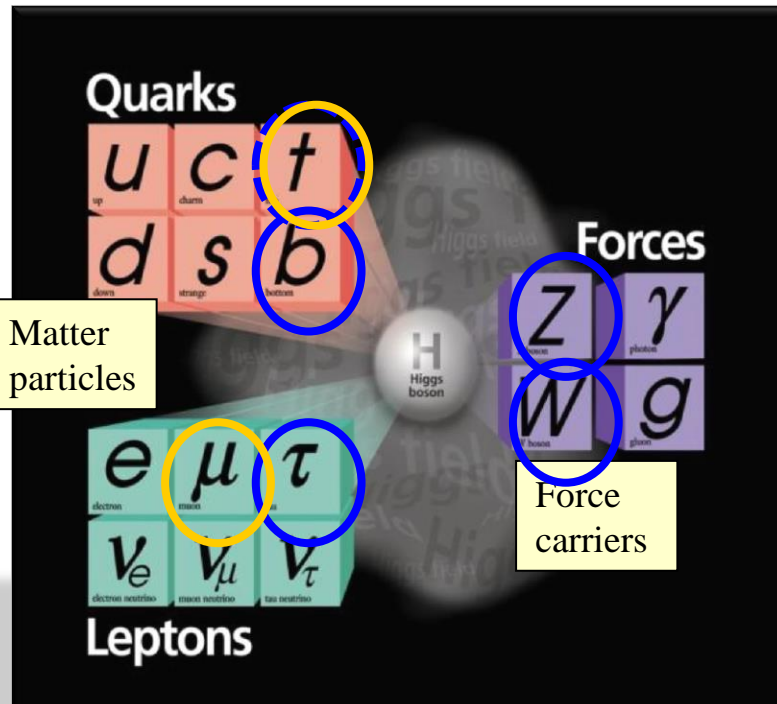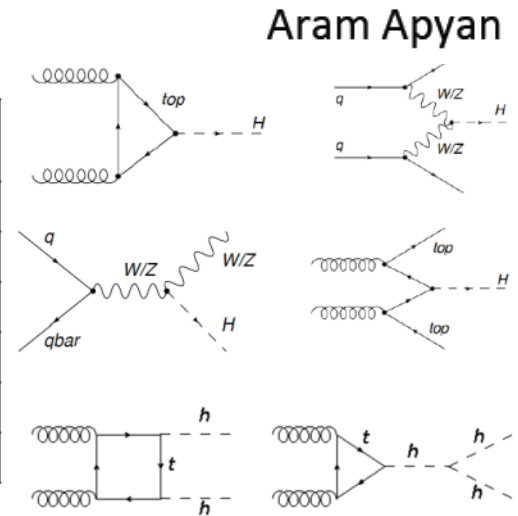

CMS Projection

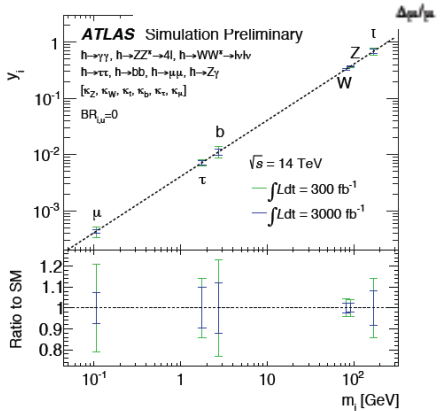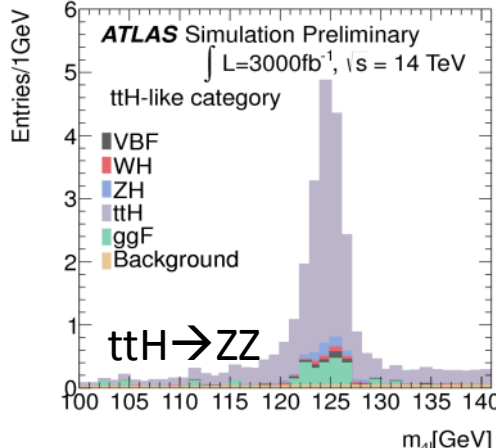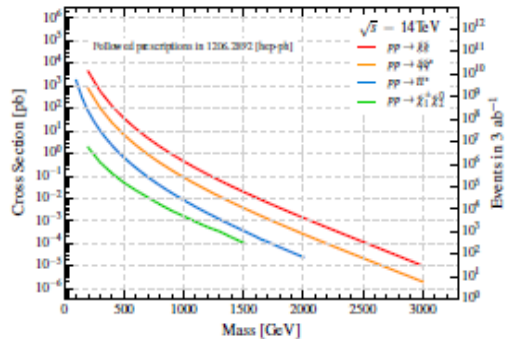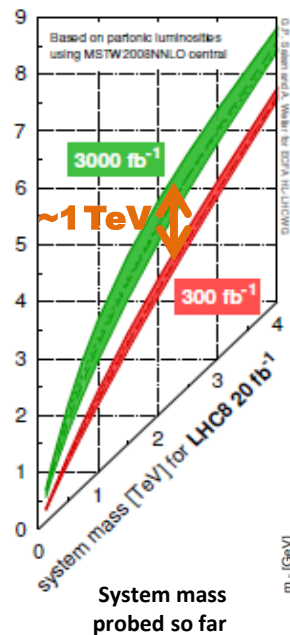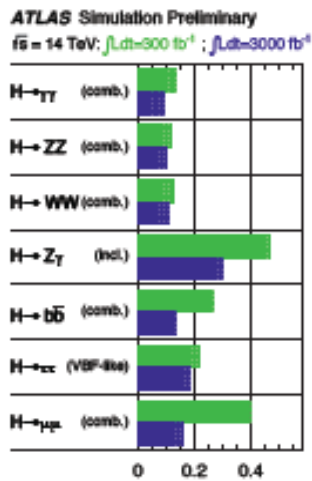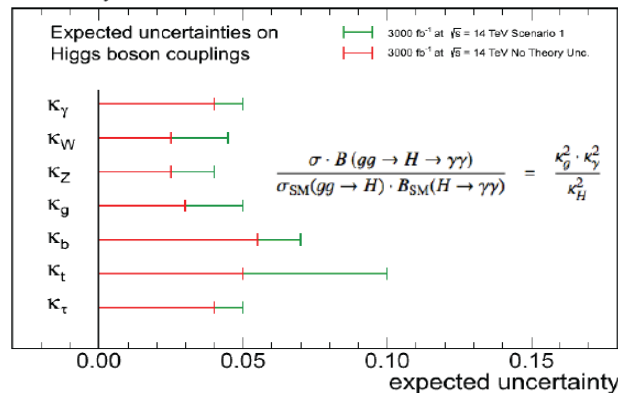

NLO SUSY Cross-section calculations

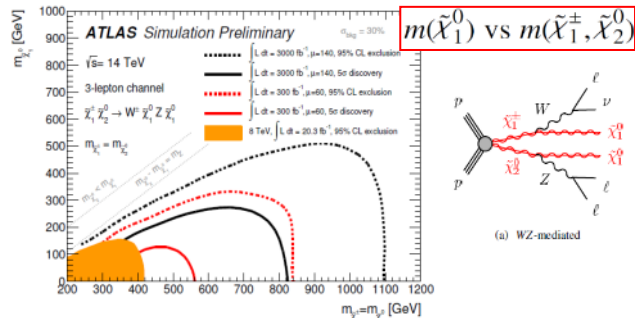

SUSY Limits at 300fb⁻¹ and 3000fb⁻¹



Improvements in coupling ratios with HL-LHC. (Depends on systematics and theory uncertainties)

Process / Selection Stage	HH	ZH	ttH	bbH	$\gamma\gamma$ +jets	γ +jets	jets	t \bar{t}
Object Selection & Fit Mass Window	22.8	29.6	178	6.3	2891	1616	292	113
Kinematic Selection	14.6	14.6	3.3	2.0	128	96.9	20	20
Mass Windows	9.9	3.3	1.5	0.8	8.5	6.3	1.1	1.1



CMS HH studies. Both experiments close to reaching required sensitivity but very difficult channel.

Much more progress, particularly on flavour, HI and SM physics than time here to cover


CMS PAS FTR-13-014

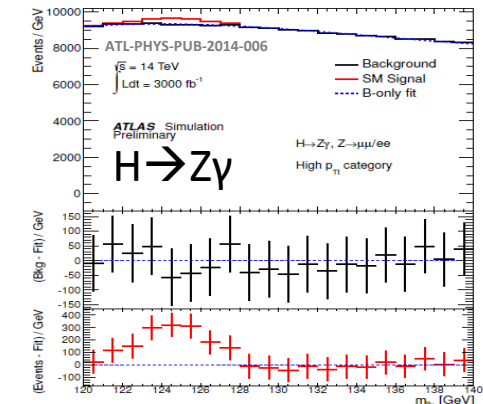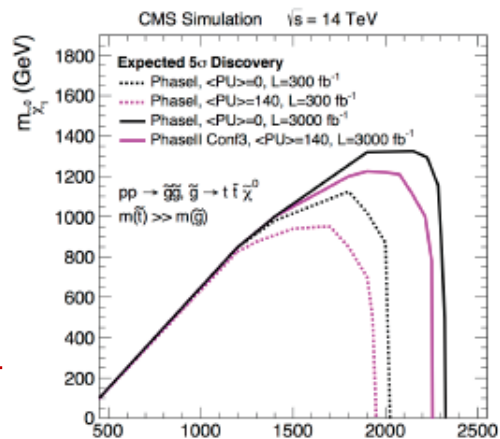


Beam luminous region different lengths in baseline & Crab Kissing (CK) scheme studies along with very high <PU>

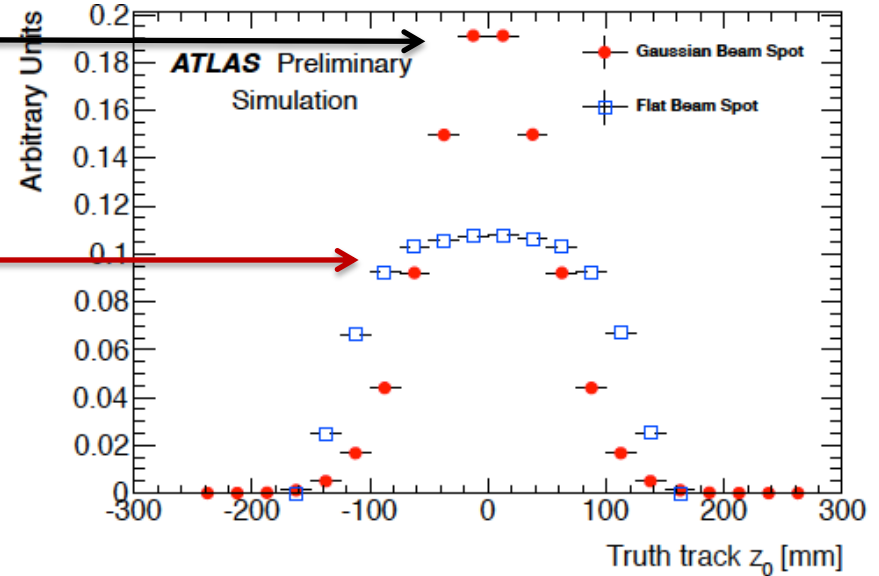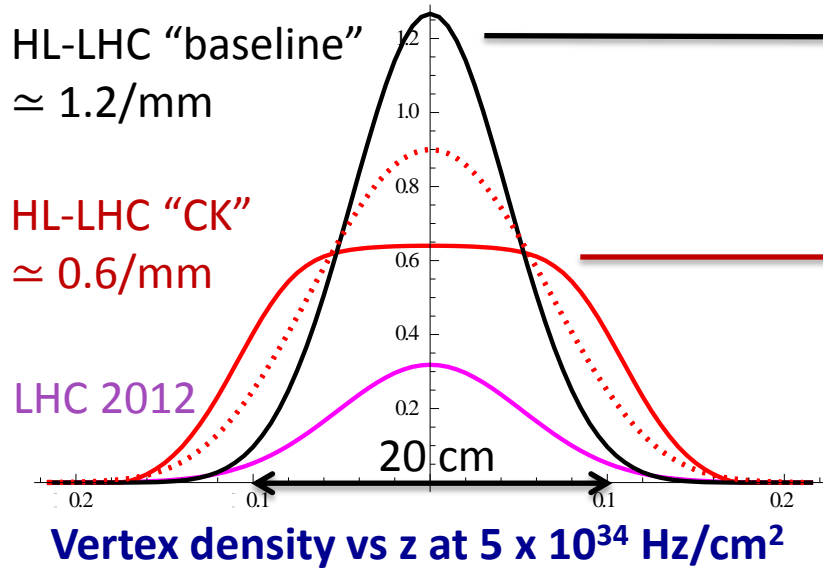


Similar results for ATLAS & CMS

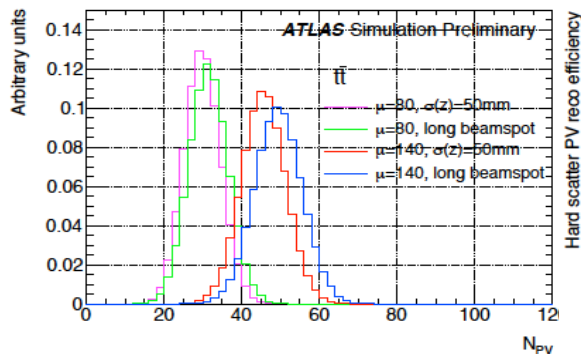

10% increase in effic. for all PVs

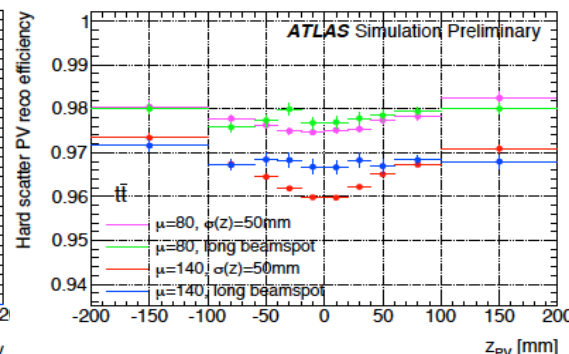


Improvement becoming more pronounced at $\mu=140$ for $t\bar{t}$ PVs

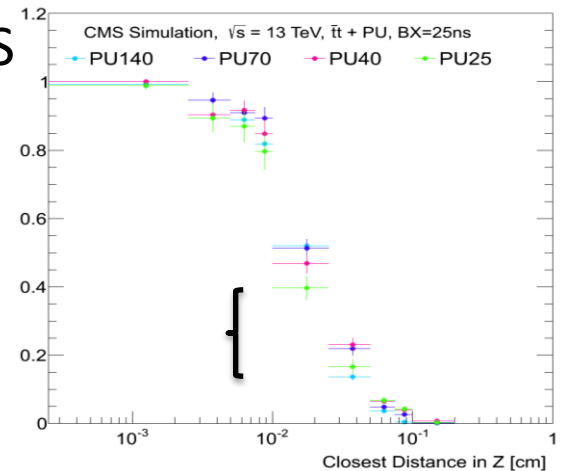



Rate of merged PVs increases with PU density

Beam luminous region different lengths in baseline & Crab Kissing (CK) scheme studies along with very high $\langle \text{PU} \rangle$

All PVs

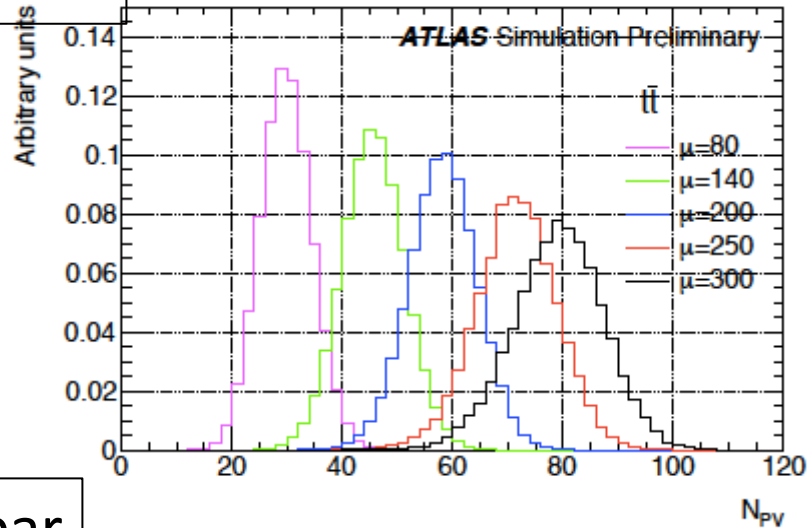Gaussian, μ [80,300]

ttbar

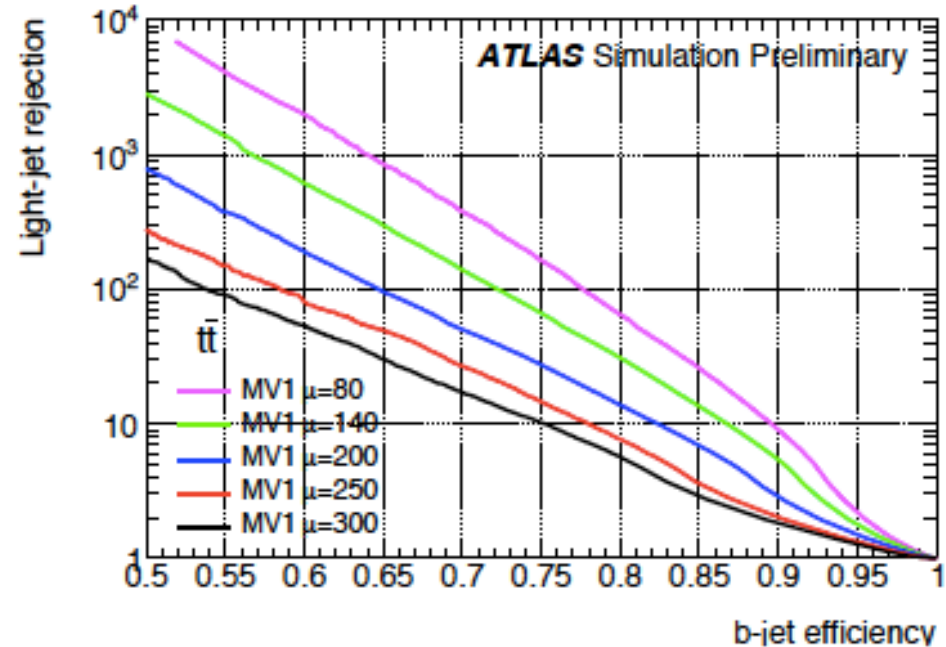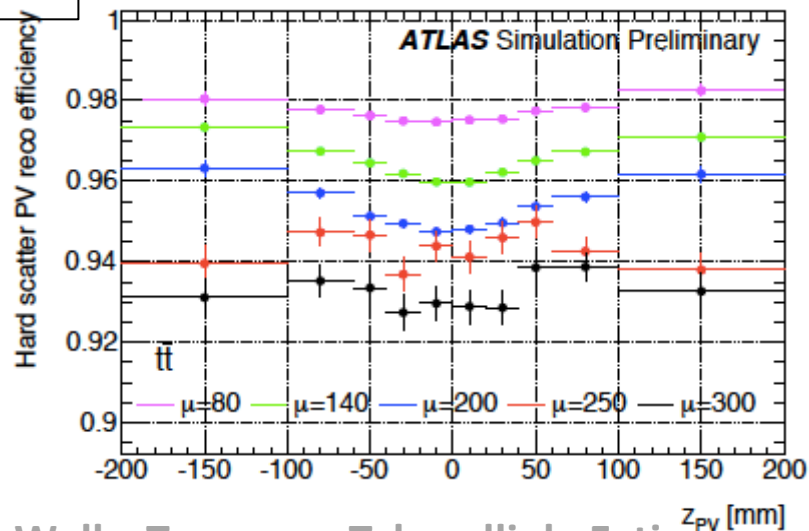

Substantial degradation is observed with increasing $\langle \text{PU} \rangle$ but this strongly depends on pixel detector design & resolution – not yet fully defined




CMS Phase 2 Possibilities at Large η

Muons

Complete RPC coverage in forward region (new GEM/RPC technology)
 Nominal coverage to $\eta \sim 2.4$
 Investigate Muon-tagging up to $\eta \sim 4$
 (pending calorimeter investigations)

New Tracker

Radiation tolerant - high granularity - less material
 Tracks in hardware trigger (LI)
 Coverage up to $\eta \sim 4$

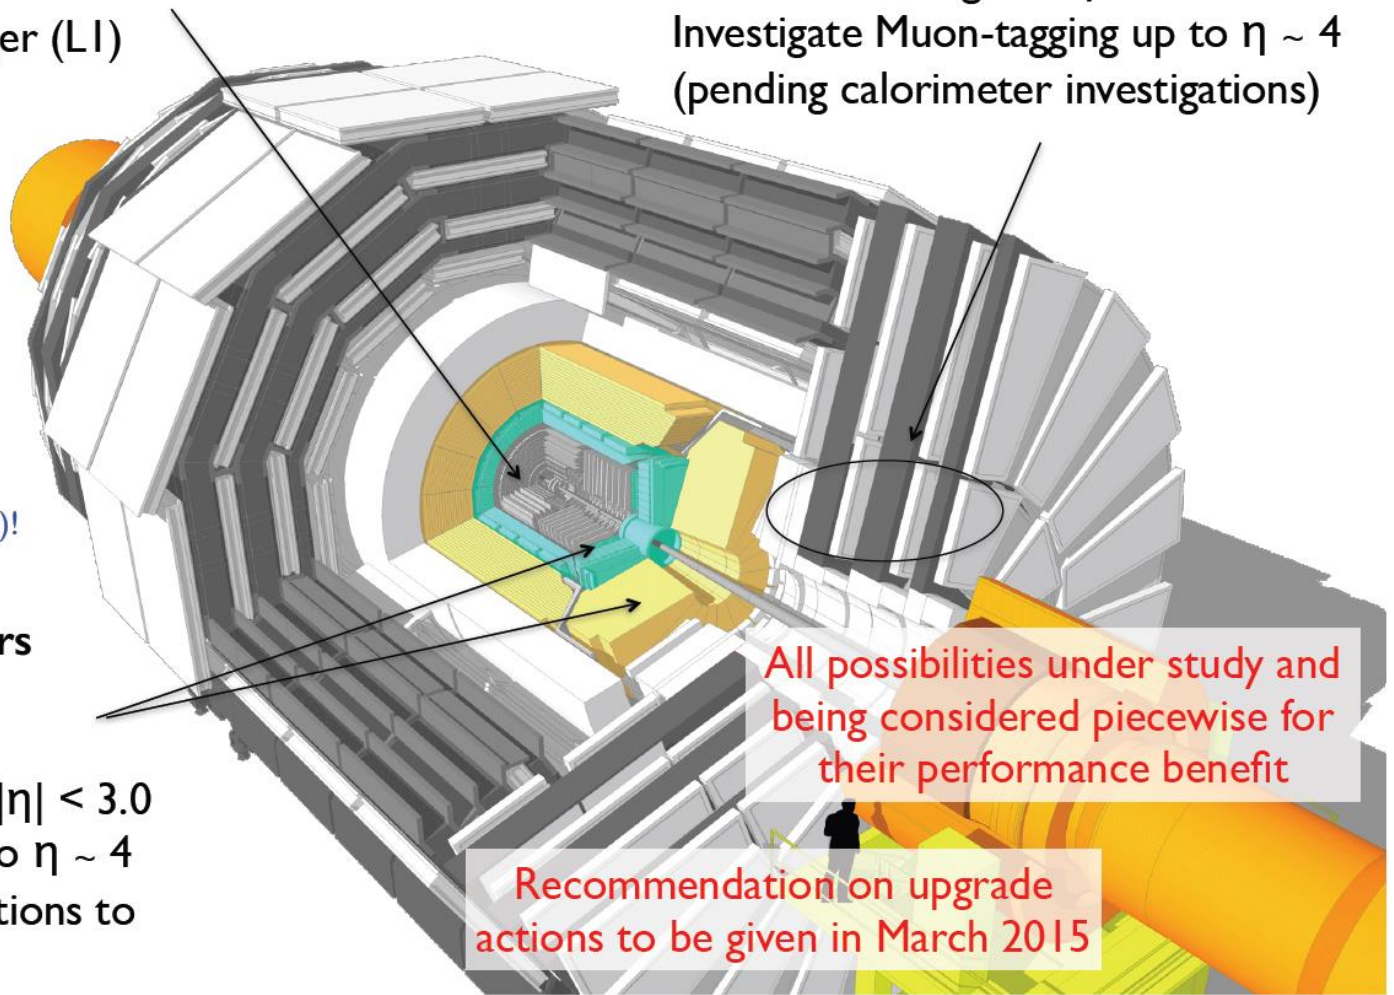

See talks by:
 Roger Rusack (Si HGCal),
 David Petyt (Shashlik + HE Rebuild)!



New Endcap Calorimeters

Radiation tolerant - high granularity
 Nominal coverage $1.5 < |\eta| < 3.0$
 Investigate coverage up to $\eta \sim 4$
 Investigate fast timing options to augment Endcap

All possibilities under study and being considered piecewise for their performance benefit

Recommendation on upgrade actions to be given in March 2015



ATLAS Phase 2 Possibilities at Large η

Extend ITK tracker to $2.5 < \eta < 4$ + L0/L1 Track Trigger

sFCal with improved segmentation and reduced pulse length in $3.1 < \eta < 4.9$

All possibilities under study and being considered piecewise for their performance benefit

Muon spectrometer extensions to $2.7 < \eta < 4.0$

Recommendation on upgrade actions to be given in March 2015

Segmented timing detectors in front of EMEC/FCAL in $2.5 < \eta < 4$ (MBTS location) (~100 μ m; ~10ps)

Options:

- 1 pixelated tag chamber before EC toroid
- 2 chs (before/after EC toroid)
- 2 chs +1.5T warm toroid

Lindsey Gray, FNAL

See Tommaso Tabarelli's talk for more information on fast timing!








High η Conclusions

- An active program of forward detector research is in progress at both ATLAS and CMS
 - Results analyzing both the depth of need and impact on physics performance of upgrades are arriving
 - Each subdetector upgrade is being considered individually to arrive at optimized sets of upgrades for each detector
- Forward tracking upgrades in both detectors play a prominent role in driving the physics motivation for these upgrades, as shown in Higgs physics
 - ATLAS demonstrates significantly improved Jet/MET performance using forward tracking to mitigate the effects of large pileup
 - Significant gain in sensitivity to VBF production of Higgs
 - CMS upgraded tracker η coverage and granularity similar to ATLAS
 - Excited to see full physics impact of the upgraded tracker combined with the higher granularity endcap calorimeter upgrade options
- ATLAS extended tracker + muon system increases ZZ to 4μ acceptance by up to 35%
- Stay tuned, exciting times are ahead of us!
 - Both ATLAS and CMS plan to finalize studies by March 2015

Hybrid Pixel Detector R&D for LHC Upgrades


HL-LHC (3000fb⁻¹) implies doses up to 2×10¹⁶n_{eq}/cm² and 1Grad (also up to 200 collisions per beam crossing). However n-in-n, n-in-p planar, 3D and diamond sensors are useable after such doses

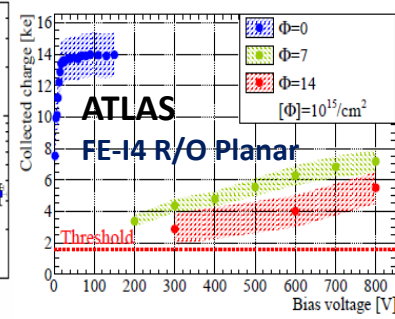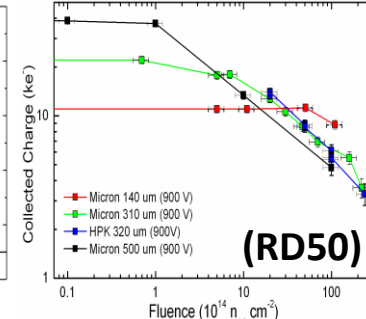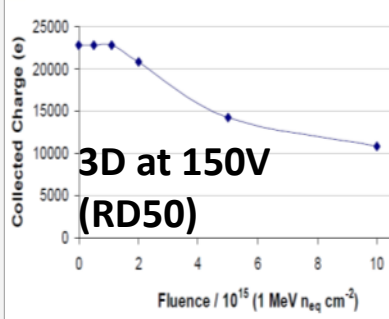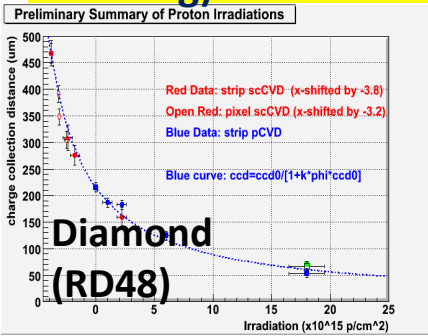

→ The mechanisms leading to larger than expected signals (also seen in 3D sensors) is mostly understood and is even now being exploited (doping profile, trenches) to enhance the signals after radiation


Propose to use 65nm CMOS ASIC technology to allow pixel sizes of 55μm×55μm (LHCb VeLoPIX 130nm) or ~50μm×50μm (RD53)

Large format sensors needed to tile larger areas and examples have been prototyped with a number of potential suppliers


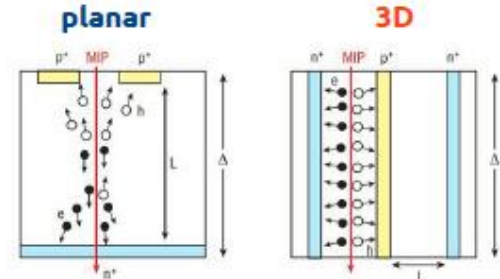


(3D sensors installed in ATLAS IBL)


26 planes of sensor
5.1mm to beam

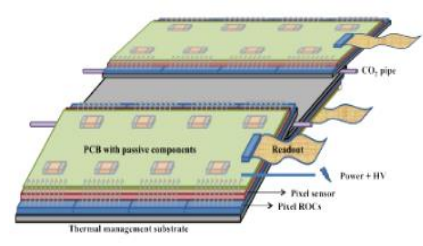

CMS Phase-II Pixel Module Concept







LHCb
VeLoPix
Module
Design

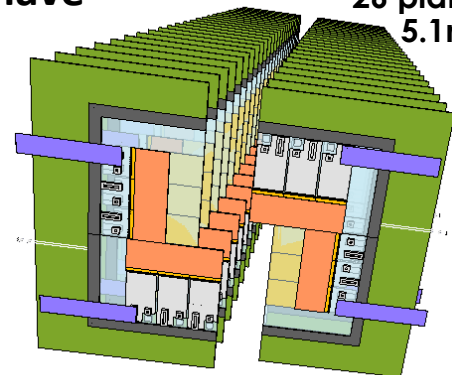

Paula Collins



Hybrid Pixel Detector R&D for LHC Upgrades

- Irradiated single and quad n-in-p pixel modules (for higher radii) studied in test-beam with excellent performance

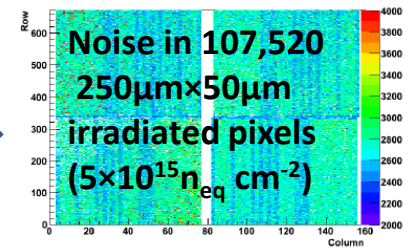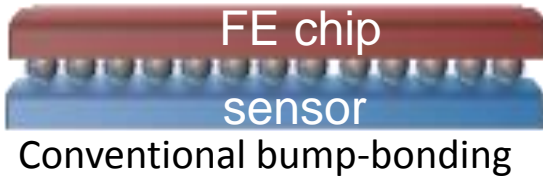

- Micro-channel in-silicon cooling (NA62, ALICE, LHCb)
- Need custom rad-hard, low power, fast opto-electronics



LHCb VeLoPix Module

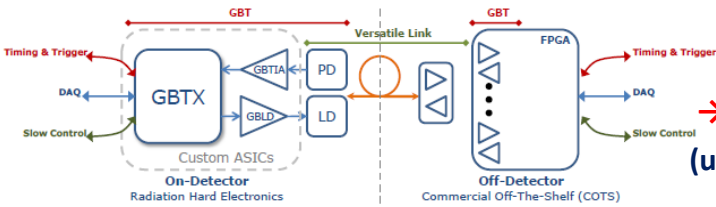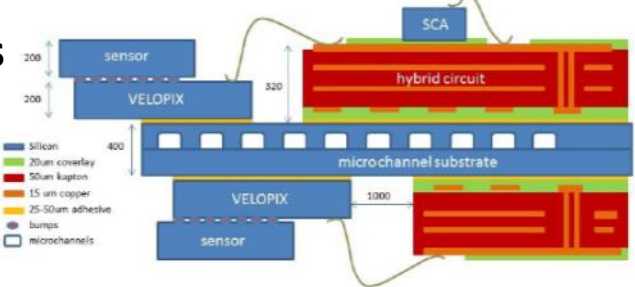



→ IpGBTx, + VTTx
(up to 10 Gbit/s and versatile link)

- Low mass structures, services (electrical link to optical for innermost layers), LV (serial powering for innermost layers, DC/DC elsewhere), CO₂ cooling...

DC to DC converter to step down 10V → 2.5V

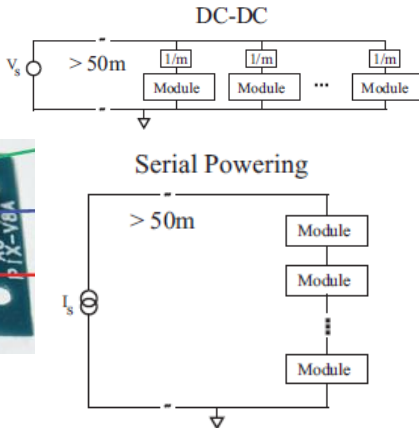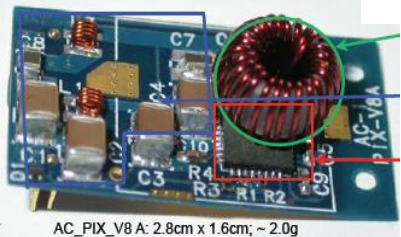


ATLAS Phase-II Prototype Barrel Pixel Supports




Paula Collins,
Maurice Garcia-Sciveres

ATLAS





MAPS/CMOS Detector R&D for LHC Upgrades

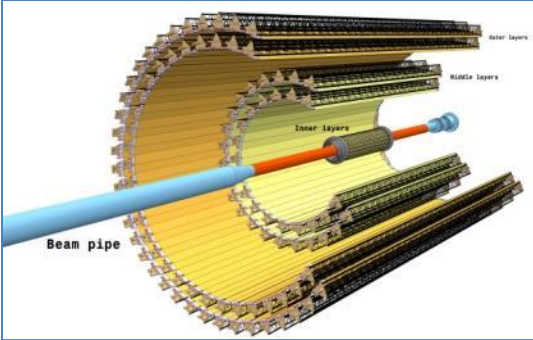


MAPS for ALICE



Priority is ultra-low radiation length due to the low p_T of the decay products of interest.

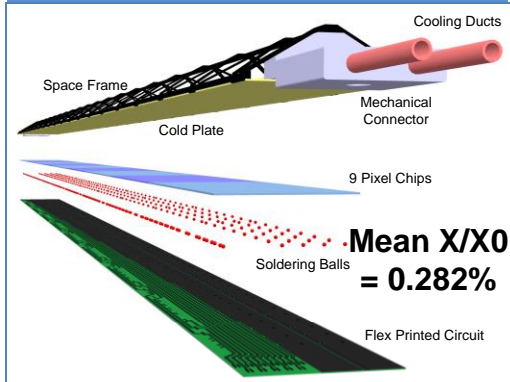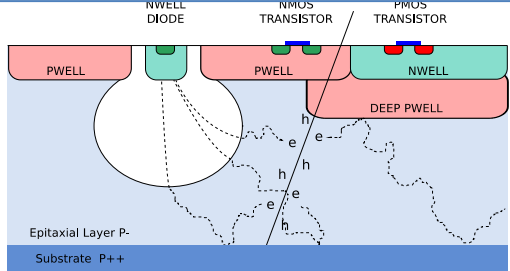

MAPS installed at STAR (RHIC)

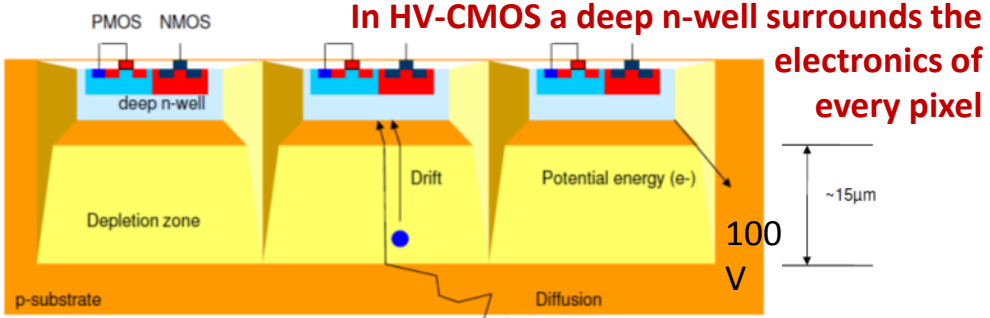

In HR/HV-CMOS charge collection through drift greatly improves radiation hardness and speed - use at pp collision rates → HL-LHC Upgrades? Can consider pixels with CMOS-based pixel electronics either monolithic or capacitively coupled pixel detectors (CCPDs) based on sensor implemented as a smart diode array with wafer bonding or glued to ASICs (no bumps)

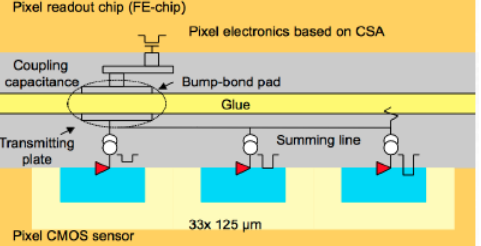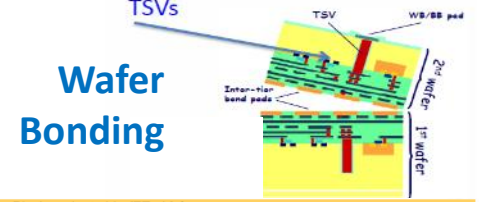


Target:
 Pb-Pb up to 13 nb^{-1}
 → 8×10^{10} events
 pp $\geq 6 \text{ pb}^{-1}$
 → 14×10^{10} events
 Read-out all Pb-Pb (50 kHz)
 ($L = 6 \times 10^{27} \text{ cm}^{-1}\text{s}^{-1}$)

Some key fundamental issues around HV/HR-CMOS sensors are not yet fully understood, in particular the charge collection and efficiencies (especially after irradiation) which all need further R&D. Also a reasonable sized detector still needs to be demonstrated in particle beams

Silicon Strip Detectors for Large Area Tracking

HL-LHC Need radiation hardness of current n-in-n pixel sensors at fraction of the cost

→ **n-in-p technology**

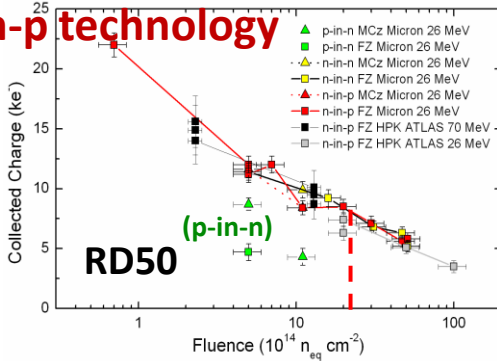


Many large area prototypes produced

10cm×10cm
4×1280 strip
n-in-p sensor


Interest in larger (8") wafers particularly for forward regions

ATLAS

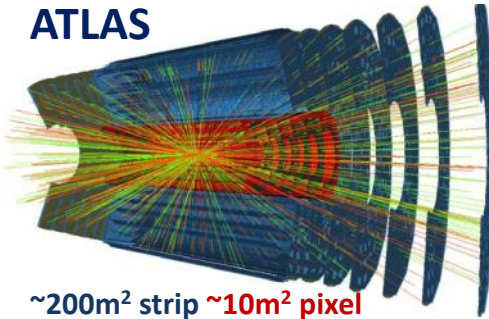




~200m² strip ~10m² pixel

CMS proposes paired layers for fast track p_T selection for input to level-1 trigger

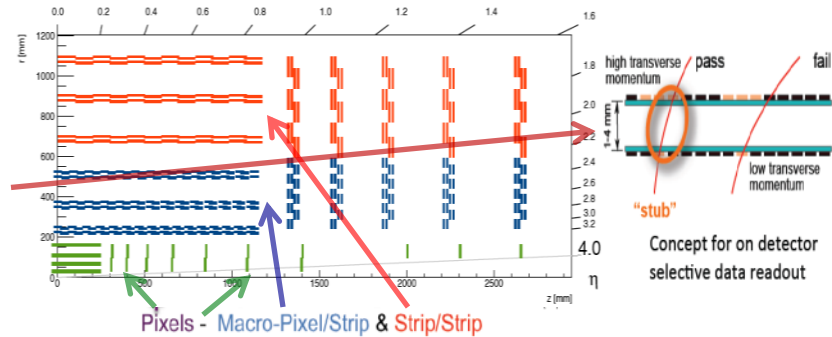

Concept for on detector selective data readout

ATLAS uses paired strip modules with small angle stereo (for z determination) around a central structure with embedded cooling (Trigger: Level-0 trigger objects from calorimeter and muon systems plus tracker information available to level-1 trigger)

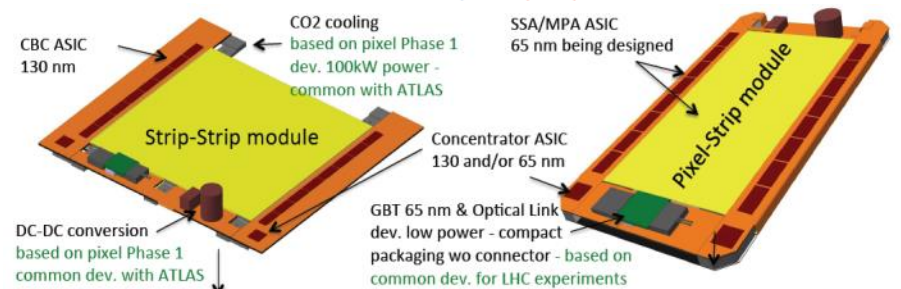

CMS


Flex hybrid - Flip-Chip assembly - possibly TSV for inter-chip connection

Strip-Strip Module Prototype

Silicon Strip Detectors for Large Area Tracking



HL-LHC Need radiation hardness of current n-in-n pixel sensors at fraction of the cost

→ **n-in-p technology**

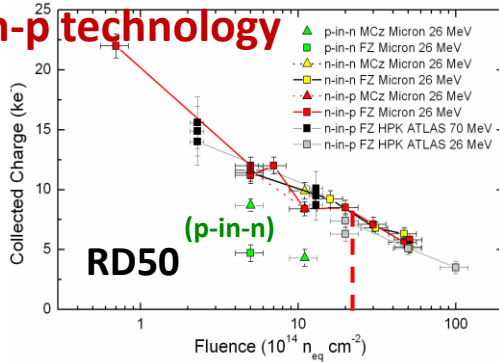


Many large area prototypes produced

10cm×10cm
4×1280 strip
n-in-p sensor

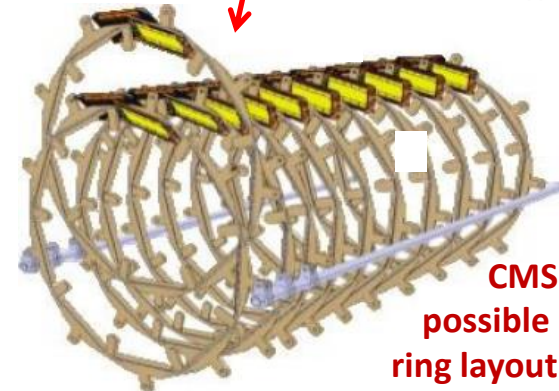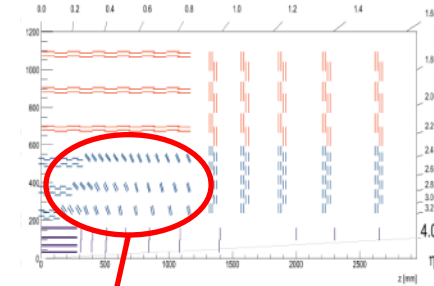

12 module ATLAS prototype stave: 61440 channels ~600e noise

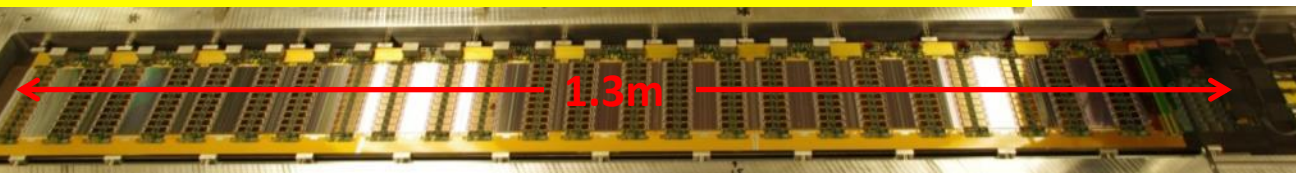


Powering (DC/DC or Serial), HV multiplexing, CO₂ embedded cooling, low mass modular supports & services




4 row wire bonds



STVI0 DC-DC on module






Thermo-Mechanical Module with compact DCDC converter



Gaseous Detector R&D (including micro-pattern)

Main R&D activities for **ATLAS** and **CMS** are for new muon chambers in the forward directions.


- Increase rate capabilities and radiation hardness
- Improved resolution (online trigger and offline analyses)
- Improved timing precision (background rejection)

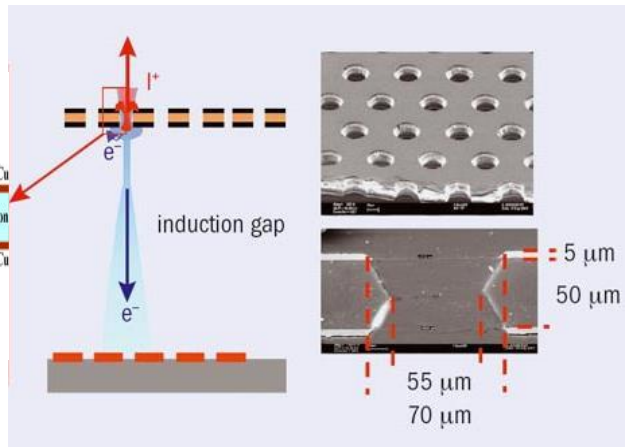



Technologies

- Gas Electron Multiplier detectors (**LHCb** now, **ALICE TPC** - CMS forward chambers)
- Micro-Megas and Thin Gap Chambers (TGCs) (**ATLAS** forward chambers)
- Resistive Plate Chambers (RPCs) - low resistivity glass for rate capability - multi-gap precision timing (**CMS** forward chambers)

GEM stack for ALICE TPC R/O

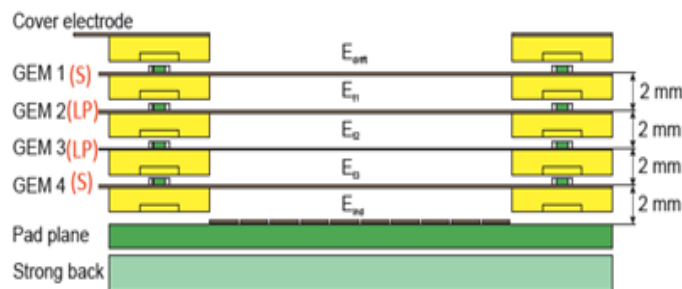


4 layer stack to target Ion backflow < 1% given continuous readout at 50kHz

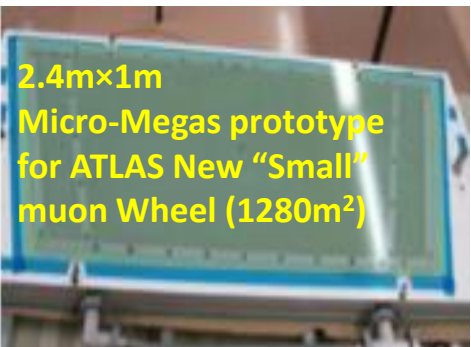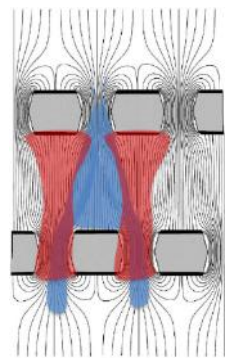


2.4m×1m Micro-Megas prototype for ATLAS New "Small" muon Wheel (1280m²)

CERN RD51 common micro-pattern gas detector R&D

Need to develop commercial large-scale production capabilities

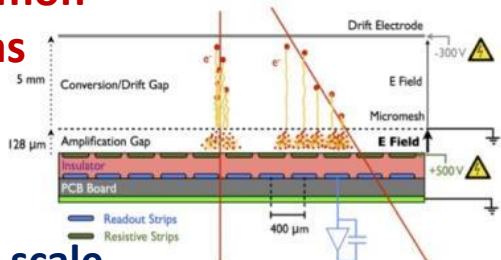


Micro-Megas Principle

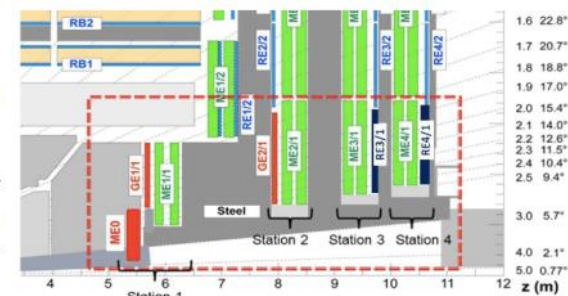

CMS triple-GEM detectors (double stations) in 1.5<|η|<2.2 endcap region





Scintillating Fibre Detector R&D

Large scale SciFi tracker for LHCb

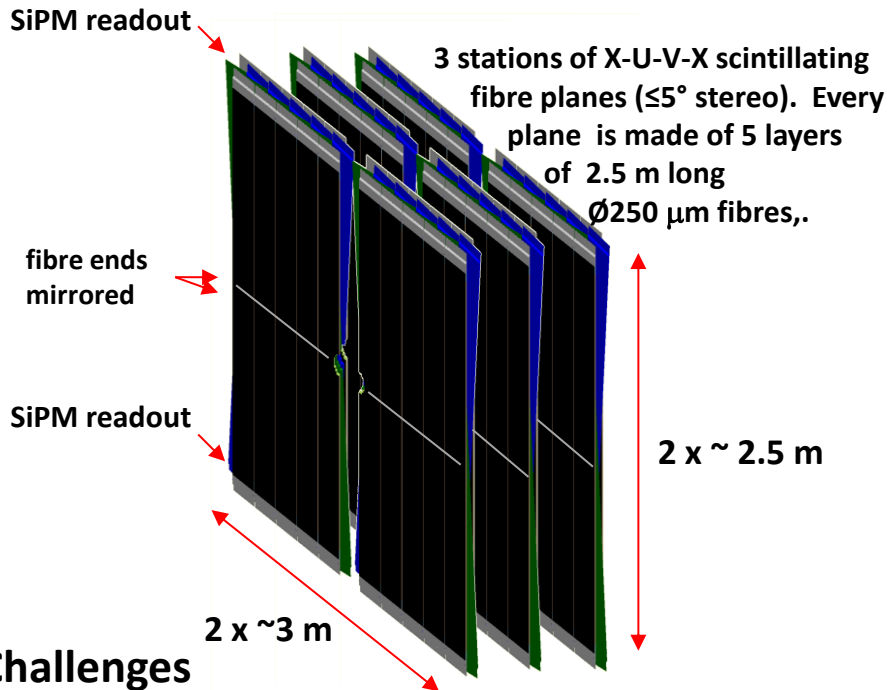

Challenges

- Large size – high precision
- $O(10,000 \text{ km})$ of fibres
- Operation of SiPM at -40°C

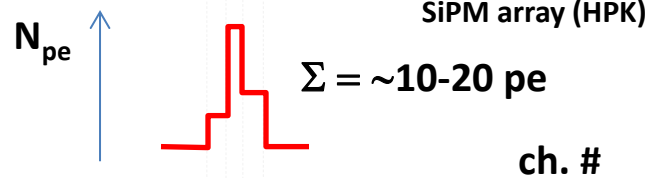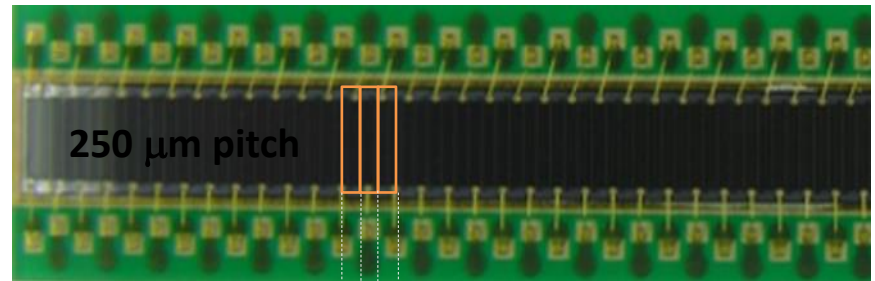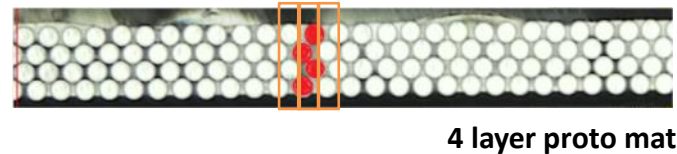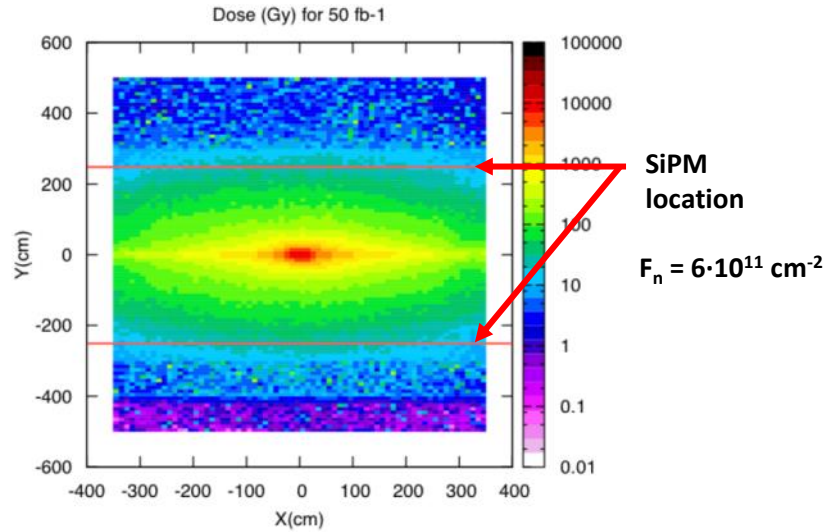

3 million (SCSF-78 MJ baseline) scintillating fibres with up to 30kGy non-uniform exposure

Christian Joram

R&D for Sampling Calorimeters at HL-LHC

LHC Upgrades:

ALICE new forward calorimeter (FoCal)

R&D on Tungsten-Silicon sampling
Electromagnetic Calorimeter





LHCb minor replacement in central part
of ECAL due to radiation damage

ATLAS investigating replacement of LAr forward
calorimeter (FCAL) with greater granularity

CMS need to replace ECAL and HCAL end-cap
calorimeters due to radiation damage

Limitation mostly from loss of transparency with radiation


LYSO or CeF₃ offer very high light yield. One CMS proposal for ECAL
is a compact W+LYSO/ CeF₃ Shashlik using quartz capillary with WLS
core and readout using GaInP

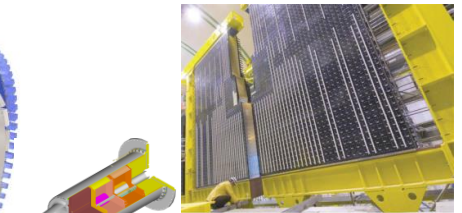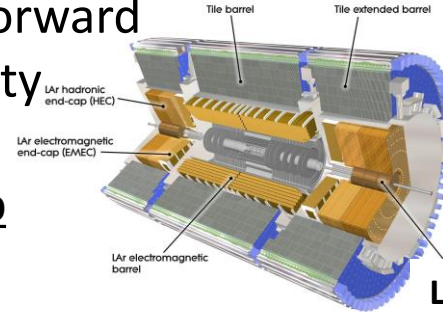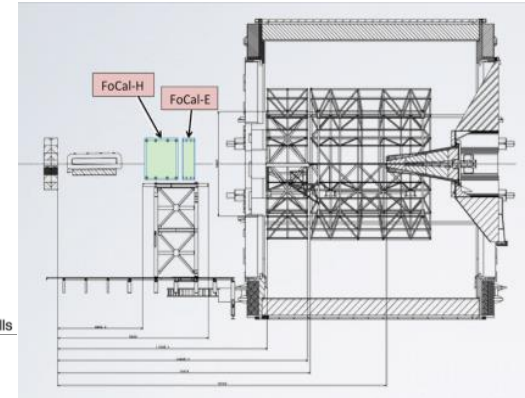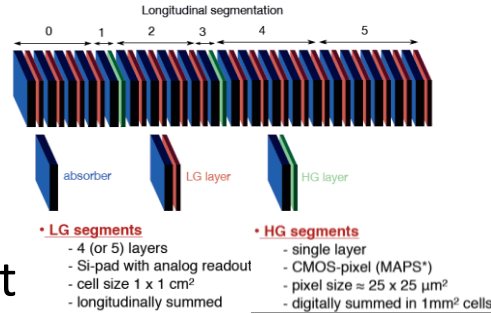



LHCb ECAL Tiles

LAr FCAL



CMS scintillator-based HCAL
with 30% of volume replaced
by finger tiles to reduce
optical path and attenuation

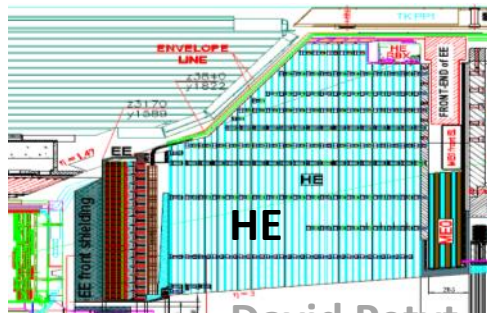


David Petyt

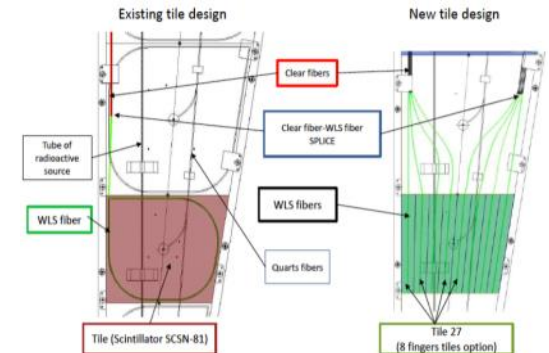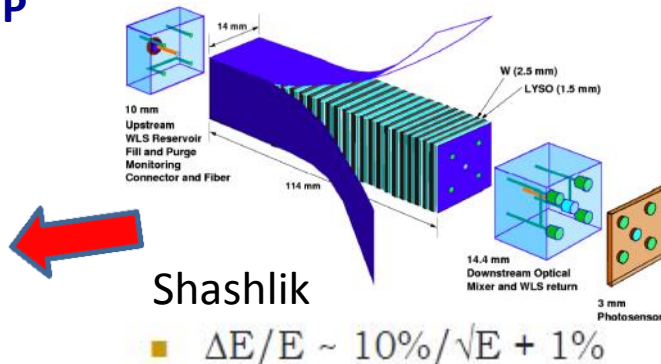

R&D for Sampling Calorimeters at HL-LHC

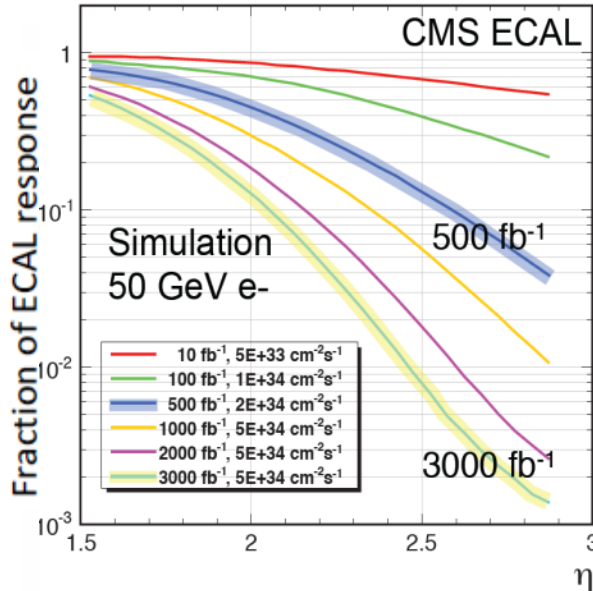



CMS PFA Upgrade Option high granularity calorimeter

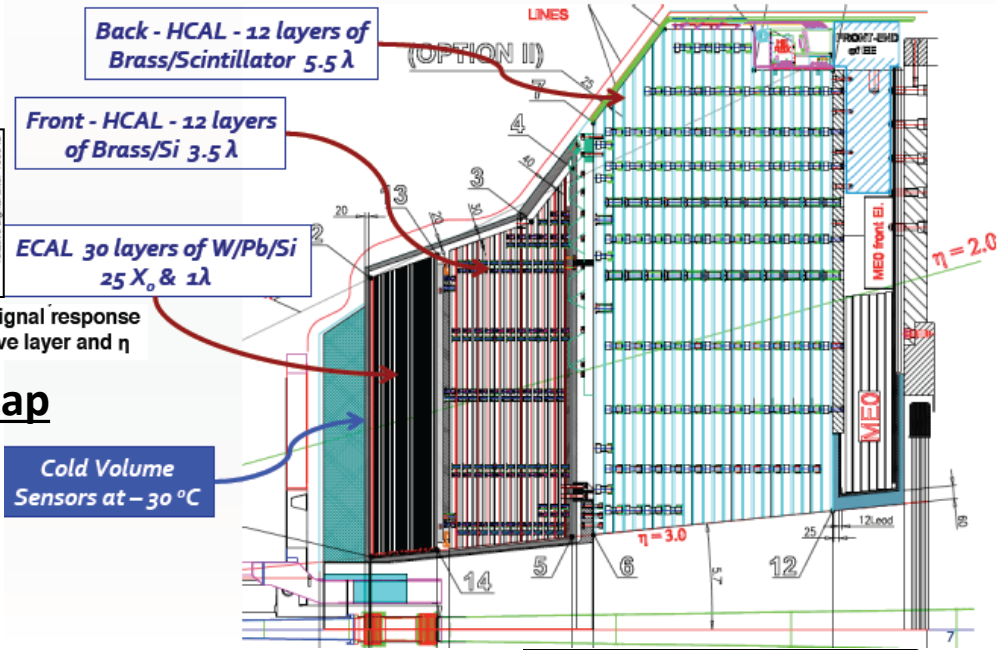

CMS need to replace ECAL and HCAL end-cap calorimeters due to radiation damage


Silicon-W/Pb/Cu **ECAL** (25 X_0 , 1 λ)
 and silicon-brass **front HCAL** (3.5 λ) 8.7 M channels, pad sizes 0.9 cm² or 0.45 cm² depending on η
 Scintillator-brass **backing HCAL** (5.5 λ , lower radiation zone)

420 + 250 m² Silicon :
 e/ γ resolution $\sim 20\%/\sqrt{E} + \leq 1\%$

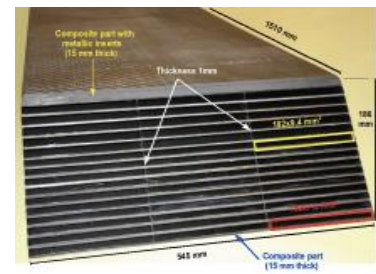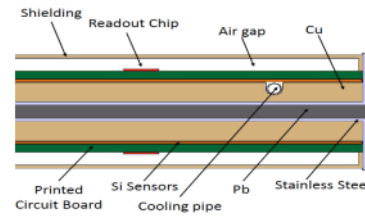


Silicon pads to withstand doses up to 10¹⁶n/cm² and several MGy



Particle ID and Timing Detectors

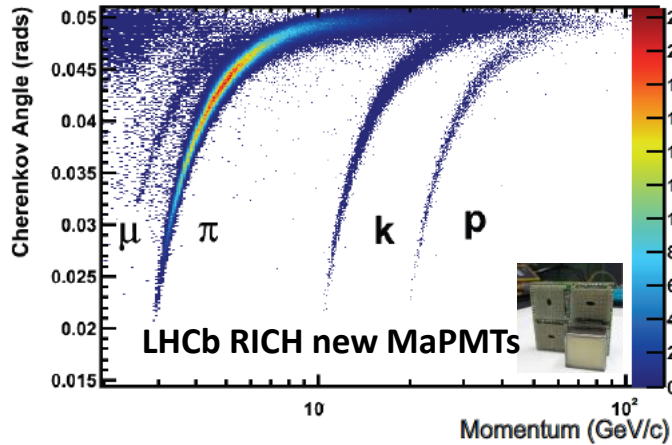



LHCb RICH system needs upgrades for triggerless operation at higher rates:
 $\mathcal{L} = 2 \times 10^{33} \text{ cm}^{-2} \text{ s}^{-1}$

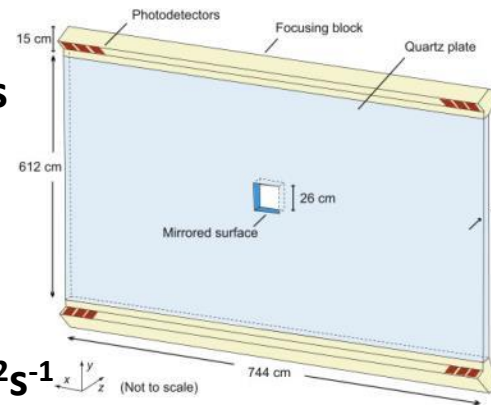


Also Time Of internally Reflected Cherenkov (TORCH) $\sim 15 \text{ ps}/\text{track}$

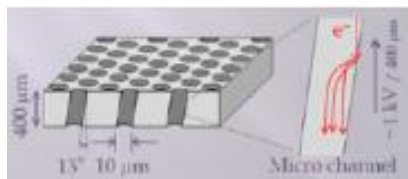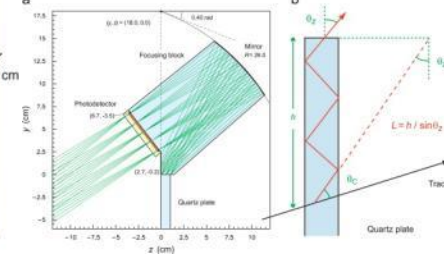

Multi-channel plate



ATLAS AFP (MCP-PMT) Timing Detector for far-forward proton tagging 6 independent quartz bars combined $\rightarrow 14 \text{ ps}$

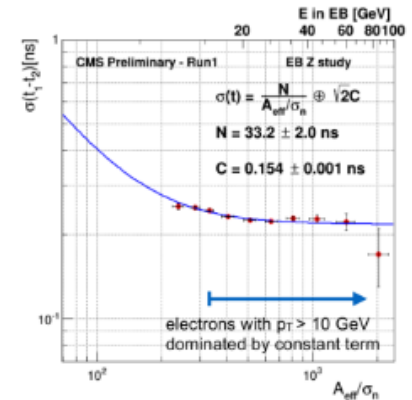

CMS crystal calorimeter shows 150ps in operation (test beam down to 20ps)


Other technologies: high doped silicon (RD50), diamond (RD42), Multi-gap RPC,..

For 140 PU and "crab kissing", HL-LHC can deliver collision spread up to $\sim 1 \text{ ns}$


\rightarrow Use 20-30ps timing to better associate high p_T objects to vertices

Mitigation of neutral PU with fast timing devices is being investigated - may depend on collision time distribution

HL-LHC baseline:
Collision time RMS
~160 ps (*)


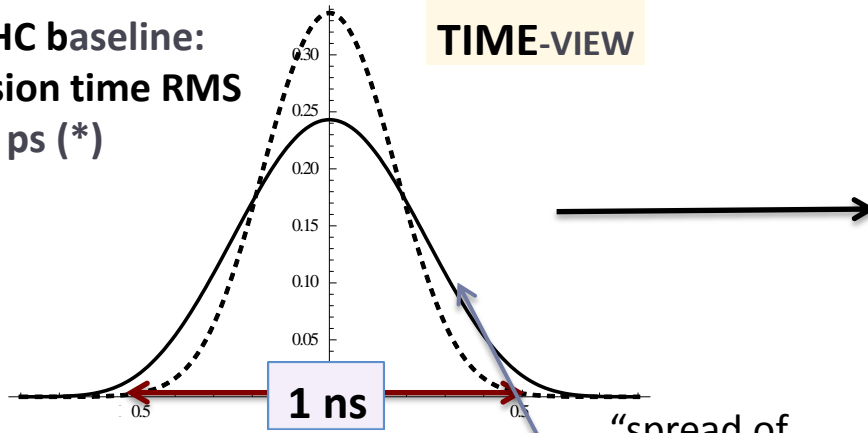


Crab kissing:
Collision time RMS
~100 ps (*)

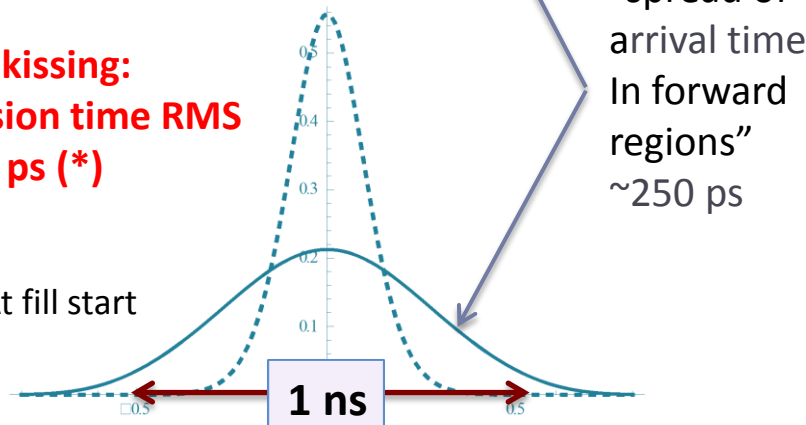

(*) At fill start

Also need more studies in PFlow reconstruction framework

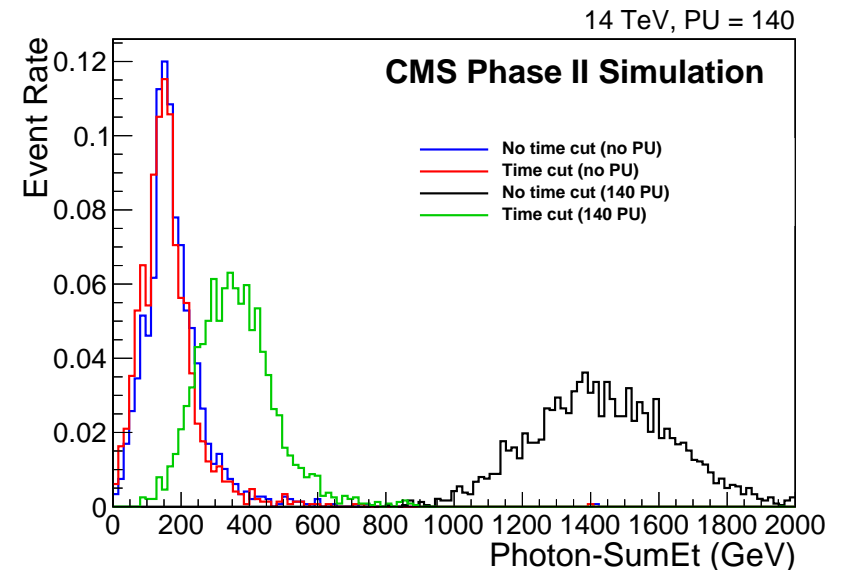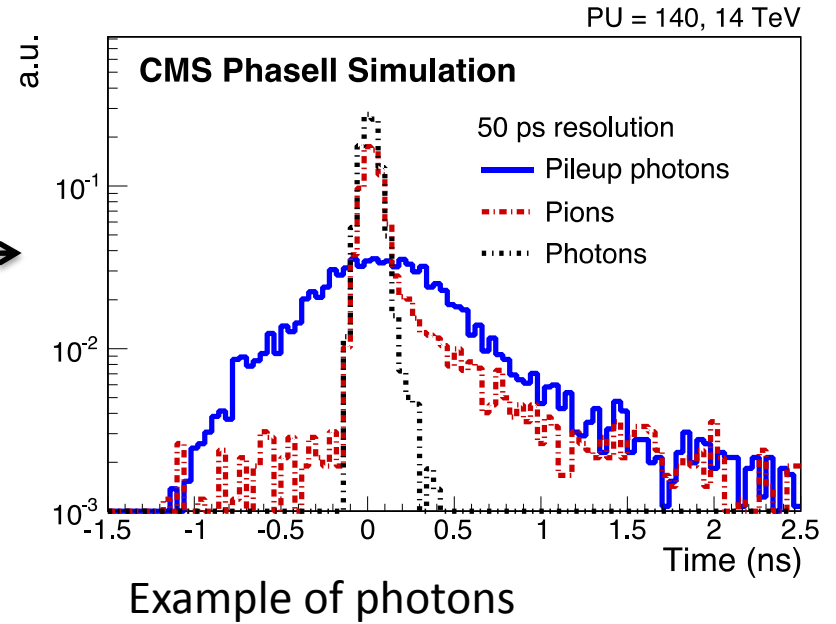

2nd ECFA HL-LHC... R&D for Mechanics and cooling

For HL-LHC detectors, particularly for Trackers or HGC, high power dissipation makes the thermo-mechanical design a challenge - although designs are different, material & techniques are mostly similar in all experiments

- Mechanical & thermal design are strongly coupled and shall proceed in parallel - new material or techniques (3D printing) being investigated in all aspects including radiation tolerance - need updated DB
- With the trend to lower temperature, to lighten cooling structures and to achieve a “greener” system, CO₂ evaporative cooling is becoming a standard technology. Work ongoing to standardize all system aspects and develop common prototype for future ~ 50 kW ~ -35° plants
- Micro-channel cooling presents further advantages in material reduction & thermal expansion mismatch - ALICE (ITS) and LHCb (VELO) are leading the developments
- QA, integration and environmental aspects need to be addressed at an early stage to keep system simple and reliable

2nd ECFA HL-LHC... R&D for Electronics systems

Several FE ASIC chips already available as prototypes - this is more advanced than it was for construction of current detectors - R&D focus on 65 nm technology supported by TSMC contract (IBM 130 nm situation to be monitored)

- ALICE: ITS (ALPIDE & MISTRAL) & TPC (SAMPA, FEERIC) prototypes available
- ATLAS: Strips ABC130 prototype available, HCC submitted - Calorimeters (ADC) & Muon (VMM, ART and TDS) prototypes available
- CMS: Strips (CBC) prototype available - Pixel-strips (MPA & SSA) under design (65nm), Muons (GEM, VFAT3) under design
- LHCb: Velo (VELOPIX) prototype (= Timepix3), Fibres (PACIFIC) & Tracker (SALT) prototypes available
- RD53: 65 nm - common ATLAS & CMS architecture defined - extensive radiation tests - developing IP blocks

2nd ECFA HL-LHC... R&D for Electronics systems

Optical data transfer - GBT & Versatile Link is a crucial (common) development to all experiments and all detectors

- GBT chipset and VTTX/VTRX ready for production
- Low power GBT (65 nm) and Versatile Link + started development
- Also testing of some photonics devices

Powering scheme development, especially for pixel detectors, would benefit from new contributions

- Radiation-hard point of load DC-DC first version in production (>200 Mrad & $8 \cdot 10^{14}$ 1 MeV.n.cm^{-2})
- Serial power and DC-DC successfully tested
- Some progress on HV switches (silicon sensors bias)

Interconnection

- First positive results for TSV last techniques

Modular electronics

- Progress made (μ TCA in CMS), xTCA in the others
- First “CERN specification” for procurement

2nd ECFA HL-LHC... R&D for Trigger, DAQ and computing

ALICE & LHCb proceeding with computing trigger architectures while ATLAS & CMS still need a hardware trigger selection to allow full data readout

- Need to implement track trigger and increase L0/L1 rates in ATLAS & CMS is well motivated by trigger object rates and physics menu studies
 - Current BW for data transfer becomes limiting factor for acceptable power consumption and material weight, particularly for inner OT and pixel layers
- Track trigger involves modification of calorimeter & muon readouts (longer latency, higher rates) - trend is to readout at 40 MHz - also allowing full granularity & resolution usage at L1
- Higher rates require fast online software processing - fully exploiting new many-core architectures, and based on new algorithms
- Progress in network switches & high speed links should be sufficient for future DAQ system requirements

The experience of ALICE and LHCb on these two last aspects will greatly benefit ATLAS and CMS

2nd ECFA HL-LHC... R&D for Trigger, DAQ and computing

Natural CPU and disk growth resources will fall short by x 3-5 (at least) for HL-LHC requirements - this must be gained from proper usage of new technologies

- Costs of disk and speed of I/O are a concern
 - New network technologies and on-demand data distribution
- Diversification of resources (Era of Xeon x86 mono-culture is over)
 - Kernels of reconstruction and simulation code must be portable
- Efficient memory access is the key to optimal use of clock cycles
 - Data Oriented Design
- Multi-threaded code is a requirement
 - Framework evolution is advancing well, algorithmic code to follow
- Simulation must get faster, ex. track triggers simulation is difficult
 - Mix fast and full simulation for best physics results within budget

This work needs to establish dedicated expertise

2nd ECFA HL-LHC... Outlook

- ECFA workshops are extremely valuable opportunities to discuss upgrade goals and key techniques to fully exploit the HL-LHC physics potential. A lot of material was covered in this intense, 3-day workshop.
- As for 2013, a report will be prepared on the workshop to provide to ECFA by the end of the year and, as before, we also expect a more detailed report specifically on the physics and performance studies.
- In 2015, experiments will be busy with Run 2 data taking & analysis, in addition to Phase-I upgrade construction and on-going Phase-II upgrade optimisation
- A new ECFA workshop is envisaged in 2016, when ATLAS & CMS will approach TDRs, and ALICE & LHCb will be experiencing upgrades construction