


One SPD Carbon Fiber Support Sector

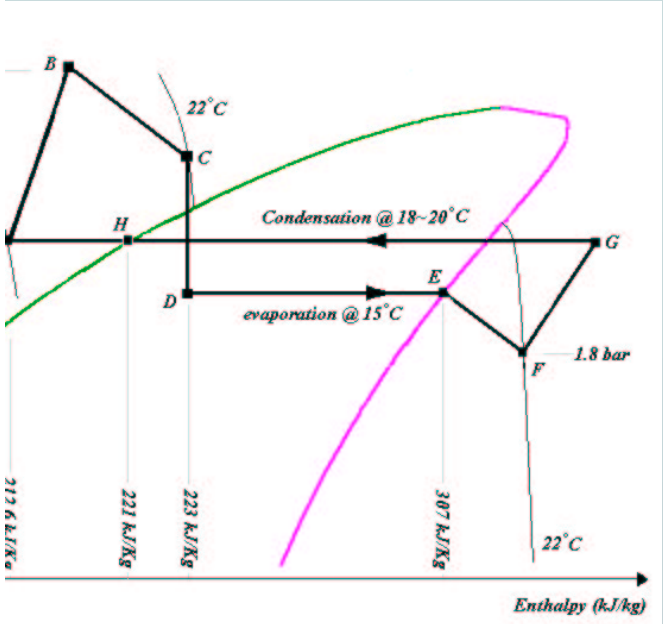

remain, soon after ex  
 return to the cooling  
 vapour to thermal ec  
 compressor, thermoc  
 adjusted via a PID lo  
 temperature) in the s  
 a limited range (14°  
 cools down and char  
 H) collects at the bo  
 exchanger (point A)  
 to a value high enou  
 and 5m above floor  
 equilibrium with the  
 outlet pressure can b  
 through the capillary  
 regimes within a lim  
 capillary outlet bring  
 co-exist (point D). A  
 absorbed in the proc

**ATLAS TRT C<sub>6</sub>F<sub>14</sub> liquid system**

ector to be maintained at room temperature whilst dissip  
 and returning to the cooling plant at 20°C. The pressure  
 of the so-called “leakless” (sub-atmospheric operation) n