



ISOTDAQ

2016 7th International School of Trigger and Data Acquisition

25th January - 2nd February 2016

Weizmann Institute of Science, Rehovot, Israel

Introduction to trigger concepts

F.Pastore (Royal Holloway Univ. of London)

francesca.pastore@cern.ch

➤ Two lectures to describe the main trigger concepts


➤ Introduction to trigger concept

- Why using a trigger?
- Interface to a DAQ system
- How measuring trigger efficiencies
- Many examples

➤ Strategies for building up a trigger system

- From a very simple system...
- ... to a more complex one, with many levels
- Dead-time
- Optimal devices for a fast trigger
- Selectivity of a complex system
- How technology helps

The data deluge

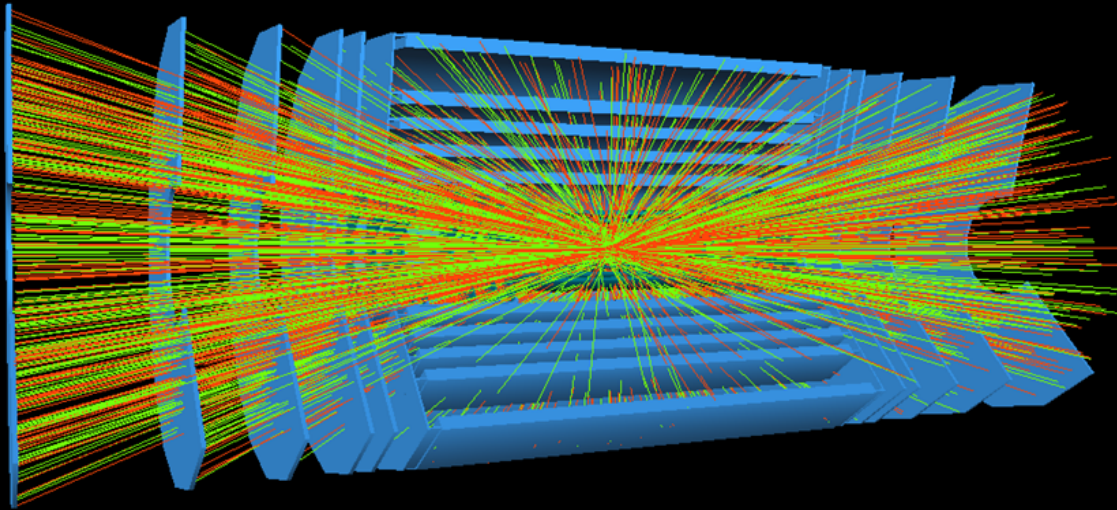

- In many systems, like particle physics or astronomy experiments, to store all the possibly relevant data provided by the sensors is UNREALISTIC and often becomes also UNDESIRABLE
- Three approaches are possible:
 - **Reduced amount of data (packing and/or filtering)** → **Trigger!**
 - **Faster data transmission and processing**
 - **Both!**

The trigger concept

Digital signal saying YES or NO

- It's like deciding to take a very good photo in Rehovot:
 - **click the button** to open the bolt and let the sensors operate
 - take the photo only when you think the **subjects** are ready
 - **focus** the image
 - check if there is enough **light** for your lenses (or add a flash light)
 - only if your hand is not **shaking**




- ➔ The trigger starts the photo process
- ➔ First identify the interesting event
- ➔ Ensure the sensitivity to parameters
- ➔ Ensure a good synchronisation

Trigger concept in HEP



The constrain between trigger and DAQ rate is the storage and the offline computing capabilities

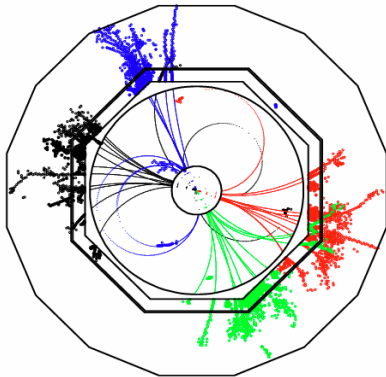

- What is “interesting”?
 - Define what is signal and what is background
- Which is the balance between Trigger and DAQ resources?
 - Define the maximum allowed rate
- How fast the selection must be?
 - Define the maximum allowed processing time

Which is the expected trigger rate?

The expected event rate is derived from the physics process (x-section times Luminosity)

$$R = \sigma_{in} \times L$$

LHC: the trigger challenge!


Total non-diffractive p-p cross section is **70 mb**

Total trigger rate is ~ GHz!!!

Huge range of cross-sections and production rates at design:

Beauty (0.7 mb)	– 1000 Hz
W/Z (200/60 nb)	– 100 Hz
Top (0.8 nb)	– 10 Hz
Higgs - 125 GeV (30 pb)	– 0.1 Hz

$$\frac{\sigma_{tot}}{\sigma_{H(500\text{ GeV})}} \approx \frac{100\text{ mb}}{1\text{ pb}} \approx 10^{11}$$

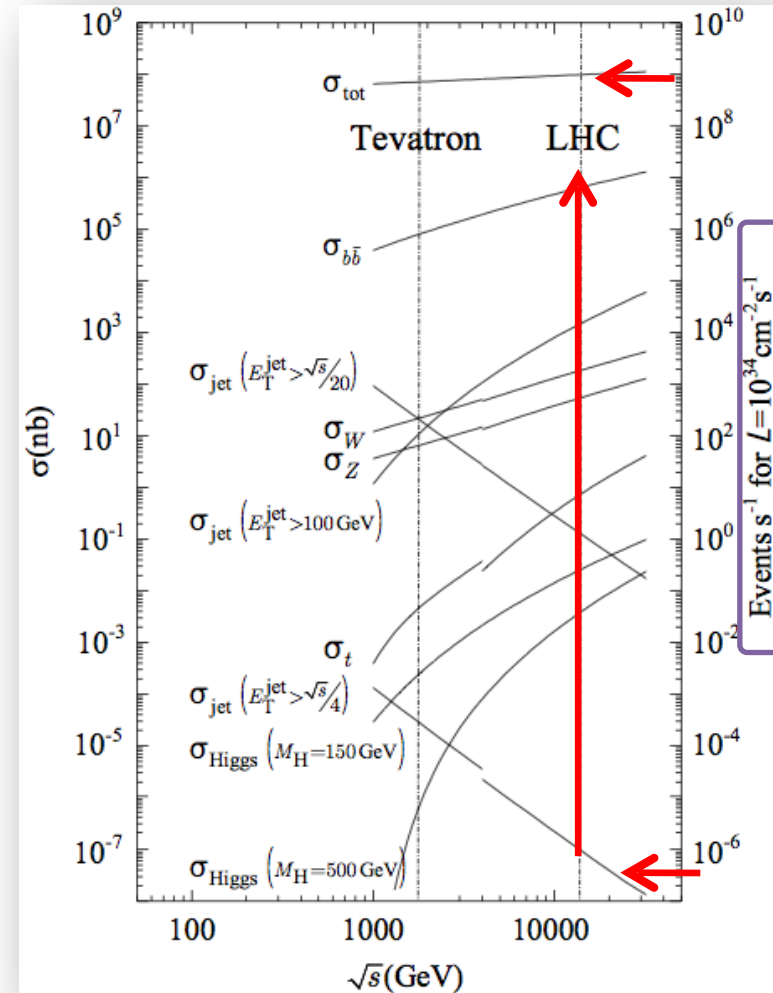

Background discrimination is crucial

- The final rate is often dominated by not interesting physics
- The trigger accepts events with features similar to the signal


As easy as....



- Crucial for selecting specific features within widely extended systems
- With limited amount of time
- With limited resources

Which is a good trigger for the Higgs Boson?

All tracks

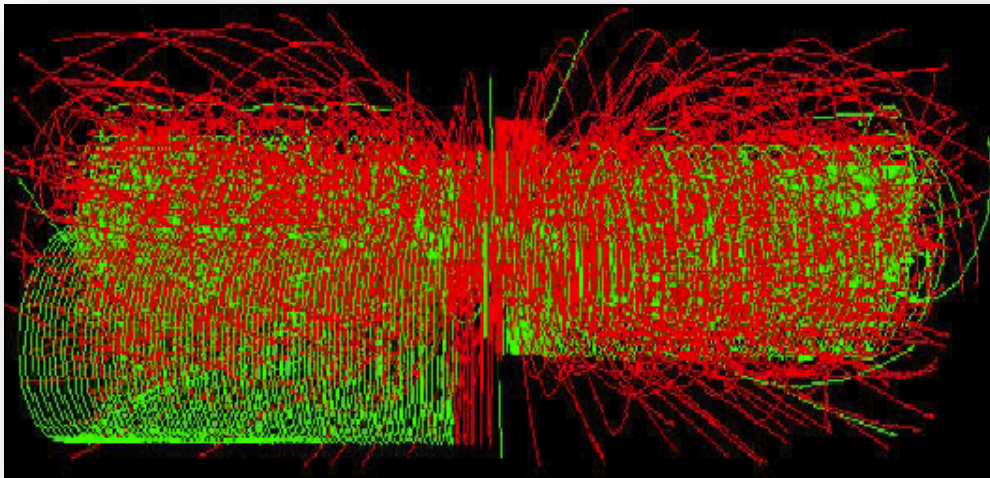


Simulate the **signal** events
Higgs \rightarrow 4μ as it appears at the
LHC (with soft collisions coming
from the p-p interactions)



Only high-pt tracks

+30 MinBias

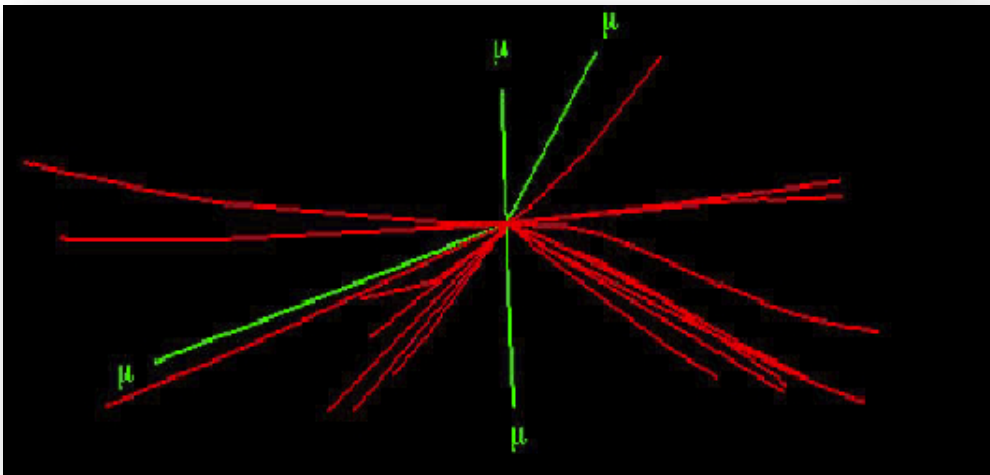

The trigger signature is given by
high momentum muons
(at least one)

Higgs \rightarrow 4μ

Which is the affordable trigger rate?


- The Data Acquisition system collects data and write it to disk
- With limited capabilities, mainly for money and dimensions
 - Limited computing power (available for online and offline processing)
 - Limited storage capabilities
- Given the **size** of one typical measurement/event, the maximum allowed trigger rate is due to

$$R_{DAQ} = R_T^{max} \times S_E$$

DAQ rate *Maximum Trigger rate* *Event size*

How many particles in the event?
How many FE channels?

Not always need to reduce the rate

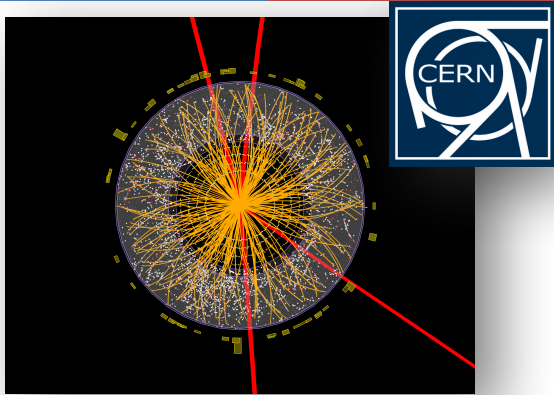

- **LHC – ATLAS**
- Project started in 1996
- Technology chosen in 2000
- Start data-taking 2008
- Full p-p collision rate: 40 MHz
- Average event size: 1.5 MB
- **Full data rate: ~60 TB/s**
- Defined physics channels
- Complex trigger: reduces 5 orders of magnitudes to 1 kHz
- **Affordable DAQ rate: ~1.5 GB/s -> 1 KHz**
- **Data distribution (GRID)**



- **SKA (Square Km Array)**
- Project started in 2011
- Technologies under evaluation now
- Start operations in 2024
- Photograph the sky continuously
- 1.12 PB/s of photons collected
- EXASCALE system 10^{18} operations for correlation and imaging
- **Simple correlator : 10 TB/s**
- **Total Internet Traffic \approx 8 TB/s in 2010**
- Required large computing power
- Big-data and cloud-computing drive market


Which is the best filter?



Trigger requirements

Requirement 1: *high background rejection*

*Inclusive single muon
 p_T spectrum*

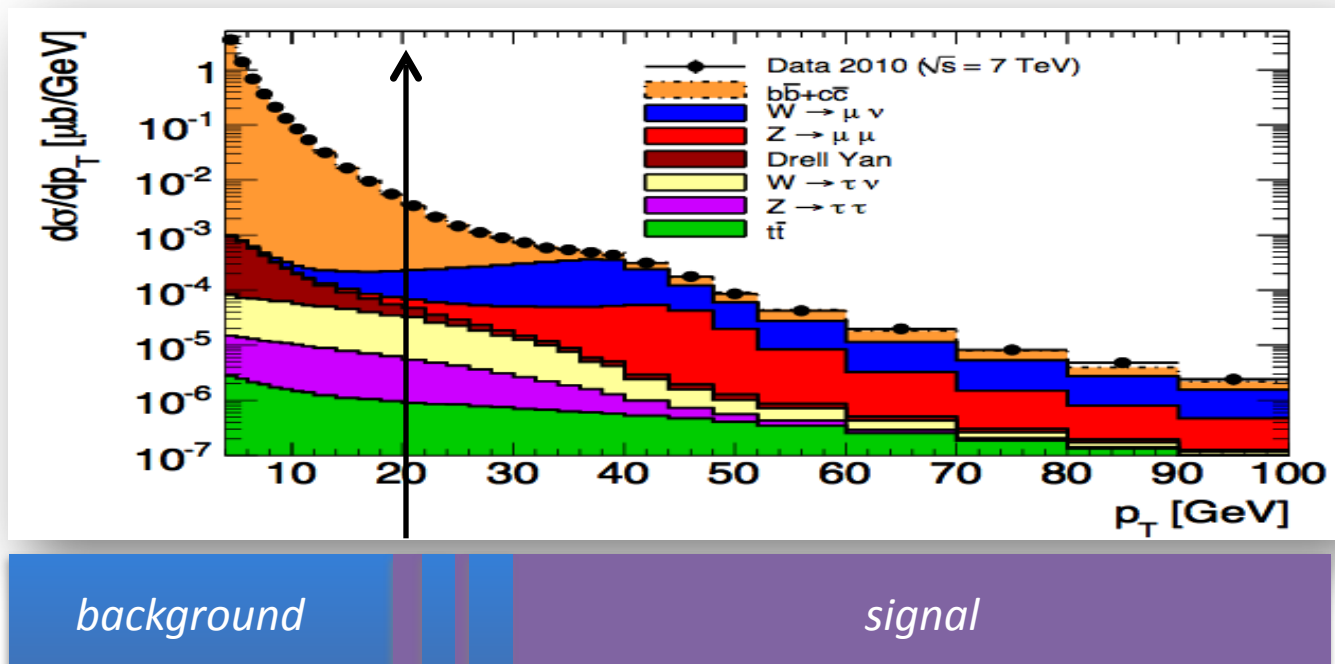

$$\text{Rej}_{\text{bkg}} = 1 - N_{\text{bad(accepted)}} / N_{\text{bad (produced/expected)}}$$



Background rejection (Rate control)



Instrumental or physics background



Need to identify **characteristics** which can suppress the background




Need to demonstrate solid **understanding** of background rate and shapes




Backgrounds sometimes are known with great uncertainties: make your trigger **flexible and robust**

Requirement 2: *high signal efficiency*

4-leptons invariant mass,
selected events for
 $H \rightarrow ZZ \rightarrow 4l$

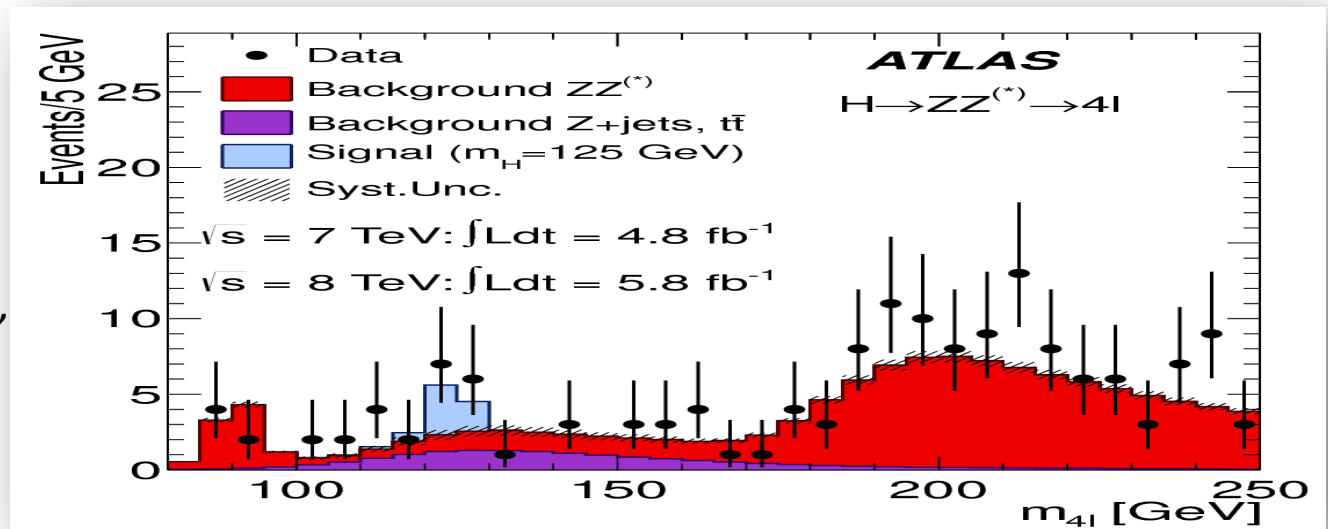

muon p_T

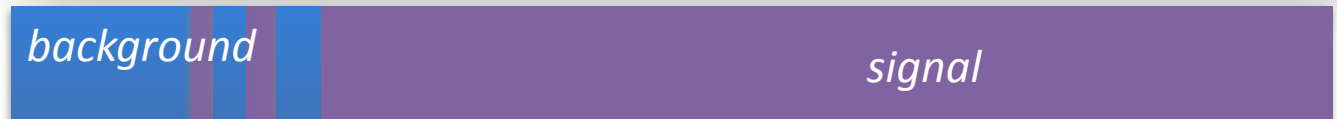

➤ Signal efficiency:

$$\epsilon_{\text{trigger}} = N_{\text{good (accepted)}} / N_{\text{good (produced/expected)}}$$




➤ Maximize the acceptance

➤ Good design of the architecture

➤ Optimize the selection

➤ The selection must be optimized on the signal

...with compromises?

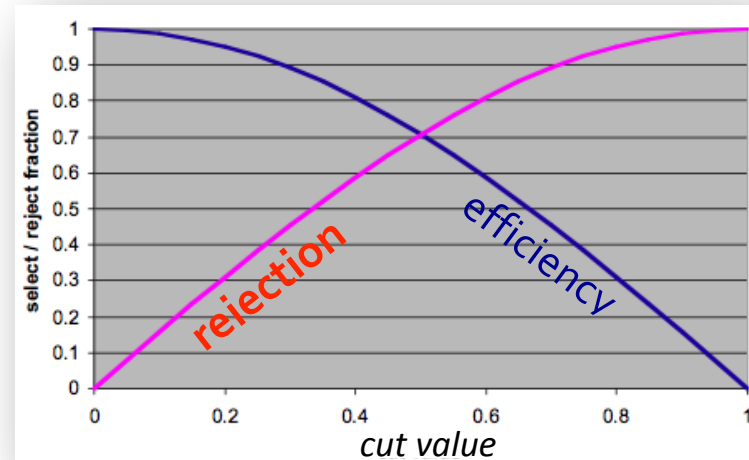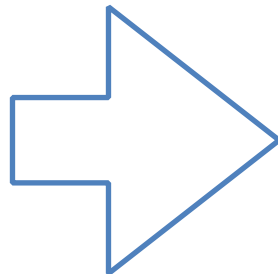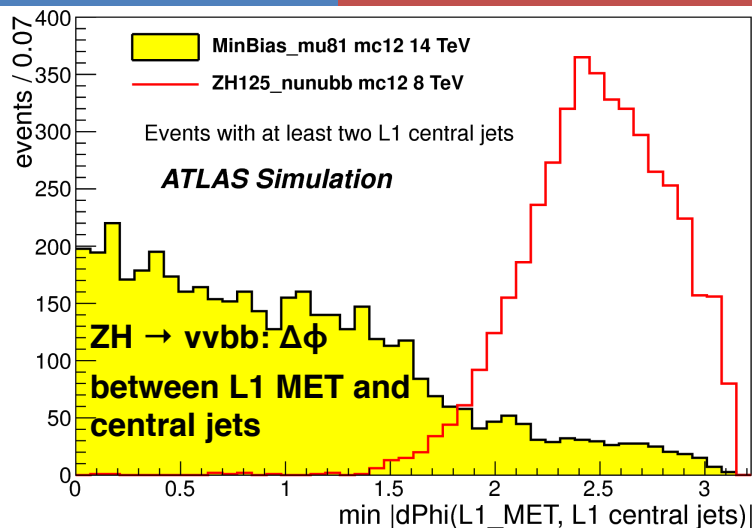

- If any of the two requirements cannot be realised, **refine your selection!**
 - Change the parameters, eventually with more complex ones, but still remain **fast!**
 - With additional compromises (number of processors working in parallel and fastness of the algorithms)
- **Whatever criteria you choose, discarded events are lost for ever!**
- So, check that your trigger system:
 - **Is not biasing your measurement**
 - Discovery experiments: use inclusive selections
 - Precision experiments: use well known selections
 - **Is reliable**
 - Do you trust your trigger? If not, add control samples!

Ensure good efficiency with...




Robustness! Win against the unexpected!

- **Flexibility: to cope changes in conditions and background**
 - Programmable thresholds, high granularity to maintain uniform performance, able to follow changes of luminosity, beam-size and vertex position, able to reach physics results also after 10 years of data taking
- **Redundancy: to make trigger rates independent from the detector and the collider performance**
 - Different backgrounds can change the event shape and dimension, so the result of your trigger selection
- **Selectivity**
 - Good granularity and good resolution of the parameters to ensure good rejection of the unwanted background

And now let's go to details and examples

Trigger signatures


- **Signature** = a collection of parameters used for discrimination
 - Can be the amplitude of a signal passing a given **threshold** or a more complex quantity given by software calculations
- We first use intuitive criteria: **be fast and reliable!**
 - Use clear/simple signatures
 - i.e.: apply thresholds on: muon momenta, energy deposits in the calorimeters, good quality tracks in the tracker detectors....
- Eventually combine more signals together following a certain trigger logic (AND/OR), giving **redundancy**

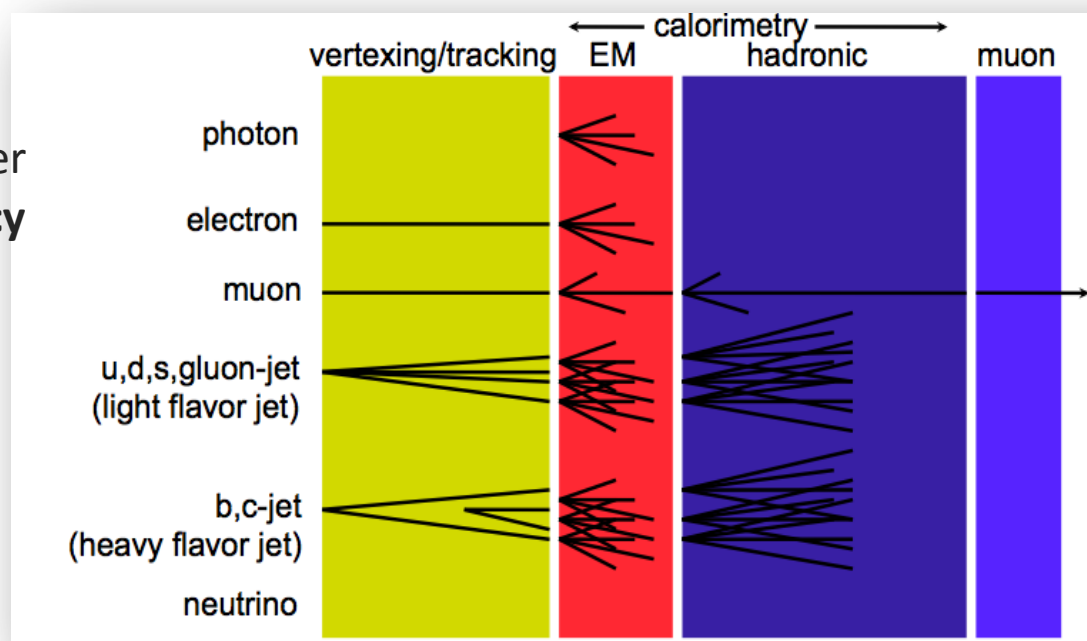

Use of multi-level trigger

Example for LHC

To obtain high efficiency with large background rejection, the trigger selection can be organized in multiple steps

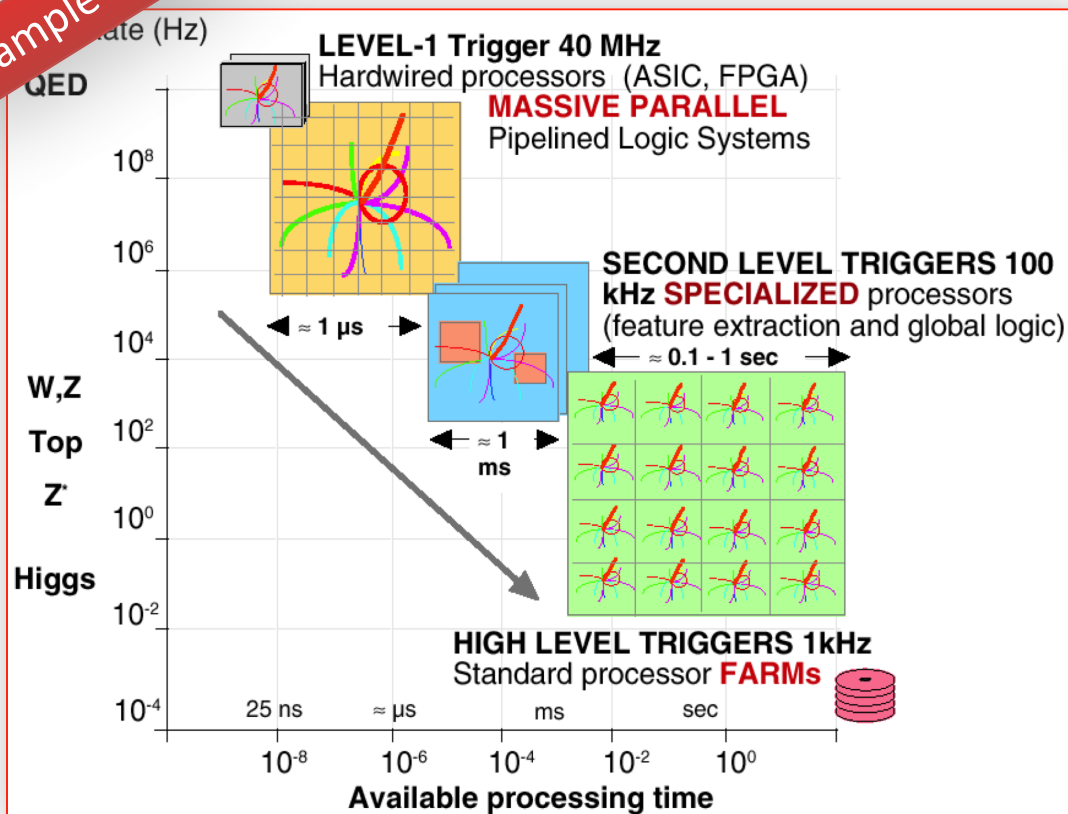

Architectural view

L1: Inclusive trigger

L2: Confirm L1, inclusive and semi-incl., simple topology, vertex rec.


L3: Confirm L2, more refined topology selection, near offline

Logical view

In the next trigger lesson we will learn how to implement it

Simple signatures: Auger observatory

- Detect air showers generated by cosmic rays above 10^{17} eV
- Expected rate $< 1/\text{km}^2/\text{century}$. Two large area detectors
- On each detector, a 3-level trigger operates at a wide range of primary energies, for both vertical and very inclined showers

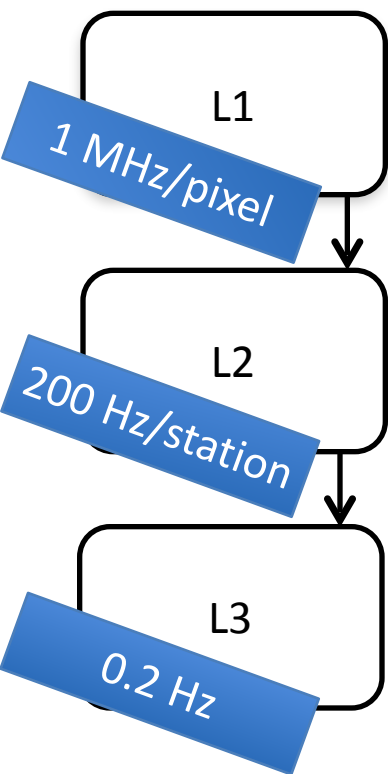



L1: (local) decides the pixel status (on/off)

- ADC counts $>$ **threshold**
- ADC digitizes any 100 ns (**time** resolution)
- ADC values stored for 100 μ s in **buffers**
- **Synchronized** with a signal from a GPS clock

L2: (local) identifies track segments

- Geometrical criteria with recognition algorithms on programmable patterns

L3: (central) makes spatial and temporal correlation between L2 triggers

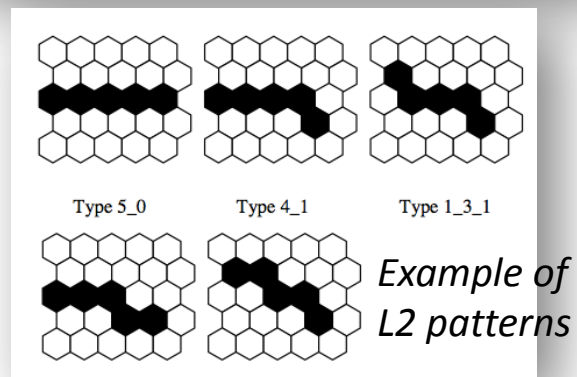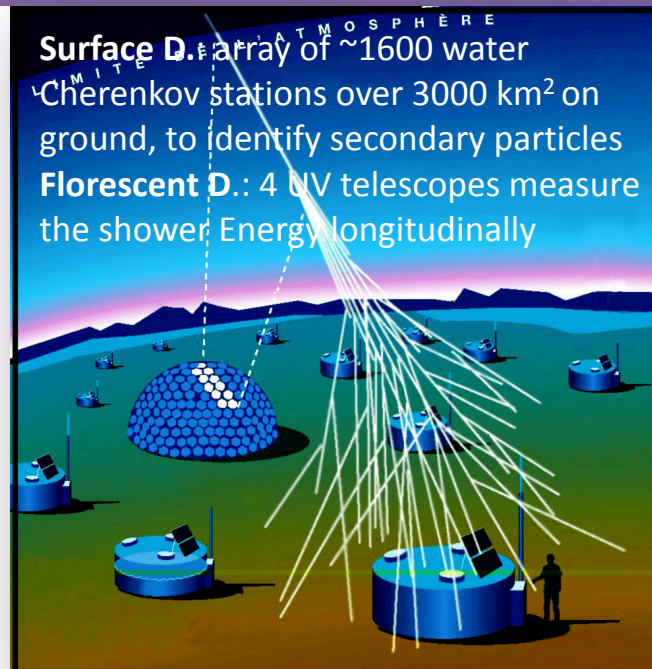




One event $\sim 1\text{MB} \rightarrow 0.2 \text{ MB/s}$ bandwidth needed for the DAQ system

Multiple signatures: the ATLAS calorimeter trigger

➤ Identify high energy e , γ , τ , jets, missing E_T , ΣE_T



➤ 1: Dedicated Front-End electronics

➤ Front-End of cells sends shaped analog signals

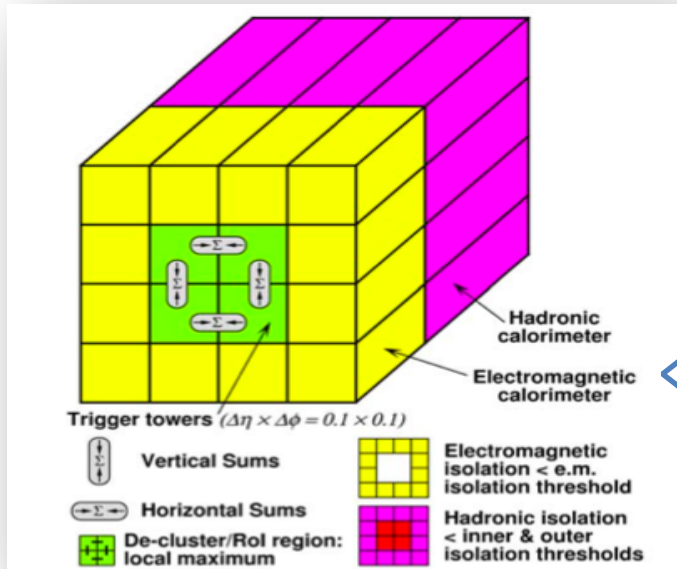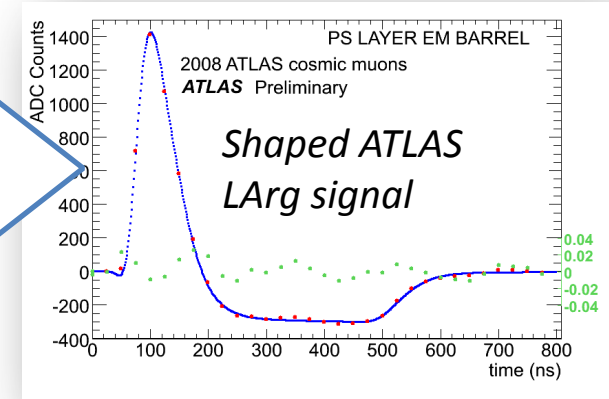

➤ 2: Level-1 trigger

➤ Dedicated **processors** apply simple cluster algorithms over cells and programmable E_T thresholds

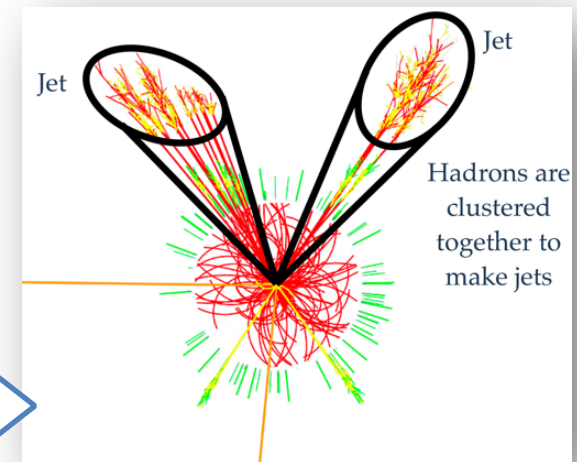

➤ 3: High-Level triggers

➤ **Topological** variables and **tracking** information


➤ e /jet separation using cluster shapes

➤ e/γ separation using tracking

➤ **Isolation** criteria




Multi objects trigger: CDF

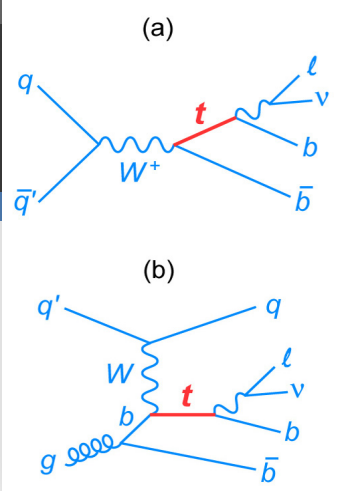

$t \rightarrow Wb \sim 100\%$

missing Energy

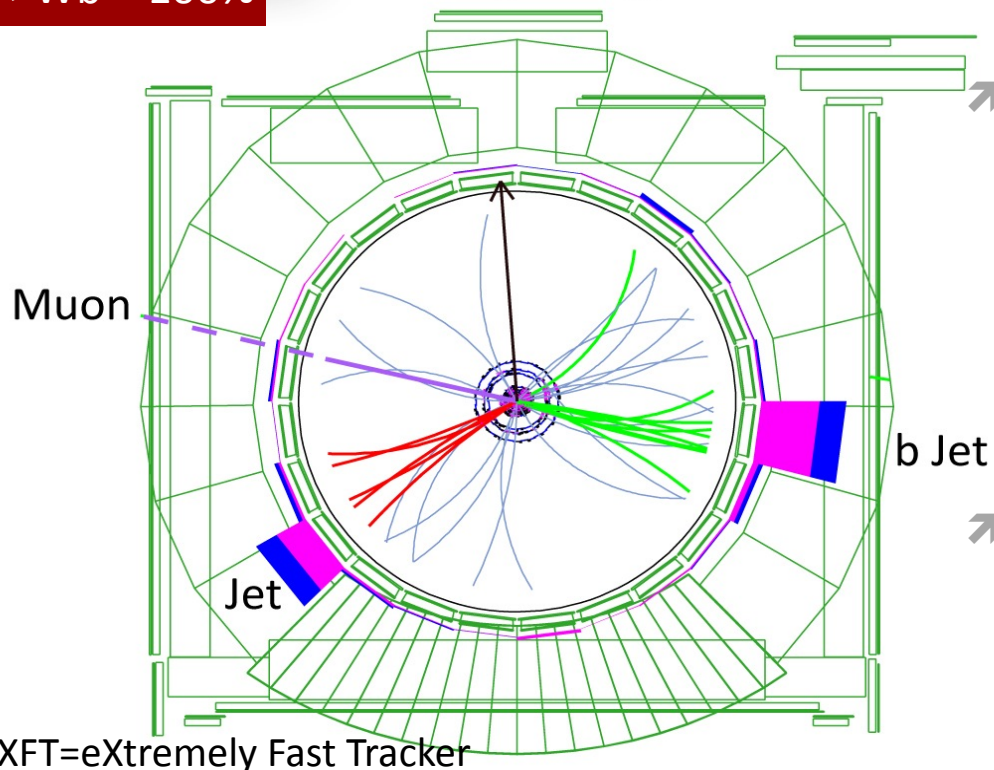

CDF single top event

Signal characterization:

- 1 high p_T lepton, in general isolated
- Large MET from high energy neutrino
- 2 jets, 1 of which is a b-jets

Trigger objects at L1


- Central tracking (XFT $p_T > 1.5 \text{ GeV}$)
- Calorimeter
 - Electron (Cal + XFT)
 - Photon (Cal)
 - Jet (Cal EM+HAD)
- Missing E_T , Sum E_T
- Muon (Muon + XFT)

Trigger objects at L2:

- L1 information
- SVT (displaced track, impact parameter)
- Jet cluster
- Isolated cluster
- Calorimeter ShowerMax (CES)

Multi objects trigger: CDF

CDF single top event

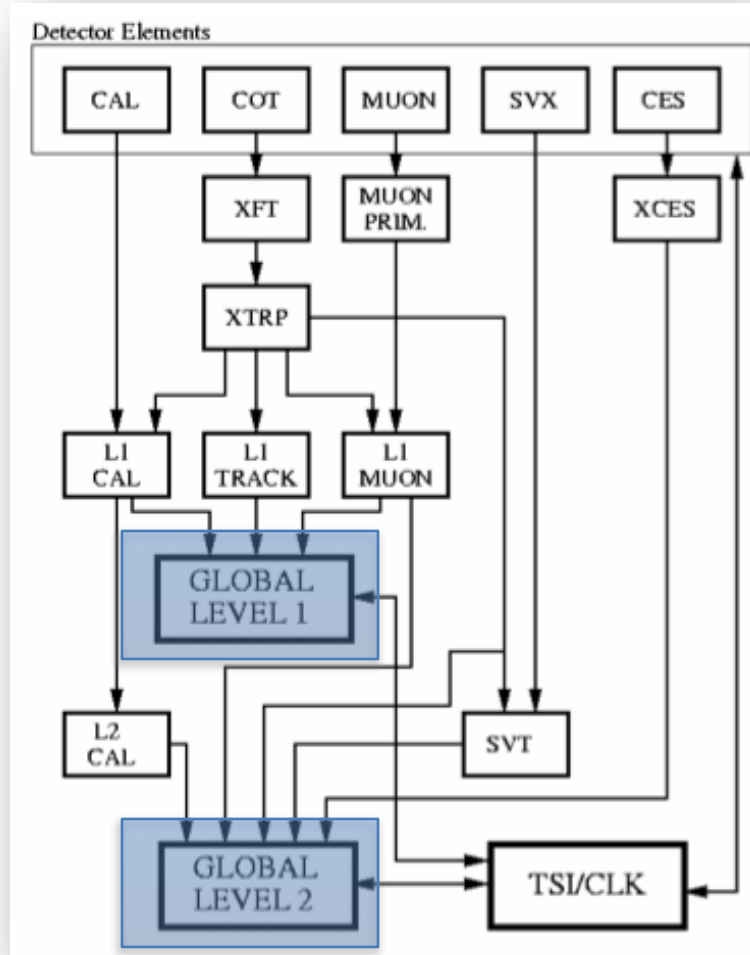

- Signal characterization:
 - 1 high p_T lepton, in general isolated
 - Large MET from high energy neutrino
 - 2 jets, 1 of which is a b-jets
- Trigger objects at L1
 - Central tracking (XFT $p_T > 1.5\text{GeV}$)
 - Calorimeter
 - Electron (Cal + XFT)
 - Photon (Cal)
 - Jet (Cal EM+HAD)
 - Missing E_T , Sum E_T
 - Muon (Muon + XFT)
- Trigger objects at L2:
 - L1 information
 - SVT (displaced track, impact parameter)
 - Jet cluster
 - Isolated cluster
 - Calorimeter ShowerMax (CES)

Trigger efficiency is a parameter of your measurement

$$BR(\textit{Signal}) = \frac{(N_{\textit{candidates}} - N_{bg})}{\alpha \cdot \epsilon_{\textit{total}} \cdot \sigma_{Bs} \cdot \int L dt}$$

$$\alpha \cdot \epsilon_{\textit{total}} = \alpha \cdot \epsilon_{\textit{Tracking}} \cdot \epsilon_{\textit{Reco}} \cdot \epsilon_{\textit{L1-Trig}} \cdot \epsilon_{\textit{L2-Trig}} \cdot \epsilon_{\textit{L3-Trig}} \cdot \epsilon_{\textit{vertex}} \cdot \epsilon_{\textit{analysis}}$$

Trigger efficiency must be **precisely known**, since it enters in the calculation of the cross-sections

For some precise measurements, the crucial performance parameter is not the efficiency, but the **systematic** error on determining it

Different **independent** trigger selections allows good cross-calibration of the efficiency

Besides your “physics” triggers, foresee additional **back-up triggers**

Trigger for precision measurements: BaBar

➤ Goal: reduce systematic errors on the measurement of CP violating parameters

Golden event in the BaBar Detector
e⁺e⁻ collision producing a B and an anti-B

— Golden B (for CP violation)
— Tagging B

➤ Babar trigger objects:


- **Charged tracks** in the drift chamber, with different p_T cuts: long track (0.18GeV), short track (0.12 GeV)
- **EM calorimeter clusters** with different E_T cuts

➤ Search for topology

- **Number of objects**, optionally requiring geometrical separation cuts or matching between tracks and clusters

➤ Deep studies on signal and background to determine the error on the efficiency measurement

- The selection of background samples must be foreseen in the trigger itself

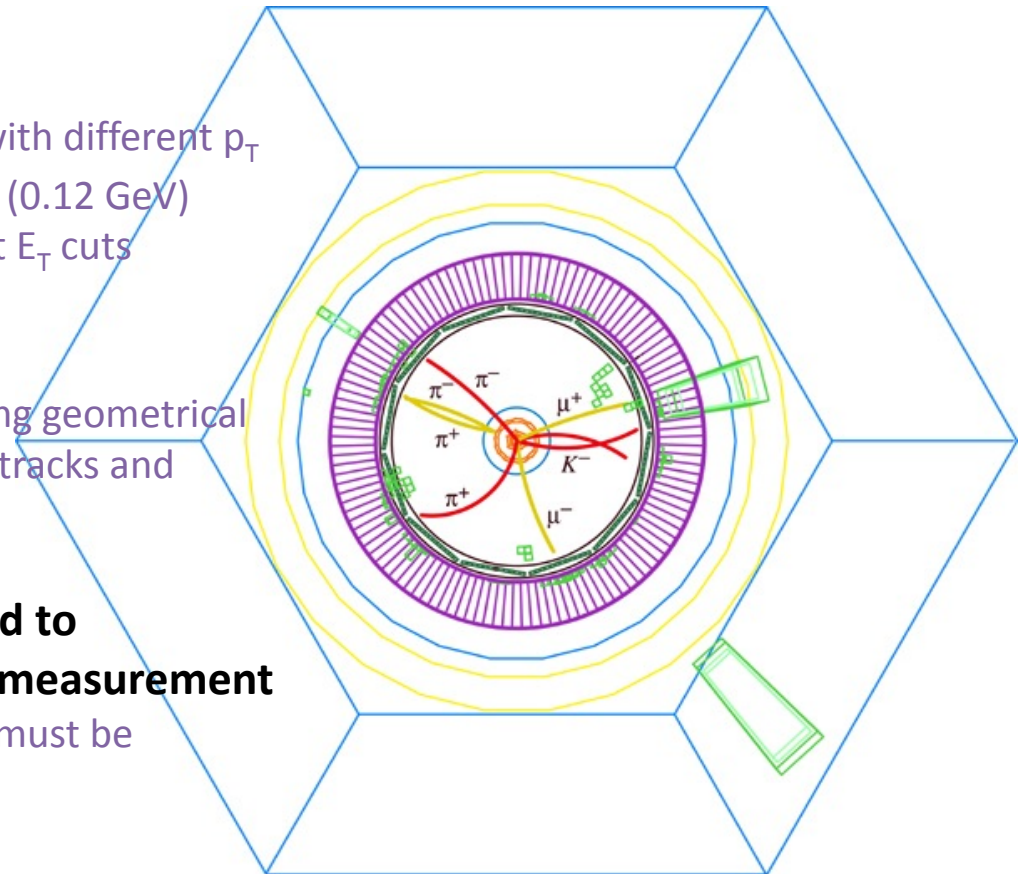

Trigger efficiency measurement (1)

$$\text{Efficiency} = \frac{\text{number of events that passed the selection}}{\text{number of events without that selection}}$$

Basic idea: compare rates before and after applying the selection

➤ It's crucial to select the correct **sample without biases**

For High level triggers

➤ the efficiency is easily measured using back-up triggers called **pass-through**

➤ A trigger that does not include the selection

L2 muon at 10GeV


$$\text{Eff (L2MU10)} = \frac{\text{events passing L2MU10}}{\text{events passing L2MU10_PASSTHROUGH}}$$

Trigger efficiency measurement (2)

$$\text{Efficiency} = \frac{\text{number of events that passed the selection}}{\text{number of events without that selection}}$$

For L1, we cannot know the absolute rate in the denominator; different methods are used


- ☐ Calculate the efficiency **relatively** to another independent trigger selection
- ☐ Zero and minimum bias (MB) triggers:
 - ☐ **Control trigger bias**: always record small fraction of events with triggers with zero bias or very small (minimum) bias
 - ☐ **Zero bias**: e.g. trigger on random (filled) bunches
 - ☐ **Minimum bias**: trigger on minimum detector activity (e.g. hits in specialized small scintillation counters)

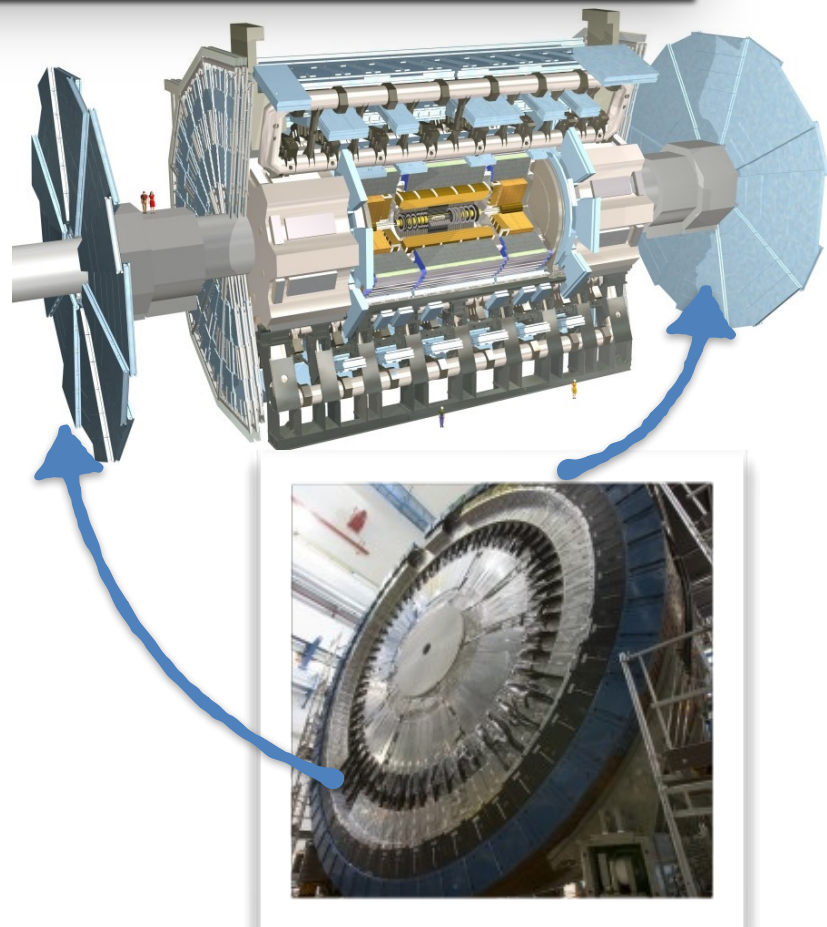

Trigger efficiency measurement (3)

$$\text{Efficiency} = \frac{\text{number of events that passed the selection}}{\text{number of events without that selection}}$$

- ▶ Experimental technique called “**Tag-and-Probe**” can be applied on some specific signatures (for example electrons, muons,...)
 - ▶ Use a **known physics process** in which the signature can be selected very clean (like the Z-boson decay into leptons)
 - ▶ Ensures that we are excluding fakes
- ▶ How?
 - ▶ Online: Trigger on independent signature (**Tag**)
 - ▶ Offline: Reconstruct the event and identify the candidate signature (**Probe**)
 - ▶ For example, tight offline requirements and Z mass selection
 - ▶ Offline: measure trigger efficiency on the Probe

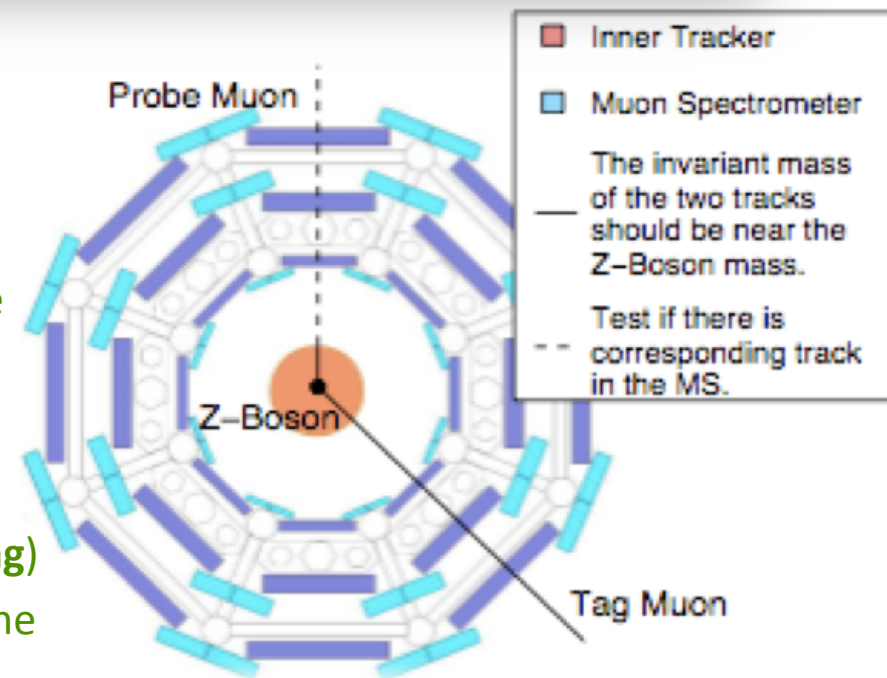

Use back-up triggers:
L1_LOWEST_THRESHOLD

Trigger efficiency measurement (3)

The threshold is not exactly applied as a step function. Better use the Error function, usually called **trigger turn-on**



➤ The capability of controlling the rate depends on the **resolution** on the trigger parameter

➤ For example some particles can be under threshold, failing the trigger, because their trigger parameter is underestimated

➤ Crucial is the study of the **step region**, in which efficiency changes very quickly and contamination from background can be important (soft particles are often abundant!)


➤ If **quick**, better background suppression

➤ If **slow**, can be better extrapolated and systematic error can be reduced

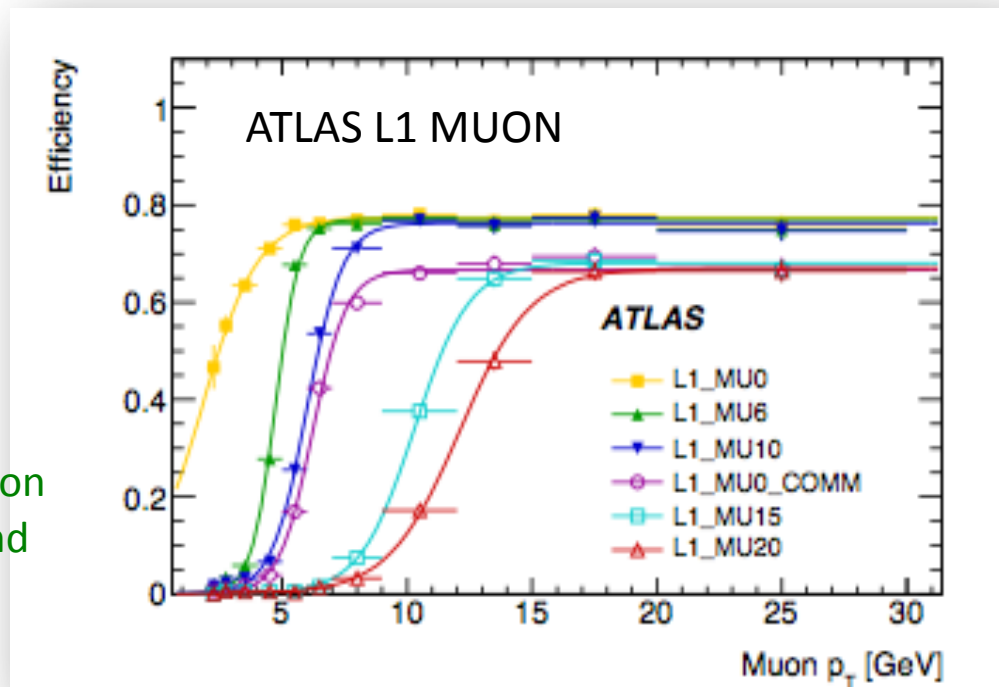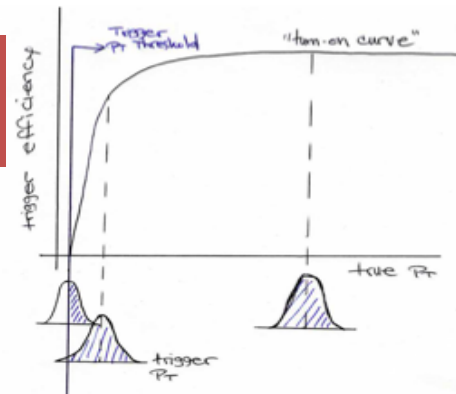

Parametrising the trigger efficiency

- The trigger behaviour, and thus the analysis sample, can change quickly due to important changes in
 - Detector
 - Trigger hardware
 - Trigger algorithms
 - Trigger definition
- The analysis must keep track of all these changes
- Multi-dimensional study of the efficiency: $\varepsilon(p_T, \eta, \phi, \text{run\#})$
 - Fit the turn-on curves for different bins of η, ϕ, p_T
 - Actually fit the $1/p_T$ dependency since the resolution is Gaussian in $1/p_T$

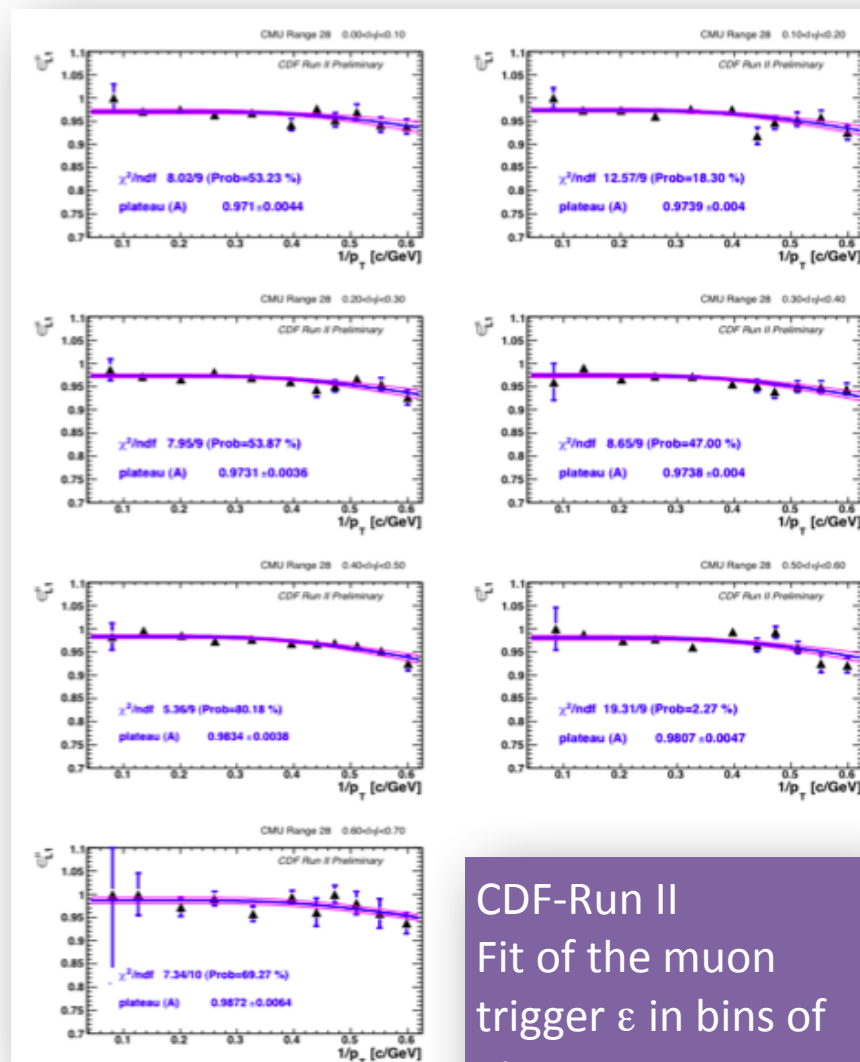

CDF-Run II
Fit of the muon
trigger ε in bins of
 η

How many trigger signatures?

➤ Physics triggers

- **Discovery experiments:** multiple inclusive selections ensure wide open windows to look at
- **Precision experiments:** multiple triggers for multiple measurements

➤ Calibration triggers


- Detectors calibrations
- Detectors and trigger efficiency measurements
- Tagging efficiency
- Energy scale measurements

➤ Background triggers

- Instrumental and physics background
- Better description of the background can be extrapolated from data than from Monte Carlo
- Understand resolutions, including the under-threshold population

➤ Monitor triggers

- To monitor the trigger itself (remember, lost events are lost for ever!)



Bulk of the selected events!


Rate allocations of the trigger signatures

- ✓ The target is the final allowed DAQ bandwidth
- ✓ The rate allocation on each trigger signature based on
 - ✓ Physics goals (plus calibration, monitoring samples)
 - ✓ Required efficiency and background rejection
 - ✓ Bandwidth consumed

Rates scale linearly with luminosity, but linearity is smoothly broken due to pile-up

$$R_i = L \int_{p_{T_inf}}^{p_{T_cutoff}} \frac{d\sigma_i}{dp_T} \cdot \epsilon(p_T) dp_T$$

Trigger Efficiency

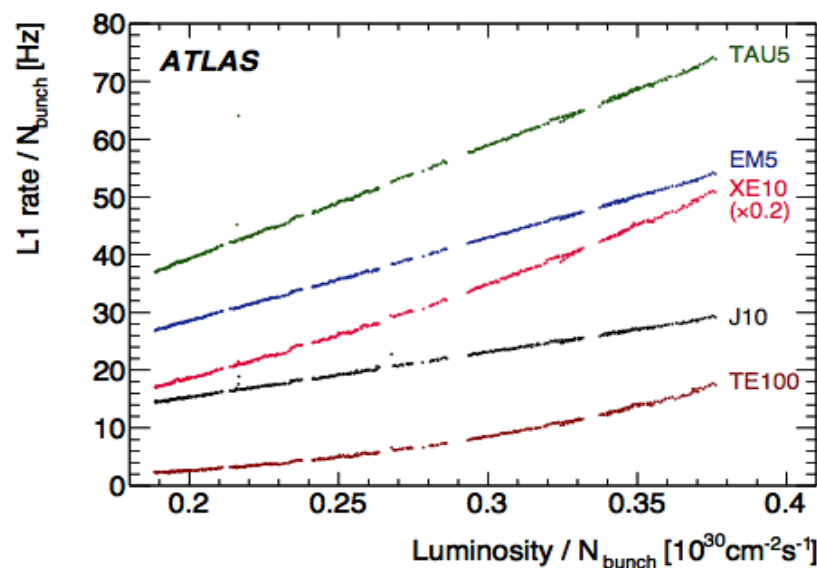

Extrapolate the expected trigger rates:

- **For trigger design and commissioning:** use large samples of simulated data, including large cross-section backgrounds
 - 7 million of non-diffractive events used in the ATLAS trigger design
 - Large uncertainties due to detector response and background cross-sections: apply **safety factors**, then tuned with data
- **During running (at colliders),** (some) rates can be extrapolated to higher Luminosity

Physics interest vs system bandwidth...

Lower thresholds would be desirable, but the physics coverage must be balanced against considerations of the offline computing cost

➤ How accommodate a broad physics program?


➤ And cope with increasing rates?

Organize trigger menus!



Design a trigger menu


- The list of our selection criteria must be
 - **Redundant** to ensure the efficiency measurement
 - Sufficiently **flexible** to face possible variations of the environment (detectors, machine luminosity) and the physics program
- A well done trigger menu is crucial for the physics program
 - Multiple triggers serve the **same analysis** with different samples (going from the most inclusive to the most exclusive)
 - Ideally, it will keep **some events from all processes** (to provide physics breadth and control samples)

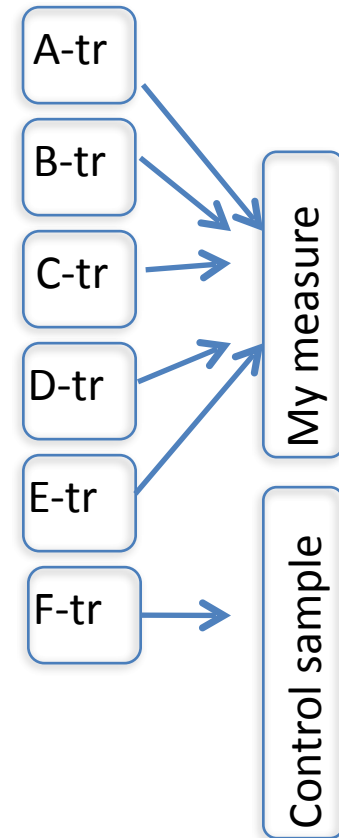

Trigger strategy @ colliders: ATLAS menu

ATLAS

Trigger rates per signature at 10^{33}

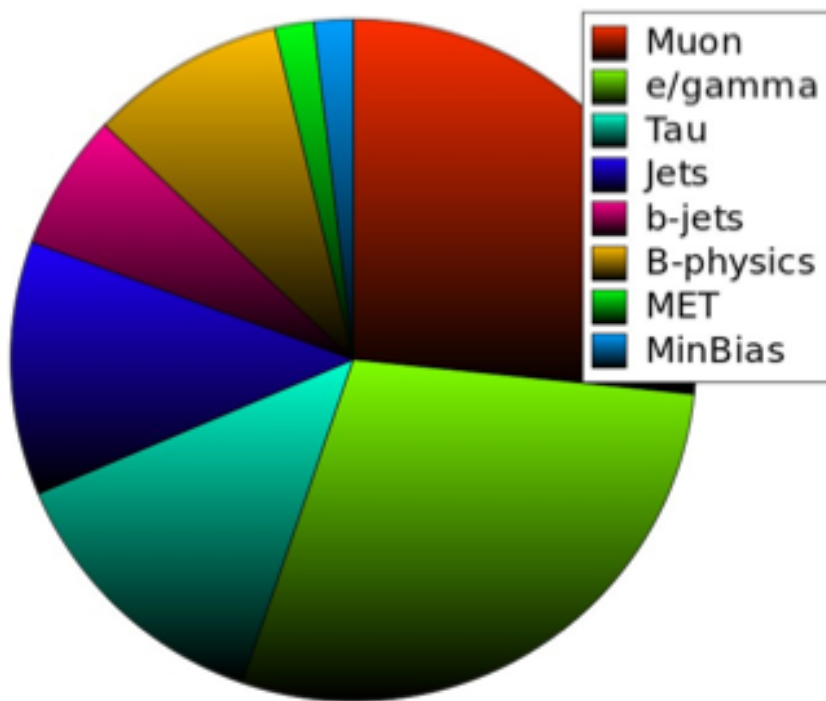

➤ Inclusive triggers to collect the **signal samples**

➤ **Single high- p_T**

➤ $e/\mu/\gamma$ ($p_T > 20$ GeV)

➤ jets ($p_T > 100$ GeV)

➤ **Multi-object events**

➤ $e-e$, $e-\mu$, $\mu-\mu$, $e-\tau$, $e-\gamma$, $\mu-\gamma$, etc... to further reduce the rate

➤ **Back-up triggers** designed to spot problems, provide control samples (often pre-scaled)

➤ Jets ($p_T > 8, 20, 50, 70$ GeV)



➤ Inclusive leptons ($p_T > 4, 8$ GeV)

➤ Lepton + jet

Priority List for >300 Hz

Chain		Unique rate L1 (Hz)	Unique rate L2 (Hz)	Unique rate EF (Hz)	Sorted by Problem level
EF_xe60_verytight_noMu	SUSY/Exotics	0	0	0.5	EF (pileup)
EF_j100_a4tc_EFFS_ht400	SUSY	0	0	2.5	EF
EF_4j45_a4tc_EFFS	SUSY/SM	0	0	2	EF
EF_5j30_a4tc_EFFS		0	5	3	EF
EF_j240_a10tc_EFFS	Exotics/SM	0	0	1	EF
EF_tau29_loose1_xs45_loose_noMu_3L1J10	Higgs	0	40	5	EF
EF_b10_medium_4j30_a4tc_EFFS	Top/Higgs	0	4	10	EF
EF_2mu4_BmumuX		0	7	0.9	EF
EF_2mu4_Jpsimumu	B-physics	0	6	1.7	EF
EF_mu4mu6_DiMu		0	25	6.5	EF
EF_mu4mu6_DiMu_DY20	SM	0	10	5?	EF
EF_2MUL1_l2j30_HV_allMS	Exotics	0	?	?	EF
EF_mu20i_medium	5x10 ³³ prep.	0	15	3	EF
EF_mu18_MG_medium		0	0	60	EF
EF_mu18_medium	Many	0	0	60	EF
EF_e60_loose	(Exotics)	0	5	7	EF,client
EF_mu15/18/22_njX?	SUSY/??	100	10	?	EF,non-validated
EF_g22_hiptrt?	Exotics	0	?	< 1?	non-validated
EF_e15_medium_xe40_noMu	SUSY/Exotics	310	70?	1.3	L2 (pileup)
EF_j55_a4tc_EFFS_xe55_medium_noMu_dphi2j30xe10		70	210	1.5	L2
EF_e10_medium_mu6_topo_medium	Higgs	1200	9	1	L1
EF_tau20_medium_e15_medium	Higgs	3700	10	1	L1
EF_xe60_tight_noMu	SUSY	680?	150?	1	L1,L2 (pileup),EF
EF_e10_medium_mu6	Higgs/SUSY	1200	75	10	L1, EF
EF_l2j30_Trackless_HV_L1MU6	Exotics	1500?	0.5	0.5	L1
Total extra rate		6500	600	100	Peak at 3 × 10 ³³

Trigger menu flexibility: commissioning of the ATLAS trigger

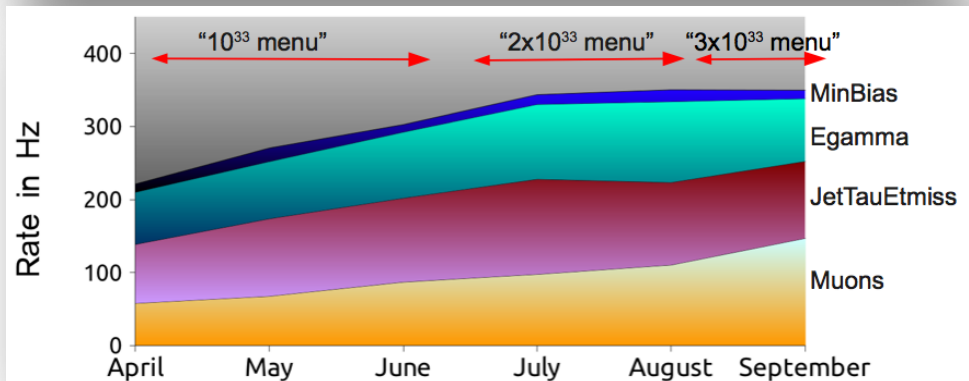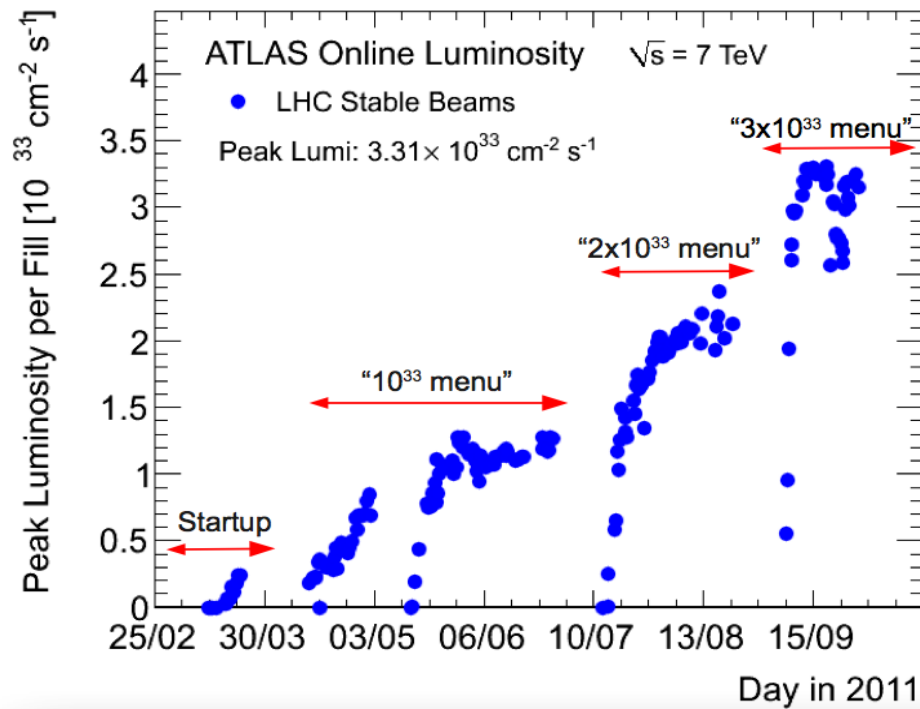

- **ATLAS start-up in 2008:** $L=10^{31} \text{ cm}^{-2} \text{ s}^{-1}$
 - **Level-1:** Low p_T thresholds and loose selection criteria
 - In the meanwhile, deploy high thresholds and multi-objects triggers for validation (to be used as back-up triggers)
 - **HLT:** running in pass-through mode for offline validation or with low thresholds
- Trigger menu **evolved** in several steps with increasing LHC luminosity
 - Complex signatures and higher p_T thresholds are added to reach the physics goals
 - Maintain stable trigger conditions for important physics results (for conferences)
 - Mostly keep the same balance between physics streams (electrons, muons, jets, minimum-bias)

Inclusive trigger example: from CDF

Trigger Chain: Inclusive High- p_T Central Electron

- Level 1
 - EM Cluster $E_T > 8$ GeV
 - $R\phi$ Track $p_T > 8$ GeV
- Level 2
 - EM Cluster $E_T > 16$ GeV
 - Matched Track $p_T > 8$ GeV
 - Hadronic / EM energy < 0.125
- Level 3
 - EM Cluster $E_T > 18$ GeV
 - Matched Track $p_T > 9$ GeV
 - Shower profile consistent with e-

To efficiently collect
W, Z, tt, tb, WW, WZ, ZZ,
 $W\gamma$, $Z\gamma$, W' , Z' , etc...

✓ Only one of these analysis
needs to measure trigger
efficiency, the others can benefit
from one (use Standard Model
Z,W)

✓ Use resolution at L2/L3 to
improve purity
✓ only really care about L1
efficiency near L2 threshold

Back-up trigger example: from CDF

Back-up Triggers for central Electron 18 GeV:

- W_NOTRACK
 - L1: $\text{EMET} > 8 \text{ GeV} \ \&\& \ \text{MET} > 15 \text{ GeV}$
 - L2: $\text{EMET} > 16 \text{ GeV} \ \&\& \ \text{MET} > 15 \text{ GeV}$
 - L3: $\text{EMET} > 25 \text{ GeV} \ \&\& \ \text{MET} > 25 \text{ GeV}$
- NO_L2
 - L1: $\text{EMET} > 8 \text{ GeV} \ \&\& \ r\phi \text{ Track } pT > 8 \text{ GeV}$
 - L2: **AUTO_ACCEPT**
 - L3: $\text{EMET} > 18 \text{ GeV} \ \&\& \ \text{Track } pT > 9 \text{ GeV} \ \&\& \ \text{shower profile consistent with e-}$
- NO_L3
 - L1: $\text{EMET} > 8 \text{ GeV} \ \&\& \ r\phi \text{ Track } pT > 8 \text{ GeV}$
 - L2: $\text{EMET} > 8 \text{ GeV} \ \&\& \ \text{Track } pT > 8 \text{ GeV} \ \&\& \ \text{Energy at Shower Max} > 3 \text{ GeV}$
 - L3: **AUTO_ACCEPT**

✓ Factorize efficiency into all the components:

- ✓ efficiency for track and EM inputs determined separately
- ✓ separate contributions from all the trigger levels

Redundant trigger example: from CDF

- Inclusive, Redundant Inputs are helpful
- L1_EM8_PT8 feeds
 - Inclusive high- p_T central electron chains
 - Di-lepton chains (ee, e μ , e τ)
 - Several back-up triggers
 - 15 separate L3 trigger chains in total
- A ttbar cross section analysis uses
 - Inclusive high- p_T central e chains
 - Inclusive high- p_T forward e chains
 - MET + jet chains
 - Muon chains

Trigger menus must be

Inclusive:

Reduce the overhead for the program analysis

Redundant:

if there is a problem in one detector or in one trigger input, the physics is not affected (less efficiently, but still the measurement is possible)

Concluding remarks

- The trigger strategy is a trade-off between physics requirements and affordable systems and technologies
 - A good design is crucial – then the work to maintain optimal performance is easy
- Here we just reviewed the main trigger requirements coming from physics
 - High efficiency – rate control
 - Perfect knowledge of the trigger selection on signal and background
 - Flexibility and redundancy
- In the next lecture, we will see how to implement such a system, still satisfying these requirements