

Future Circular Collider Study

Status and Parameter Update

M. Benedikt

gratefully acknowledging input from FCC coordination group
global design study team and all other contributors

LHC

SPS

PS

FCC



<http://cern.ch/fcc>

Introduction

Motivation and Scope

Study Timeline

Study Progress

Implementation and Layout

Machine parameters and optics

Machine-Detector Activities, Technologies

FCC Collaboration Status

Outlook



FCC Strategic Motivation


- **European Strategy for Particle Physics 2013:**
“...to **propose an ambitious post-LHC accelerator project**....., CERN should undertake design studies for accelerator projects in a global context,...with emphasis on proton-proton and electron-positron high-energy frontier machines....coupled to a vigorous accelerator R&D programme, including high-field magnets and high-gradient accelerating structures,....”
- **US P5 recommendation 2014:**
”....A very high-energy proton-proton collider is the most powerful tool for direct discovery of new particles and interactions under any scenario of physics results that can be acquired in the P5 time window....”
- **ICFA statement 2014:**
”.... ICFA supports studies of energy frontier circular colliders and encourages global coordination.....”

Future Circular Collider Study

GOAL: CDR and cost review for the next ESU (2019)

International FCC collaboration (CERN as host lab) to study:

- **pp -collider (*FCC-hh*)**
→ main emphasis, defining infrastructure requirements
- ~16 T ⇒ 100 TeV pp in 100 km**
- **80-100 km tunnel infrastructure** in Geneva area
 - **e^+e^- collider (*FCC-ee*)** as potential first step
 - **p - e (*FCC-he*) option**
 - **HE-LHC** with *FCC-hh* technology

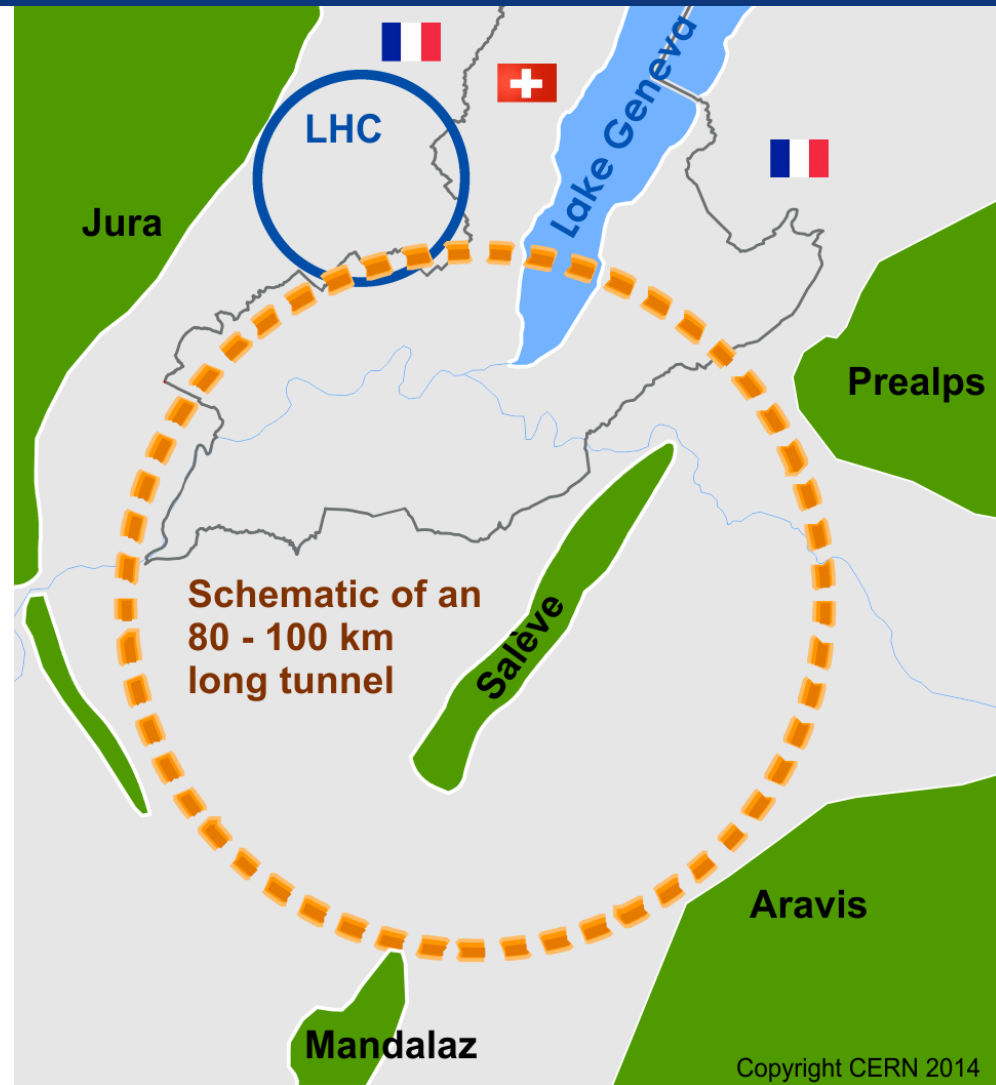

FCC Scope: Accelerator and Infrastructure



FCC-hh: **100 TeV pp collider as long-term goal**
→ defines infrastructure needs

FCC-ee: **e^+e^- collider**, potential intermediate step
HE-LHC: based on FCC-hh technology




key technologies


pushed in dedicated R&D programmes, e.g.

16 Tesla magnet program

SRF technologies and RF power sources




tunnel infrastructure in Geneva area, linked to CERN accelerator complex;
site-specific, as requested by European strategy




Physics Cases

physics opportunities for hh, ee and he
discovery potentials



Experiments

experiment concepts for hh, ee and he
machine Detector Interface studies
concepts for **worldwide data services**




Cost Estimates

overall cost model ;
cost scenarios for collider options
including infrastructure and injectors ;
implementation and governance models




CERN Circular Colliders & FCC

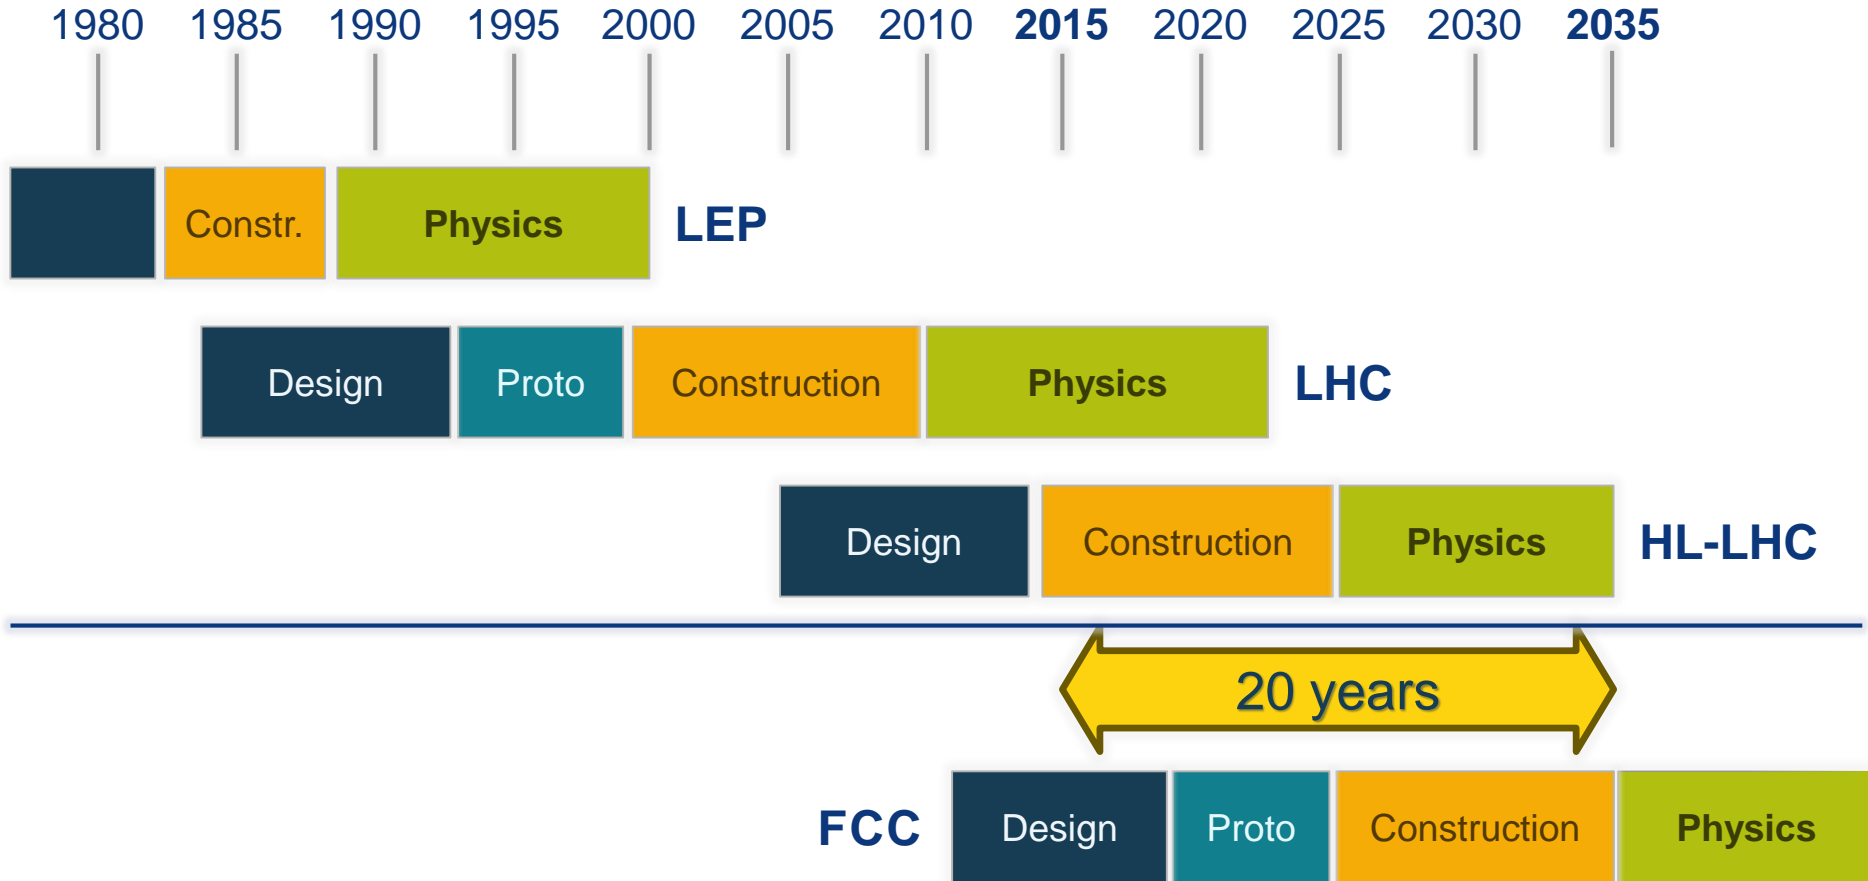

Now is the time to plan for the period 2035 – 2040



CDR Study Time Line

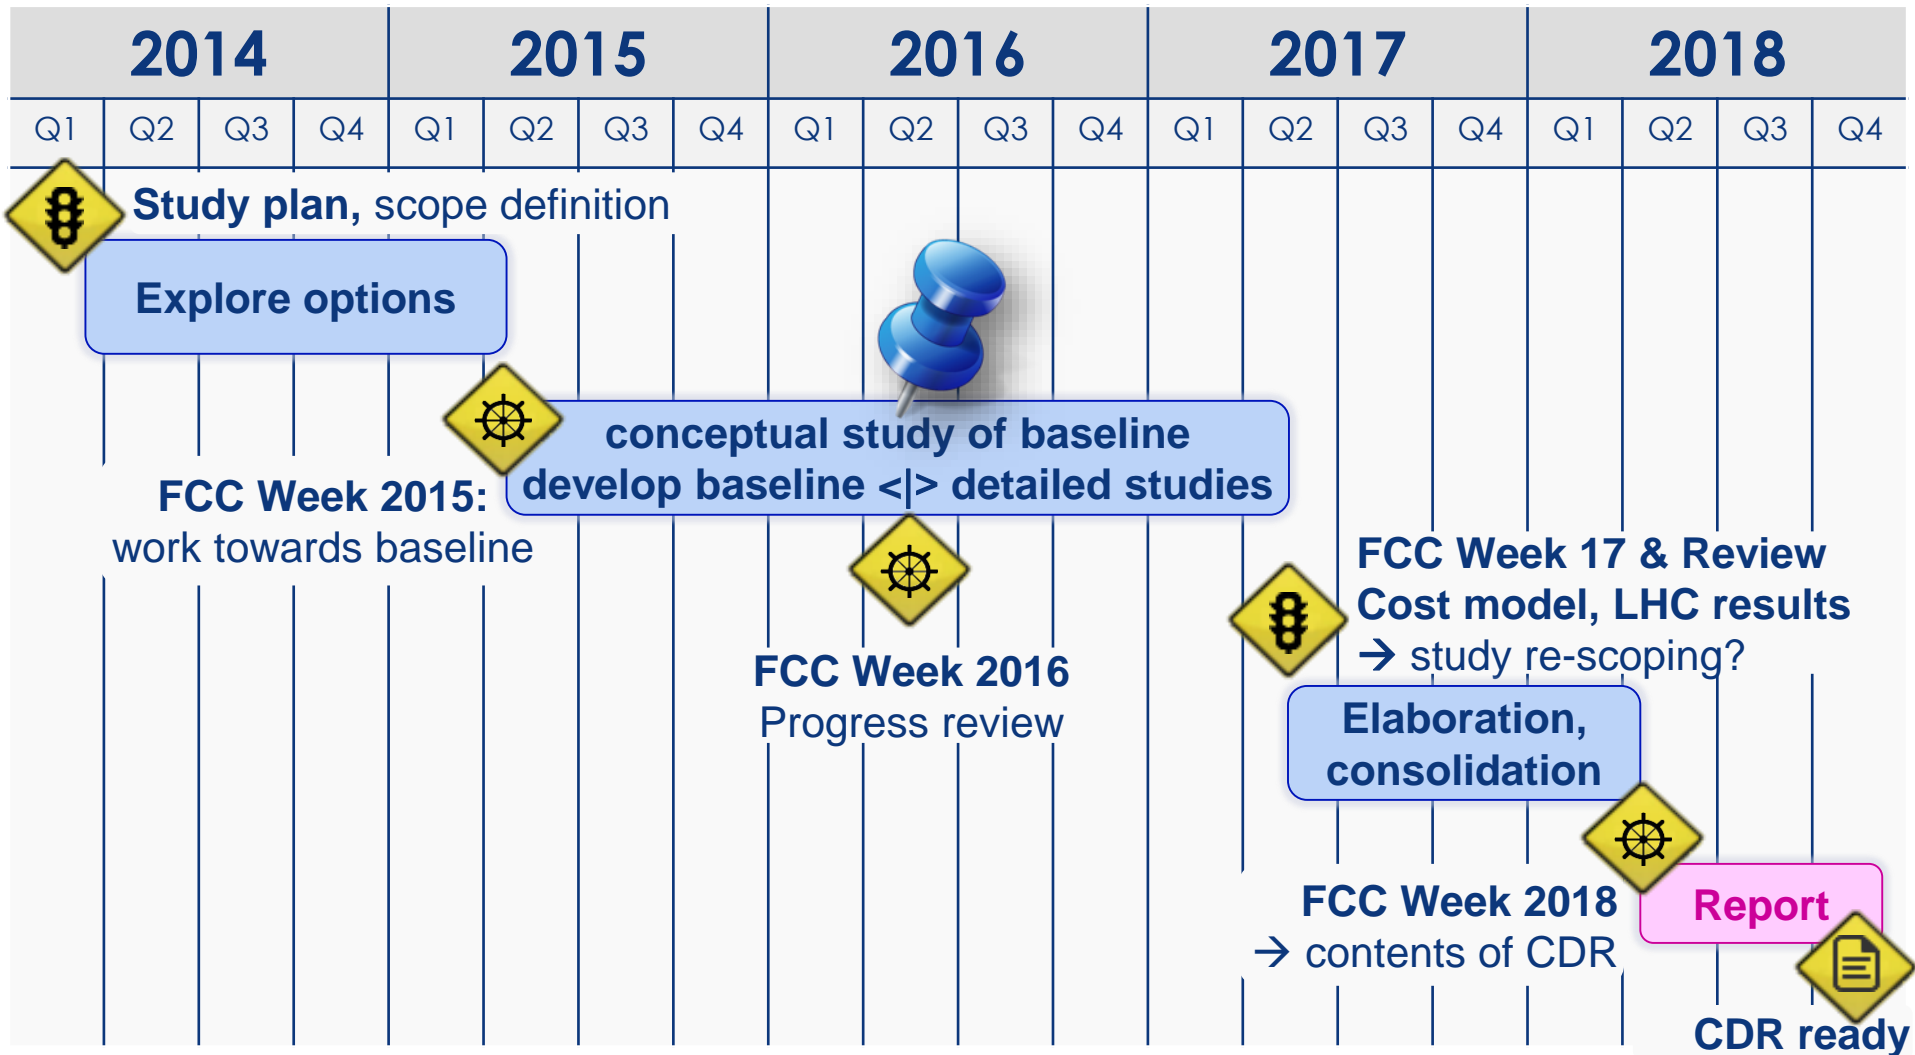



Status and Progress



Alignment Shafts Query

Choose alignment option
100km quasi-circular

Tunnel elevation at centre: 261mASL


Grad. Params:

Azimuth (°): -20
Slope Angle x-x(%): 0.65
Slope Angle y-y(%): 0

LOAD SAVE CALCULATE

Alignment centre
X: 2499731 Y: 1108403

	Angle	CP 1 Depth	Angle	CP 2 Depth
LHC	-64°	220m	64°	172m
SPS		242m		241m
TI2		235m		241m
TI8		242m		170m

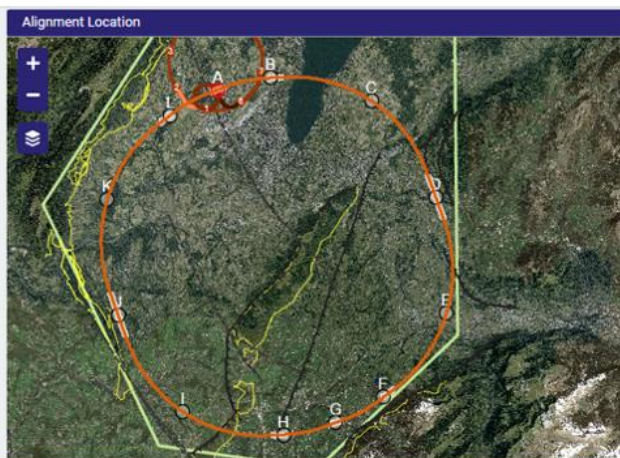

Geology Intersected by Shafts Shaft Depths

Point	Actual	Shaft Depth (m)				Geology (m)	
		Molasse SA	Wildflysch	Quaternary	Molasse	Urgonian	Calcaire
A	304	0	0	12	213	0	79
B	266	0	0	80	156	0	30
C	257	0	0	58	199	0	0
D	272	52	0	40	181	0	0
E	132	0	0	64	68	0	0
F	392	0	0	40	296	0	56
G	354	0	0	116	237	0	0
H	268	0	0	0	268	0	0
I	170	0	0	12	158	0	0
J	315	0	0	22	293	0	0
K	221	0	0	52	169	0	0
L	260	0	0	21	239	0	0
Total	3211	52	0	517	2478	0	109

Alignment Profile

- 90 – 100 km fits geological situation well
- Review confirmed focus on 100 km, planar version
- LHC suitable as potential injector
- The 100 km version, intersecting LHC, is being studied now in more detail

Injector options:


- SPS → LHC → FCC
- SPS/SPS_{upgrade} → FCC
- SPS → FCC booster → FCC

Current baseline:



- injection energy 3.3 TeV LHC
- confirmed by review

Alternative options:



- Injection around 1.5 TeV
- compatible with: SPS_{upgrade}, LHC, FCC booster

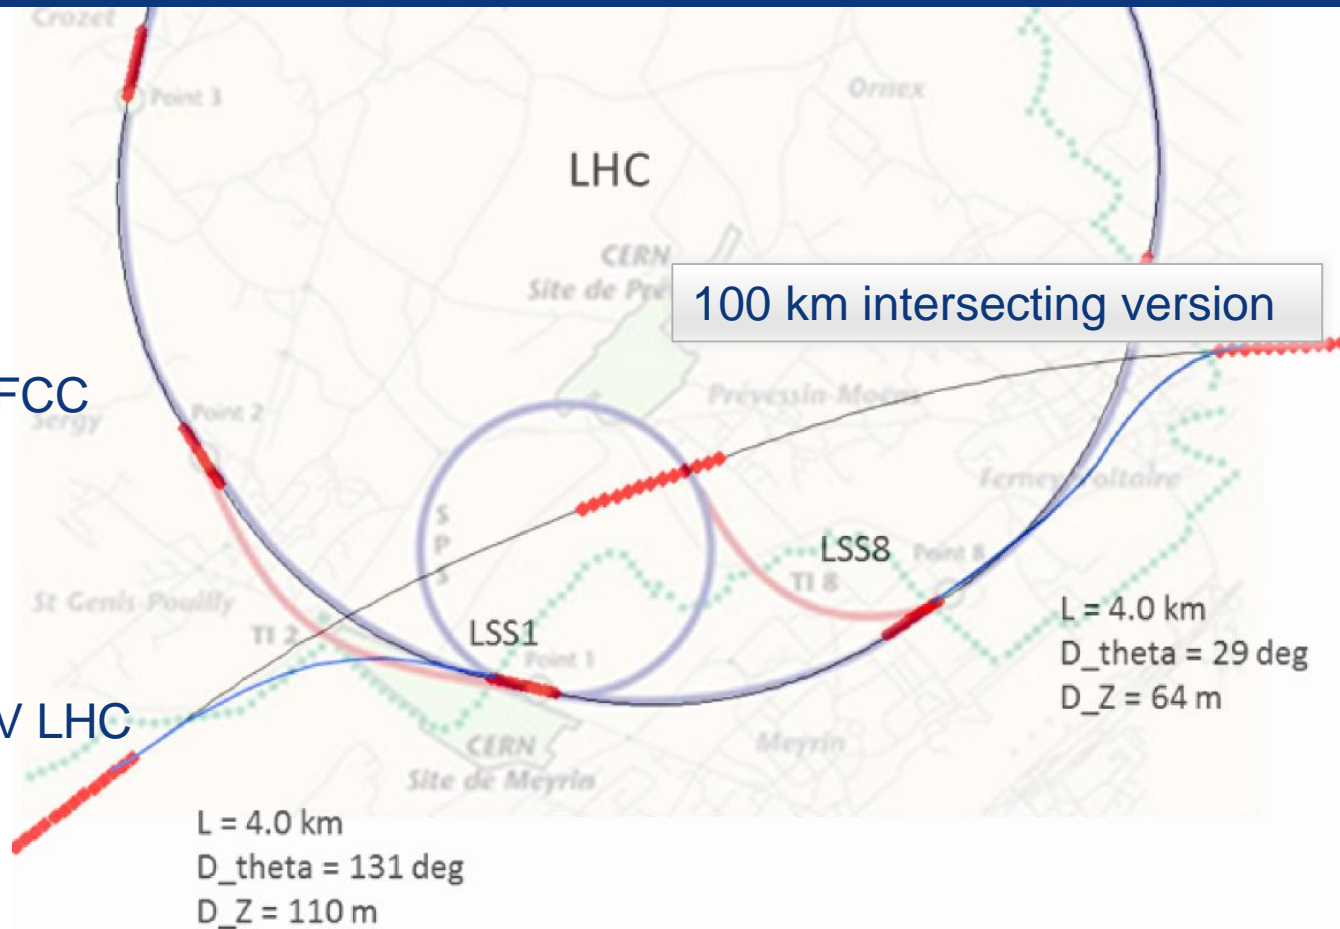

FCC-ee 1, FCC-ee 2, FCC-ee booster (FCC-hh footprint)

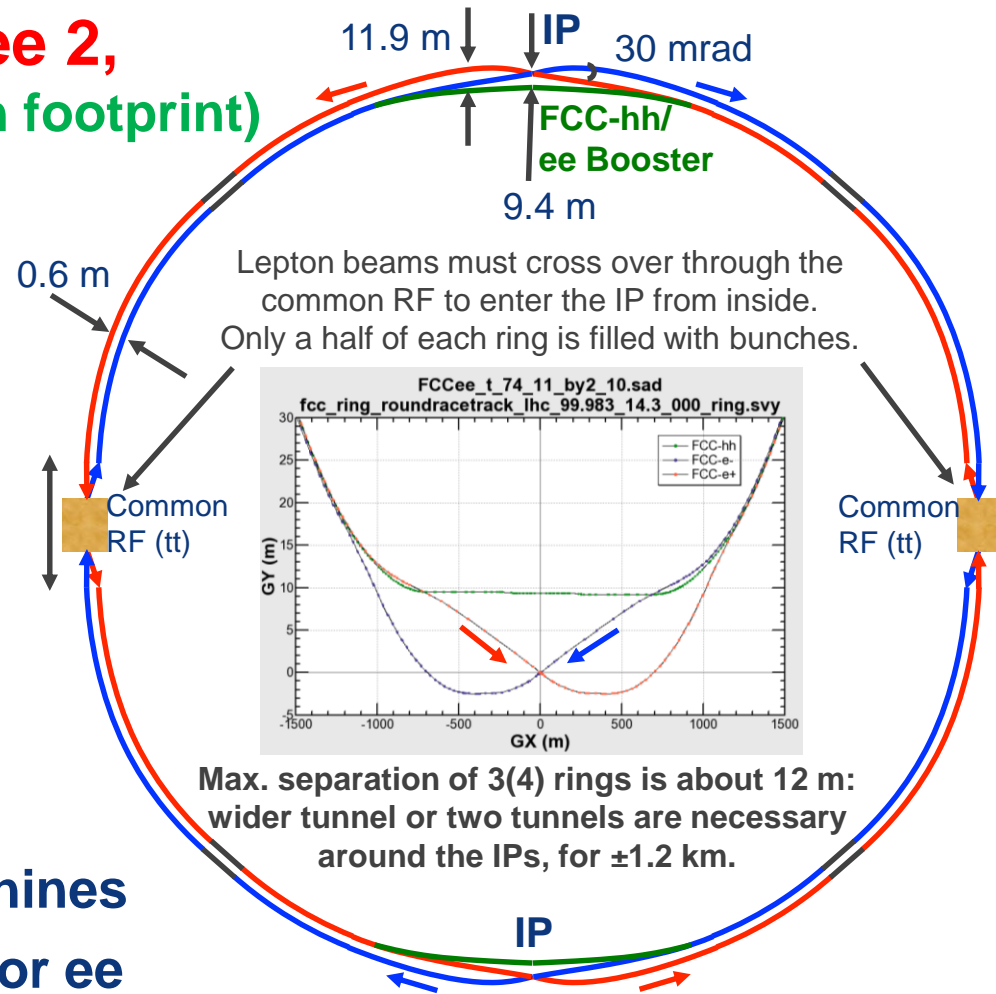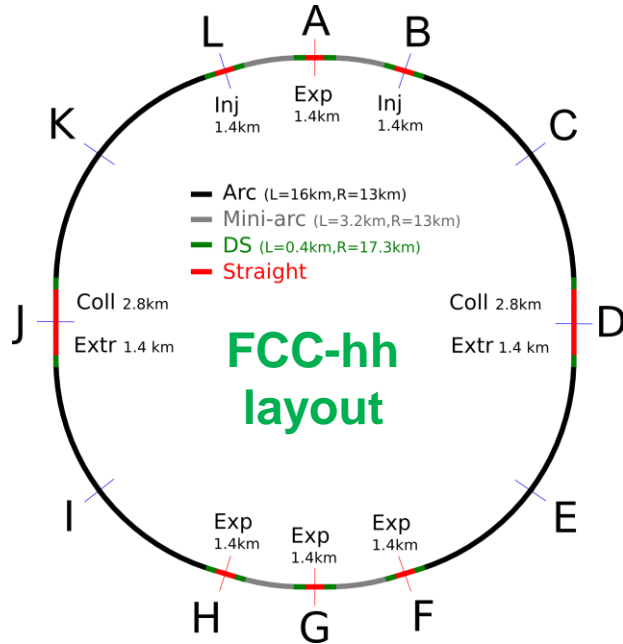


- 2 main IPs in A, G for both machines
- asymmetric IR optic/geometry for ee to limit synchrotron radiation to detector

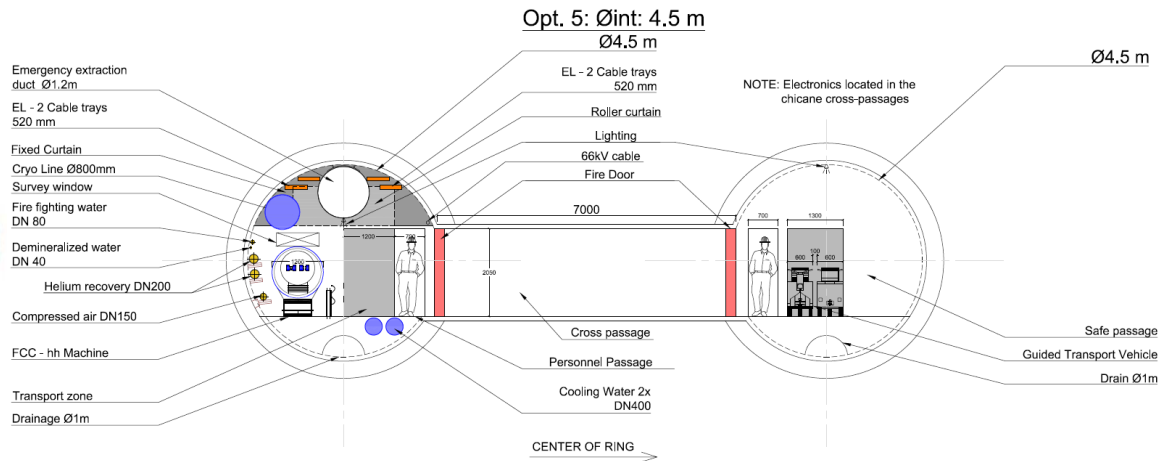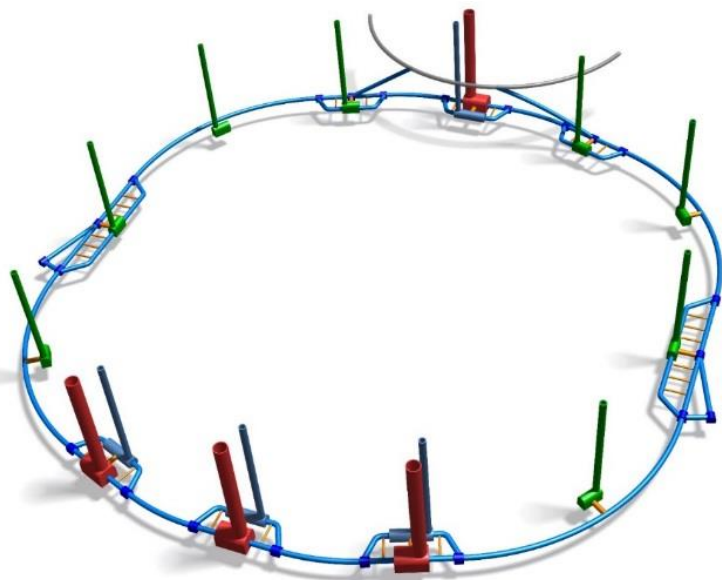

More detailed studies launched on

- CE: single vs. double tunnels
- CE: caverns, shafts, underground layout
- technical infrastructures
- safety, access
- transport, integration, installation
- operation aspects

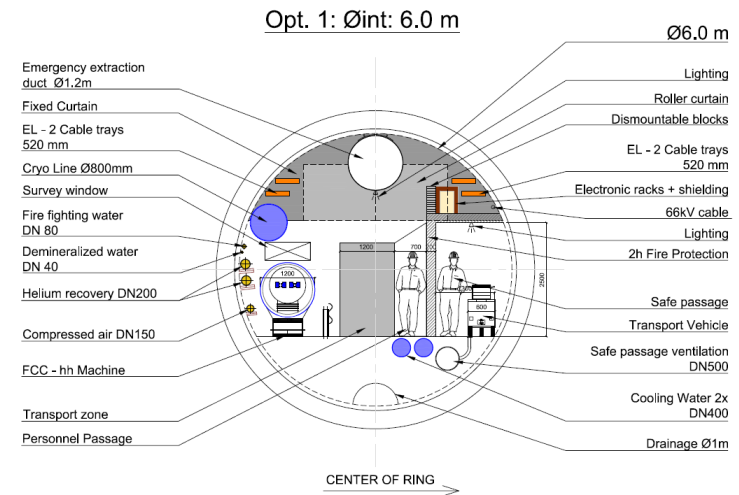



hadron collider parameters

parameter	FCC-hh		SPPC	HE-LHC* *tentative	(HL) LHC
collision energy cms [TeV]	100		71.2	>25	14
dipole field [T]	16		20	16	8.3
circumference [km]	100		54	27	27
# IP	2 main & 2		2	2 & 2	2 & 2
beam current [A]	0.5		1.0	1.12	(1.12) 0.58
bunch intensity [10^{11}]	1	1 (0.2)	2	2.2	(2.2) 1.15
bunch spacing [ns]	25	25 (5)	25	25	25
beta* [m]	1.1	0.3	0.75	0.25	(0.15) 0.55
luminosity/IP [$10^{34} \text{ cm}^{-2}\text{s}^{-1}$]	5	20 - 30	12	>25	(5) 1
events/bunch crossing	170	<1020 (204)	400	850	(135) 27
stored energy/beam [GJ]	8.4		6.6	1.2	(0.7) 0.36
synchrotr. rad. [W/m/beam]	30		58	3.6	(0.35) 0.18



5 year long operation periods

- 3.5 years operation periods with
 - 1 year HW comm., MDs, short stops
 - 2.5 years lumi. run with 70% availability
- 1.5 year shutdown

2 periods at baseline parameters (10 yrs)


- Peak luminosity $5 \times 10^{34} \text{cm}^{-2}\text{s}^{-1}$
- Total of 2.5ab^{-1} (per detector)

3 periods at ultimate parameters (15 yrs)

- Peak luminosity $\leq 30 \times 10^{34} \text{cm}^{-2}\text{s}^{-1}$
- 5ab^{-1} per period total of 15ab^{-1}

$O(20) \text{ab}^{-1}$ integrated luminosity/experiment

luminosity [$10^{34} \text{cm}^{-2}\text{s}^{-1}$] radiation damping: $\tau \sim 1 \text{h}$

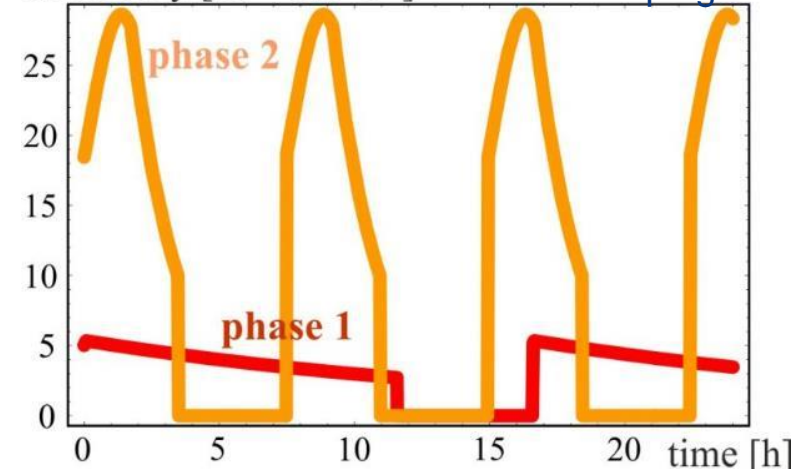

phase 1: $\beta^* = 1.1 \text{ m}$, $\Delta Q_{\text{tot}} = 0.01$, $t_{\text{ta}} = 5 \text{ h}$, $250 \text{ fb}^{-1} / \text{year}$
 phase 2: $\beta^* = 0.3 \text{ m}$, $\Delta Q_{\text{tot}} = 0.03$, $t_{\text{ta}} = 4 \text{ h}$, $1 \text{ ab}^{-1} / \text{year}$

consistent with
physics goal:
 20ab^{-1} in total

Detectors must sustain a total of $>20 \text{ab}^{-1}$ and $>5 \text{ab}^{-1}$ between maintenance stops
 Machine design to support 3.5 year operation periods w/o warm up or long stops



Physics prospects




Physics at the FCC-hh

<https://twiki.cern.ch/twiki/bin/view/LHCPhysics/FutureHadroncollider>


- **Volume 1: SM processes** (238 pages)
 - **Volume 2: Higgs and EW symmetry breaking studies** (175 pages)
 - **Volume 3: beyond the Standard Model phenomena** (189 pages)
 - **Volume 4: physics with heavy ions** (56 pages)
 - **Volume 5: physics opportunities with the FCC-hh injectors** (14 pages)
-
- will be published as CERN yellow report
 - paper copies available at registration desk




Regular arc cell

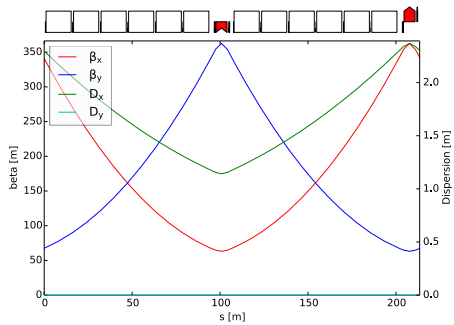


Interaction region

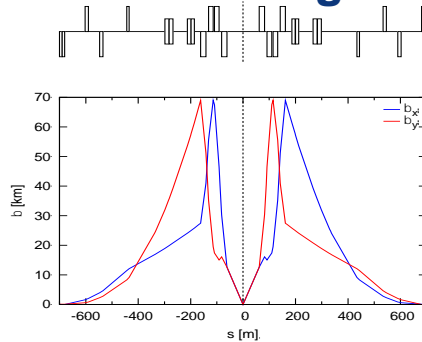

Injection with RF

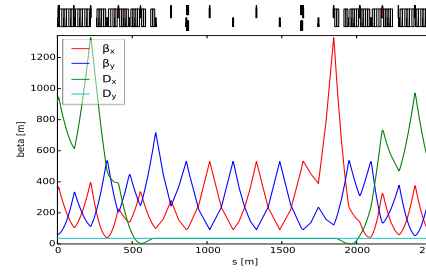


Momentum collim.

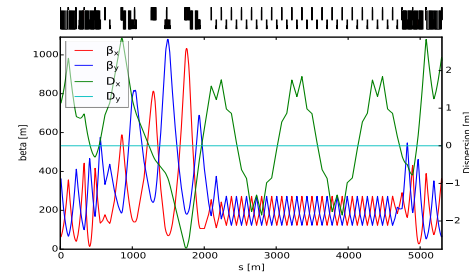


Full ring optics design available as basis for:


- beam dynamics studies
- optimisation of each insertion
- definition of system specifications (apertures, etc.)
- improvement of baseline optics and layout

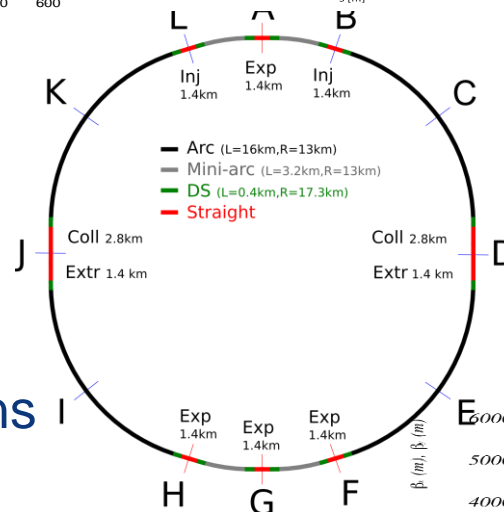

Betatron collimation



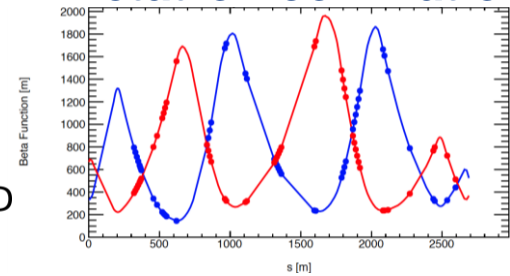


Extraction/dumping

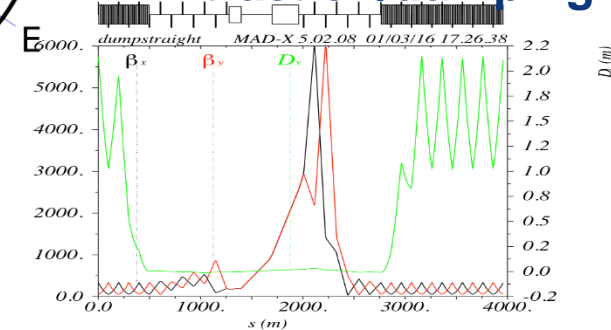


Design of interaction region

- consistent for machine and detector
 - $L^*=45$ m
 - integrated spectrometer and compensation dipoles
- new optics design with longer triplet with large aperture
 - should help for collision debris
 - more beam stay clear

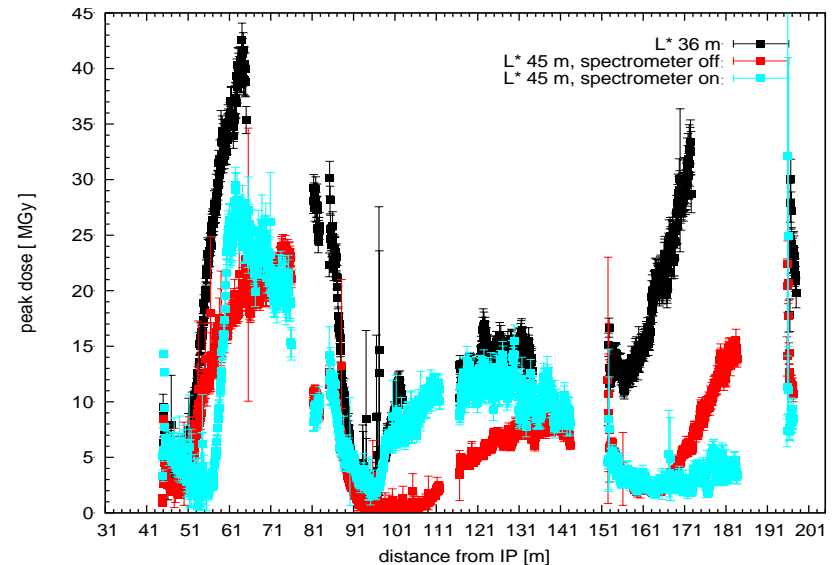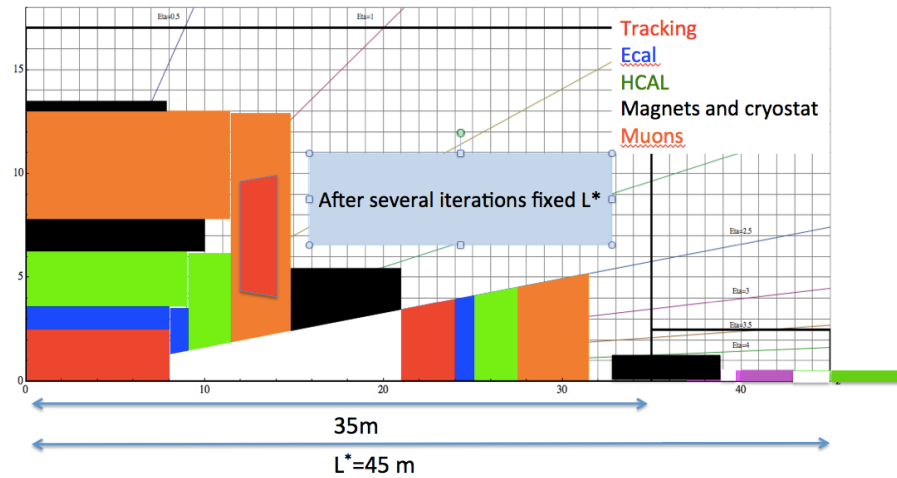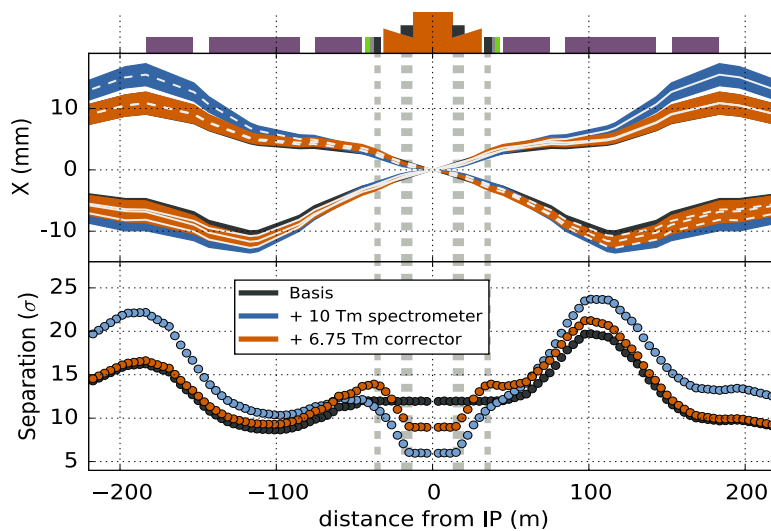

A $B=6$ T, $R=6$ m solenoid with shielding coil and 2 dipoles has been engineered in detail.

Different alternative magnet systems are also being explored.

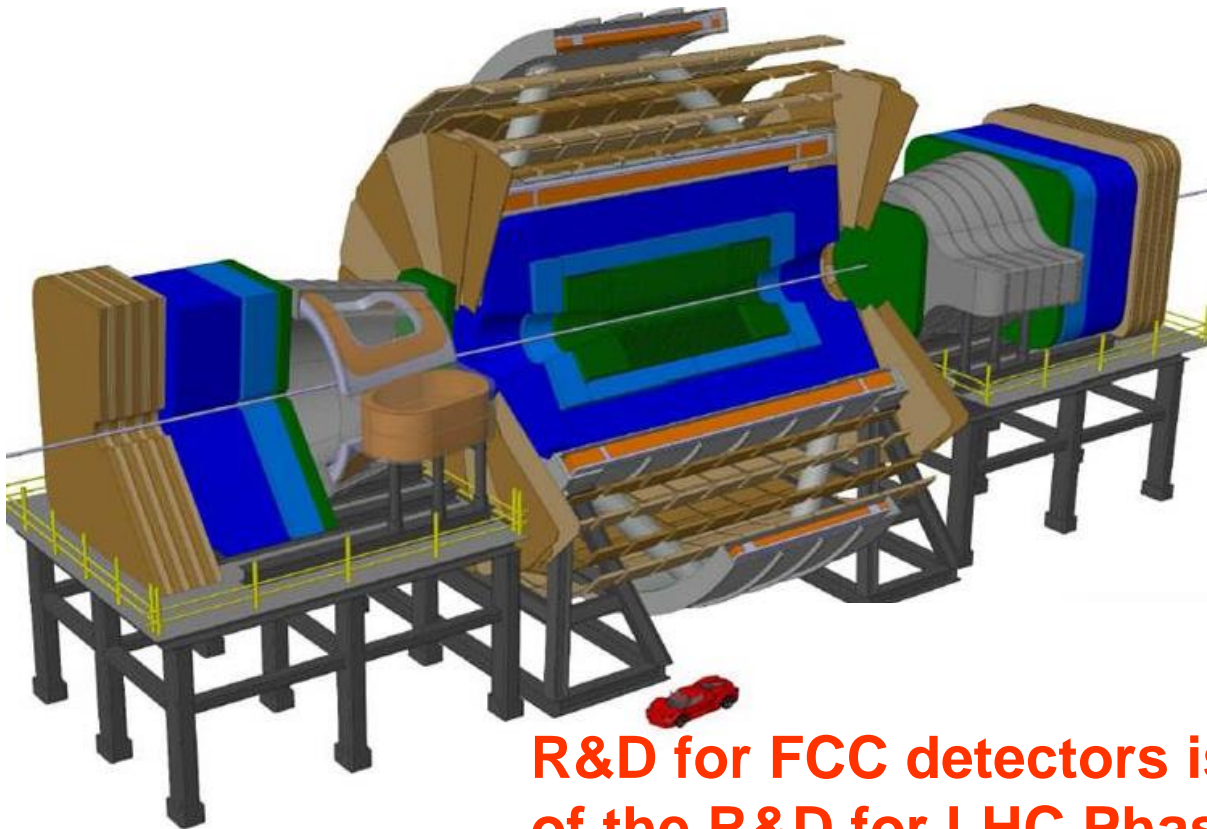


Some design challenges:


- large η acceptance
- radiation levels of >50 x LHC Phase II
- pileup of ~ 1000

R&D for FCC detectors is a natural continuation of the R&D for LHC Phase II upgrade


- Detector studies well under way for hh and ee
- Parametrized detector performance model (DELPHES) available and integrated in FCC software framework for physics simulations
<https://twiki.cern.ch/twiki/bin/view/FCC/FccPythiaDelphes>

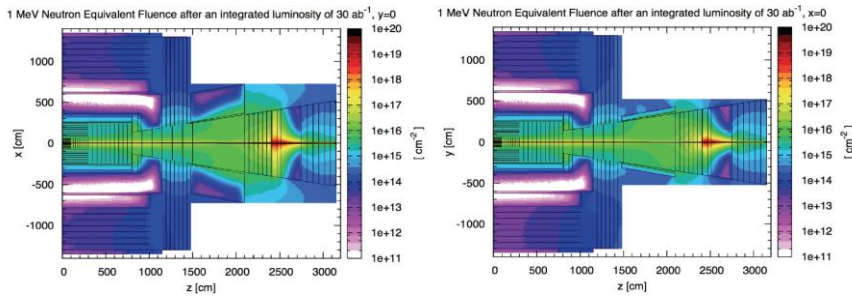


Radiation simulations, shielding requirements

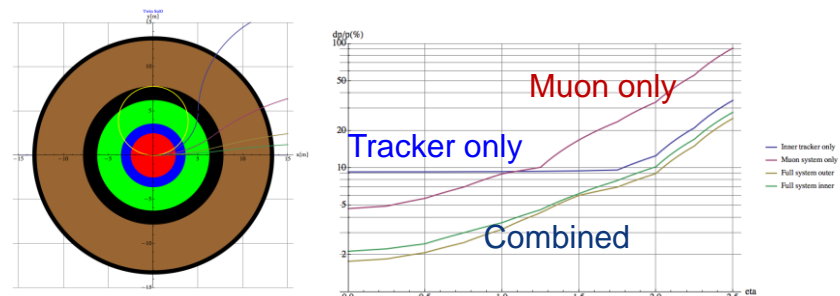

Muon system performance & requirement studies

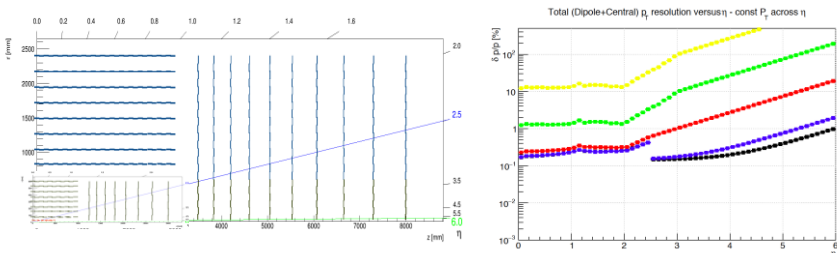

Tracker resolution, occupancy, data rate studies

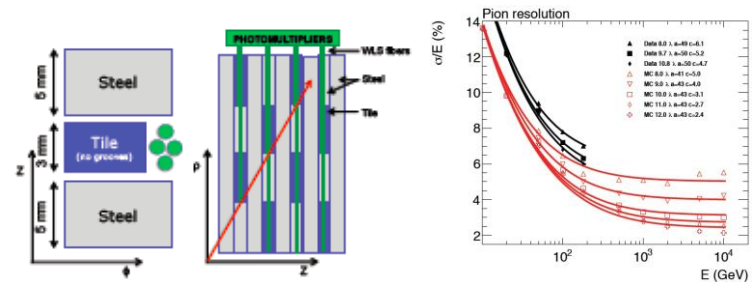

Calorimeter resolution, containment studies



Synchrotron radiation/beam screen



High synchrotron radiation load of protons @ 50 TeV:

- ~30 W/m/beam (@16 T) (LHC <0.2W/m)
- 5 MW total in arcs

New Beam screen with ante-chamber


- absorption of synchrotron radiation at 50 K to reduce cryogenic power
- avoids photo-electrons, helps vacuum

First FCC-hh beam screen prototype Testing 2017 in ANKA within EuroCirCol

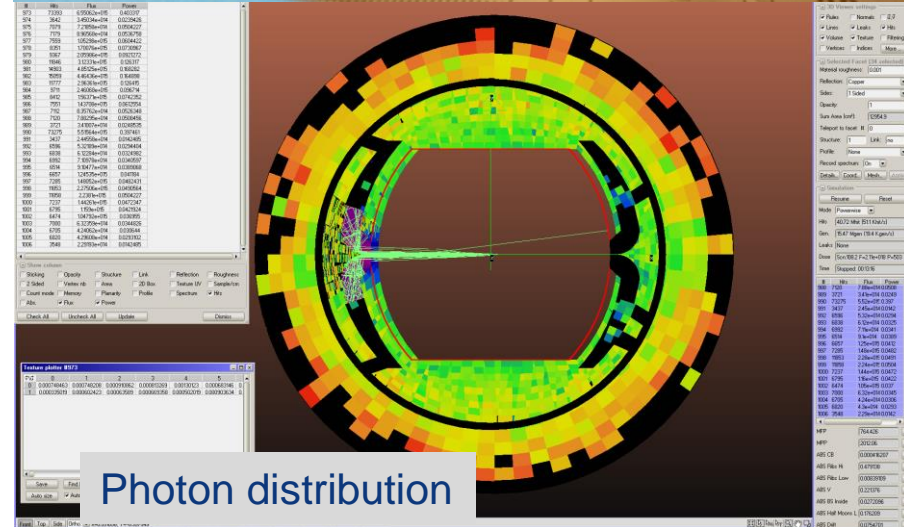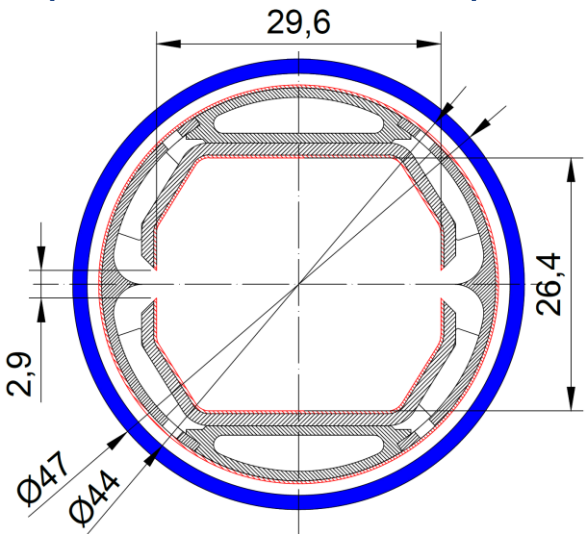


Main Milestones of the FCC Magnet Program 2016 - 2019


Milestone	Description	15	2016	2017	2018	2019	2020	21
M0	High J_c wire development with industry	█	█	█	█	█	█	█
M1	Supporting wound conductor test program	█	█	█	█	█	█	█
M2	Design & manufacture 16T ERMC with existing wire	█	█	█	█	█	█	█
M3	Design & manufacture 16 T RMM with existing wire	█	█	█	█	█	█	█
M4	Design & manufacture 16T demonstrator magnet	█	█	█	█	█	█	█
M5	Procurement of enhanced high J_c wire	█	█	█	█	█	█	█
M6	EuroCirCol design 16T accelerator quality model	█	█	█	█	█	█	█
	Manufacture and test of the 16 T EuroCirCol model	█	█	█	█	█	█	█

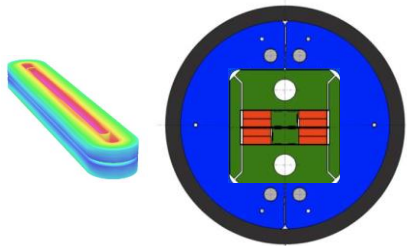

ERMC (16 T mid-plane field)
mid 2017

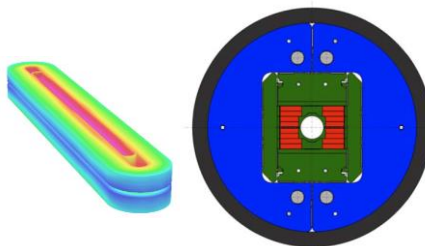

RMM (16 T in 50 mm cavity)
end 2017

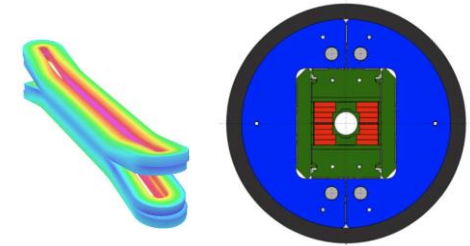

Demonstrator (16 T, 50 mm gap)
end 2018




Nb₃Sn conductor program

Nb₃Sn conductor is one of the major cost and performance factors for FCC-hh and must be given highest attention

- **Goals: J_c increase (16 T, 4.2 K) > 1500 A/mm², significant cost reduction**
- **Actions ongoing and planned (in addition to activities at CERN):**
 - Purchase of wires in Europe, US
 - Industrial R&D in Europe
 - Collaboration agreements with KEK, Russia, Korea (in preparation), to stipulate conductor development with regional industry
 - Collaborations with several European Universities and Research Centres
- **Strong industrial R&D program is highly desired also in the US**

FCC study continues effort on high-field collider in LHC tunnel

2010 EuCARD Workshop Malta;
Yellow Report CERN-2011-1

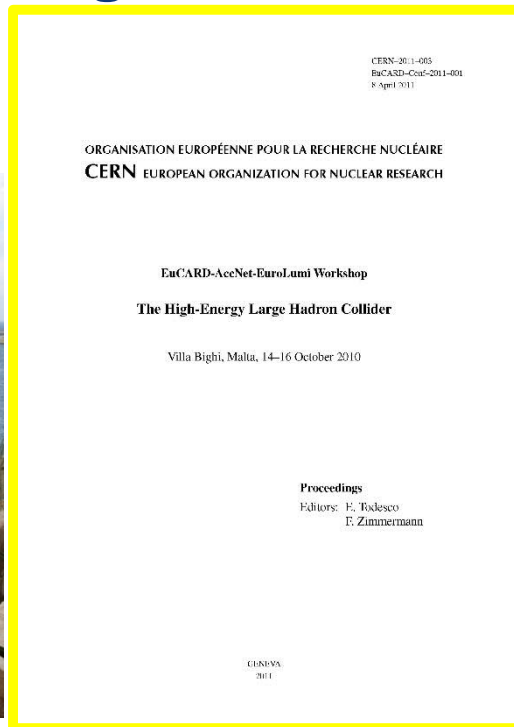

EuCARD-AccNet-
EuroLumi Workshop:
The High-Energy
Large Hadron Collider
- HE-LHC10,
E. Todesco and F.
Zimmermann (eds.),
EuCARD-CON-2011-
001; arXiv:1111.7188;
CERN-2011-003
(2011)

- based on 16-T dipoles developed for FCC-hh
- extrapolation of other parts from the present (HL-)LHC and from FCC developments




lepton collider parameters

parameter	FCC-ee (400 MHz)					CEPC	LEP2
Physics working point	Z		WW	ZH	tt_{bar}	H	
energy/beam [GeV]	45.6		80	120	175	120	105
bunches/beam	30180	91500	5260	780	81	50	4
bunch spacing [ns]	7.5	2.5	50	400	4000	3600	22000
bunch population [10^{11}]	1.0	0.33	0.6	0.8	1.7	3.8	4.2
beam current [mA]	1450	1450	152	30	6.6	16.6	3
luminosity/IP x $10^{34} \text{cm}^{-2} \text{s}^{-1}$	210	90	19	5.1	1.3	2.0	0.0012
energy loss/turn [GeV]	0.03	0.03	0.33	1.67	7.55	3.1	3.34
synchrotron power [MW]	100					103	22
RF voltage [GV]	0.4	0.2	0.8	3.0	10	6.9	3.5


identical FCC-ee baseline optics for all energies

FCC-ee: 2 separate rings CEPC, LEP: single beam pipe

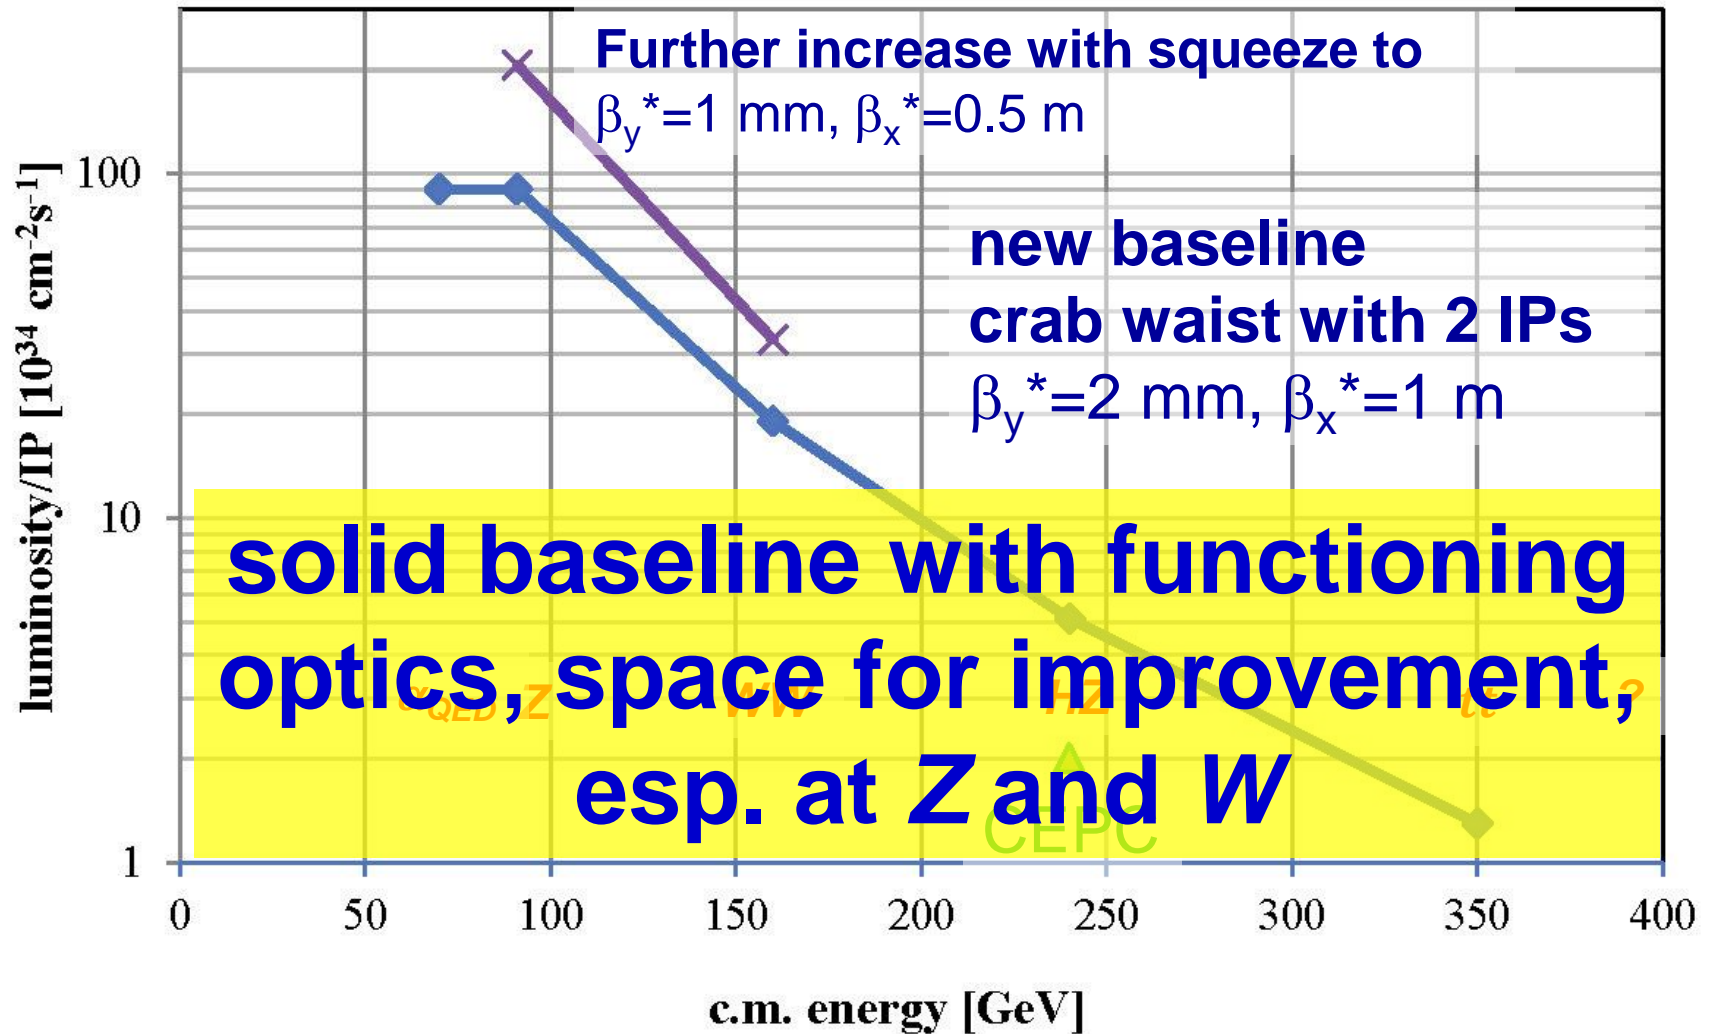



FCC-ee exploits lessons & recipes from past e^+e^- and pp colliders

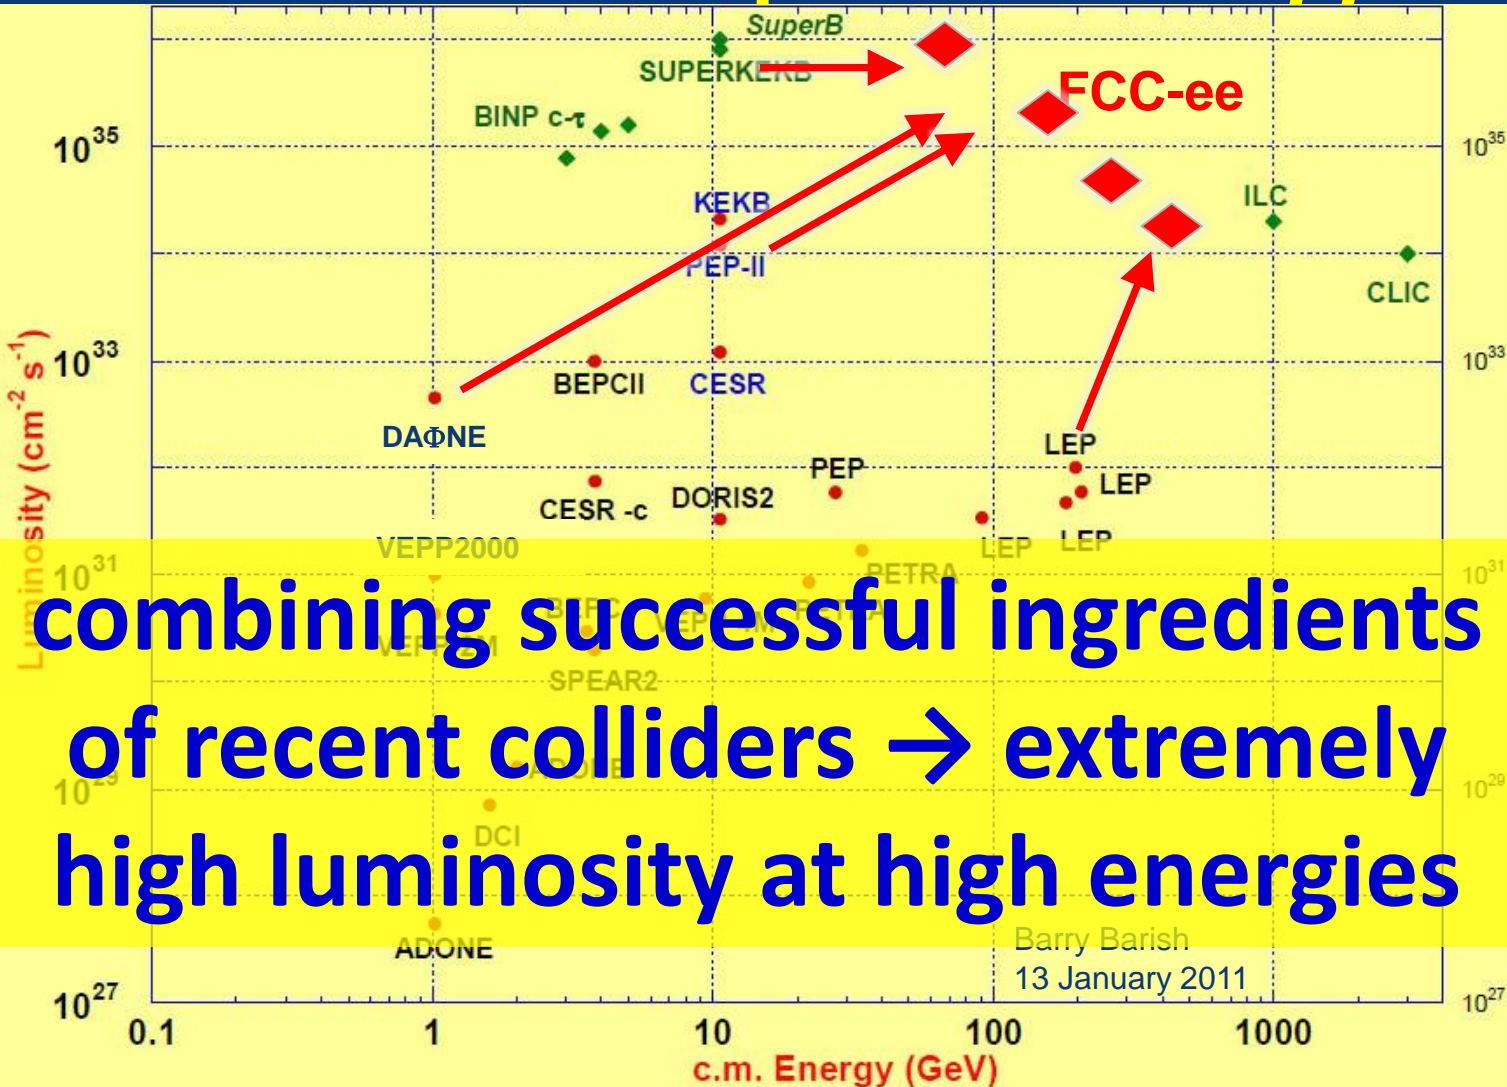

LEP:

high energy
 SR effects

B-factories:

KEKB & PEP-II:

**high beam
 currents**

top-up injection

DAΦNE: **crab waist**

Super B-factories

S-KEKB: **low β_y ***

KEKB: e^+ source

HERA, LEP, RHIC:


spin
 gymnastics



Optics design for all working points achieving baseline performance

Interaction region: asymmetric optics design

- Synchrotron radiation from upstream dipoles <100 keV up to 450 m from IP
- Dynamic aperture & momentum acceptance requirements fulfilled at all WPs

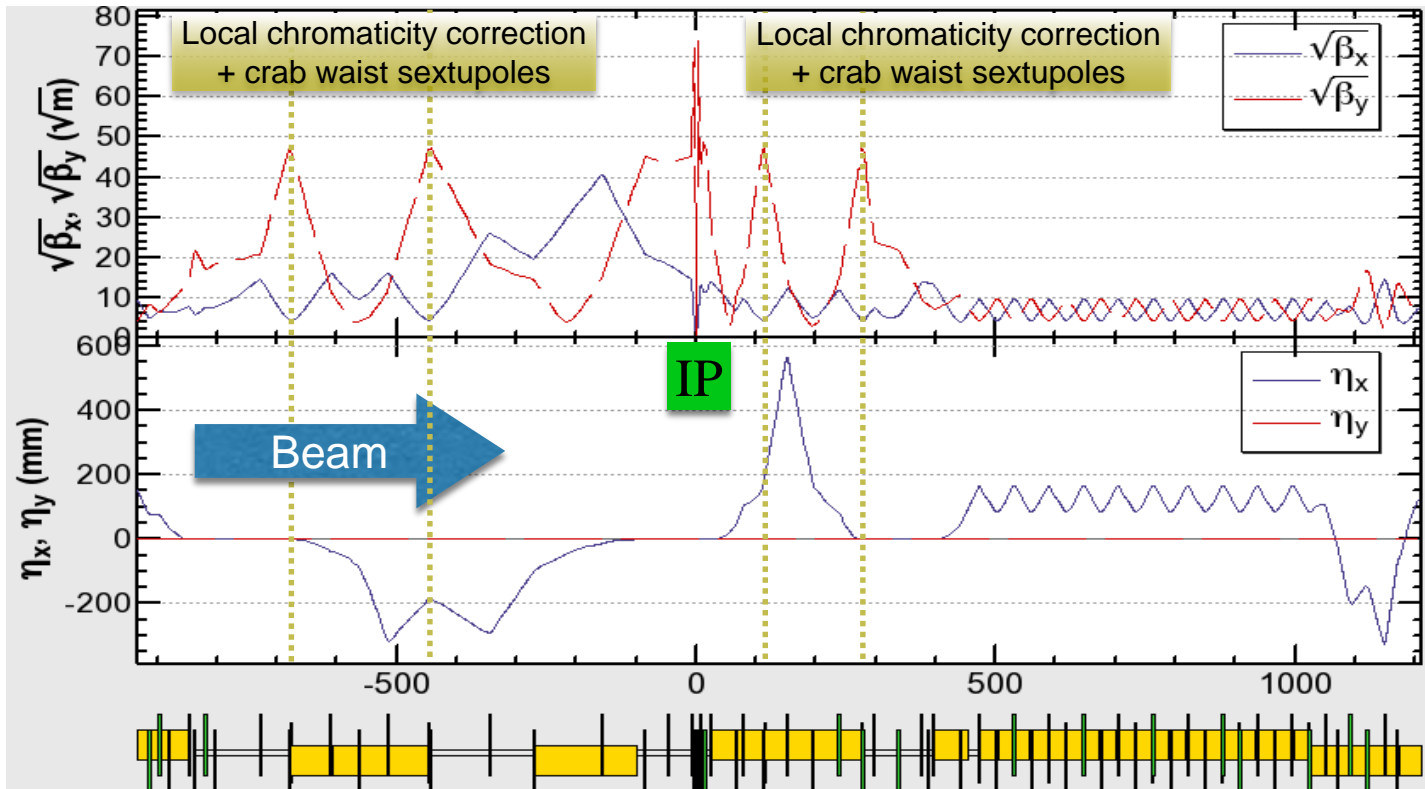


Very large range of operation parameters

“Ampere-class” machines

	V_{total} GV	n_{bunches}	I_{beam} mA	$\Delta E/\text{turn}$ GeV
hh	0.032		500	
Z	0.4/0.2	30000/90000	1450	0.034
W	0.8	5162	152	0.33
H	5.5	770	30	1.67
t	10	78	6.6	7.55

“high gradient” machines


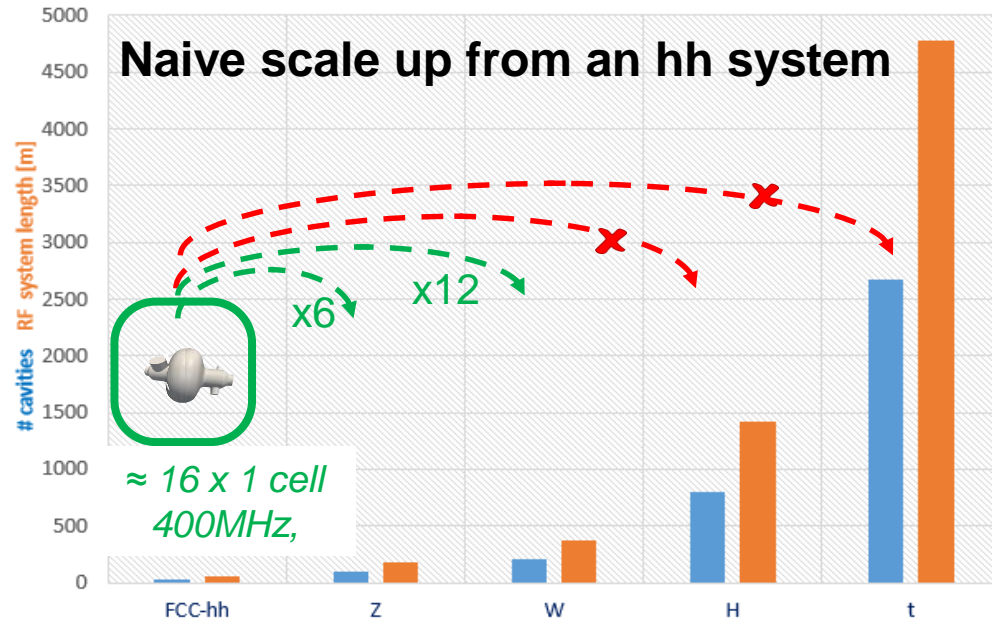


- Voltage and beam current ranges span more than factor $> 10^2$
- **No well-adapted single RF system solution satisfying requirements**

RF system R&D lines



400 MHz single-cell cavities preferred for hh and ee-Z (few MeV/m)

- Baseline Nb/Cu @4.5 K, development with synergies to HL-LHC, HE-LHC
- R&D: power coupling 1 MW/cell, HOM power handling (damper, cryomodule)

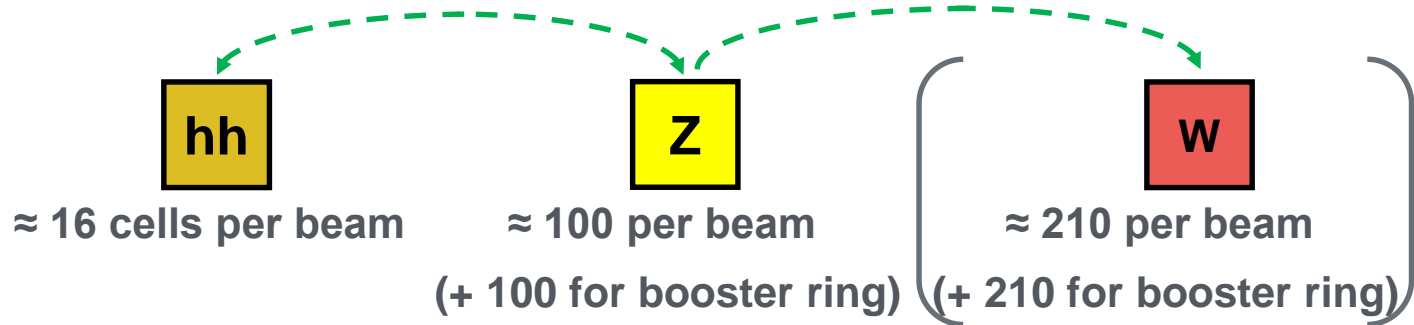


400 or 800 MHz multi-cell cavities preferred for ee-H, ee-tt and ee-W

- Baseline options 400 MHz Nb/Cu @4.5 K, \longleftrightarrow 800 MHz bulk Nb system @2K
- R&D: High Q_0 cavities, coating, long-term: Nb₃Sn like components

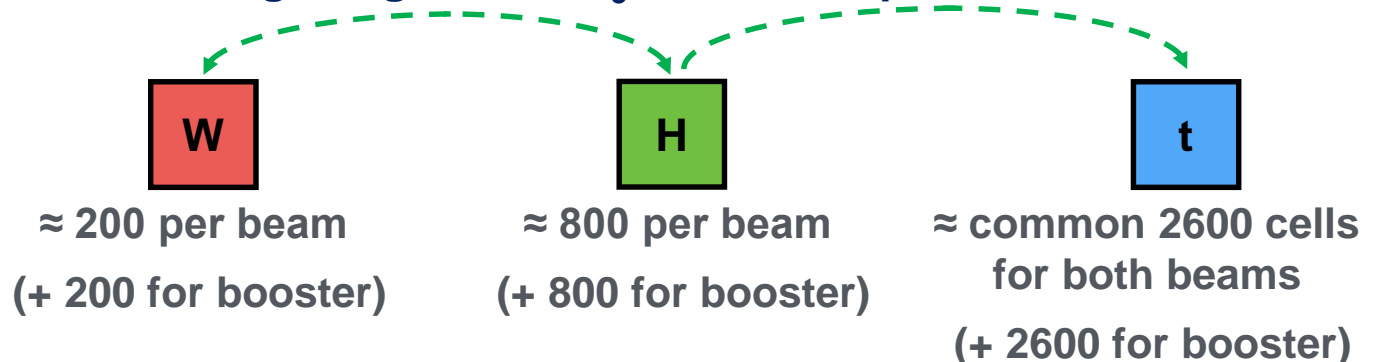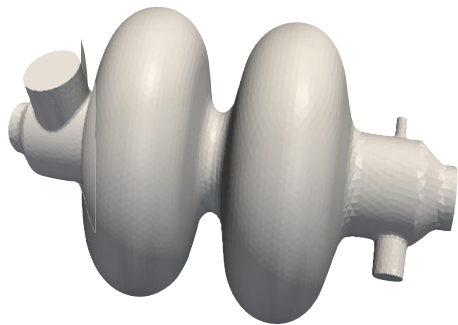

MDI work started with optimization of

- I^* , IR quadrupole design
- compensation & shielding solenoid
- SR masking and chamber layout


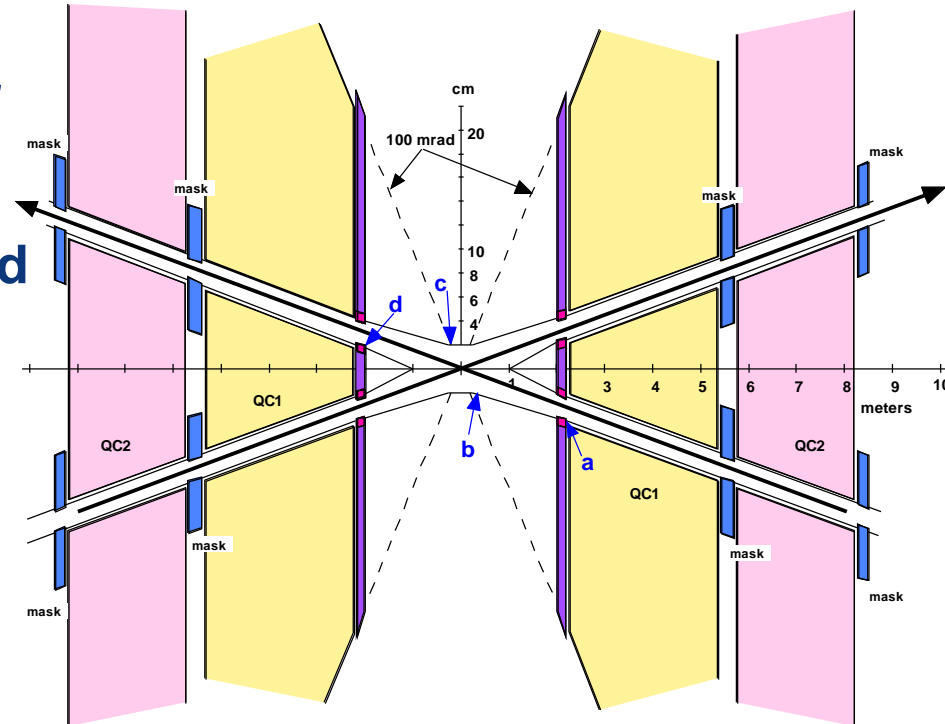


“envelope” for the shielding solenoid (yellow) :

- $z_{start} = 2.2$ m (front face)

Compensating solenoid (green):

- $z_{start} = 1.3$ m, $z_{end} = 2.2$ m
 - $B = 4.9$ T

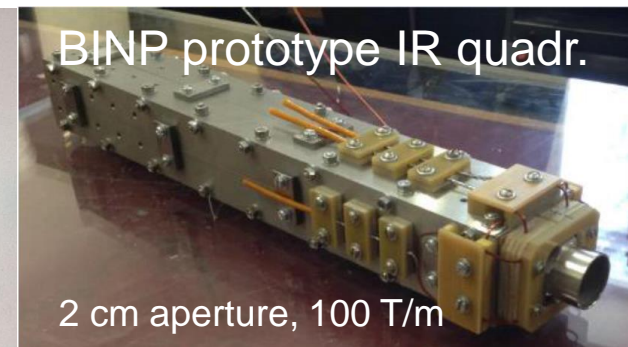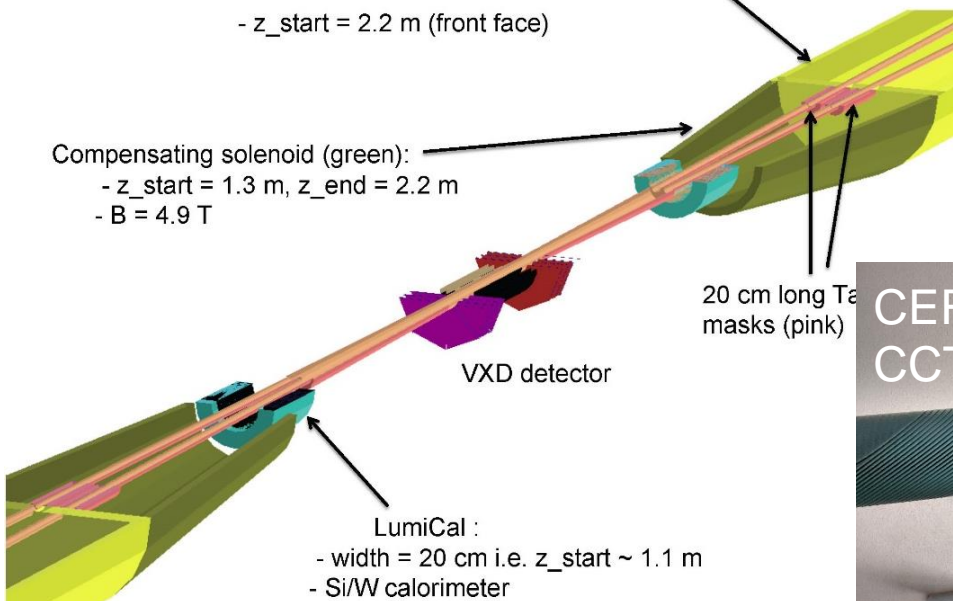


Adapted from ILC/CLIC detector:
Experience with LEP detectors
and ~20 years R&D for LC

Some physics differences


- Lower maximum energy 400GeV vs. >1000 GeV
- ➔ Momentum & energy resolution requirements
- Higher statistics – need matching systematics

Some technical differences

- High physics rate: 100 kHz Zs, must keep all.
- No bunching ➔ cooling issues
- better definition of beam energy and lower beam induced backgrounds

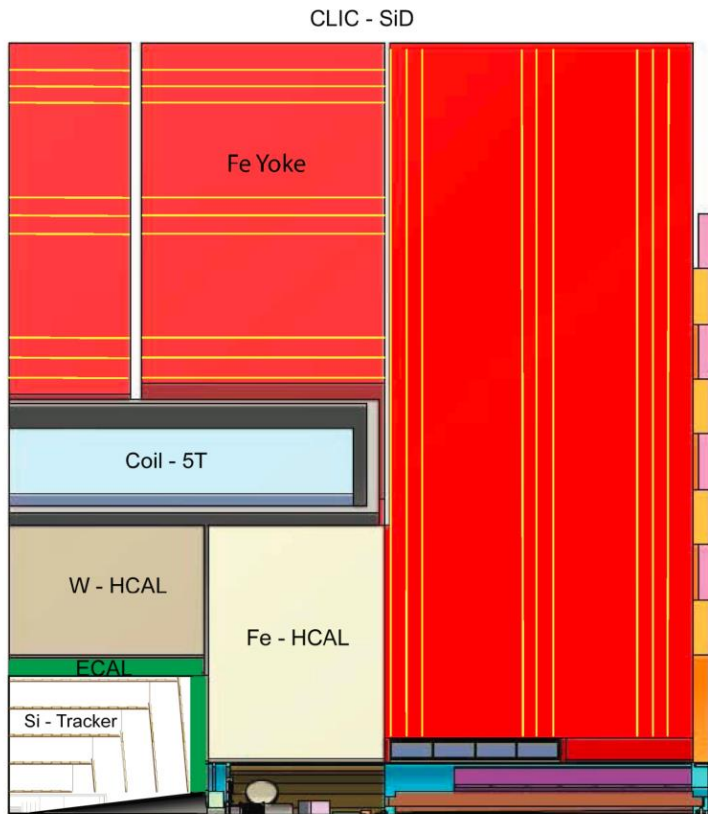

Exemple:
Improved Higgs
missing mass
due to lower σ_{Ecm}
@ FCC-ee ➔

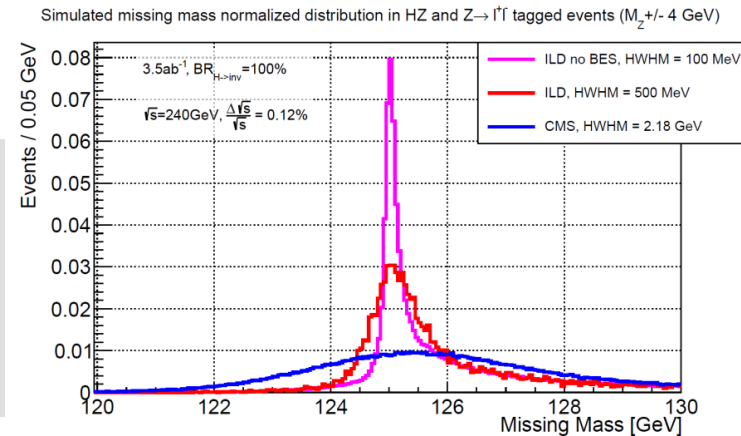

- **74 institutes**
- **26 countries + EC**



Status: April, 2016



FCC Collaboration Status

74 collaboration members & CERN as host institute, March 2016

ALBA/CELLS, Spain
Ankara U., Turkey
U Belgrade, Serbia
U Bern, Switzerland
BINP, Russia
CASE (SUNY/BNL), USA
CBPF, Brazil
CEA Grenoble, France
CEA Saclay, France
CIEMAT, Spain
Cinvestav, Mexico
CNRS, France
CNR-SPIN, Italy
Cockcroft Institute, UK
U Colima, Mexico
UCPH Copenhagen, Denmark
CSIC/IFIC, Spain
TU Darmstadt, Germany
TU Delft, Netherlands
DESY, Germany
DOE, Washington, USA
ESS, Lund, Sweden
TU Dresden, Germany
Duke U, USA
EPFL, Switzerland

UT Enschede, Netherlands
U Geneva, Switzerland
Goethe U Frankfurt, Germany
GSI, Germany
GWN, Korea
U. Guanajuato, Mexico
Hellenic Open U, Greece
HEPHY, Austria
U Houston, USA
IIT Kanpur, India
IFJ PAN Krakow, Poland
INFN, Italy
INP Minsk, Belarus
U Iowa, USA
IPM, Iran
UC Irvine, USA
Istanbul Aydin U., Turkey
JAI, UK
JINR Dubna, Russia
FZ Jülich, Germany
KAIST, Korea
KEK, Japan
KIAS, Korea
King's College London, UK
KIT Karlsruhe, Germany


KU, Seoul, Korea
Korea U Sejong, Korea
U. Liverpool, UK
U. Lund, Sweden
MAX IV, Lund, Sweden
MEPhI, Russia
UNIMI, Milan, Italy
MIT, USA
Northern Illinois U, USA
NC PHEP Minsk, Belarus
U Oxford, UK
PSI, Switzerland
U. Rostock, Germany
RTU, Riga, Latvia
UC Santa Barbara, USA
Sapienza/Roma, Italy
U Siegen, Germany
U Silesia, Poland
TU Tampere, Finland
TOBB, Turkey
U Twente, Netherlands
TU Vienna, Austria
Wigner RCP, Budapest, Hungary
Wroclaw UT, Poland




EC contributes with funding to FCC-hh study

- Launched in June 2016, is in full swing now and makes essential contributions to the FCC-hh work packages:
- **Arc & IR optics design, 16 T dipole design, cryogenic beam vacuum system**
- **Recognition of FCC Study by European Commission.**

H2020 EuroCirCol



Hadron Collider



Key Technologies

Resources provided by research institutes and universities with H2020 grant support.

Future Circular Collider study **without** H2020 Support Requests



Infrastructure



Implementation



Cost Baseline



Resources provided and work carried out by worldwide collaboration.



Summary study status

- Consolidated parameter sets for FCC-hh and FCC-ee machines
- Complete optics baselines for FCC-hh and FCC-ee, beam dynamics compatible with parameter requirements
- Common footprint for both accelerator options
- First round of geology and implementation CE and TI studies completed
- 6 reviews to confirm implementation, layout, optics, hh-injection & rf work

- Convergence on main MDI parameters
- Detector studies ongoing
- Framework available for physics and detector simulations
- FCC-hh physics report being published
- Technologies:
 - SC magnets, cryogenic beam vacuum and cryogenics programs well under way
 - RF, feedback, materials, protection, beam transfer, beam diagnostics moving into focus

- Further baseline improvement (insertions optimization, MDI optimization, power optimization, ...)
- Launch HE-LHC conceptual design effort
- Functional specifications of elements for technical WPs and TI to enable conceptual design work
- Enforce technical infrastructure concepts, integration, installation, safety for machines & detectors
- Continue detector simulations, detector design work and definition of infrastructure requirements
- Development of TDR and construction schedules as basis for cost estimates and governance models
- **Study review at FCCW 2017, to freeze baselines**



The FCC Week 2016 should:

- Stimulate exchange between participants of all study areas
- Strengthen the collaboration network
- Allow fruitful discussions to develop solutions for our common goals
- **Have a Great Week!**