

# Machine Protection

Lars Fröhlich  
DESY



CERN Accelerator School on FELs and ERLs – June 9, 2016

- What & Why?
- Interaction of Beams with Matter
- Damage to Permanent Magnets



*Photo: Wikimedia Commons, CC BY-SA 3.0*

<https://commons.wikimedia.org/w/index.php?curid=134686>

What & Why?



---

# What is Machine Protection?


Machine protection is the sum of all measures that protect an accelerator and its infrastructure from the beam.

- Machine Protection System

- Interlock on components (magnets, screens, ...)
- Monitoring of the beam (beam loss monitors, charge monitors, BPMs, ...)
- Mitigation (inform the operator, reduce repetition rate, fire abort kickers, stop beam production immediately, ...)

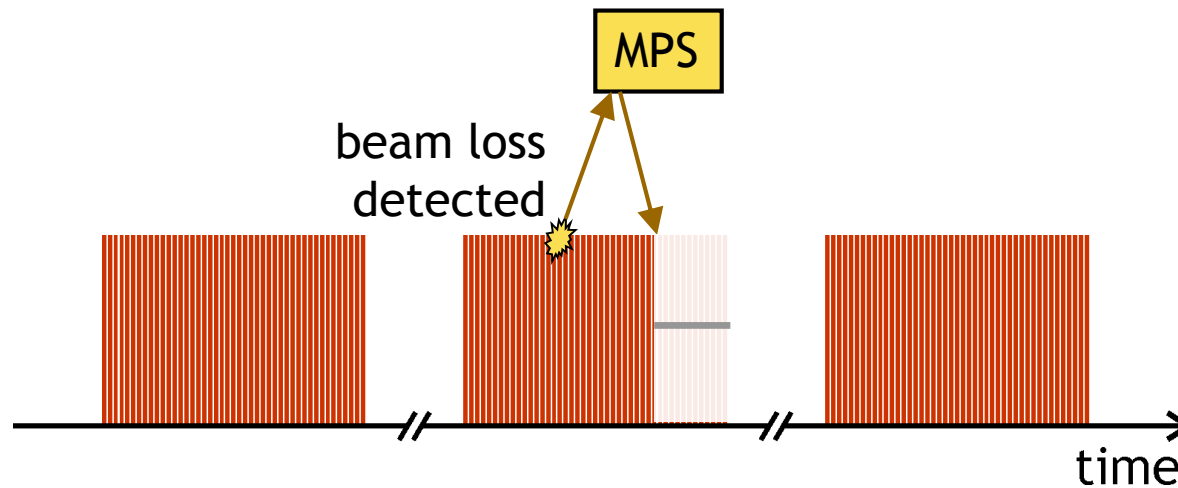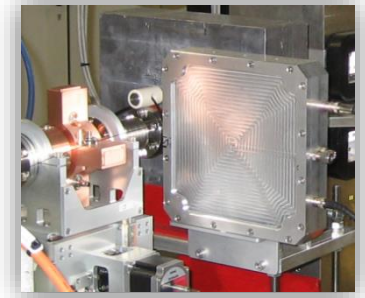




# Case Study: European XFEL (Early Design)

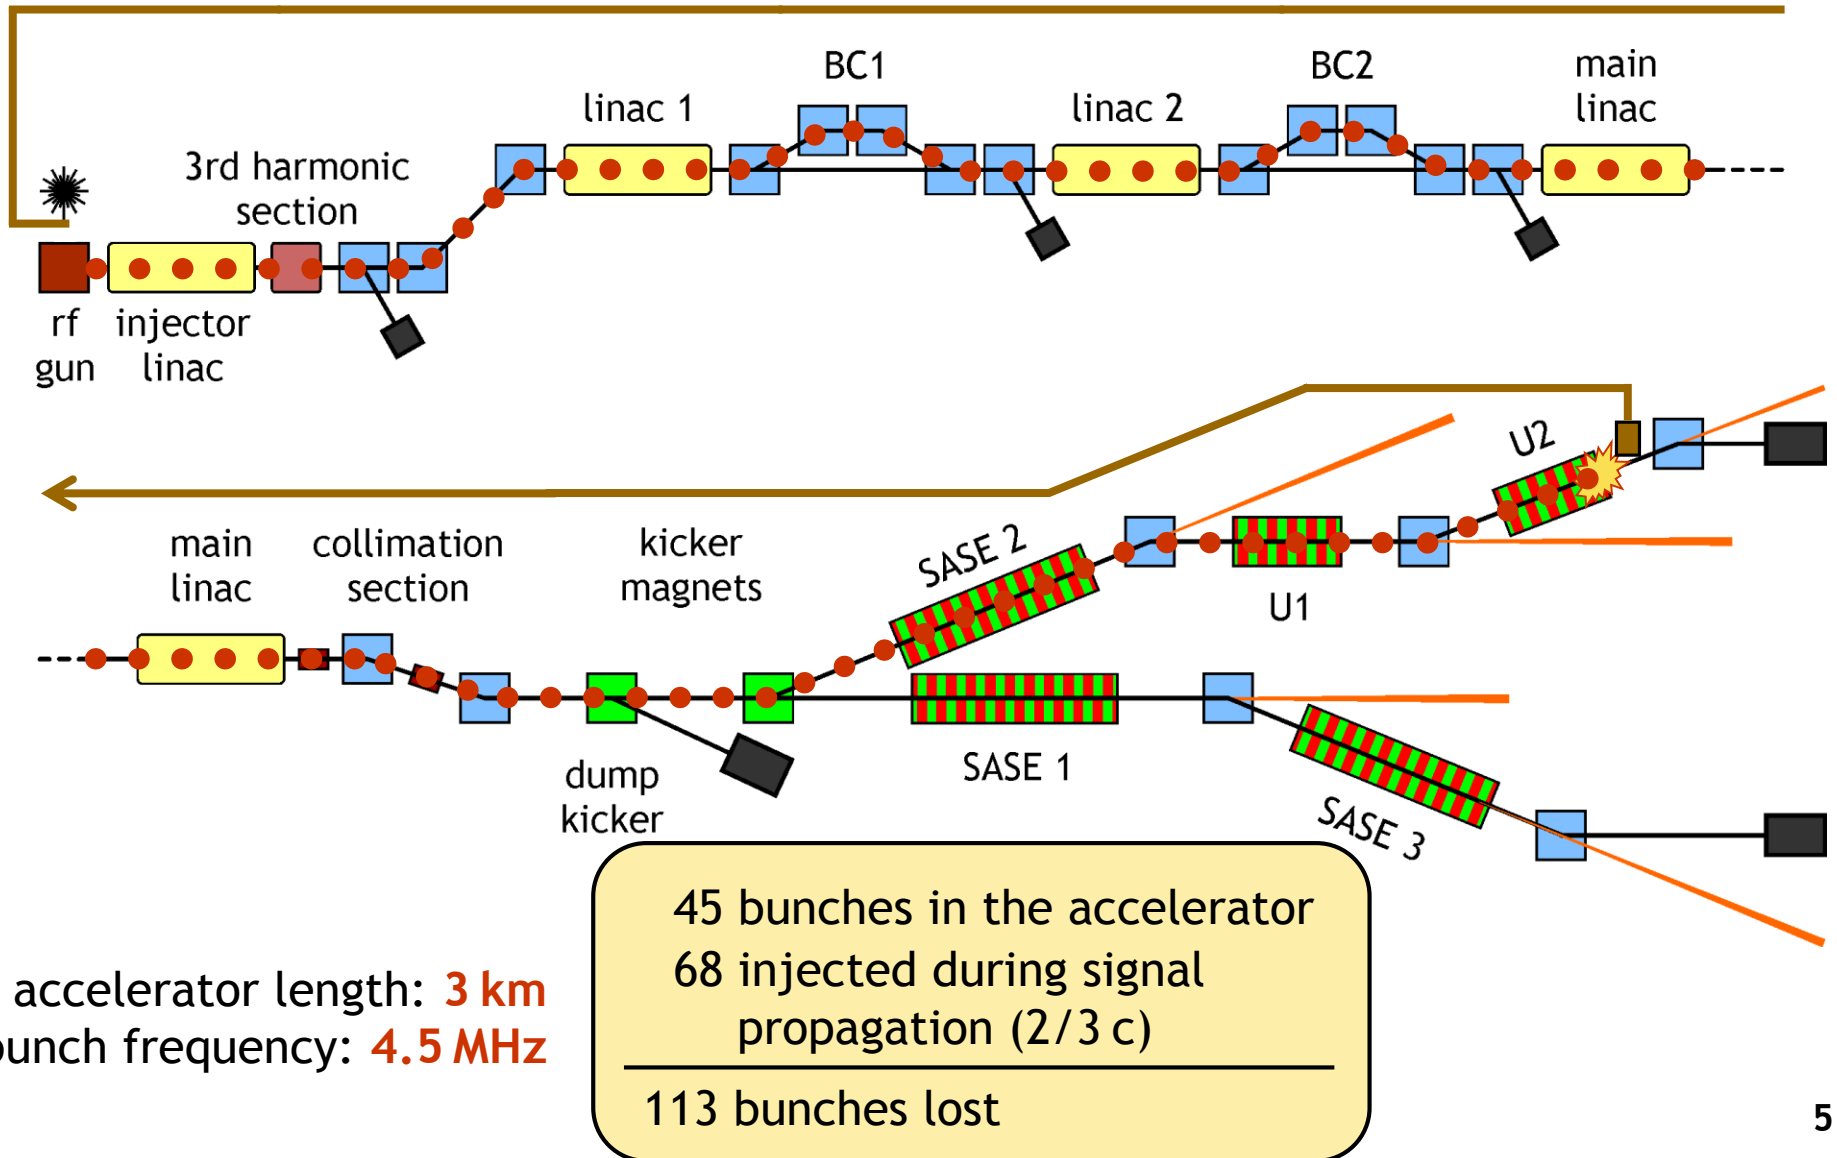

# What is Machine Protection?

Machine protection is the sum of all measures that protect an accelerator and its infrastructure from the beam.

- Machine Protection System
  - Interlock on components (magnets, screens, ...)
  - Monitoring of the beam (beam loss monitors, charge monitors, BPMs, ...)
  - Mitigation (inform the operator, reduce repetition rate, fire abort kickers, stop beam production immediately, ...)
- Collimators, absorbers
- Shielding
- Physics (matching, collective effects, ...)
- Robust systems+software (feedbacks, LLRF, controls, ...)
- Safe procedures (switch on, change beam energy, ramp to full power, ...)

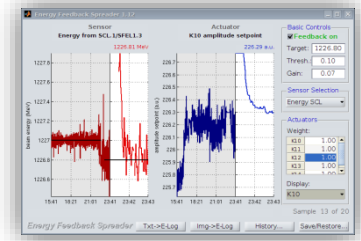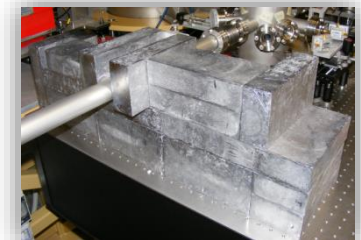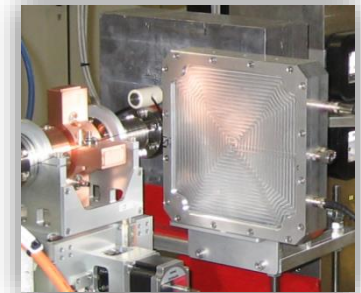

# Average Electron Beam Powers



Photo: Michael J. Linden

## Normal conducting


• FERMI@Elettra	1.4 GeV	10 Hz	14 W
• SACLA	7 GeV	10-60 Hz	18-140 W
• LCLS	15 GeV	120 Hz	36-360 W



Photo: DESY

## Superconducting

• FLASH	1.3 GeV	1-3 MHz pulsed	10 W - 22 kW
• European XFEL	17.5 GeV	4.5 MHz pulsed	>500 kW
• LCLS-II	4 GeV	0.1-1 MHz CW	120 kW



## Energy recovery linacs

• NovoFEL	12 MeV	5.6-22 MHz CW	15-60 kW
• Jlab FEL	200 MeV	75 MHz CW	>1 MW
• Future ERLs?	5 GeV	1.3 GHz CW	500 MW

# “Power = Energy · Current”




Photo: Michael J. Linden

## Normal conducting

• FERMI@Elettra	1.4 GeV	10 Hz	14 W
• SACLA	7 GeV	10-60 Hz	18-140 W
• LCLS	15 GeV	120 Hz	36-360 W

$$\begin{aligned} \text{average beam power} &= \frac{\text{energy}}{\text{charge}} \cdot \frac{\text{charge}}{\text{time}} \\ &= \frac{\text{“beam energy”}}{e} \cdot \text{average current} \\ &= \frac{\text{“beam energy”}}{e} \cdot \text{repetition rate} \cdot \text{bunch charge} \end{aligned}$$



## Energy recovery linacs

• NovoFEL	12 MeV	5.6-22 MHz CW	15-60 kW
• Jlab FEL	200 MeV	75 MHz CW	>1 MW
• Future ERLs?	5 GeV	1.3 GHz CW	500 MW



For an accelerator with  $P = 1 \text{ MW}$ :

Local loss power (W)	Effects
100 – <del>1000</del> $10^{-3}$	Thermal/mechanical damage
10 – 100	Mechanical failure of flange connections
1 – 100	Activation of components
1 – 100	Radiation damage to electronics, optical components, &c.
1 – 10	Excessive cryogenic load, quenches
0.01 – <del>0.1</del> $10^{-7}$	Demagnetization of permanent magnets






# Interaction of Beams with Matter

# Energy Loss of Electrons in Matter

stopping power (energy loss per path length)

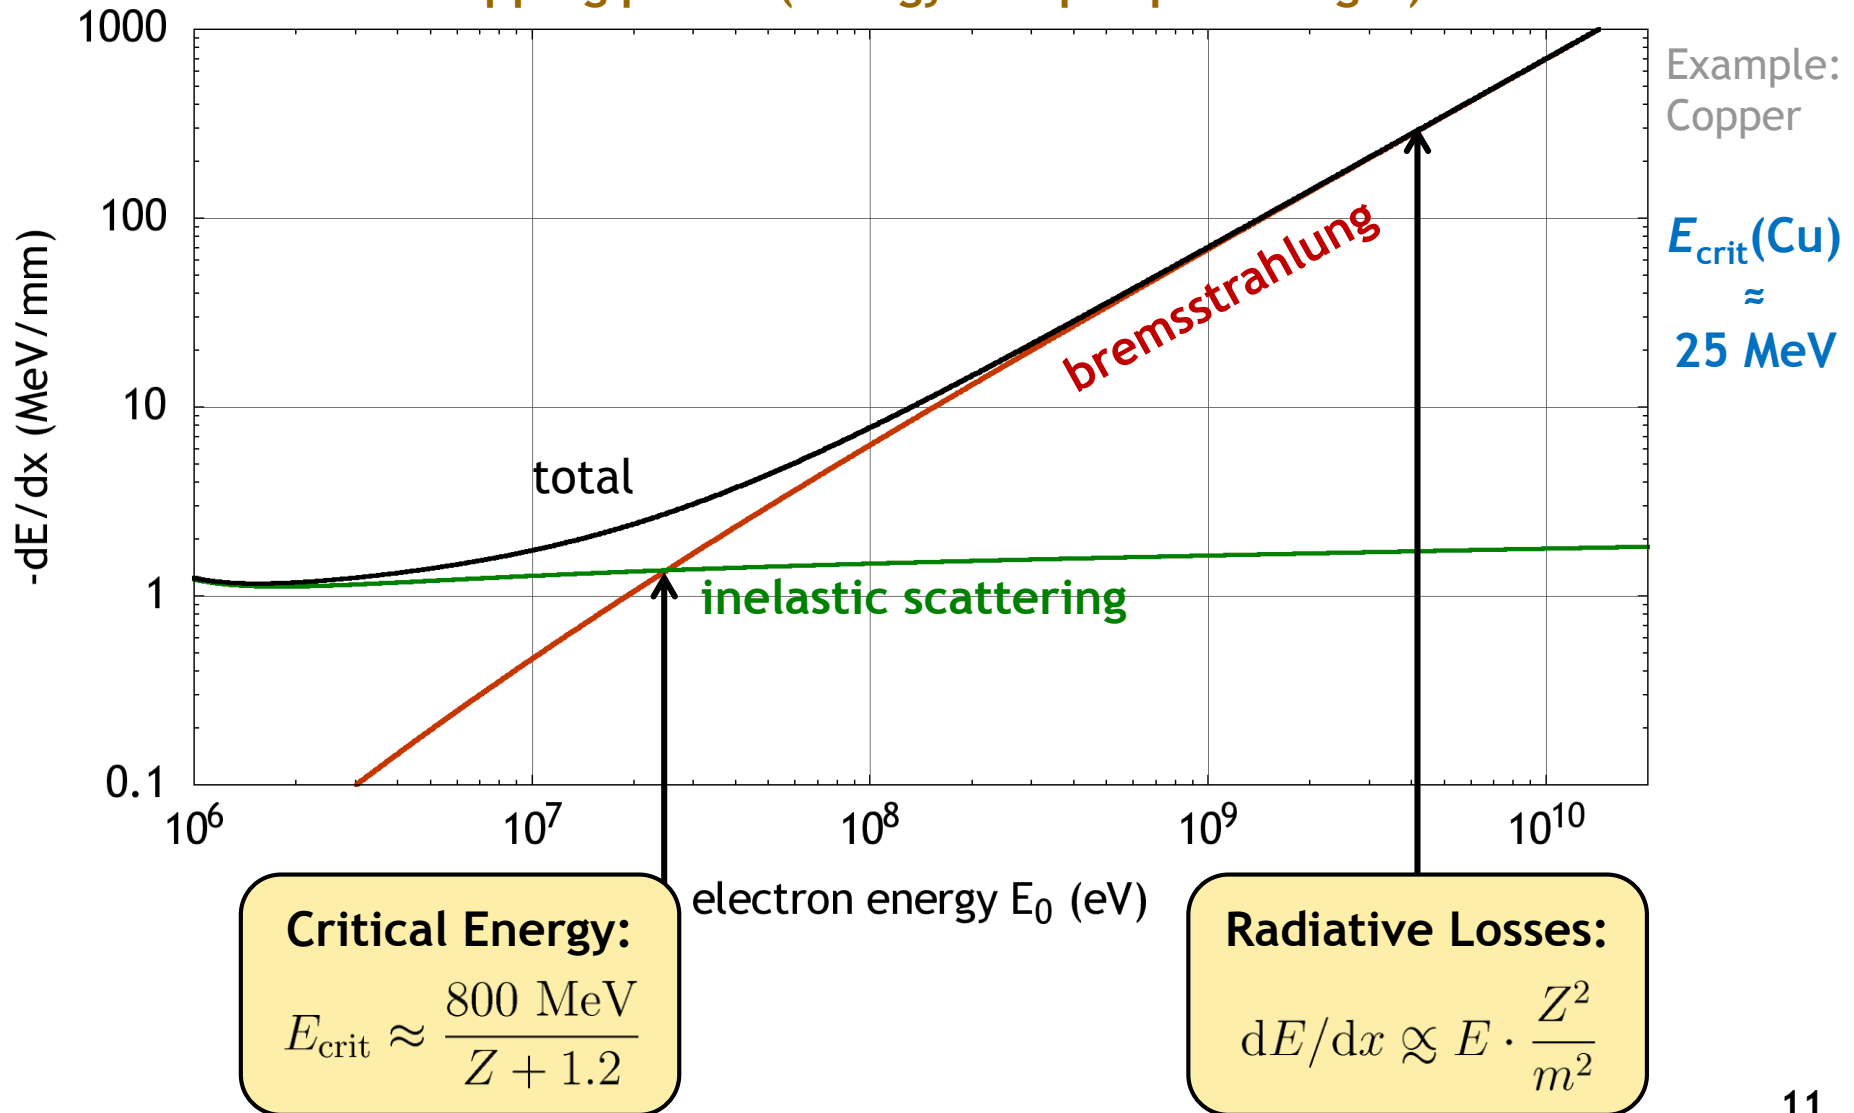

# Bremsstrahlung: Radiation Length

- At high energies, the energy loss by bremsstrahlung scales like:

$$dE/dx \approx E \cdot \text{const.}$$

- Therefore, the remaining particle energy can be written as:


$$E(x) \approx E_0 \exp\left(-\frac{x}{L_{\text{rad}}}\right)$$

- After one radiation length, the energy of a high energy electron has decreased to 1/e of its initial value.**


- The radiation length is often normalized to a standard density:

$$X_0 = L_{\text{rad}} \cdot \rho_0$$

	$L_{\text{rad}}$ (cm)	$X_0$ (g/cm <sup>2</sup> )
Aluminum	8.9	24.01
Titanium	3.56	16.17
Iron	1.76	13.84
Copper	<b>1.43</b>	12.86
Tungsten	0.35	6.76
Lead	0.56	6.37

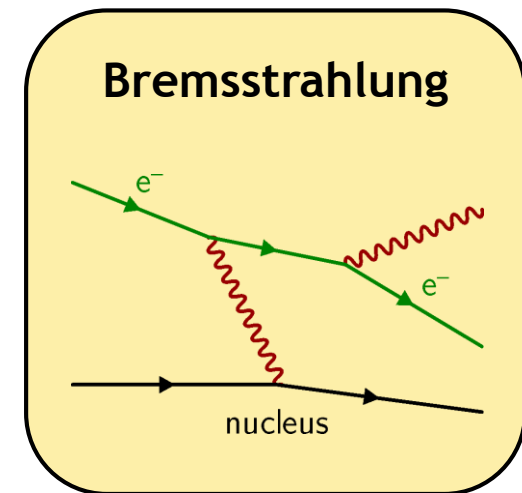


# Photonic Interactions with Matter

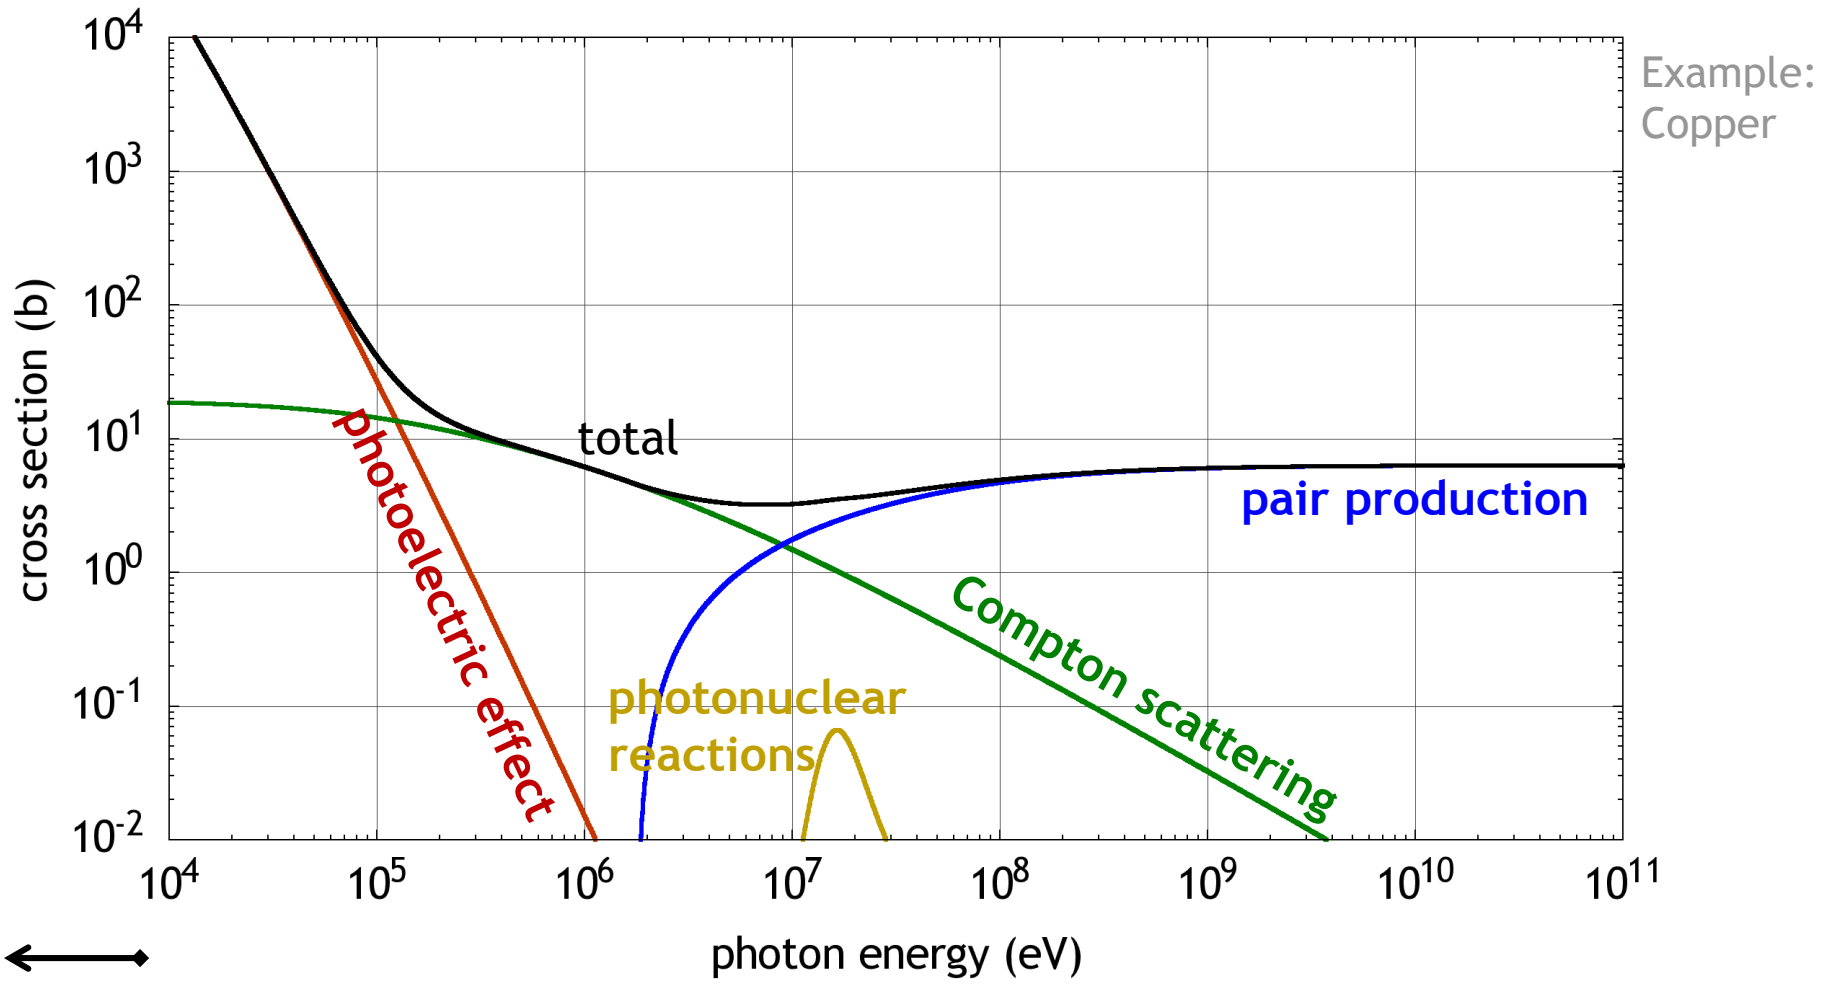

# Pair Production




- Minimum energy for pair production:  
 $2 \cdot 511 \text{ keV} \approx 1.02 \text{ MeV} (e^+/e^-)$   
 $2 \cdot 106 \text{ MeV} \approx 211 \text{ MeV} (\mu^+/\mu^-)$
- Cross section for muon production is small, but muons are of concern for personnel protection!
- Cross section scales roughly as  $Z^2$ :  
Heavy elements shield well against photon beams
- Mean free photon path at high energies:

$$L_{\text{pair}} \approx \frac{9}{7} L_{\text{rad}}$$

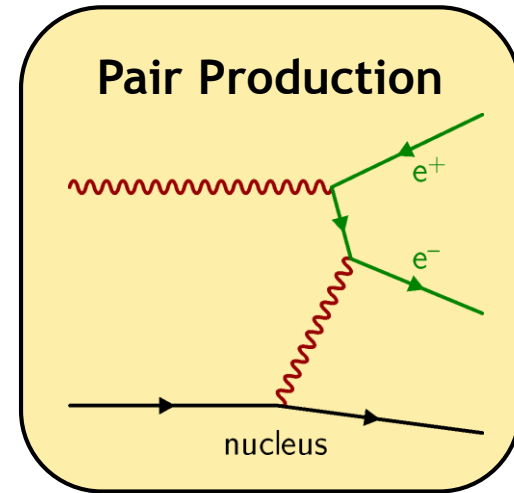

**The typical path length a photon can travel in matter until it is consumed in a pair production event is ~30% higher than the radiation length of the material.**

# Electromagnetic Cascades

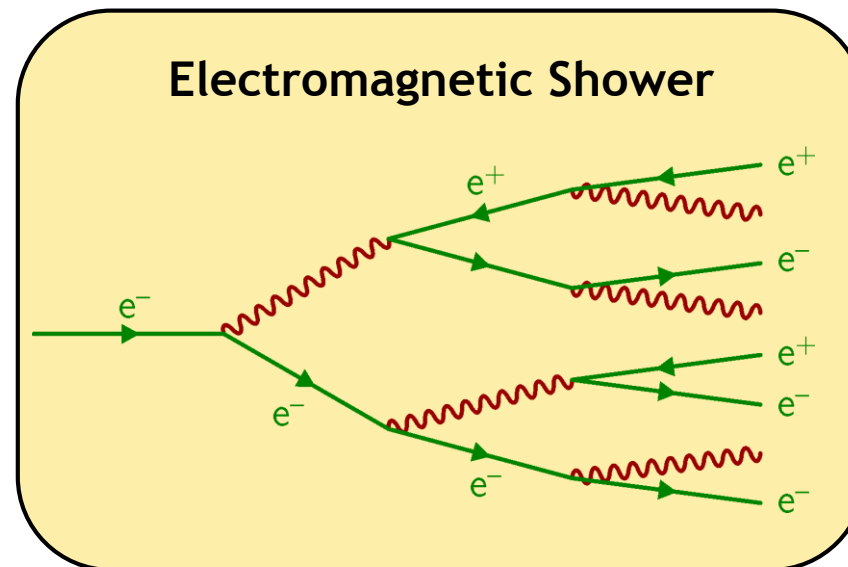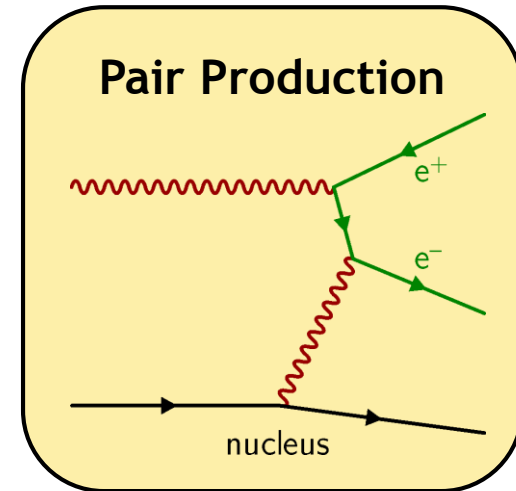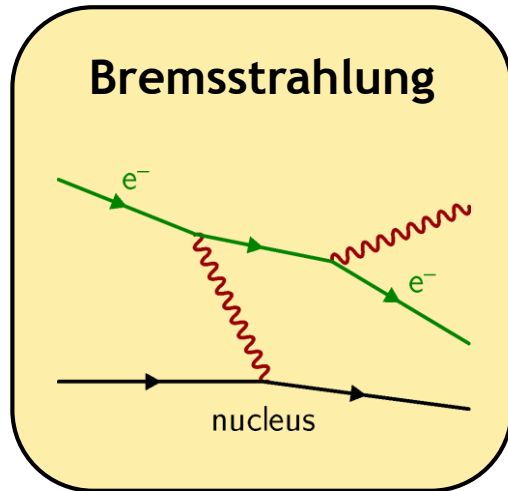


one particle of high energy

many particles of lower energy

# A Veeery Simple Shower Model

Assumptions:

- An electron emits half of its energy as a single photon after  $L_{\text{rad}}$ .
- A photon is converted to an  $e^+/e^-$  pair, each carrying half of its energy, after  $L_{\text{rad}}$ .
- The shower stops when particle energies drop below the critical energy.

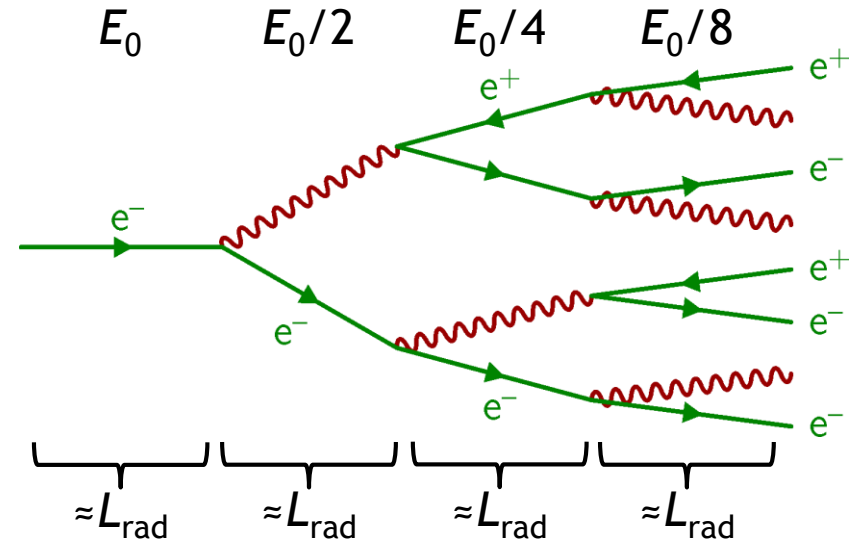

Particle energy after  $N$  radiation lengths:

$$E(N) = E_0/2^N$$

The critical energy is reached after  $N_{\text{crit}}$  radiation lengths:

$$E_{\text{crit}} = E(N_{\text{crit}}) = E_0/2^{N_{\text{crit}}}$$


Number of radiation lengths to reach the critical energy:

$$N_{\text{crit}} = \ln(E_0/E_{\text{crit}}) / \ln(2)$$

**This is only a qualitative model!**  
Better: Monte Carlo (Fluka, Geant, ...)




# 1 GeV Electrons on Copper

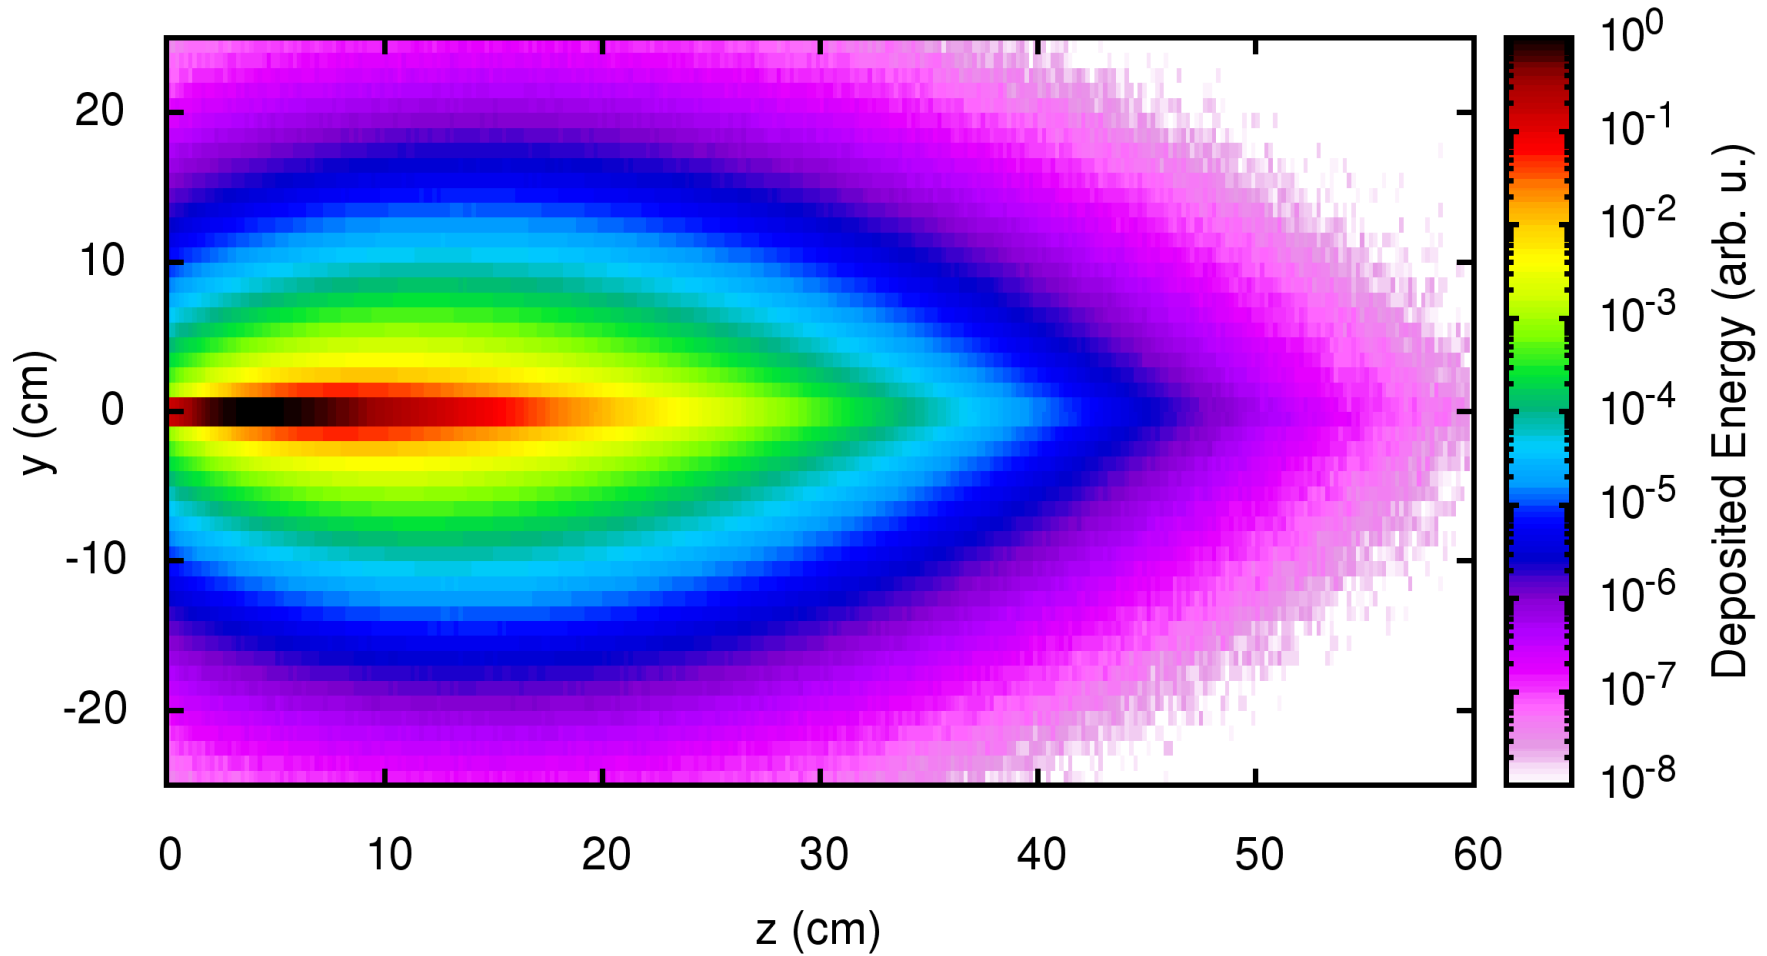


# 1 GeV Electrons on Copper


---

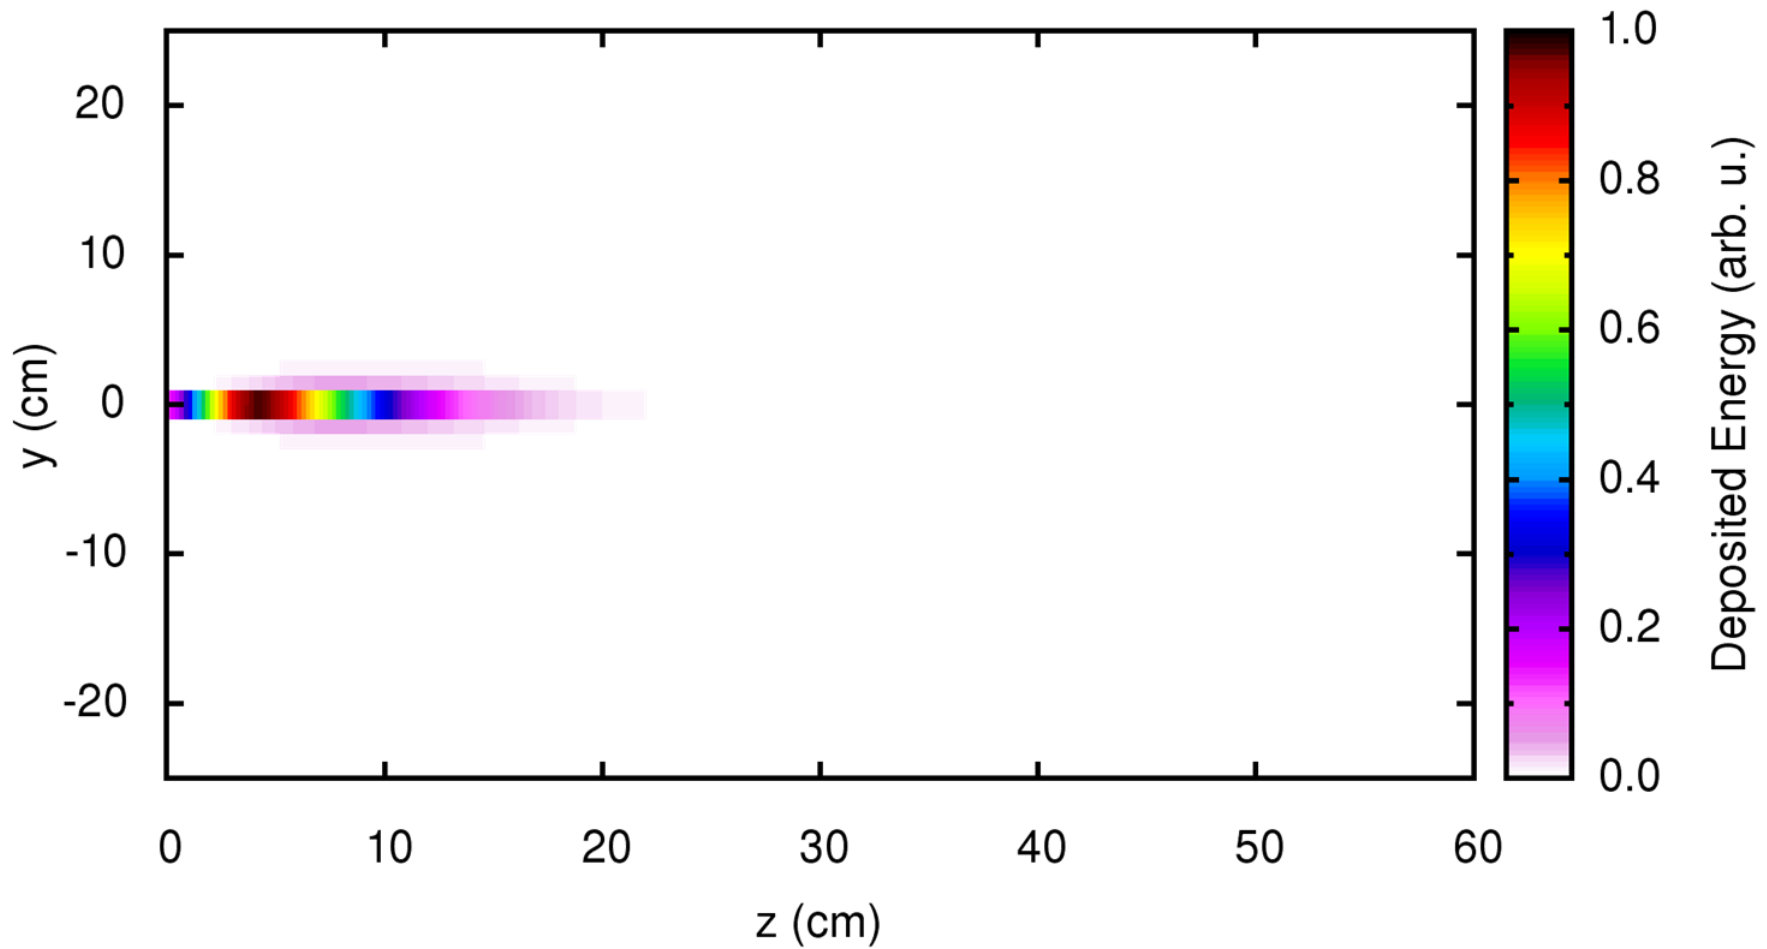

# Electron Beam Hitting a Copper Target

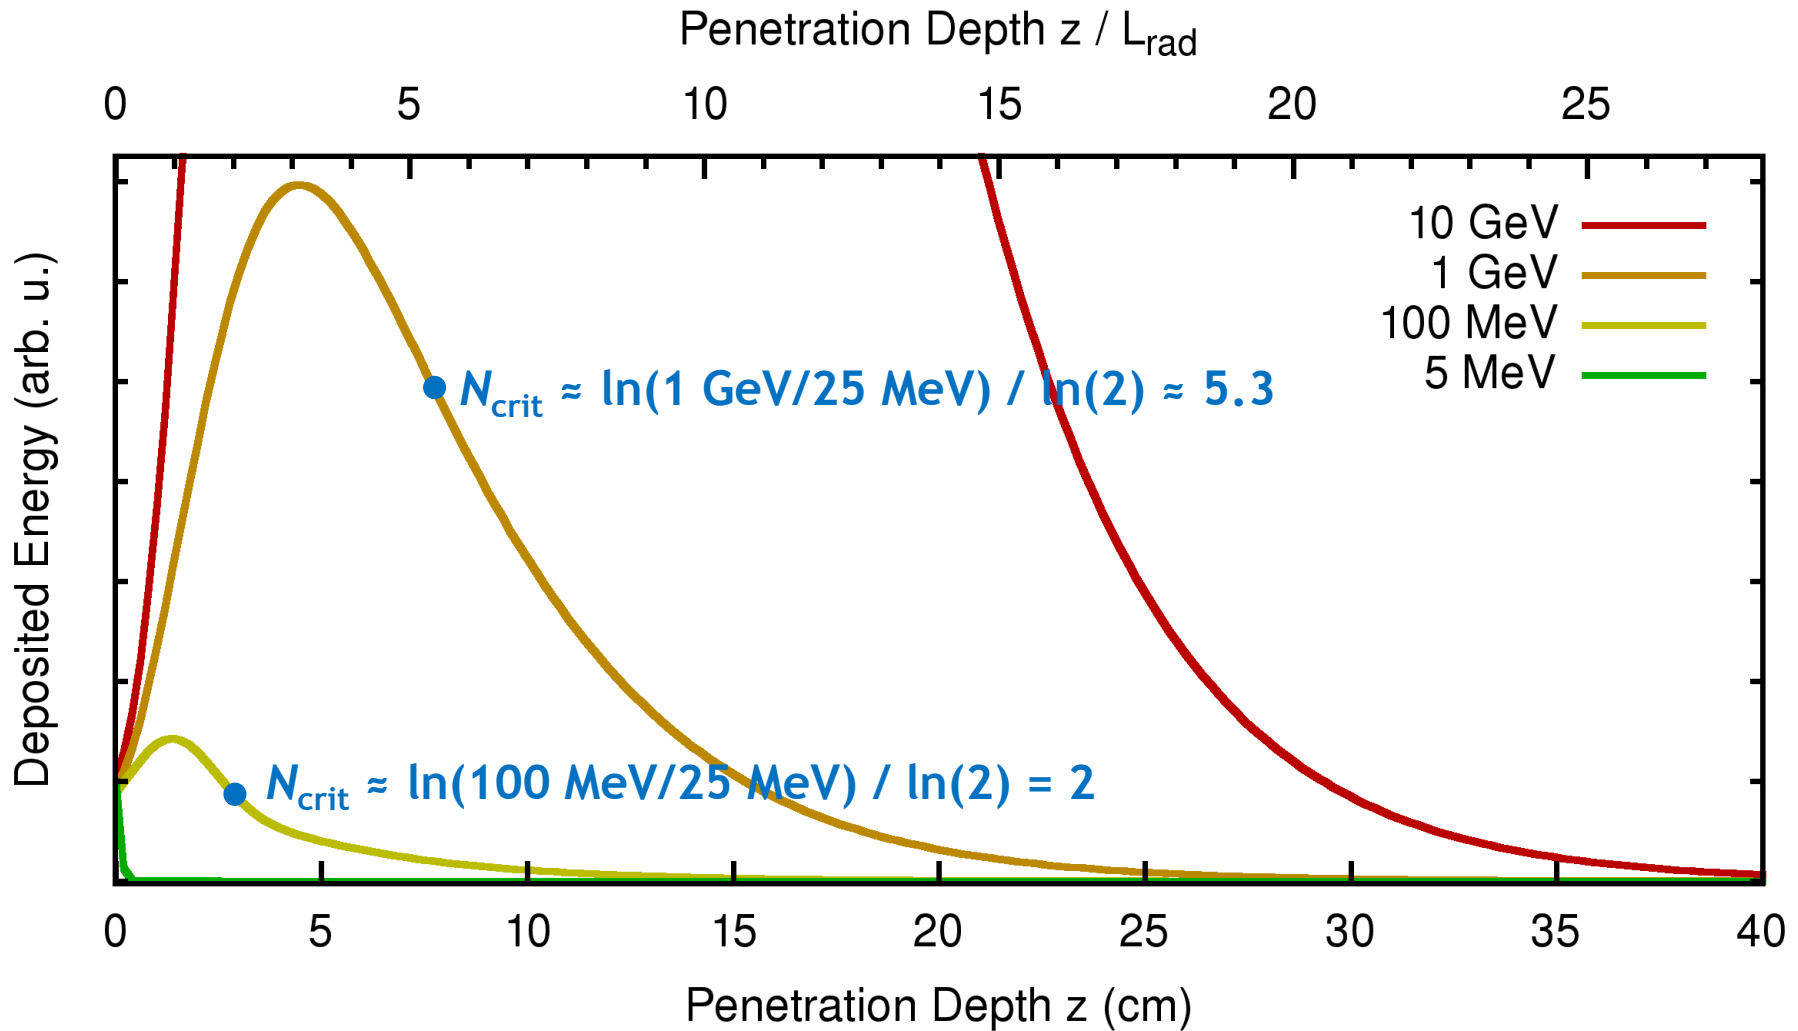


# Electron Beam Hitting a Copper Target

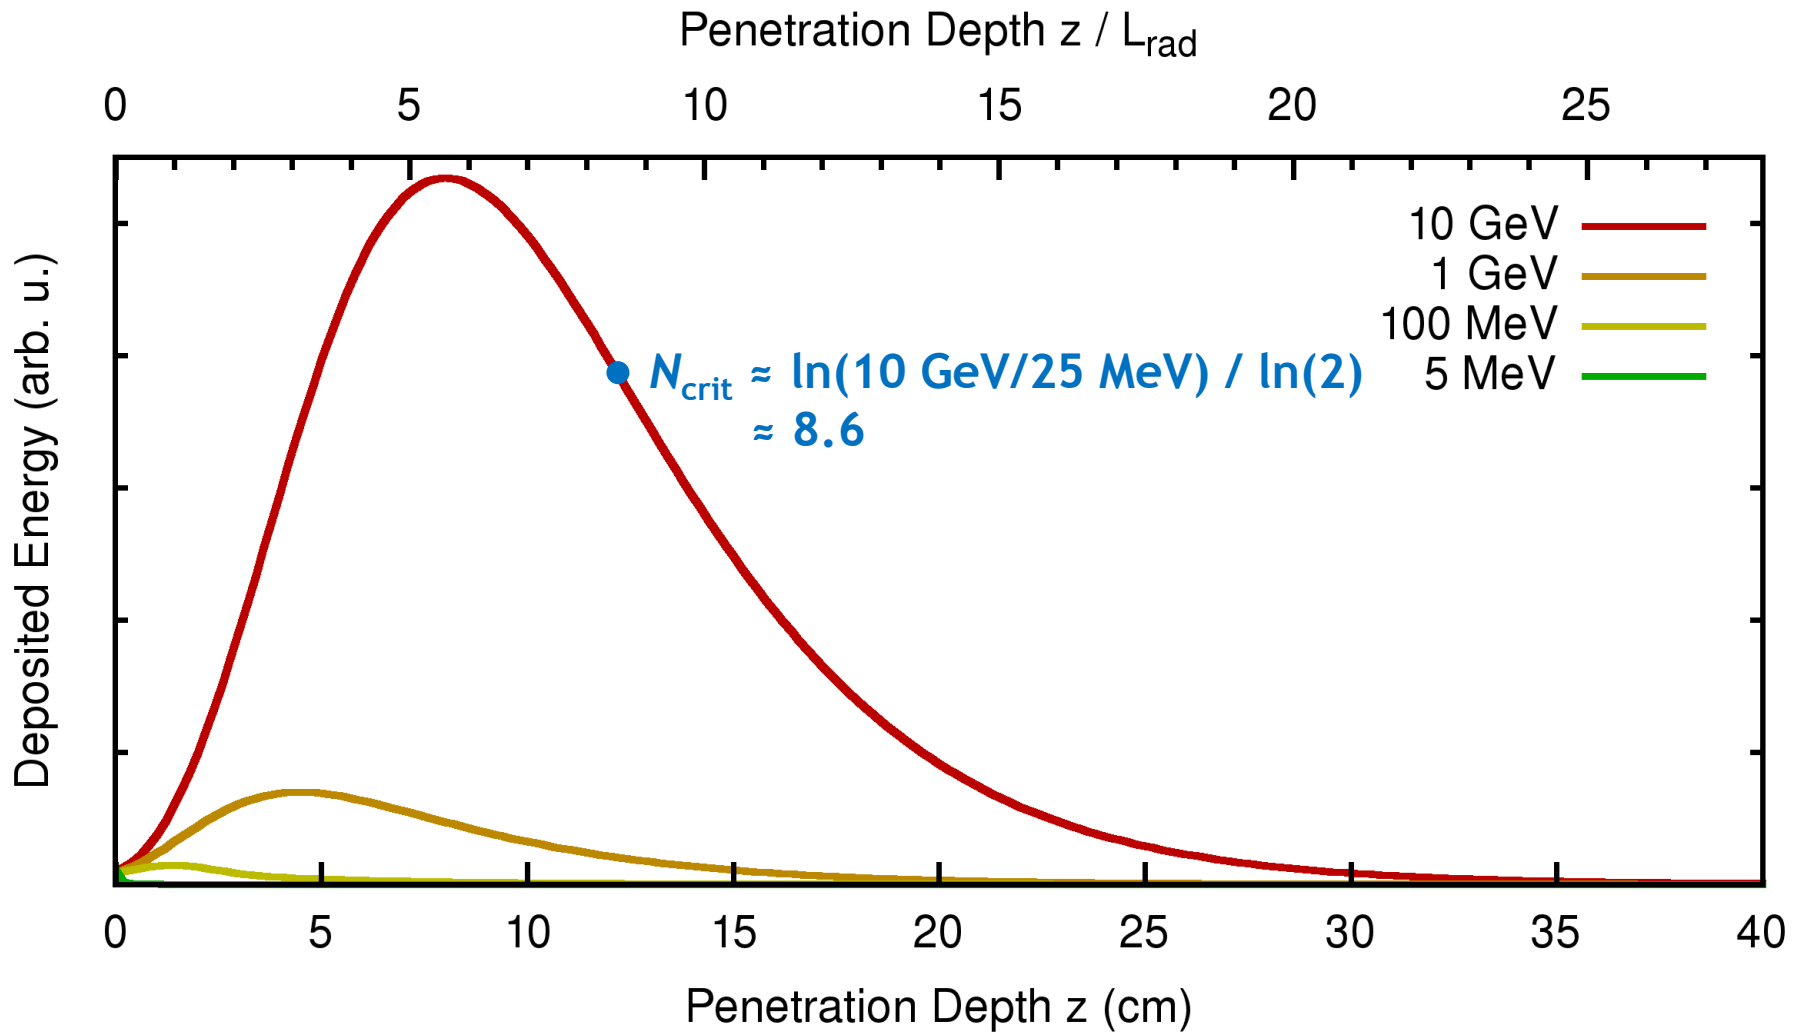

# Damage to Permanent Magnets




# Demagnetization of Permanent Magnets

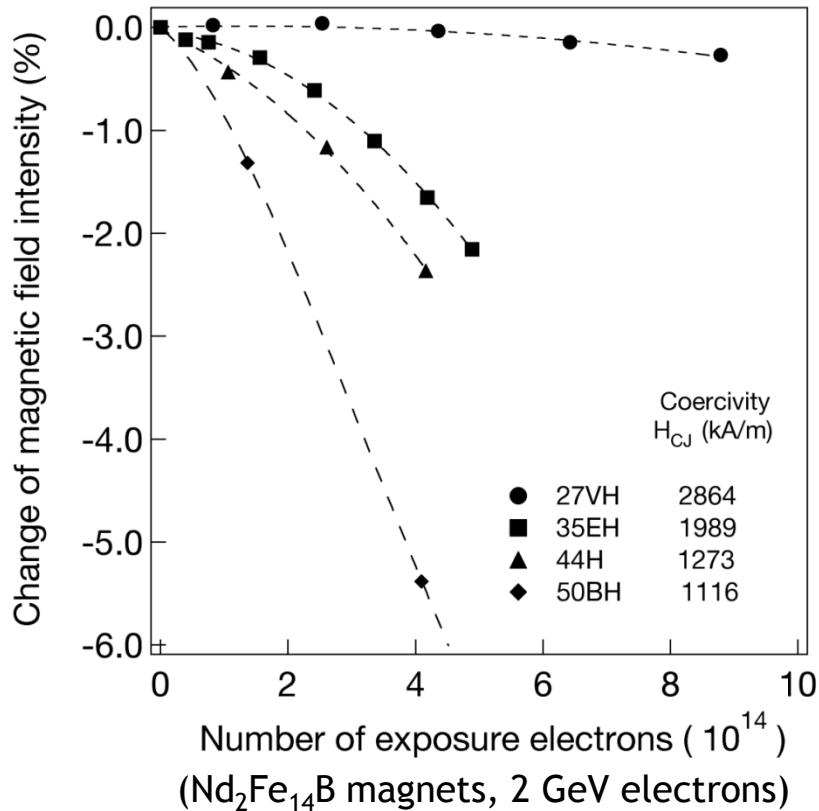

Teruhiko Bizen - "Brief Review of the Approaches to Elucidate the Mechanism of the Radiation-induced Demagnetization"  
(ERL workshop 2011, Tsukuba, Japan)

- FELs rely on precision magnetic fields
- Permanent magnets lose magnetic field under irradiation with high energy electron beams
- Various magnetic materials behave differently


Skupin et al., "Undulator demagnetization due to radiation losses at FLASH", Proc. EPAC 2008, pp. 2308-2310

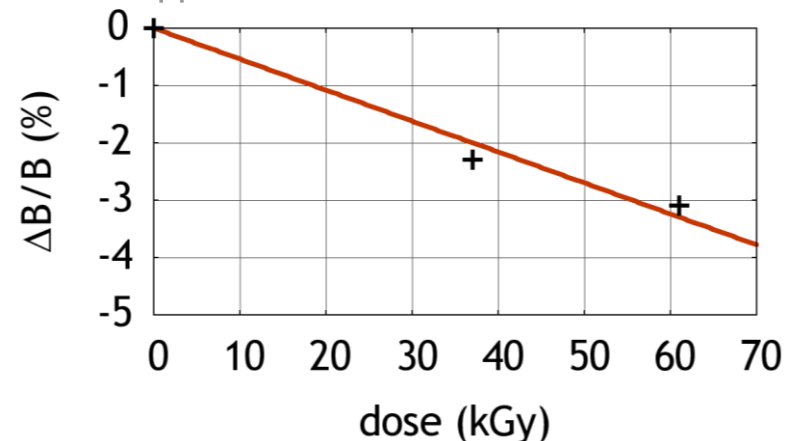

# Demagnetization of Permanent Magnets


Can demagnetization be compensated by undulator tuning (opening gaps)?

FLUKA beam loss simulation  
(FLASH, 1 bunch, 10 Hz)

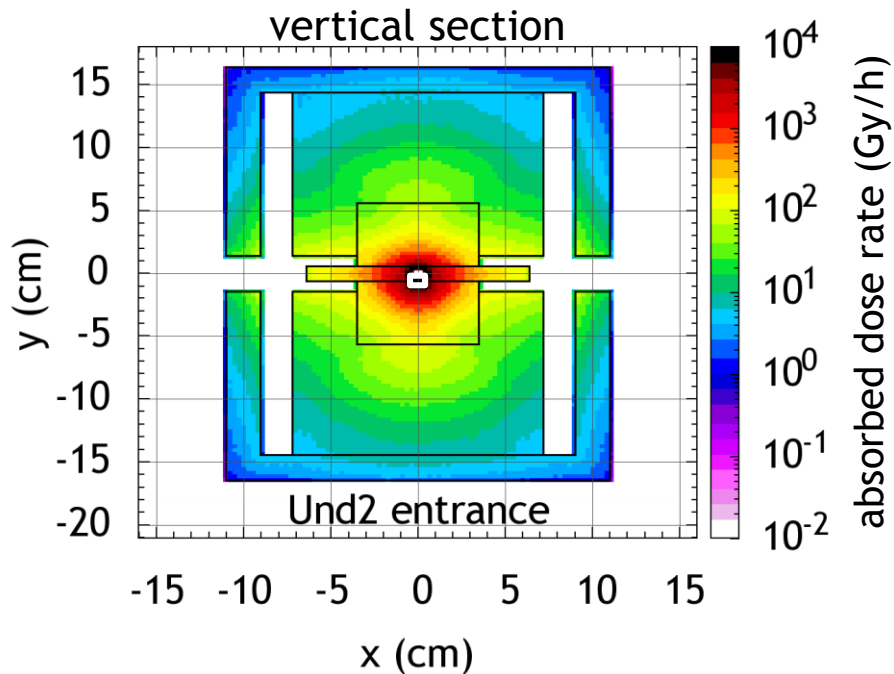


- FELs rely on precision magnetic fields
- Permanent magnets lose magnetic field under irradiation with high energy electron beams
- Various magnetic materials behave differently

Skupin et al., “Undulator demagnetization due to radiation losses at FLASH”, Proc. EPAC 2008, pp. 2308-2310

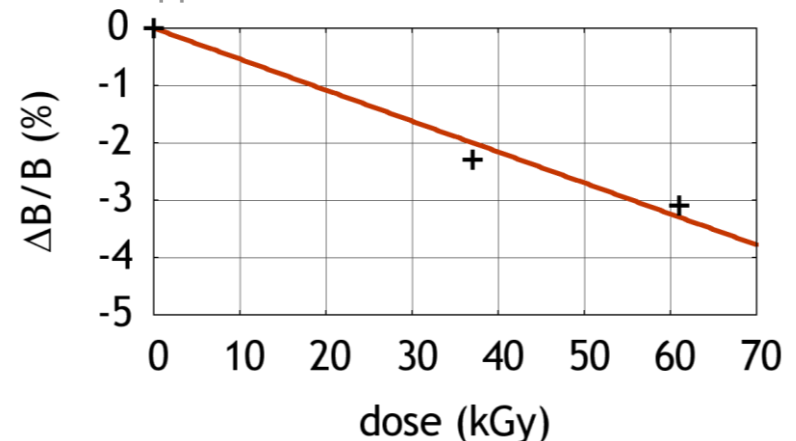

# FLASH: Longitudinal Dose Distribution

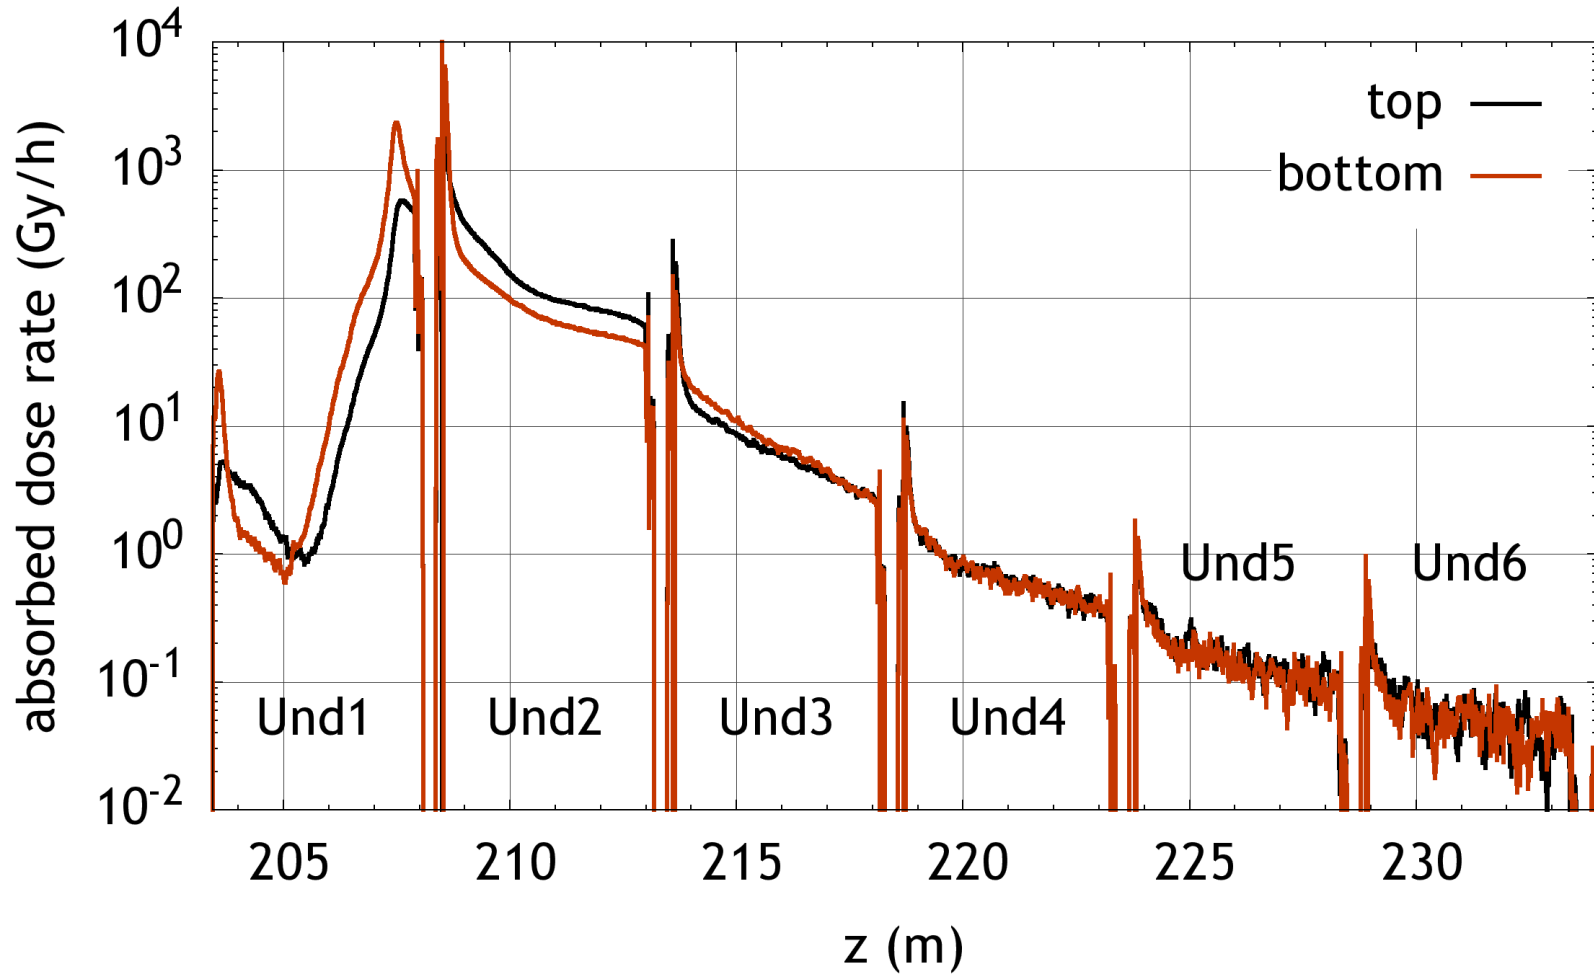


Approximate parameters:  
7200 bunches at 1 nC, 10 Hz, -1 GeV





# Field Loss of a PETRA-II Undulator

---

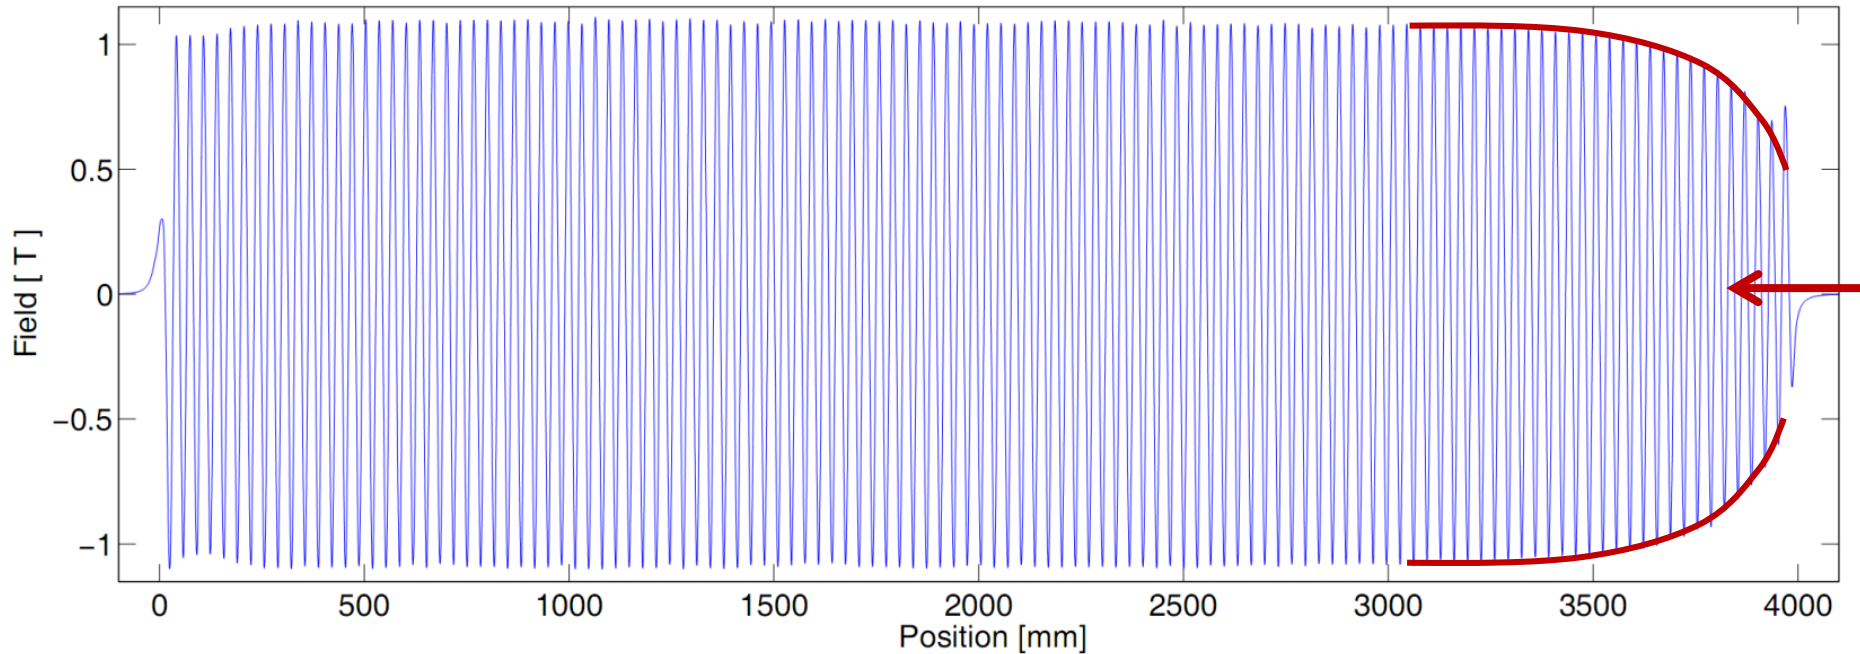

P. Vagin et al., "Commissioning experience with insertion devices at PETRA III", SR2010, Novosibirsk, Russia.

# Demagnetization and Phase Error

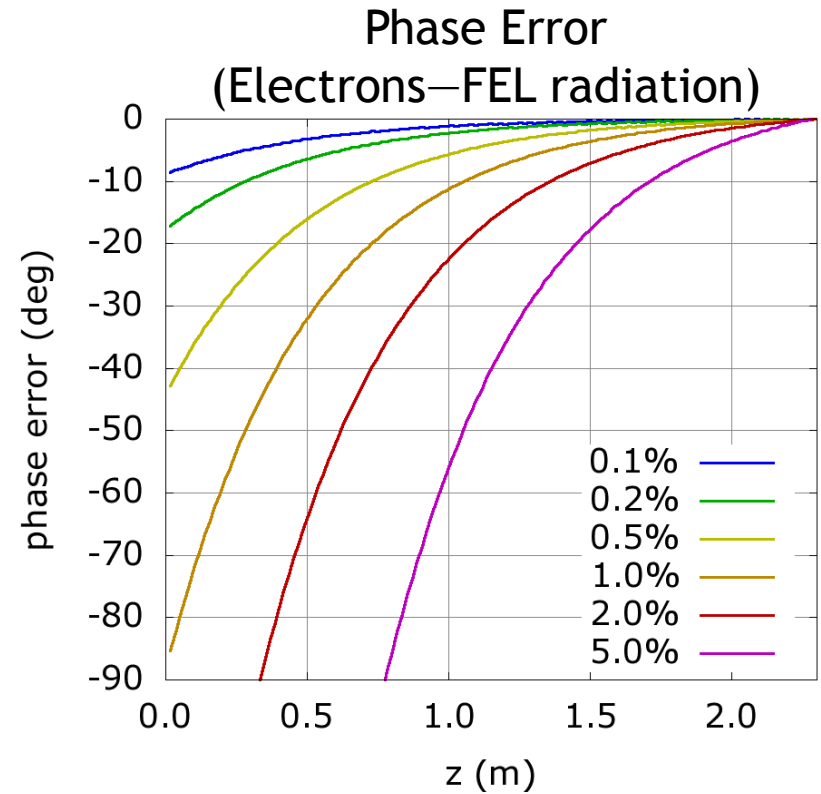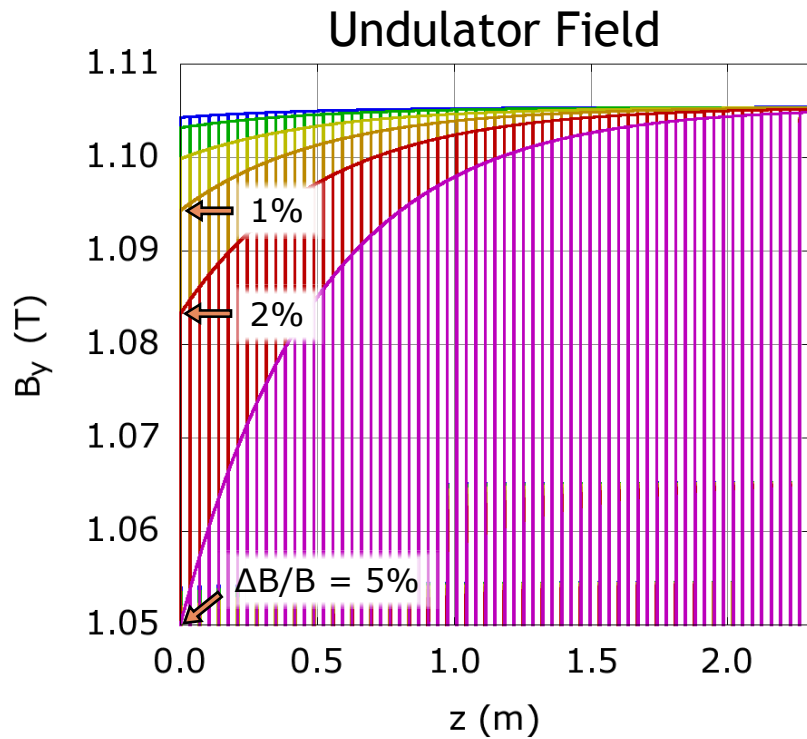

Example: FERMI@Elettra FEL-2, second stage radiator  
66 periods of 3.48 cm

A photograph of a mountain range with dense, green forest. The foreground is filled with various types of trees and plants, including some with small orange flowers. The middle ground shows rolling hills covered in thick vegetation. In the background, higher mountain peaks are visible, with some shrouded in mist or low clouds. The overall scene is vibrant and natural.

# Final Remarks

# Final Remarks & References

---

- Balance:
  - Protect the machine
  - Protect the beam
  - With as little resources as possible
- Variety:
  - Beam dynamics, particle physics, instrumentation, controls, reliability theory, systems design

C. Sibley, “Machine Protection Strategies for High Power Accelerators”, PAC 2003.

[http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=1288989](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=1288989)

R. Schmidt et al., “Protection of the CERN Large Hadron Collider”, New Journal of Physics 8 (2006) 290,

<http://dx.doi.org/10.1088/1367-2630/8/11/290>

K. Wittenburg, “Beam Loss Monitors”, CERN Accelerator School, Dourdan, France, 2008.

<http://cern.ch/cas/France-2008/Lectures/Wittenburg-BLM.pdf>

L. Fröhlich, “Machine Protection for FLASH and the European XFEL”, DESY-THESIS-2009-012.

<http://dx.doi.org/10.3204/DESY-THESIS-2009-012>

L. Fröhlich, “Machine Protection for Single-Pass FELs”, FEL 2012.

<http://accelconf.web.cern.ch/AccelConf/FEL2012/papers/weoa03.pdf>

R. Schmidt, “Machine Protection”, CERN Accelerator School, Trondheim, Norway, 2013.

<https://cas.web.cern.ch/cas/Norway-2013/Lectures/Schmidt.pptx>

J. Wenninger, “State-of-the-Art and Future Challenges for Machine Protection Systems”, IPAC 2014.

<https://cds.cern.ch/record/1741652/files/CERN-ACC-2014-0080.pdf>

I. Strašák, “Machine Protection”, CERN Accelerator School, Prague, Czech Republic, 2014.

<http://cas.web.cern.ch/cas/CzechRepublic2014/Lectures/Strasik.pdf>



The End.

Photo: Stefan Wernli, Wikimedia Commons, CC-BY-SA 2.5  
<https://commons.wikimedia.org/w/index.php?curid=824272>